




## GP-15HCN1L/H

- Centrifugal type
- Capacity = 30 L/min - 145 L/min
- Total head = 22m - 38.7m
- Stainless steel (SUS 304) impeller
- Cast iron casing with double paint coated housing
- SUS 304 steel motor shaft
- Insulation class: F
- IEC Standard compliance

### Dimension

Unit : mm

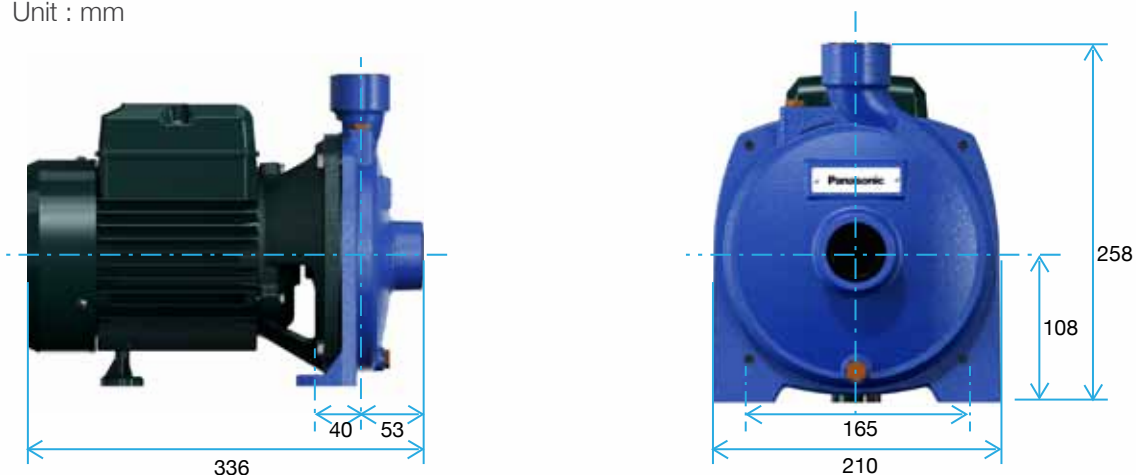

### Specification

	GP-15HCN1L/H
Rated Voltage	220V - 240V 50Hz, single phase
Capacity [L/min]	30 - 145
Total Head [m]	22 - 38.7
Input Wattage [kW]	1.66
Output Wattage [kW]	1.1 (1.5 HP)
Ampere [A]	7.26
IP Rating	IP54
Suction Pipe	1-1/4 inch (32 mm)
Discharge Pipe	1 inch (25 mm)
Size (L x W x H) [mm]	336 x 210 x 258
Weight [kg]	20

