


NE-2180

2100 Watt* Commercial Microwave Oven

Technical Specifications

Power source: 208/230-240 V, 60 Hz, Single phase

Receptacle required: 30 Amp, NEMA 6-30R 

Frequency: 2,450MHz

Required power: 208V (20.0A) 230-240V (18.0A)

Output*: 2100 watts

Outer dimensions: 25 9/16" w x 20 3/4" d x 18 9/16" h

Cavity dimensions: 21 1/8" w x 13" d x 9" h

Net weight: 117 lbs

Shipping weight: 128 lbs.

Shipping box size: 29 7/8" w x 26 1/8" d x 22 1/4" h, 9.9 ft³

Timer: Maximum times for each stage of cooking
 — Hi and Med. power=15 minutes
 — Low, Defrost and Hold power=60 minutes

Memory capability: 16 programs




To specify a Panasonic Connectionless Steamer:

The NE-2180 Commercial Microwave Oven meets or exceeds all safety performance and sanitation standards set for commercial food service microwave ovens by: UL, HHS, FCC and NSF.

Plus, oven shall have output power 2100 Watts*, equipped with four magnetrons, top and bottom energy feed, able to accommodate two 4" tall full-size pans, drop down counter style door, Grab & Go door handle, removable center shelf, 8 programmable pads, 16 memory, shift key (AM-PM), 3-stage cooking, 5 power levels (HI, MED., LOW, DEF., HOLD), programmable lock, cycle counter, tone control, self diagnostics, dial timer to select cooking time, video training and Chef/Test kitchen technical support.

* I.E.C. 705-88 Test Procedure. Specifications subject to change without notice.


Receptacle Required

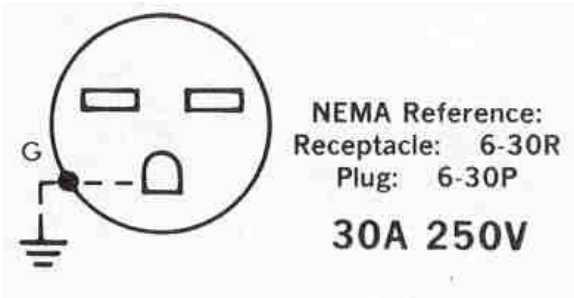

ADA Compliance

§4.28.2 ((CFR) –
 28CFR Part 36)
 "For Alarms".

§4.27 "For controls
 and operating
 mechanisms".

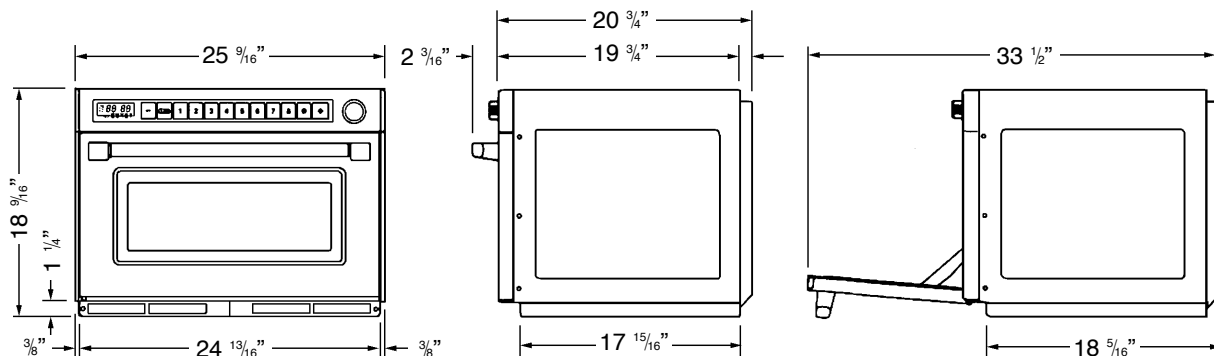

Panasonic

Panasonic Appliance & Commercial Group

Division of Panasonic North America

Executive Offices:

Two Riverfront Plaza, 8th Fl (08N-120), Newark, NJ 07102-5490

Toll Free: 1-888-350-9590

www.panasonic.com/cmo