

Project: _____

Item No: _____

NE-3280

3200 Watt* Commercial Microwave Oven

Technical Specifications

Power source: 208/230-240 V, 60 Hz, Single phase

Receptacle required: 30 Amp, NEMA 6-30R 

Frequency: 2,450MHz

Required power: 208V (20.0A) 230-240V (18.0A)

Output*: 3200 Watts

Outer dimensions: 25 $\frac{9}{16}$ "w x 20 $\frac{3}{4}$ "d x 18 $\frac{9}{16}$ "h

Cavity dimensions: 21 $\frac{1}{16}$ "w x 13"d x 9 $\frac{1}{8}$ "h

Net weight: 137 lbs

Shipping weight: 148 lbs.

Shipping box size: 29 $\frac{1}{16}$ "w x 26 $\frac{1}{8}$ "d x 22 $\frac{1}{4}$ "h, 9.9 ft³

Timer: Maximum times for each stage of cooking

— Hi and Med. power=15 minutes

— Low, Defrost and Hold power=60 minutes

Memory capability: 16 programs




To specify a Panasonic Connectionless Steamer:

The NE-3280 Commercial Microwave Oven meets or exceeds all safety performance and sanitation standards set for commercial food service microwave ovens by: UL, HHS, FCC and NSF.

Plus, oven shall have output power 3200 Watts*, equipped with four magnetrons, top and bottom energy feed, able to accommodate two 4" tall full-size pans, drop down counter style door, Grab & Go door handle, removable center shelf, 8 programmable pads, 16 memory, shift key (AM-PM), 3-stage cooking, 5 power levels (HI, MED., LOW, DEF., HOLD), programmable lock, cycle counter, tone control, self diagnostics, dial timer to select cooking time, video training and Chef/Test kitchen technical support.

* I.E.C. 705-88 Test Procedure. Specifications subject to change without notice.

Receptacle Required




NEMA Reference:
Receptacle: 6-30R
Plug: 6-30P

30A 250V

ADA Compliance

§4.28.2 ((CFR) –
28CFR Part 36)
“For Alarms”.

§4.27 “For controls
and operating
mechanisms”.

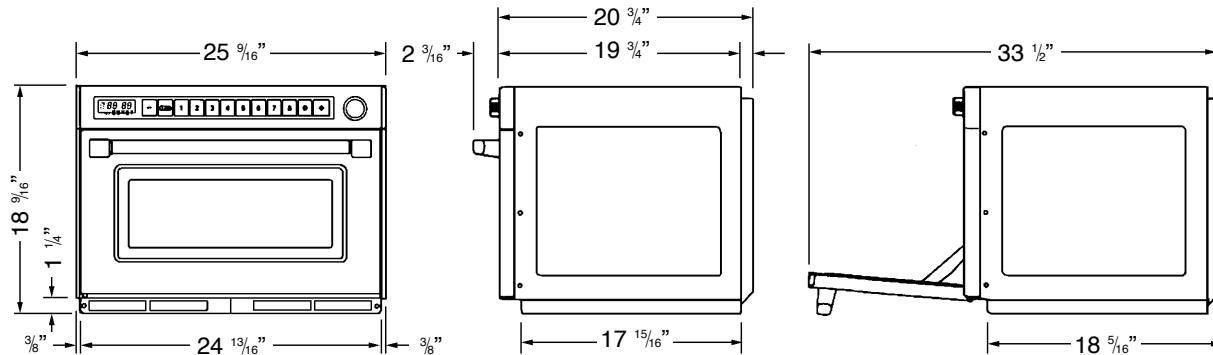

Panasonic

Panasonic Appliance & Commercial Group

Division of Panasonic North America

Executive Offices:

Two Riverfront Plaza, 8th Fl (08N-120), Newark, NJ 07102-5490

Toll Free: 1-888-350-9590

www.panasonic.com/cmo