


PanaSync/Pro™ E110i

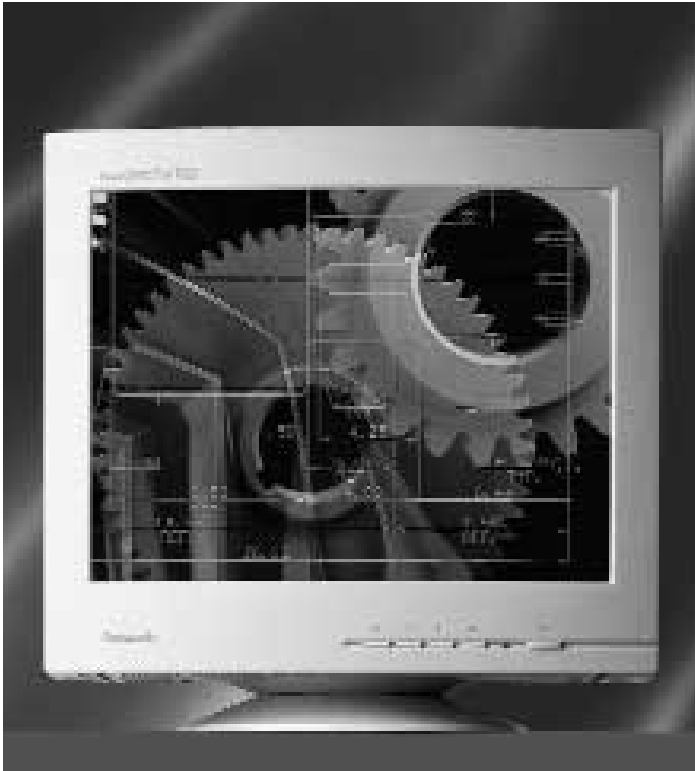

- 21" Multi-Scan Color Display (VIS 20.0")
- 1,600 x 1,280 Maximum Resolution NI
- 0.25mm Dot Pitch
- B - AGRAS™ Coating
- TCO, ENERGY STAR® & MPR II Compliant
- Enhanced On-Screen Adjustment Menu
- 3 Year Limited Warranty
- 1 Year "On-Site" Replacement
- USB Hub Option (TY- LD65A)

As an ENERGY STAR® partner, Panasonic Document Imaging Company has determined that this product meets the ENERGY STAR® guidelines for energy efficiency. All product/brand names are trademarks or registered trademarks of their respective holders. Specifications, design and availability subject to change without notice. Product may be subject to export control regulations. PanaSync, A-AGRAS Coating and DQ-DAF Gun are trademarks of Matsushita Electric Industrial Co. Ltd. Copyright ©1999 Matsushita Electric Corporation of America. All rights reserved.

O n l i n e S p e c S h e e t

Panasonic	Panasonic Document Imaging Company Unit of Matsushita Electric Corporation of America Computer Peripherals Division Headquarters: 2 Panasonic Way, Secaucus, NJ 07094
------------------	--

w w w . p a n a s o n i c . c o m / d i s p l a y s

PanaSync/Pro™ E110i Specifications

CRT Screen Size	21" CRT (20.0"/50.8cm viewable image size) flat-square	
Dot Pitch	0.25mm (horizontal: 0.218mm / vertical: 0.130mm)	
Surface	Black Anti-glare, Anti-reflection & Anti-static coating (B-AGRAS™)	
Viewable Display Area (HxV)		
Factory Preset	15.43" x 11.57" x 19.3" diagonal	
Full Scan	15.98" x 11.97" 20.0" diagonal (Typical)	
Input Signal		
Video Signal	RGB Analog (0.7 Vp-pm 1.0 Vp-p, 75 ohms)	
Sync Signal	H/V separate (TTL), H/V combined, or sync on green	
H-sync	30 - 97 kHz	
V-Sync	50 -180 Hz	
Modes	1 Factory Preset, 7 Reservations, 13 User Memories	
Connectors & Cables		
Signal	One 15-pin mini D-sub to 15 - pin male mini D-Sub (4.92'/1.5 meters)	
Power	One UL 3-pole (CEE 22 type) (5.91'/1.8 meters)	
Controls		
Front Panel	1 (menu) key, left key, right key, 2 (select) key, power switch (On/Off)	
On-Screen Display	Contrast, Brightness, Degauss, Recall (factory setting), H./V. Position, H./V. Size, V. Pincushion, Trapezoid, Parallelogram, Rotation, Color Temp. (9,300K/6,550K/ User Color), Disp. Frequency, Video Level (0.7/1.0 Vp-p), Input Select, H./V. Moiré, H./V. Convergence, Focus, Language (German, French, English, Italian & Spanish), Monitor Self-Test (w/no signal input)	
Video		
Bandwith Resolution (HxV)	1,280 dots x 1,024 lines 73Hz NI, FCC Class B, max. 1,600 dots x 1,280 lines 69Hz NI, FCC Class A, max. *	
Operating		
Temperature	32-104°F	
Humidity	5%-90% Non-condensing	
Power Supply	90 to 132, 198 to 264V AC (50 or 60 Hz) Automatic	
Power Consumption		
On	145 watts (Typical @ 120 VAC)	power LED green
Stand-by	<15 watts	power LED amber
Suspend	<15 watts	power LED amber
Off State	< 4 watts	power LED amber
Power Switch Off	0 watts	power LED dark
Dimensions	18.8" (H) x 19.6" (W) x 19.5" (D)	
Weight	59.4 lb.	
Approvals	UL1950, CSA22.2 No. 950, TUV/GS, NORDIC, FCC, Part 15, Subpart B Class B&A, IC-B (DOC-B&A), VCCI 2 DHHS, HC(HWC), PTB, MPR-II, TCO '92, CE, ISO9241 3-8, VESA DPMS/ENERGY STAR®	
Windows 95 Plug & Play	VESA DDC 1/2B/2B+/AB (access bus) (meets Windows 95 Plug & Play requirements)	
Warranty	3 Year Limited Parts & Labor, 1 Year "On Site" Replacement (see your dealer for details)	
Optional Adapters	Mac Adpater	UNIMAC-82D (not included)**
Cables Available	USB Hub Stand	TY-LD65A Up Stream: x 1, Down Stream: x 4 (not included)

*This monitor may only be used in a commercial, business or industrial environment at resolutions above 1,600 x 1200 at 73 Hz **Available free of charge