

PanaSync™ E70




Features:

- 17" Multi-mode Color Display (VIS 16.0")
- 1,280 x 1,024 Maximum Resolution NI
- .27mm Dot Pitch
- Crystal Pigment
- Advanced AGRAS™ Coating
- ENERGY STAR® Compliant
- On-screen Adjustment Menu
- 3 Year Limited Warranty
- 1 Year "On-Site" Replacement

As an ENERGY STAR® partner, Panasonic Computer Peripheral Company has determined that this product meets the ENERGY STAR® guidelines for energy efficiency. All product/brand names are trademarks or registered trademarks of their respective holders. Specifications and designs are subject to change without notice. Product may be subject to export control regulations. Copyright ©1998 Matsushita Electric Corporation of America. All rights reserved.

O n l i n e S p e c S h e e t

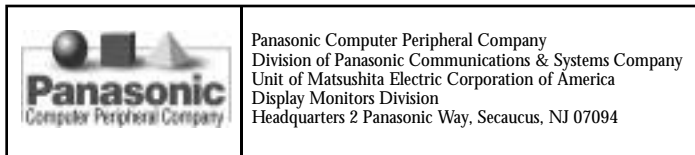

w w w . p a n a s o n i c . c o m / a l i v e

PanaSync™ E70 Specifications

| | | |
|------------------------------|---|--|
| CRT Screen Size | 17" CRT (16.0"/40.6 cm viewable image size) flat-square | |
| Dot Pitch | 0.27mm (H.:0.236mm/ V.: 0.137mm) | |
| Surface | Advanced anti-glare, anti-reflection and anti-static coating (A-AGRAS™) | |
| Viewable Display Area (HxV) | | |
| Factory Preset | 11.81" x 8.86", 14.8" diagonal at 1,024 x 768 75 Hz NI | |
| Full Scan | 12.76" x 9.57", 16.0" diagonal (typical) | |
| Input Signal | | |
| Video Signal | RGB analog (0.7 Vp-p, 1.0 Vp-p, 75 ohms) | |
| Sync Signal | H/V separate (TTL), H/V combined | |
| H-Sync | 30-70kHz | |
| V-Sync | 50-160Hz | |
| Modes | 1 factory preset, 7 factory reservations, 13 user memories | |
| Connectors & Cables | | |
| Signal | One 15-pin male mini D-sub detachable cable (4.92'/1.5 meters) | |
| Power | One UL 3-pole (CEE 22 type) (5.91'/1.8 meters) | |
| Controls | | |
| Front Panel | 1 key, left key, right key, 2 key, power switch (on/off) | |
| On-Screen Display | Contrast, Brightness, H./V. Size, H./V. Position, V. Pincushion, V. Pin. Bal., Trapezoid, Parallelogram, Color Temp. (9,300 + 8 MPCCD/ 7500K/6500K/ 5000K/User Color), Recall (factory setting), Video Level (0.7/1.0 Vp-p), Language (English, French & Spanish), Degauss, Tilt (rotation), Disp. Frequency, Monitor Self-Test (w/no-signal input) | |
| Video | | |
| Maximum Pixel Clock | 108 MHz (typical) | |
| Resolution (HxV) | 1,280 dots x 1,024 lines 60Hz NI, FCC Class B, Max. 1,280 dots x 1,024 lines 66Hz NI, FCC Class A, Max.* | |
| Operating | | |
| Temperature | 32-95°F | |
| Humidity | 5%-90% non-condensing | |
| Power Supply | 90 to 132 VAC (50 or 60Hz) automatic | |
| Power Consumption | | |
| On | 95 watts (typical) | power LED green |
| Standby | <15 watts | power LED amber |
| Suspend | <15 watts | power LED amber |
| Off State | 4.5 watts (Typ 120 V AC) | power LEDamber |
| Power Switch Off | 0 watts | power LEDdark |
| Dimensions (Net) (W x H x D) | 15.9" x 15.9" x 16.7" (405.0mm x 404.5mm x 425.0mm) | |
| Weight (Net) | 36.7 lbs. (16.7 kg) (typical) | |
| Approvals | UL, CUL(CSA), DHHS, PTB, HC(HWC), MPR II, FCC Class B, CE, TUV/GS, NORDIC, ISO9241-3/-8, IC-B (DOC-B), CISPR-B, VCCIclass B, VESA DPMS/ENERGY STAR® | |
| Windows '95 Plug & Play | VESA DDC 1/2B (meets Windows '95 Plug & Play Requirements) | |
| Warranty | 3 years limited parts & labor, 1 year on-site replacement (see your dealer for details) | |
| Optional Adapters Available | Mac Adpater USB Hub Stand | UNIMAC-82D (not included) TY-LD65A Up Stream: x 1, Down Stream: x 4 (not included) |

*This monitor may only be used in a commercial, business or industrial environment at resolutions above 1,280 x 1,024 60 Hz.