

# KXL-D783A Portable 8X CD-ROM Player




## Features:

- Connects to a Notebook Computer through a standard Type II Card (PCMCIA Type II Card and Cable are included).
- Windows 95, Windows 3.1, Windows 3.11, Windows NT 3.51, OS/2 Warp V3 Ready.
- Operates on Compact and Lightweight Universal Voltage AC Adaptor (100-240 V, 50/60 Hz), Six (6) AA/ILR6 Size Alkaline Batteries (not supplied) or Optional NI-CD Rechargeable Battery.
- SCSI-2 Command Compatible. Easy to install Software.
- SPATIALIZER - delivers 3D-Stereo Surround Sound. Expands the sound from two conventional speakers.
- Built-in Stereo Speakers and Headphone Jack.
- Power Save Function. Drive enters "Sleep Mode" after 4 minutes of inactivity to expand Battery life.
- 2-Year Limited Warranty (see dealer for details).

All product/brand names are trademarks or registered trademarks of their respective holders. Specifications subject to change without notice. Product may be subject to export control regulations. Copyright © 1997 Matsushita Electric Corporation of America. All rights reserved.

O n l i n e   S p e c   S h e e t

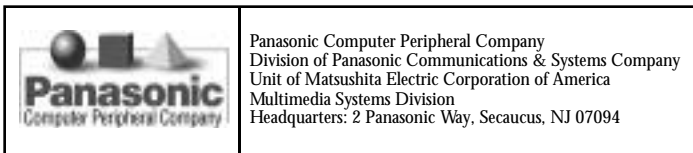

www.panasonic.com/alive

## KXL-D783A Specifications

### Performance

Disc Diameter	Accepts 4.75" or 3.16" Discs
Disc Speed	Normal Velocity (1X) 200-530 rpm 8x Velocity 1,600-4,240 rpm
Data Transfer Rate w/ AC adaptor	Normal Velocity (1 x) 50 KB/s / 8x Velocity 1,200 KB/s. From Buffer 7.0 MB/s (Max. only un-synchronous)
Access Time w/ AC adaptor	Access Time (8X) 180ms typical (1/3 strokes)
Buffer Size	128 KB
MTBF	50,000 power on hours

<b>Power Requirement</b>	AC Operation Input: AC Adaptor. 100-240 V, 50/60 Hz Output: DC. 13 V, 1A DC Operation Six (6) AA/LR6 Size Alkaline Batteries (not supplied) or Optional Rechargeable Battery (Ni-Cd)
--------------------------	--

Dimensions (WXDXH)	5.52" x 8.16" x 1.4" (138mm x 204mm x 35mm)
Weight	Approx. 1.135 lbs. (515 g): without batteries

### Sound Performance

Line in (stereo) Input level	1.2 Vrms or lower
Signal to Noise Ratio	More than 80 dB (A Range)
Output Level	14 mW (EIAJ) (Phones Out) Sound Blaster FM sound source for Windows and Ad-Lib for DOS compatible
# of Quantization Bits	8 bit, 16 bit

### System Requirements

Notebook Computer	IBM or IBM compatible computer, PCMCIA Type II Card Slot, DOS 6.3-7.0/MS-DOS 6.2, Windows 3.1, 3.11/Windows 95, NT 3.51 or OS/2 Warp V3, IBM Card Service or Systemsoft or Phoenix PCMPPLUS
Desktop Computer	IBM and IBM Compatible with SCSI Board including ASPI Manager (Adapter AHA-1, 54X, AHA-2940) or PCMCIA Type II Card Slot -PC DOS 6.3-7.0 /MS-DOS 6.2/Windows 3.1, 3.11/Windows 95/Windows NT 3.51 or OS/2 Warp V3

Note: The information is based on the test results measured by Panasonic internal test software. All brands & product names are trademarks or registered trademarks of their respective companies. This product is designed for computers with built-in sound. Certain audio features of this product manufactured under a license from Desper Products, Inc. Spatializer and the circle-in-square device are trademarks owned by Desper Products, Inc. Microsoft, MS-DOS, Windows and Windows NT are registered trademarks of Microsoft Corp. in the United States and /or other countries.