


PanaSync/Pro™ P15



- On-Screen Adjustment Menu
- 1,280 x 1,024 Maximum Resolution NI
- MPR II Certified
- .27mm Dot Pitch
- AGRAS™ Coating for Reduced Glare
- 48 Hour Swap / 3 Year Limited Warranty

All product/brand names are trademarks or registered trademarks of their respective holders. Specifications subject to change without notice. Product may be subject to export control regulations. Copyright © 1997 Matsushita Electric Corporation of America. All rights reserved.

O n l i n e S p e c S h e e t

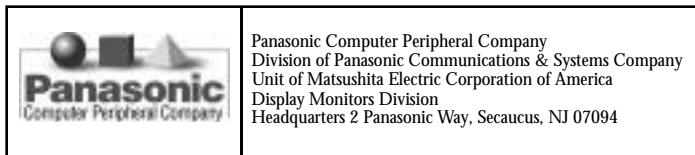

w w w . p a n a s o n i c . c o m / a l i v e

PanaSync/Pro™ P15 Specifications

CRT Screen Size	15" CRT (14.0"/35.6 cm Viewable Image Size) Flat-Square
Dot Pitch	0.27mm
Surface	AGRAS™ Silica-Coat
Viewable Display Area (HxV)	
Factory Preset	10.24" x 7.68", 12.8" diagonal
Full Scan	11.18" x 8.39", 14.0" diagonal (typical)
Input	
Video Signal	RGB analog (0.7 Vp-p, 1.0 Vp-p with sync on green, 75 ohms) H/V separate (TTL), H/V
Sync Signal	Combined, or Sync on Green
H-Sync	30-69kHz
V-Sync	50-160Hz
Modes	1 Factory Preset, 7 Reservations, 13 User Memories
Connector & Cables	
Video Input	One 15-pin Male Mini D-Sub on attached cable (4.92'/1.5 meters)
Mac Adapter	Available-Free of Charge
Power	One UL 3-pole (CEE 22 type) (4.92'/1.5 meters)
Controls	
Front Panel	1 (menu) key, Left key, Right key, 2 (select) key, Power Switch (On/Off)
Indicators	LED power indicator Green=On, Yellow=Power-saving mode
On-Screen Menu	Contrast, Brightness, Recall (Factory Setting), H Position, H Size, V Position, V Size, V Pincushion, Trapezoid, Parallelogram, Color Temperature (9,300K /6,550K/User Color), Display Frequency, Video Level (0.7/1.0 Vp-p), Monitor Self-Test (w/no Signal Input)
Video Bandwidth	86MHz (typical)
Resolution (HxV)	1,280 dots x 1,024 lines 60Hz NI FCC Class B, Max. 1,280 dots x 1,024 lines 65Hz NI FCC Class A, Max.
Operating Conditions	
Temperature	32-95°F
Humidity	5%-90% Non-condensing
Dimensions	14.6" (W) x 15.0" (H) x 16.2" (D)
Weight	28.6 lbs
Approvals	UL, C-UL=CSA, DHHS, HWC, MPR II, FCC Class B, Energy Star/VESA DPMS
Power Consumption	
Supply	100 to 240V AC (50 or 60Hz), Auto Switch
On	95 Watts (Typical)
Standby	<30 Watts
Suspend	<30 Watts
Off	<8 Watts
Warranty	3 Years Limited Parts & Labor, 1 Year On-Site Replacement (see your dealer for details)
Other	Windows '95 Plug & Play 24-hour/7-day customer support 48-hour Swap Program