


PanaSync/Pro™ P50



- On-Screen Adjustment Menu
- 1,280 x 1,024 Maximum Resolution NI
- MPR II Certified
- .27mm Dot Pitch
- Silica Anti-Glare and Anti-Static Coating
- 48-Hour Swap / 3-Year Limited Warranty

All product/brand names are trademarks or registered trademarks of their respective holders. Specifications subject to change without notice. Product may be subject to export control regulations. Copyright © 1997 Matsushita Electric Corporation of America. All rights reserved.

O n l i n e S p e c S h e e t

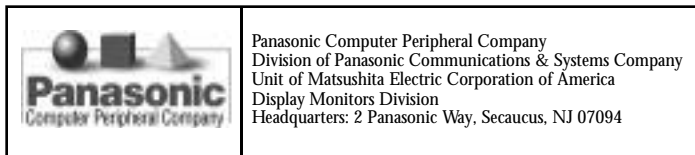

www.panasonic.com/alive

PanaSync/Pro™ P50 Specifications

CRT Screen Size	15" CRT (14.0"/35.6 cm Viewable Image Size) Flat-Square
Dot Pitch	0.27mm
Surface	Silica Anti-Glare and Anti-Static Coating
Viewable Display Area (HxV)	
Factory Preset	10.70" x 8.03", 13.4" diagonal
Full Scan	11.25" x 8.44", 14.0" diagonal (typical)
Input	
Video Signal	RGB analog (0.7 Vp-p, 1.0 Vp-p with Sync-on-Green, 75 ohms)
Sync Signal	H/V separate (TTL), H/V combined, or Sync-on-Green
H-Sync	30-70kHz
V-Sync	50-180Hz
Modes	1 Factory Preset, 7 Reservations, 13 User Memories
Connector & Cables	
Video Input	One 15-pin Male Mini D-Sub on attached cable (4.92"/1.5 meters)
Mac Adapter	Available-Free of Charge
Power	One UL 3-pole (CEE 22 type) (5.91"/1.8 meters)
Controls	
Front Panel	Left Select key, Right Select key (manual Degauss wo/OSD), Left Adjust key, Right Adjust Key, Power Switch (On/Off)
Indicators	LED power indicator Green=On, Yellow=Power-saving mode
On-Screen Menu	Contrast, Brightness, Recall (Factory Setting), H. Position, H. Size, V. Position, V. Size, V. Pincushion, Side Pincushion Balance, Trapezoid, Parallelogram, Color Temperature (9,300 + 8 MPDCD/7500K/6550K/5000K/User Color), OSD Position, Display Frequency (H&V), Video Level (0.7/1.0 Vp-p), Rotation, EXIT, Language (English, French, German, Spanish, Italian & Japanese), Monitor Self-Test (w/no Signal Input)
Video Bandwidth	86MHz (typical)
Resolution (HxV)	1,280 dots x 1,024 lines 60Hz NI FCC Class B, Max. 1,280 dots x 1,024 lines 66Hz NI FCC Class A, Max.*
Operating Conditions	
Temperature	32-95°F
Humidity	5%-90% Non-condensing
Dimensions	14.6" (W) x 15.0" (H) x 16.2" (D)
Weight	26.9 lbs (Typical)
Approvals	UL, CUL=CSA, DHHS, HWC, TCO'92, MPR II, FCC Class B, CE, IC-B (DOC B) VESA DPMS/Energy Star
Power Consumption	
Supply	90 to 264V AC (50 or 60Hz), Automatic
On	85 Watts (Typical)
Standby	<30 Watts
Suspend	<30 Watts
Off	<5 Watts
Warranty	3 Years Limited Parts & Labor, 1 Year On-Site Replacement (see your dealer for details)
Other	Windows '95 Plug & Play 24-hour/7-day customer service 48-hour Swap Program

*This monitor may only be used in a commercial, business or industrial environment at resolutions above 1,280 x 1,024 60Hz.