

Specification Data

Panasonic Ventilation Fan

Panasonic

WhisperLite™
VENTILATION FAN



FV-08VQL3 (90 cfm)

Description

Ventilating fan shall be Low Noise ceiling mount type rated for continuous run. Fan shall be Energy Star rated and certified by the Home Ventilating Institute (HVI). Fan shall include energy efficient compact fluorescent lighting. Evaluated by Underwriters Laboratories and conform to both UL and cUL safety standards.

Motor/Blower:

- Four-pole totally enclosed condenser motor rated for continuous run.
- Power Rating shall be 120 volts and 60 hz.
- Fan shall be UL and cUL listed for tub/shower enclosure when used with a GFCI branch circuit wiring.
- Motor equipped with thermal-cut-off.
- Removable with permanently lubricated plug-in motor.

Housing:

- Rust proof paint, galvanized steel body.
- Detachable 4" diameter duct adapter.
- Built in backdraft damper.
- Double hangar bar system allowing for ideal positioning.

Grille:

- Attractive design using PP material.
- Attaches directly to housing with torsion springs.

Light:



- Two 13 watt, 3500 Kelvin quick start compact fluorescent lamps included.
- One 4 watt, night-light included.

Warranty:


- The factory warranty shall be a minimum of 3 years limited warranty on parts.

Typical Specifications:


Ventilating fan and light shall be of the ceiling mount, Energy Star rated type, with no less than 90 CFM and no more than 0.6 sone as certified by the Home Ventilating Institute (HVI) at 0.1 static pressure in inches water gauge. Fan power consumption shall be no greater than 19.9 watts and Energy Star rated with efficiency rating of no less than 4.5 cfm/watt. The motor shall be totally enclosed, four pole condenser type engineered to run continuously. Power rating shall be 120v/60Hz. Duct diameter shall be no less than 4". Fan shall be UL and cUL listed for tub/shower enclosure when used with GFCI branch circuit wiring. Lamps shall be of the compact fluorescent type with the fan utilizing no less than two 13-watt energy efficient, compact fluorescent lamps. Night-light feature shall be included.

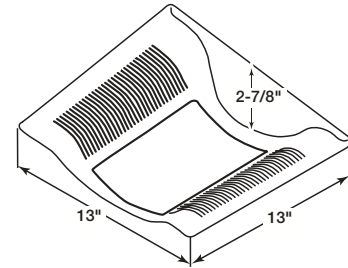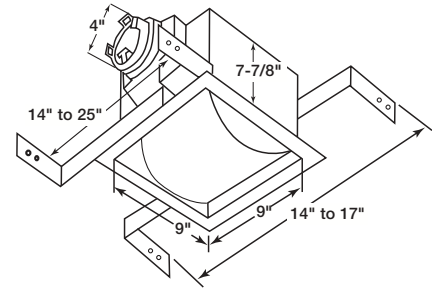

Fan Curve FV-08VQL3

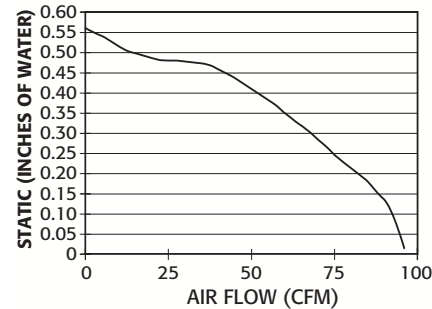

| Specifications: | FV-08VQL3 | |
|-------------------------------|-----------|------|
| Static Pressure (inches w.g.) | 0.1" | 0.25 |
| Air Volume (CFM) | 90 | 76 |
| Noise (sones) | 0.6 | NA |
| Power Consumption (Watts) | 19.9 | 19.4 |
| Energy Efficiency (CFM/Watts) | 4.5 | 3.9 |
| Speed (RPM) | 1018 | 1194 |
| Energy Star Rated | Yes | |
| Washington State VIAQ Code | Yes | |



Included:
2 Panasonic
Quick Start
13 Watt
Compact
Fluorescent
Lamps.

For Complete Installation Instructions Visit www.panasonic.com/building



| Model | Quantity | Comments | Project: |
|-------|----------|----------|---------------|
| | | | Location: |
| | | | Architect: |
| | | | Engineer: |
| | | | Contractor: |
| | | | Submitted by: |
| | | | Date: |