SPECIFICATION

Series			Consum	ption [W]	Air Volume				Noise [dB(A)]		
	Model		E011	/ 01.1-	50Hz	50Hz 60Hz	50Hz	60Hz	E011-	/ 011	Weight [kg]
			50Hz	60Hz	[CMH]	[CMH]	[CFM]	[CFM]	50Hz	60Hz	
Automatic Shutter Louver	FV-20AL1		18	22	550	610	323	359	38	42.5	2.0
	FV-25AL1		25	31	840	860	494	506	40.5	42	2.5
Series	FV-30AL1		28	33	1000	1000	588	588	39	40	2.8
	EV_20DL1	Exhaust	17	-	550		323	-	38	-	2.1
	FV-20RL1	Intake	12.5	=	430	= 3	253	-	45		
Reversible	FV-25RL1	Exhaust	25		840		494	-	40.5	_	2.5
Louver Series		Intake	16.5		600		353	-	43	_	
	FV-30RL1	Exhaust	27.5		1000		588		39		2.8
		Intake	18		750	=3	441	=	42	_	
	FV-20AU1		18	22	590	680	347	400	36	39	1.9
Automatic Shutter Series	FV-25AU1		25	31	950	990	559	582	38	39	2.3
	FV-30AU1		28	33	1200	1200	706	706	37	37	2.6
	FV-20RG1	Exhaust	17		590	-,,	347		36	-	2.0
Reversible Series		Intake	12.5		440		258		45	_	
	FV-25RG1	Exhaust	25	=	950	=3	559	-	38	-	2.7
		Intake	16.5	-	670	-	394	-	45	-	2.4
		Exhaust	27.5	-	1200		706	-	37	_	0.7
	FV-30RG1	Intake	18		880		517		44	_	2.7

Values in specification table are at 220V.

1.The value of power consumption, air volume and noise are specified at the static pressure of 0 Pa.

2.The value of air volume is the mean value which is measured by our company.

3.The value of noise level is measured at 1m apart from the left, the right and the front of product, then get the average of three values.

4.The value of noise level is A weight average sound pressure level, the mean value is measured by our company.



- Actual colors may vary slightly from shown. - Specifications are subject to change without prior notice.

CATALOG NO: P-VF022

08. 2022



FEATURES

SMART DESIGN

Adapted the new flat design, it creates a feeling of floating on the wall upon installation. Even for the louver series, the louver design is slim. The minimalistic design allows the ventilating fan assimilate into the space easily.






2

HALF PITCH MOTOR & BEARING

All models adopt half pitch condenser motor and long life bearing that prolongs the product durability, with average 30,000 hours life time.

They also enable energy saving by reducing power consumption down to average 13%.

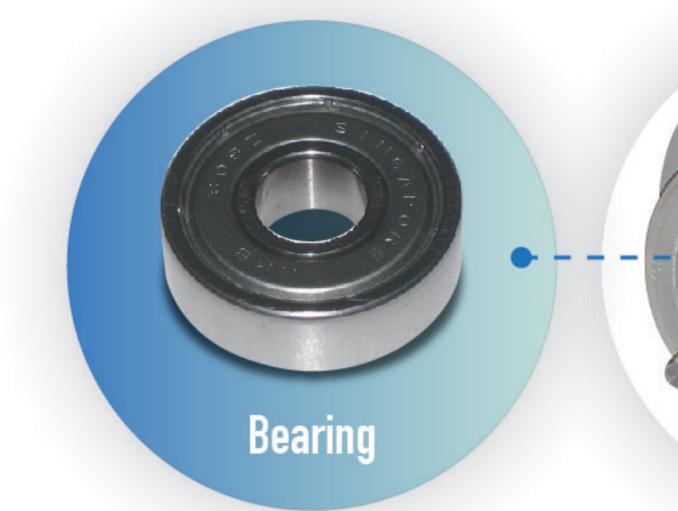



"HP Motot" and "Bearing" are used

3

THERMAL FUSE EQUIPPED

All motors are equipped with thermal fuses which stop the operation of the fans when they are overheated. It can prevent further temperature rise and reduce the risk of potential fire hazard of the motors.



SILENT STREAM FAN

New Blade design applies advanced aerodynamic principle that optimizes the design of blade shape.





--- 3D Sickle Blade

New Blade design adopts an increased blade size and airfoil curve optimization. It can increase the air volume by adjusting the blade shape to match the airflow. Also, it can lower the noise by evening the airflow velocity.

5

REVERSIBLE FUNCTION

With a pulling string, the fan blade spinning direction can be reversed, which brings greater flexibility that the ventilating fan not only exhausts air, but also intakes air. (only applicable for Reversible Louver series and Reversible series)



AUTOMATIC SHUTTER LOUVER SERIES

FV-20AL1 / FV-25AL1 / FV-30AL1




REVERSIBLE LOUVER SERIES

FV-20RL1 / FV-25RL1 / FV-30RL1



DIMENSIONS (mm)

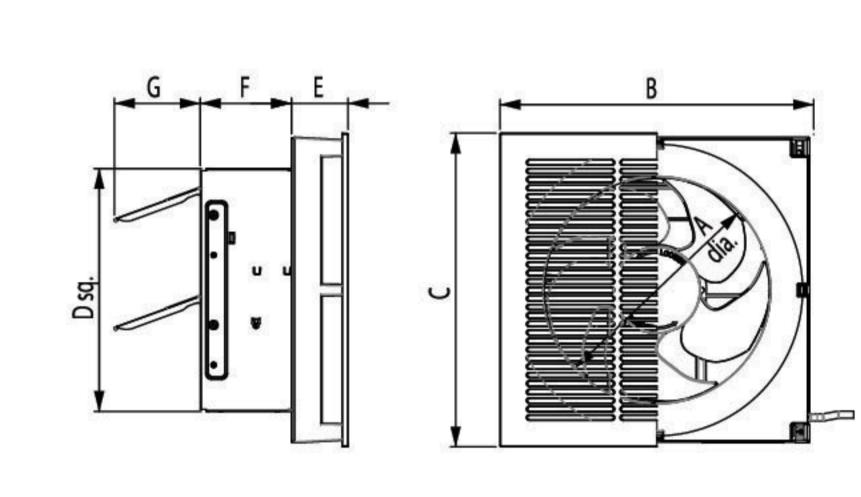

Model No.	Α	В	С	D	Е	F	G		
25AL1 / 25RL1	273	360	360	290	58	90	67		
20 AT 1 / 20 DT 1	217	/.10	7.10	27.0	50	00	0.2		

Model No.	Α	В	С	D	Е	F	G
20AL1 / 20RL1	223	310	310	240	56	90	85

AUTOMATIC SHUTTER SERIES

FV-20AU1 / FV-25AU1 / FV-30AU1




REVERSIBLE SERIES

FV-20RG1 / FV-25RG1 / FV-30RG1



DIMENSIONS (mm)

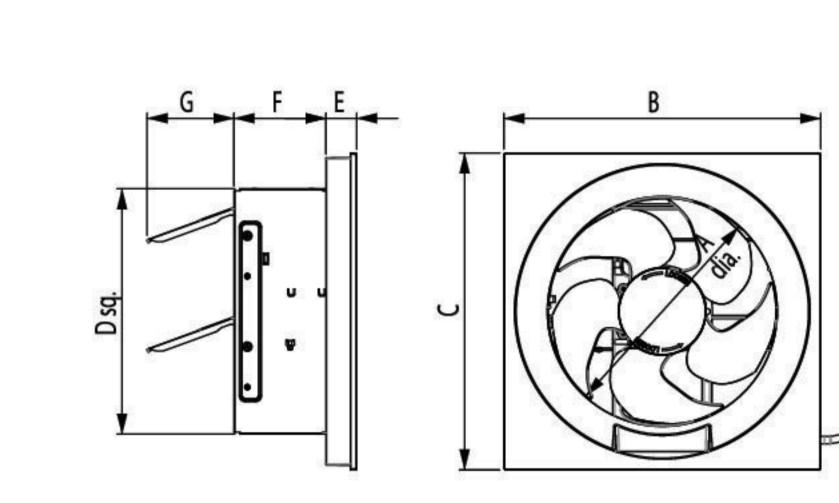

Model No.	Α	В	С	D	E	F	G
20AU1 / 20RG1	223	310	310	240	30	90	85

g F E B

Model No.	Α	В	С	D	Е	F	G
25AU1 / 25RG1	273	360	360	290	32	90	67
30AU1 / 30RG1	317	410	410	340	32	90	83