


## 一般仕様 General Specifications

- ◇許容環境温度範囲：-40℃ to +40℃ (65%RH) (Operating)  
-40℃ to +70℃ (65%RH) (Storage)  
実用上さしつかえない状態で結露無きこと
- ◇ Allowable Ambient Temperature Range :  
-40℃ to +40℃ (65%RH) (Operating)  
-40℃ to +70℃ (65%RH) (Storage)  
No such condensation as hinders practical use

## 期待できる寿命 Expected Life


- ※故障率 10%  
40,000時間 (-20℃)
- ※ Failure rate 10%  
40,000 hours (-20℃)

## 外觀図 Outline

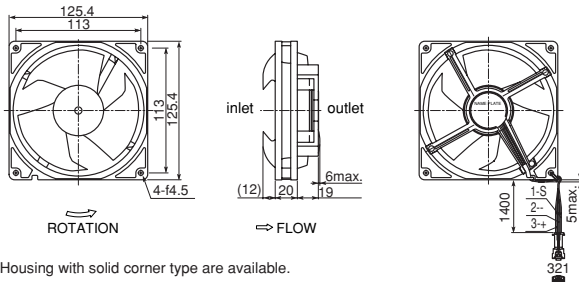


※ Housing with solid corner type are available.

## 特性曲線 Characteristic Curves



## 取付穴参考寸法 Panel Out-cuts



## 材質 Material

- ◇軸受 : ハイドロウェーブベアリング
- ◇Bearing : Hydro Wave Bearing

## 仕様 Specifications

型式 Model	定格電圧 Rated Voltage	使用電圧範囲 Operating Voltage	定格電流 Current	定格入力 Input Power	定格回転速度 Rated Speed	最大風量 Maximum Air Flow		最大静圧 Maximum Air Pressure		騒音 Noise
	(V)	(V)	(mA)*1	(W)*1	(min <sup>-1</sup> )*1	(m <sup>3</sup> /min)*1	(CFM)*1	(Pa)*1	(mmH <sub>2</sub> O)*1	(dB-A)*1
FBA12J12M	12	7.0 to 14	235	2.82	2000	1.85	65.3	24.0	2.44	32

回転方向：ラベルから見て時計方向  
風吹き出し方向：ラベル側

Rotation: Clockwise as seen from the label side.  
Airflow Outlet: Label side

\*1: Average Values in Free Air