

WALL-MOUNTED : ELITE INVERTER Single-Split Type



CS-VU9UKQ | CS-VU12UKQ | CS-VU18UKQ



Wireless



Wired (Optional)



Network Adaptor (Optional)

**SPECIFICATIONS**

MODEL		(60Hz)	CS-VU9UKQ [CU-VU9UKQ]	CS-VU12UKQ [CU-VU12UKQ]	CS-VU18UKQ [CU-VU18UKQ]
Cooling Capacity	(min-max)	kW	2.50 [0.84-3.60]	3.40 [1.02-4.50]	5.20 [1.10-5.80]
	(min-max)	kJ/h	9,000 [3,020-12,960]	12,240 [3,670-16,200]	18,720 [3,960-20,880]
EER	(min-max)	kJ/hW	18.37 [14.05-14.40]	14.93 [14.98-13.50]	12.91 [13.66-12.50]
Electrical Data	Voltage	V	230	230	230
	Current	A	2.3	3.8	6.7
	Power Input (min-max)	W	490 [215-900]	820 [245-1,200]	1,450 [290-1,670]
Moisture Removal		L/h	1.5	2.0	2.9
		Pt/h	3.2	4.2	6.1
Air Circulation	Indoor	m <sup>3</sup> /min [ft <sup>3</sup> /min]	11.5 [405]	12.8 [450]	14.8 [520]
	Outdoor	m <sup>3</sup> /min [ft <sup>3</sup> /min]	31.3 [1,110]	31.3 [1,110]	34.9 [1,230]
Noise Level	Indoor (H / L / Q-Lo)	dB [A]	42/26/18	43/28/19	46/36/33
	Outdoor (H)	dB [A]	47	48	49
Dimensions Indoor (Outdoor)	Height	mm	306 [542]	306 [542]	306 [619]
		inch	12-1/16 [21-11/32]	12-1/16 [21-11/32]	12-1/16 [24-3/8]
	Width	mm	950 [780]	950 [780]	950 [824]
		inch	37-13/32 [30-23/32]	37-13/32 [30-23/32]	37-13/32 [32-15/32]
Depth	mm	280 [289]	280 [289]	280 [299]	
	inch	11-1/32 [11-13/32]	11-1/32 [11-13/32]	11-1/32 [11-25/32]	
Net Weight	Indoor	kg [lb]	12 [26]	12 [26]	12 [26]
	Outdoor	kg [lb]	30 [66]	30 [66]	33 [73]
Refrigerant Pipe Diameter	Liquid Side	mm	ø 6.35	ø 6.35	ø 6.35
	Gas Side	inch	1/4	1/4	1/4
Pipe Extension	Chargeless Pipe Length	m	7.5	7.5	10.0
	Maximum Pipe Length	m	20	20	30
	Maximum Elevation Length	m	15	15	20
	Additional Refrigerant Gas*	g/m	10	10	25
Power Supply		Outdoor	Outdoor	Outdoor	

Cooling [ ]: Outdoor Unit

\*When pipes are not extended from the chargeless pipe length, the required amount of refrigerant is already in the unit.

**BACKLIT SKY CONTROLLER**

Enjoy innovative design at your fingertips with the new stylish and sleek Backlit Sky Controller.

With fast access to key operations and a smooth gliding cover revealing more options, controlling your settings has become simple and intuitive.

With a width of 58.9mm and a length of 164.7mm, the Sky Controller fits comfortably into your hand.




- 1 Backlit LED screen lets you view operations status in the dark.
- 2 Power Button.
- 3 Switch on nanoe™ Technology function to activate nanoe™ X and nanoe-G for air purification and deodorisation even when the air conditioner is switched off.
- 4 Toggles between RADIANT COOLING and Fast Cooling (DIRECT).
- 5 Press up or down to set the temperature.
- 6 iAuto-X lets you come home with FAST COOLING. Then enjoy continuous comfort with RADIANT COOLING which avoids direct cooling.
- 7 Set the airflow direction.
- 8 Adjusts the fan speed.
- 9 Toggles between iAUTO-X, COOL and DRY setting mode.
- 10 Delays off timer with temperature control for better sleep.
- 11 Set 24-hour Dual ON & OFF Timer.
- 12 Set the actual time [hour and minute].



Wireless  
Applicable to ELITE INVERTER



**COOLING MODELS**

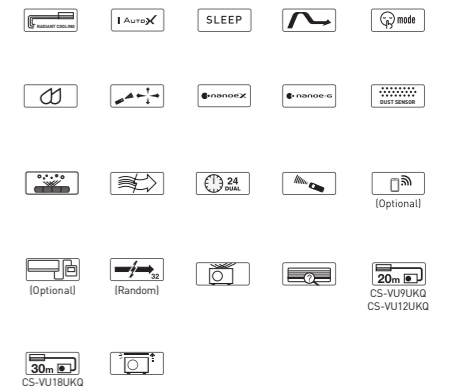

**OUTDOOR**

