



WALL-MOUNTED : PREMIUM **INVERTER** Single-Split Type



CS-XU9VKQ | CS-XU12VKQ

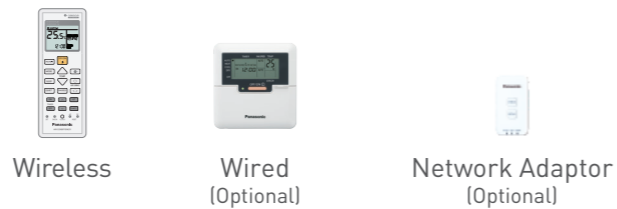

CS-XU18VKQ | CS-XU24VKQ | CS-XU30VKQ

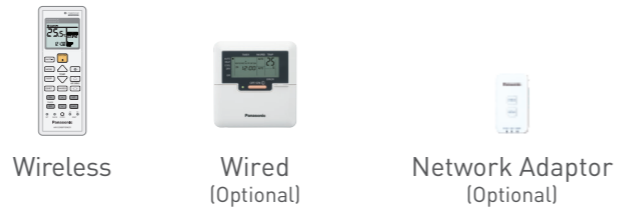

SPECIFICATIONS


MODEL		[60Hz]	CS-XU9VKQ [CU-XU9VKQ]	CS-XU12VKQ [CU-XU12VKQ]	CS-XU18VKQ [CU-XU18VKQ]	CS-XU24VKQ [CU-XU24VKQ]	CS-XU30VKQ [CU-XU30VKQ]
Cooling Capacity	(min-max)	kW	2.55 [0.84-3.20]	3.30 [1.02-4.20]	5.20 [1.10-6.00]	6.00 [1.12-7.10]	8.20 [1.15-10.00]
	(min-max)	kJ/h	9,180 [3,020-11,520]	11,880 [3,670-15,120]	18,720 [3,960-21,600]	21,600 [4,030-25,560]	29,520 [4,140-36,000]
EER	(min-max)	kJ/hW	14.34 [13.42-13.09]	14.14 [14.12-12.81]	14.86 [13.66-12.86]	13.94 [12.59-12.78]	12.83 [11.83-11.25]
Electrical Data	Voltage	V	230	230	230	230	230
	Current	A	3.1	3.9	5.7	7.1	11.0
	Power Input (min-max)	W	640 [225-880]	840 [260-1,180]	1,260 [290-1,680]	1,550 [320-2,000]	2,300 [350-3,200]
Moisture Removal		L/h	1.6	1.9	2.9	3.3	4.8
		Pt/h	3.4	4.0	6.1	7.0	10.1
Air Circulation	Indoor	m ³ /min [ft ³ /min]	10.8 [380]	11.3 [400]	20.4 [720]	21.2 [745]	21.3 [750]
	Outdoor	m ³ /min [ft ³ /min]	25.4 [895]	31.6 [1,120]	34.9 [1,230]	46.3 [1,635]	50.2 [1,770]
Noise Level	Indoor (H / L / Q-Lo)	dB [A]	38/26/23	40/28/25	45/36/33	46/37/34	47/37/34
	Outdoor (H)	dB [A]	47	48	50	50	53
Dimensions Indoor (Outdoor)	Height	mm	295 [511]	295 [542]	302 [619]	302 [695]	302 [795]
		inch	11-5/8 [20-1/8]	11-5/8 [21-11/32]	11-29/32 [24-3/8]	11-29/32 [27-3/8]	11-29/32 [31-5/16]
	Width	mm	919 [650]	919 [780]	1,120 [824]	1,120 [875]	1,120 [875]
		inch	36-3/16 [25-19/32]	36-3/16 [30-23/32]	44-1/8 [32-15/32]	44-1/8 [34-15/32]	44-1/8 [34-15/32]
Depth	mm	199 [230]	199 [289]	241 [299]	241 [320]	241 [320]	
	inch	7-27/32 [9-1/16]	7-27/32 [11-13/32]	9-1/2 [11-25/32]	9-1/2 [12-5/8]	9-1/2 [12-5/8]	
Net Weight	Indoor	kg [lb]	9 [20]	9 [20]	12 [26]	12 [26]	13 [29]
	Outdoor	kg [lb]	20 [44]	27 [60]	32 [71]	41 [90]	55 [121]
Refrigerant Pipe Diameter	Liquid Side	mm	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35
		inch	1/4	1/4	1/4	1/4	1/4
Gas Side	mm	ø 9.52	ø 12.70	ø 12.70	ø 15.88	ø 15.88	
	inch	3/8	1/2	1/2	5/8	5/8	
Pipe Extension	Chargeless Pipe Length	m	7.5	7.5	10.0	10.0	10.0
	Maximum Pipe Length	m	20	20	30	30	30
	Maximum Elevation Length	m	15	15	20	20	20
	Additional Refrigerant Gas*	g/m	10	10	15	25	25
Power Supply		Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	

*When pipes are not extended from the chargeless pipe length, the required amount of refrigerant is already in the unit.

EASY-TO-USE REMOTE CONTROLLER

Panasonic's wireless remote controller features a large Liquid Crystal Display (LCD) panel which makes it even more user-friendly. So you can sit back and enjoy easy operation and long-lasting comfort from your Panasonic Air Conditioner.

- 1 LCD display for an easy overview of the operation status.
- 2 iAUTO-X lets you come home to fast cooling. Then enjoy continuous comfort with Shower Cooling which avoids direct cooling.
- 3 Switch on nanoe™ Technology function to activate nanoe™ X and nanoe-G for air purification and deodorisation even when the air conditioner is switched off.
- 4 Press up or down to set the temperature.
- 5 Toggles between iAUTO-X, COOL and DRY setting mode.
- 6 Delays off timer with temperature control for better sleep.
- 7 Set the airflow direction.
- 8 Adjusts the fan speed.
- 9 Quiet function allows you to sleep comfortably at night.
- 10 Set 24-hour Dual ON & OFF Timer.
- 11 Set the actual time (hour and minute).

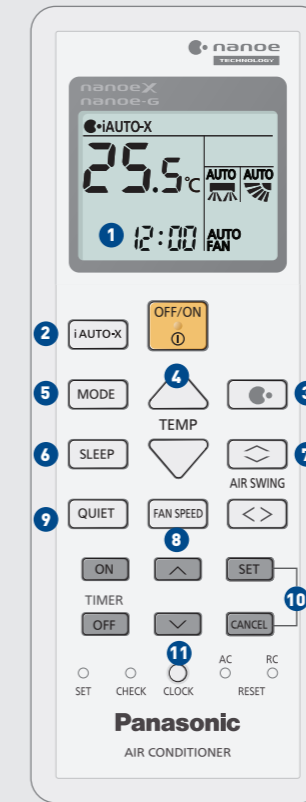

Wireless
Applicable to PREMIUM INVERTER


DUAL TIMER



DUAL TIMER FOR 2 ON AND OFF TIMES PER DAY

For convenience, the dual timer repeats everyday until you cancel it.

- 1 Select ON or OFF Timer



- 2 Set the time.



COOLING MODELS



OUTDOOR




CU-XU9VKQ



CU-XU12VKQ



CU-XU18VKQ



CU-XU24VKQ



CU-XU30VKQ