

FLOOR STANDING NEW

Model No.
CS-E28NFQ
S-38PB2Q6
S-43PB2Q6
S-48PB2Q6



TECHNICAL FOCUS

- Stylish Design
- Left-and-right Swing Airflow Louver
- Up-and-down Swing Airflow Louver (For CS-E28NFQ)
- Auto Fan Mode
- Powerful Air Flow
- 12-Hour On/Off Delay Setting Timer
- Random Auto Restart
- Self-diagnostic Function



CS-E28NFQ

S-38PB2Q6
S-43PB2Q6
S-48PB2Q6

Accessories

Wireless Remote Controller




A wireless remote controller is in the same package with the indoor unit.

(FOR CS-E28NFQ) (FOR S-38/43/48PB2Q6)


Capacity [Btu/h]		24600	38200	42000	48800
Power Source	V/Phase Hz	230 V, 1Ø Phase - 60 Hz			
Indoor		CS-E28NFQ	S-38PB2Q6	S-43PB2Q6	S-48PB2Q6
Outdoor		CU-E28NFQ	U-38PS2Q6	U-43PS2Q6	U-48PS2Q6
Cooling Capacity: Rated (Min-Max)	kW	7.2 [1.0-7.5]	11.2 [4.0-11.7]	12.3 [4.0-12.7]	14.3 [6.3-15.4]
	Btu/h	24,600 [3,410-25,600]	38,200 [13,700-39,900]	42,000 [13,700-43,300]	48,800 [21,500-52,600]
Heating Capacity: Rated (Min-Max)	kW	8.3 [1.0-10.35]	-	-	-
	Btu/h	28,320 [3,410-35,310]	-	-	-
Current: Rated (Max)	A	12.2 [14.8]	19.7 [24.0]	22.2 [26.0]	24.9 [28.0]
Cooling Power Input: Rated (Min-Max)	kW	2.55 [0.21-2.60]	4.08 [0.93-4.33]	4.60 [0.93-4.88]	5.15 [1.55-5.80]
Cooling Rated COP / EER	W/W	2.82	2.75	2.67	2.78
	Btu/hW	9.64	9.36	9.13	9.48
Indoor Unit					
Cooling Air Volume (Air Circulation) [Hi]	m ³ /min	16	32	32	32
Cooling Sound Pressure Level (Hi/Lo)	dB [A]	43 / 33	53 / 44	53 / 44	53 / 44
Cooling Sound Power Level (Hi/Lo)		-	68 / 59	68 / 59	68 / 59
Dimension	Indoor (HxWxD)	mm	1,880 x 540 x 357	1,880 x 600 x 350	1,880 x 600 x 350
Net Weight		kg	37	51	51
Outdoor Unit					
Sound Pressure Level	dB [A]	51	54	55	56
Sound Power Level	dB	-	68	69	70
Dimension	Outdoor (HxWxD)	mm	700 x 998 x 320	996 x 980 x 370	996 x 980 x 370
Net Weight		kg	46	72	81
Piping Connection	Gas Pipe	mm (inch)	12.70 [1/2]	15.88 [5/8]	15.88 [5/8]
	Liquid Pipe	mm (inch)	6.35 [1/4]	9.52 [3/8]	9.52 [3/8]
Pipe Length	Min-Max	m	3-15	7.5-50	7.5-50
Elevation Difference		m	10	30	30
Maximum Chargeless Length	Max	m	7	30	30
Additional Gas		g/m	20	50	50
Operating Range, Outdoor	Min-Max	°C	16-43	16-43	16-43

Please refer to technical documents for more details.

Dimensions (CS-E28NFQ)

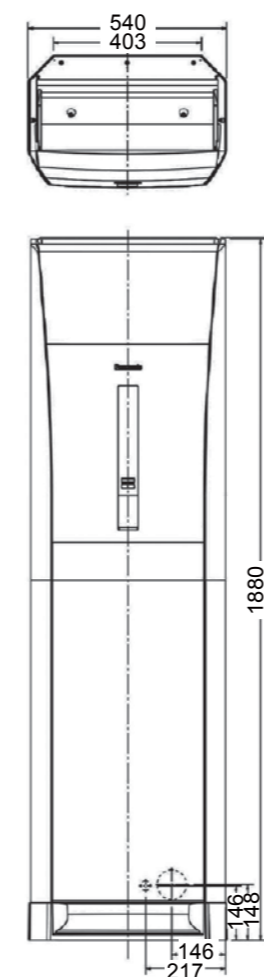

Dimensions (S-38PB2Q6 / S-43PB2Q6 / S-48PB2Q6)

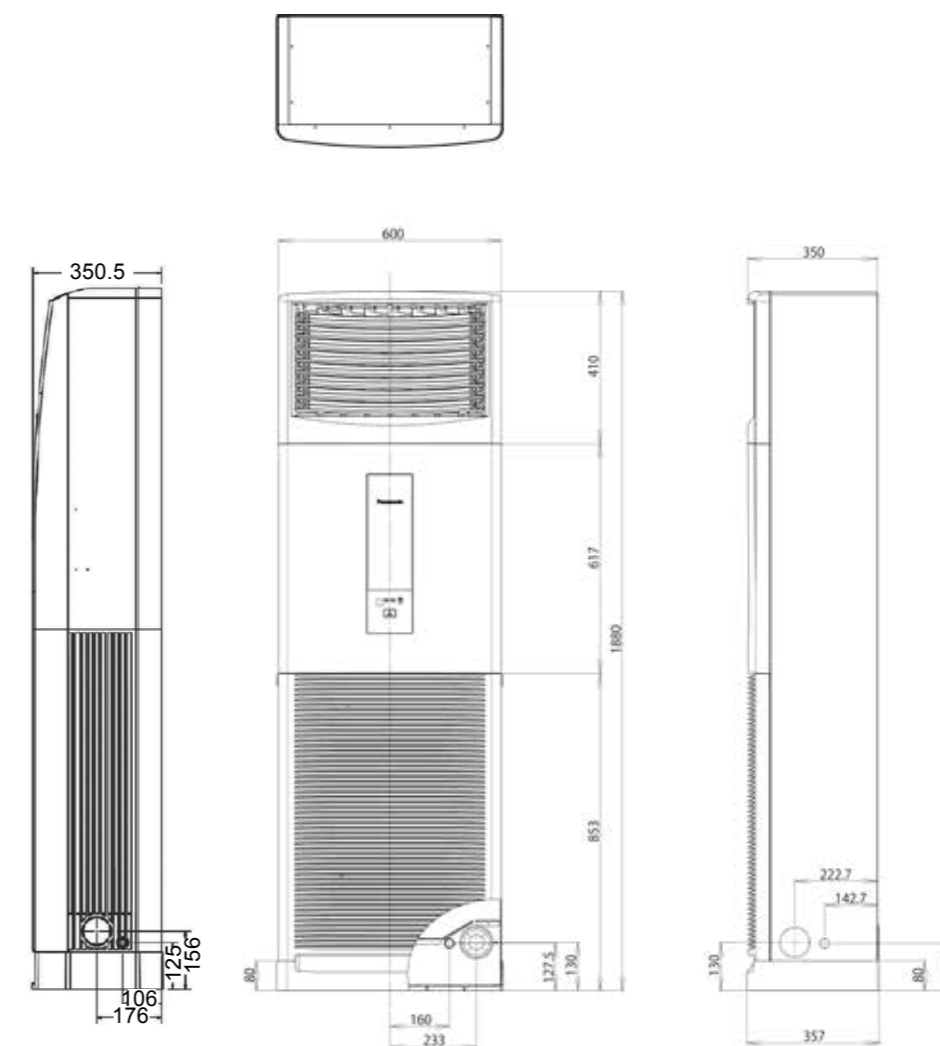

Unit:mm