

FLOOR STANDING

Model No.
CS-J18FFP5
CS-J28FFP8
CS-J45FFP8



TECHNICAL FOCUS

- 12-Hour On/Off Real Setting Timer
- Random Auto Restart (*2/3HP)
- Auto Fan Mode
- Self-Diagnostic Function (*5HP)
- Auto Freezing Control (2/3HP)




Remote Controller



A wireless remote controller is in the same package with the indoor unit.


Capacity [Btu/h]		19,100	24,900	42,300	
Power Source	V/Phase Hz	220 V, 1Ø Phase - 50 Hz		380 V, 3Ø phase - 50Hz	
Indoor		CS-J18FFP5	CS-J28FFP8	CS-J45FFP8	
Outdoor		CU-J18FFP5	CU-J28FFP8	CU-J45FFP8	
Cooling Capacity: Rated	kW	5.60	7.30	12.40	
	Btu/h	19,100	24,900	42,300	
Current	A	7.9	4.5	8.70	
Power Input: Rated	kW	1.69	2.27	4.88	
	W/W	3.31	3.21	2.54	
EER	Btu/hW	11.30	10.96	8.66	
Indoor Unit					
Air Volume	m ³ /min	15.9	16.7	27.0	
Sound Pressure Level (Hi/Lo)	dB [A]	46 / 40	48 / 42	53 / 47	
Dimension	Indoor [H×W×D]	mm	1,680 × 500 × 298	1,680 × 500 × 298	1,880 × 600 × 350
Net Weight	kg	30	31	51	
Outdoor Unit					
Sound Pressure Level	dB [A]	53	54	57	
Dimension	Outdoor [H×W×D]	mm	700 × 998 × 320	802 × 998 × 320	1,175 × 900 × 320
Net weight	kg	50.0	58.0	86.0	
Piping Connection	Gas Pipe	mm (inch)	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")
	Liquid Pipe	mm (inch)	6.35 (1/4")	9.52 (3/8")	9.53 (3/8")
Pipe Length	Min-Max	m	3.0 - 15.0	3.0 - 15.0	7.5 - 30.0
Elevation Difference			10.0	10.0	20.0
Maximum Chargeless Length	Max	m	7.0	7.0	15.0
Additional Gas		g/m	35	35	50
Operating Range, Outdoor	Min-Max	°C	21 - 43	21 - 43	21 - 43

Dimensions (CS-J18FFP5 / CS-J28FFP8)

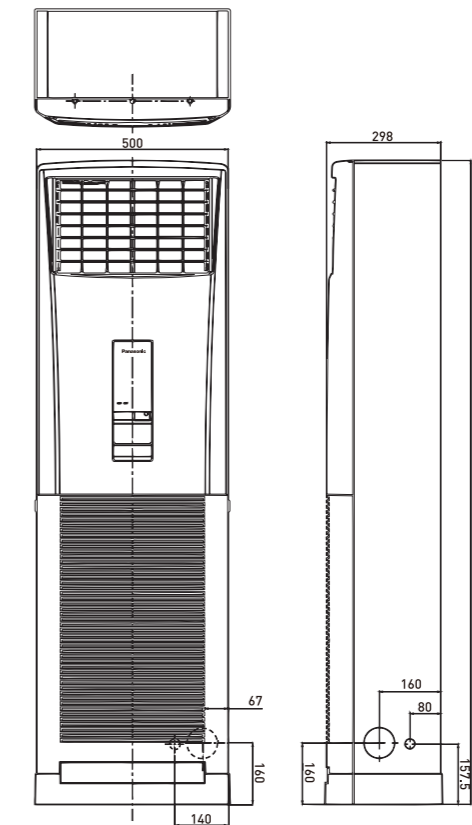

Unit:mm

Dimensions (CS-J45FFP8)

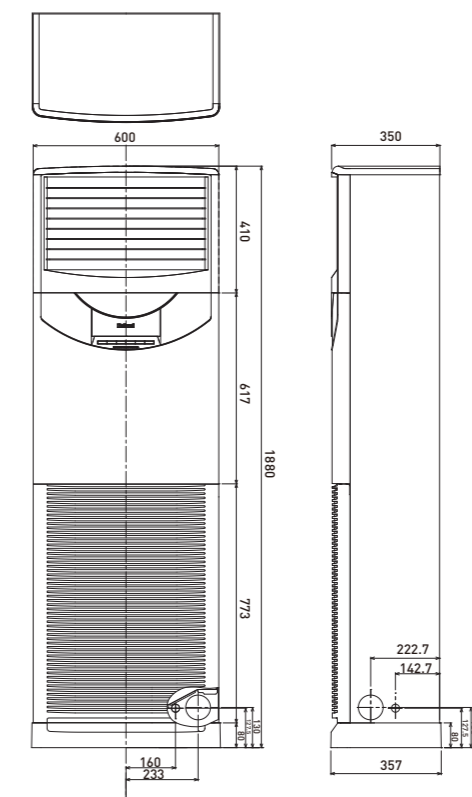

Unit:mm