

4-WAY CASSETTE

NEW

Model No.

S-18PU2Q6

S-34PU2Q6

S-21PU2Q6

S-43PU2Q6

S-24PU2Q6

S-48PU2Q6

S-30PU2Q6



TECHNICAL FOCUS

- nanoe™ X for Air Purification
- Powerful Airflow
- Wide Flap
- Simplistic Design
- LCD Wireless Remote Controller
- Easy Installation Design



Accessories

Panel



CZ-KPU3H

Selectable Remote Controller



CZ-RD513C




CZ-RL013UH

Capacity (Btu/h)			17,100	20,500
Power Source		V/Phase Hz		
Indoor			S-18PU2Q6	S-21PU2Q6
Outdoor			U-18PS2Q6	U-21PS2Q6
Panel			CZ-KPU3H	CZ-KPU3H
Cooling Capacity: Rated (Min-Max)		kW	5.00 [2.00-5.60]	6.00 [2.00-6.30]
		Btu/h	17,100 [6,820-19,100]	20,500 [6,820-21,500]
Current: Rated (Max)		A	5.3 [9.5]	7.0 [11.0]
Power Input: Rated (Min-Max)		kW	1.19 [0.55-1.70]	1.56 [0.55-1.90]
COP / EER		W/W	4.20	3.85
		Btu/hW	14.37	13.14
Indoor Unit				
Air Volume		m³/min	22.0	23.0
Sound Pressure Level (Hi/L0)		dB (A)	39 / 32	39 / 32
Sound Power Level (Hi/L0)		dB	54 / 47	54 / 47
Dimension	Indoor (H×W×D)	mm	256 × 840 × 840	256 × 840 × 840
	Panel (H×W×D)	mm	33.5 × 950 × 950	33.5 × 950 × 950
Net Weight	Indoor	kg	21	22
	Panel	kg	5	5
Outdoor Unit				
Sound Pressure Level		dB (A)	48	48
Sound Power Level		dB	64	64
Dimension	Outdoor (H×W×D)	mm	695 × 875 × 320	695 × 875 × 320
Net Weight		kg	41	41
Piping Connection	Gas Pipe	mm [inch]	15.88 [5/8]	15.88 [5/8]
	Liquid Pipe	mm [inch]	9.52 [3/8]	9.52 [3/8]
Pipe Length	Min-Max	m	7.5-50	7.5-50
Elevation Difference		m	25	25
Maximum Chargeless Length	Max	m	30	30
Additional Gas		g/m	50	50
Operating Range, Outdoor	Min-Max	°C	16-43	16-43

Dimensions

A (S-18PU2Q6 / S-21PU2Q6 / S-24PU2Q6 / S-30PU2Q6)

B (S-34PU2Q6 / S-43PU2Q6 / S-48PU2Q6)

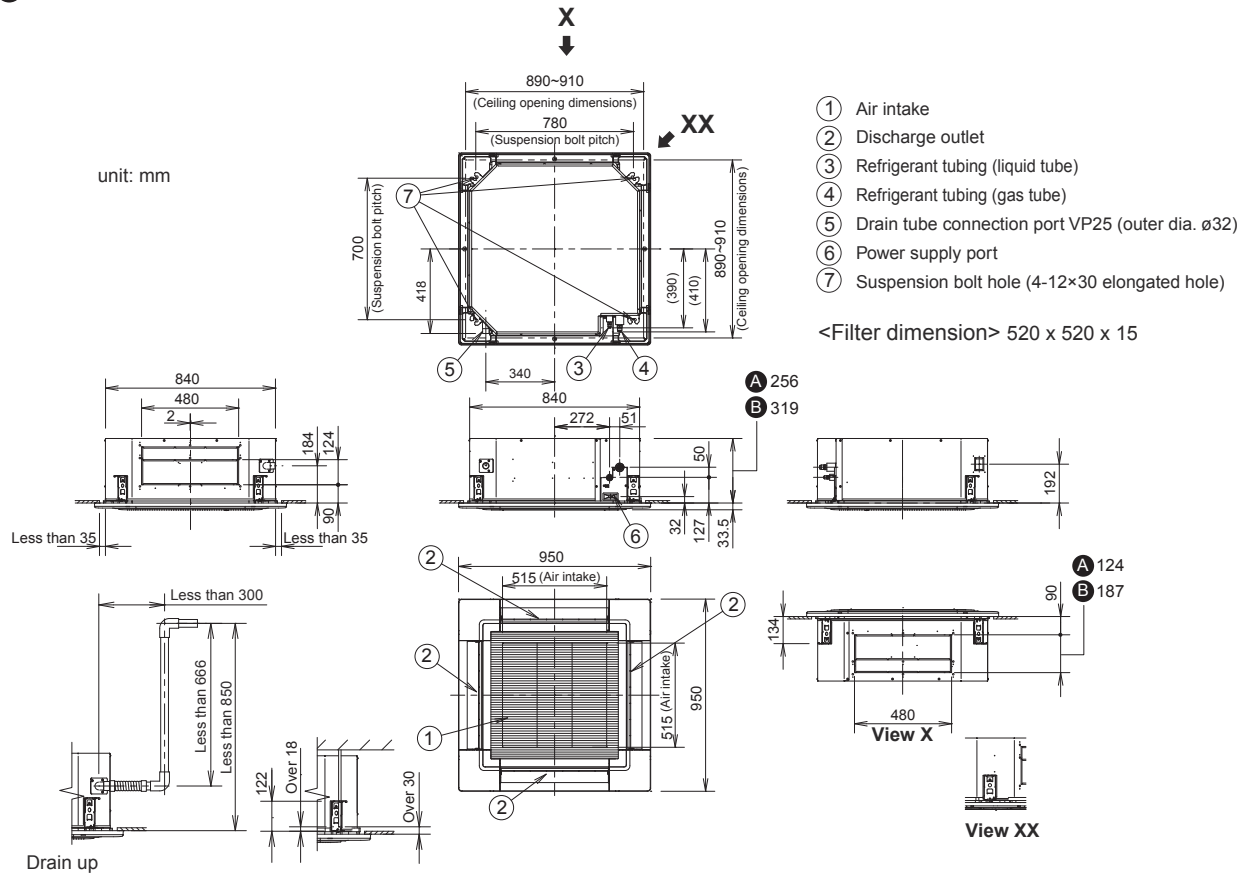

* Adjust the suspension bolt length so that the gap from the lower ceiling surface becomes 30 mm or more (18 mm or more from the lower surface of the body) as shown in the figure. When the suspension bolt length is long, it hits the ceiling panel and installation is not possible.

24,200	29,000	34,100	42,700	47,800
230 V, 1Ø Phase - 60 Hz				
S-24PU2Q6	S-30PU2Q6	S-34PU2Q6	S-43PU2Q6	S-48PU2Q6
U-24PS2Q6	U-30PS2Q6	U-34PS2Q6	U-43PS2Q6	U-48PS2Q6
CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H
7.10 [2.10-8.00]	8.50 [2.10-10.00]	10.00 [3.80-11.20]	12.50 [3.80-13.40]	14.00 [3.80-15.40]
24,200 [7,160-27,300]	29,000 [7,160-34,100]	34,100 [13,000-38,200]	42,700 [13,000-45,700]	47,800 [13,000-52,600]
8.4 [13.0]	11.4 [14.5]	12.5 [24.0]	19.5 [26.0]	24.4 [28.0]
1.88 [0.65-2.60]	2.54 [0.65-3.30]	2.76 [1.25-4.00]	4.31 [1.25-4.70]	5.39 [1.25-5.90]
3.78	3.35	3.62	2.90	2.60
12.87	11.42	12.36	9.91	8.87
25.0	25.0	32.0	36.4	36.4
41 / 33	41 / 33	44 / 37	47 / 39	47 / 41
56 / 48	56 / 48	59 / 52	62 / 54	62 / 56
256 × 840 × 840	256 × 840 × 840	319 × 840 × 840	319 × 840 × 840	319 × 840 × 840
33.5 × 950 × 950	33.5 × 950 × 950	33.5 × 950 × 950	33.5 × 950 × 950	33.5 × 950 × 950
22	22	24	24	24
5	5	5	5	5
48	49	53	54	56
64	64	67	68	70
695 × 875 × 320	695 × 875 × 320	996 × 980 × 370	996 × 980 × 370	996 × 980 × 370
43	43	72	74	81
15.88 [5/8]	15.88 [5/8]	15.88 [5/8]	15.88 [5/8]	15.88 [5/8]
9.52 [3/8]	9.52 [3/8]	9.52 [3/8]	9.52 [3/8]	9.52 [3/8]
7.5-50	7.5-50	7.5-50	7.5-50	7.5-50
30	30	30	30	30
30	30	30	30	30
50	50	50	50	50
16-43	16-43	16-43	16-43	16-43