

NEW Smart Comfort with CONEX

CONEX offers IoT integration that connects directly to a variety of apps for next-generation solutions. Easy control and access for end users, installers, and service partners with just one remote.




Please refer to the CONEX website.



New CONEX Control

New smart design with built-in BLE & WLAN model.

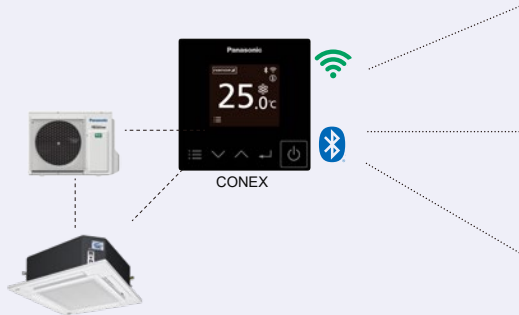

Comfort Cloud-End User

High level control and energy monitoring via WLAN and cloud giving access from anywhere anytime.



H&C Control App-End User & Installer

H&C Control App makes complex initial set-up easy and allows installers to respond swiftly to clients' requests via Bluetooth.



H&C Diagnosis App-Service Partner

Provides the service partner with detailed operational data, for in-depth analysis and optimising the system.



Remote Controller Information

Compatibility Table				
CONEX Type	CZ-RTC6BLW Built-in BLE & WLAN	CZ-RTC6BL Built-in BLE	CZ-RTC6	
	Bluetooth	Bluetooth		
App		○	○	—
		○	○	—
		○	—	—

Wireless Remote Controller

* For 4-Way Cassette



Wired Remote Controller



CZ-RTC6BLW
CZ-RTC6BL
CZ-RTC6

CZ-RTC5B


CZ-RTC4

4-WAY CASSETTE NEW Dimensions

- A S-18PU3HB/S-2124PU3HB
- B S-3448PU3HB

- ① Air intake
- ② Discharge outlet
- ③ Refrigerant tubing (liquid tube)
- ④ Refrigerant tubing (gas tube)
- ⑤ Drain tube connection port VP25 (outer dia. ø32)
- ⑥ Power supply port
- ⑦ Suspension bolt hole (4-12×30 elongated hole)

<Filter dimension> 520 x 520 x 15

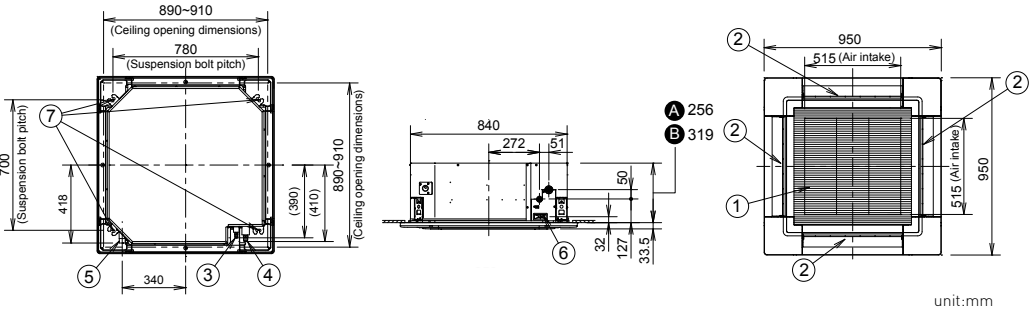


ADAPTIVE DUCTED NEW Dimensions

S-18PF3HB/S-2124PF3HB/S-3448PF3HB

Detailed dimensions of indoor unit


Type	A	B	C	D	E	F
	mm	mm	mm	mm	mm	Q'ty
1821	867	800	450 (Pitch 150 × 3)	71	592	12
2430	1,067	1,000	750 (Pitch 150 × 5)	21	792	16
3448	1,467	1,400	1,050 (Pitch 150 × 7)	71	1,192	20

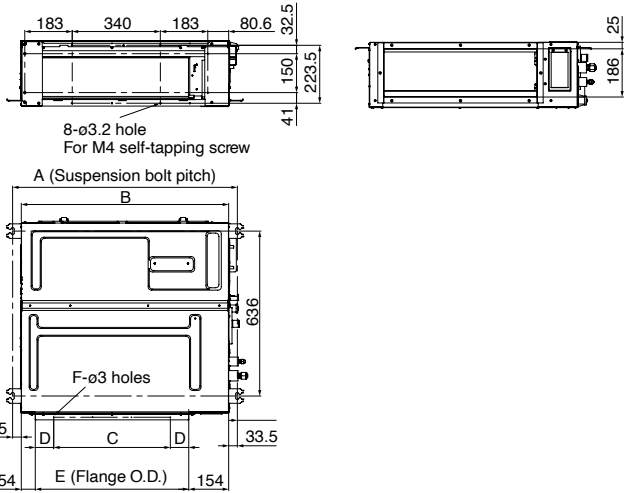

OUTDOOR UNITS NEW Dimensions

U-18PZ3H5

U-21PZ3H5/U-24PZ3H5

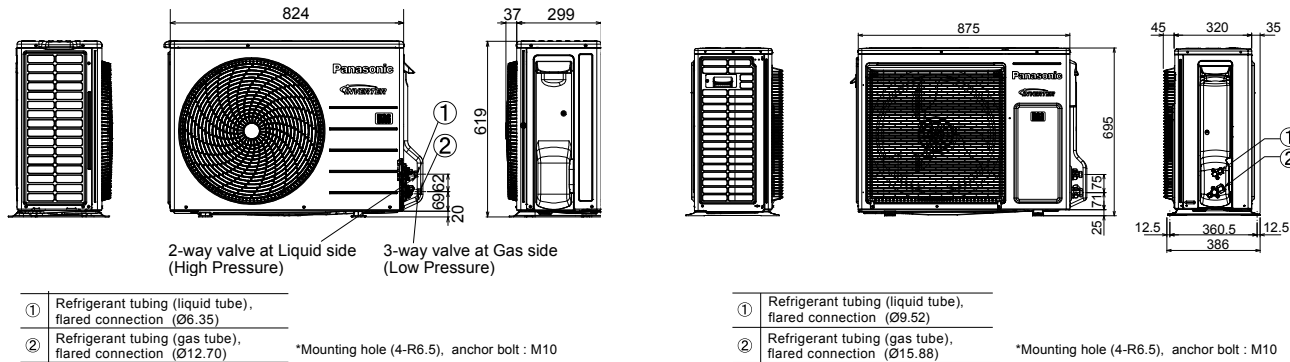


- ① Refrigerant tubing (liquid tube), flared connection (Ø6.35)
- ② Refrigerant tubing (gas tube), flared connection (Ø12.70)

*Mounting hole (4-R6.5), anchor bolt : M10

- ① Refrigerant tubing (liquid tube), flared connection (Ø9.52)
- ② Refrigerant tubing (gas tube), flared connection (Ø15.88)

*Mounting hole (4-R6.5), anchor bolt : M10

U-34PZ3H5/U-43PZ3H5/U-43PZ3H8/U-48PZ3H5/U-48PZ3H8

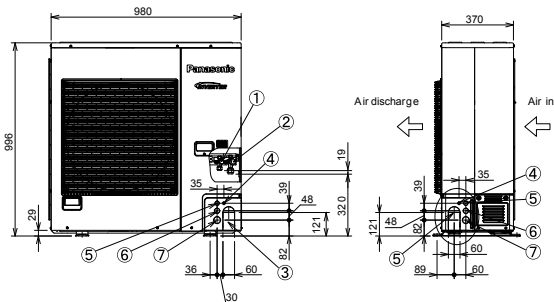

- ① Refrigerant tubing (liquid tube), flared connection (Ø9.52)
- ② Refrigerant tubing (gas tube), flared connection (Ø15.88)
- ③ Refrigerant tubing port
- ④ Electrical wiring port (Ø13)
- ⑤ Electrical wiring port (Ø22)
- ⑥ Electrical wiring port (Ø27)
- ⑦ Electrical wiring port (Ø35)

*Mounting hole (4-R6.5), anchor bolt : M10