


4-WAY CASSETTE

- Industry-leading Powerful, 360° Wide & Comfortable Airflow.
- Individual flap control for true-comfort.
- The drain pump can pump water up to a height of 850 mm, making drain pipe layout easy.

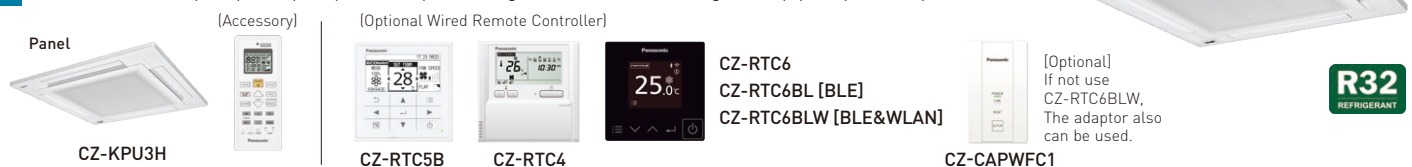


Capacity [Btu/h(Phase)]		17,100	20,500	24,200	29,000	34,100	42,700	42,700 [3]	47,800	47,800 [3]
Power Source	V/Phase Hz	230V, 1Ø Phase - 50Hz								
Indoor		S-1821PU3H-1	S-1821PU3H-1	S-2430PU3H-1	S-2430PU3H-1	S-3448PU3H-1	S-3448PU3H-1	S-3448PU3H-1	S-3448PU3H-1	S-3448PU3H-1
Outdoor		U-18PR1H5-1	U-21PR1H5-1	U-24PR1H5-1	U-30PR1H5-1	U-34PR1H5-1	U-43PR1H5-1	U-43PR1H5-1	U-48PR1H5-1	U-48PR1H5-1
Panel		CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H
Cooling Capacity: Rated (Min-Max)	kW	5.00 [2.00-5.60]	6.00 [2.00-6.30]	7.10 [2.10-8.00]	8.50 [2.10-10.00]	10.00 [3.20-11.20]	12.50 [3.80-14.00]	12.50 [3.80-14.00]	14.00 [3.80-14.71]	14.00 [3.80-14.71]
	Btu/h	17,100 [6,820-19,100]	20,500 [6,820-21,500]	24,200 [7,170-27,300]	29,000 [7,170-34,100]	34,100 [10,900-38,200]	42,700 [13,000-47,800]	42,700 [13,000-47,800]	47,800 [13,000-50,200]	47,800 [13,000-50,200]
Current: Rated	A	5.2	7.7	8.8	11.2	14.3	17.7	5.8	22.8	7.5
Power Input: Rated (Min-Max)	kW	1.14 [0.38-1.50]	1.71 [0.38-2.10]	1.99 [0.30-2.26]	2.52 [0.28-3.33]	3.23 [0.61-3.73]	3.74 [0.63-4.25]	3.74 [0.63-4.25]	4.83 [0.63-5.10]	4.83 [0.63-5.10]
CSPF		6.27	5.89	6.08	5.97	5.89	5.80	5.80	5.23	5.23
COP/EER	W/W	4.39	3.51	3.57	3.37	3.10	3.34	3.34	2.90	2.90
	Btu/hW	15.00	11.99	12.16	11.51	10.56	11.42	11.42	9.90	9.90
Indoor Unit										
Air Volume	m³/min	28.5	28.5	28.5	28.5	36.4	36.4	36.4	36.4	36.4
	cfm	1,006	1,006	1,006	1,006	1,285	1,285	1,285	1,285	1,285
Sound Pressure Level (Hi/Lo)	dB (A)	46 / 35	46 / 35	46 / 35	46 / 35	47 / 41	47 / 41	47 / 41	47 / 41	47 / 41
Sound Power Level (Hi/Lo)	dB	61 / 50	61 / 50	61 / 50	61 / 50	62 / 56	62 / 56	62 / 56	62 / 56	62 / 56
Dimension	Indoor [HxWxD] mm	256 x 840 x 840	256 x 840 x 840	256 x 840 x 840	256 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840
	Panel [HxWxD] mm	44 x 950 x 950	44 x 950 x 950	44 x 950 x 950	44 x 950 x 950	44 x 950 x 950	44 x 950 x 950	44 x 950 x 950	44 x 950 x 950	44 x 950 x 950
Net Weight	Indoor kg	21	21	21	21	24	24	24	24	24
	Panel kg	5	5	5	5	5	5	5	5	5
Outdoor										
Sound Pressure Level	dB (A)	49	50	51	53	55	57	57	58	58
Sound Power Level	dB	68	69	70	72	74	76	76	77	77
Dimension	Outdoor [HxWxD] mm	619 x 824 x 299	619 x 824 x 299	619 x 824 x 299	695 x 875 x 320	695 x 875 x 320	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net Weight	kg	29	29	33	39	48	68	67	68	67
Piping Connection	Gas Pipe mm (inch)	12.70 [1/2]	12.70 [1/2]	15.88 [5/8]	15.88 [5/8]	15.88 [5/8]	15.88 [5/8]	15.88 [5/8]	15.88 [5/8]	15.88 [5/8]
	Liquid Pipe mm (inch)	6.35 [1/4]	6.35 [1/4]	9.52 [3/8]	9.52 [3/8]	9.52 [3/8]	9.52 [3/8]	9.52 [3/8]	9.52 [3/8]	9.52 [3/8]
Pipe Length	Min-Max m	5 - 30	5 - 30	5 - 30	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50
Elevation Difference	m	20	20	20	30	30	30	30	30	30
Maximum Chargeless Length	Max m	15	15	15	25	25	25	25	25	25
Additional Gas	g/m	10	10	10	30	30	30	30	30	30
Operation Range, Outdoor	Min-Max °C	16-46	16-46	16-46	16-46	16-46	16-46	16-46	16-46	16-46

* Specifications are subject to change without notice. Please refer to technical documents for more details.

* The sound pressure level is measured in accordance with JIS C 9612 and JIS B 8616.

ADAPTIVE DUCTED

- Air intake from rear as standard. Industry-leading horizontal and vertical design.
- Powerful 150Pa ESP and space saving 250 mm height, filter included.
- Built-in Drain pump and selectable air inlet position (Bottom and Rear).

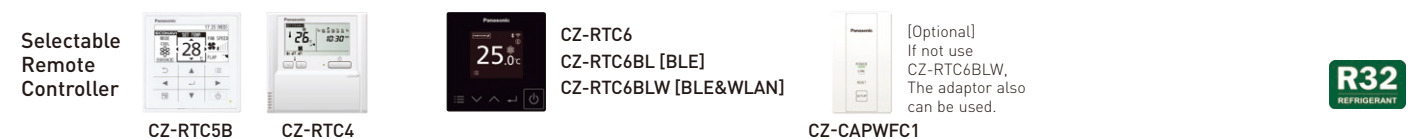

Capacity [Btu/h(Phase)]		17,100	20,500	24,200	27,600	34,100	42,700	42,700 [3]	47,000	47,000 [3]
Power Source	V/Phase Hz	230V, 1Ø Phase - 50Hz								
Indoor		S-1821PF3H	S-1821PF3H	S-2430PF3H	S-2430PF3H	S-3448PF3H	S-3448PF3H	S-3448PF3H	S-3448PF3H	S-3448PF3H
Outdoor		U-18PR1H5-1	U-21PR1H5-1	U-24PR1H5-1	U-30PR1H5-1	U-34PR1H5-1	U-43PR1H5-1	U-43PR1H5-1	U-48PR1H5-1	U-48PR1H5-1
Cooling Capacity: Rated (Min-Max)	kW	5.00 [2.00-5.60]	6.00 [2.00-6.30]	7.10 [2.00-7.60]	8.10 [2.00-8.90]	10.00 [3.20-11.20]	12.50 [3.80-13.50]	12.50 [3.80-13.50]	13.77 [3.80-14.20]	13.77 [3.80-14.20]
	Btu/h	17,100 [6,820-19,100]	20,500 [6,820-21,500]	24,200 [6,820-25,900]	27,600 [6,820-30,400]	34,100 [10,900-38,200]	42,700 [13,000-46,100]	42,700 [13,000-46,100]	47,000 [13,000-48,500]	47,000 [13,000-48,500]
Current: Rated	A	6.7	8.7	10.1	11.5	13.8	18.7	6.1	22.5	7.4
Power Input: Rated (Min-Max)	kW	1.54 [0.41-1.75]	1.95 [0.41-2.30]	2.27 [0.34-2.48]	2.60 [0.33-2.90]	3.12 [0.59-3.65]	3.96 [0.65-4.35]	3.96 [0.65-4.35]	4.77 [0.65-4.95]	4.77 [0.65-4.95]
CSPF		5.02	4.65	5.21	5.21	4.74	5.02	5.02	4.74	4.74
COP/EER	W/W	3.25	3.08	3.13	3.12	3.21	3.16	3.16	2.89	2.89
	Btu/hW	11.10	10.51	10.66	10.62	10.93	10.78	10.78	9.85	9.85
Indoor Unit										
Air Volume	m³/min	16.0	16.0	21.0	21.0	36.0	36.0	36.0	36.0	36.0
	cfm	565	565	740	740	1,270	1,270	1,270	1,270	1,270
External static pressure	Pa	30 [10-150]	30 [10-150]	30 [10-150]	30 [10-150]	50 [10-150]	50 [10-150]	50 [10-150]	50 [10-150]	50 [10-150]
Sound Pressure Level (Hi/Lo)	dB (A)	35 / 29	35 / 29	35 / 29	35 / 29	40 / 30	40 / 30	40 / 30	40 / 30	40 / 30
Sound Power Level (Hi/Lo)	dB	58 / 52	58 / 52	58 / 52	58 / 52	63 / 53	63 / 53	63 / 53	63 / 53	63 / 53
Dimension	Indoor [HxWxD] mm	250 x 800 x 730	250 x 800 x 730	250 x 1,000 x 730	250 x 1,000 x 730	250 x 1,400 x 730	250 x 1,400 x 730	250 x 1,400 x 730	250 x 1,400 x 730	250 x 1,400 x 730
Net Weight	Indoor kg	25	25	30	30	39	39	39	39	39
Outdoor										
Sound Pressure Level	dB (A)	50	51	51	53	55	57	57	58	58
Sound Power Level	dB	69	70	70	72	74	76	76	77	77
Dimension	Outdoor [HxWxD] mm	619 x 824 x 299	619 x 824 x 299	619 x 824 x 299	695 x 875 x 320	695 x 875 x 320	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net Weight	kg	29	29	33	39	48	68	67	68	67
Piping Connection	Gas Pipe mm (inch)	12.70 [1/2]	12.70 [1/2]	15.88 [5/8]	15.88 [5/8]	15.88 [5/8]	15.88 [5/8]	15.88 [5/8]	15.88 [5/8]	15.88 [5/8]
	Liquid Pipe mm (inch)	6.35 [1/4]	6.35 [1/4]	9.52 [3/8]	9.52 [3/8]	9.52 [3/8]	9.52 [3/8]	9.52 [3/8]	9.52 [3/8]	9.52 [3/8]
Pipe Length	Min-Max m	5 - 30	5 - 30	5 - 30	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50
Elevation Difference	m	20	20	20	30	30	30	30	30	30
Maximum Chargeless Length	Max m	15	15	15	25	25	25	25	25	25
Additional Gas	g/m	10	10	10	30	30	30	30	30	30
Operation Range, Outdoor	Min-Max °C	16-46	16-46	16-46	16-46	16-46	16-46	16-46	16-46	16-46

* Specifications are subject to change without notice. Please refer to technical documents for more details.

* The sound pressure level is measured in accordance with JIS C 9612 and JIS B 8616.