





## GP-20HCN1L/H

- Centrifugal type
- Capacity = 30 L/min - 154 L/min
- Total head = 26m - 46.2m
- Stainless steel (SUS 304) impeller
- Cast iron casing with double paint coated housing
- SUS 304 steel motor shaft
- Insulation class: F
- IEC Standard compliance

## Dimension

Unit : mm

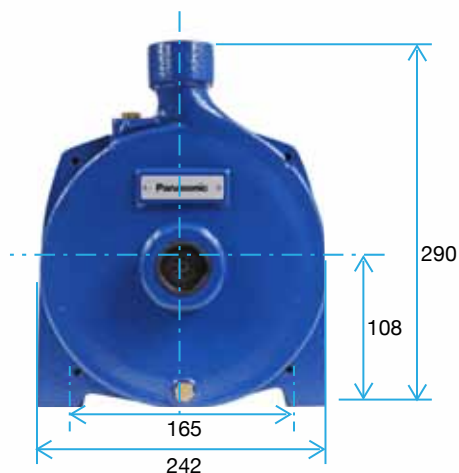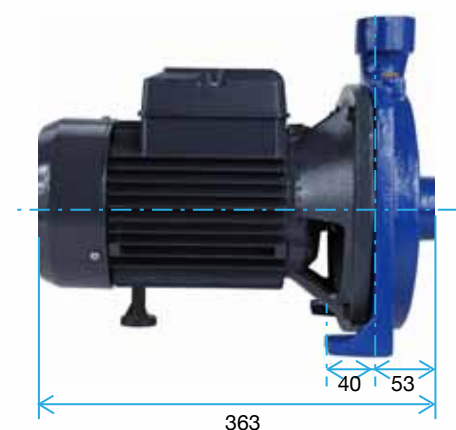

## Specification

	GP-20HCN1L/H
Rated Voltage	220V - 240V 50Hz, single phase
Capacity [L/min]	30 - 154
Total Head [m]	26 - 46.2
Input Wattage [kW]	2.22
Output Wattage [kW]	1.5 (2.0 HP)
Ampere [A]	9.7
IP Rating	IP54
Suction Pipe	1-1/4 inch (32 mm)
Discharge Pipe	1 inch (25 mm)
Size (L x W x H) [mm]	363 x 242 x 290
Weight [kg]	25

