

Panasonic[®]

Operating Instructions

Network Camera

Model No. PM-PHVULFR-W



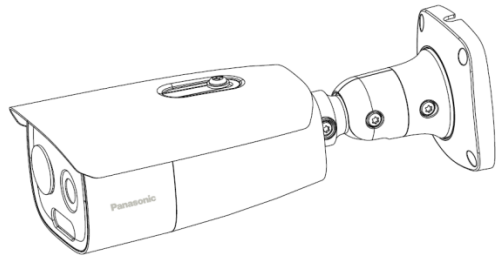


(The above picture are for illustration purposes)

Before attempting to connect or operate this product, please read these instructions carefully and save this manual for future use

Safety Instruction

The following symbols or words may be found in this manual.

Symbols/Words	Description
 Warning	Indicates a medium or low potential hazardous situation which, if not avoided, will or could result in slight or moderate injury
 Caution	Indicates a potential risk which, if not avoided, will or could result in device damage, data loss, lower performance or unexpected results
 Note	Provides additional information to emphasize or supplement important points of the text.

About the Manual

- This manual is suitable for many models. All examples, screenshots, figures, charts, and illustrations used in the manual are for reference purposes, and actual products may be different with this Manual.
- Please read this user manual carefully to ensure that you can use the device correctly and safely.
- Within the maximum scope permitted by the law, the products described in this Manual (including hardware, software, firmware, etc.) are provided “AS IS”. The information in this document (including URL and other Internet reference data) is subject to change without notice. This Manual may contain technical incorrect places or printing errors. This information will be periodically updated, and these changes will be added into the latest version of this Manual without prior notice.
- In this manual, the trademarks, product names, service names and company names that are not owned by our company are the properties of their respective owners.

Use of the Product

- This product should not be used for illegal purposes.
- The company does not allow anyone to use the Company's products to infringe the privacy, personal information, and portrait rights of others. The user shall not use this product for any illegal use or any prohibited use under these terms, conditions, and declarations. When using this product, the user shall not damage, disable, overload or

obstruct any of the hardware of this product in any way, or interfere with the use of this product by any other users. Also, the user should not attempt to use the product or the software, by hacking, stealing the password, or any other means.

Electrical Safety

- This product is intended to be supplied by a Listed Power Unit, marked with 'Limited Power Source', 'LPS' on unit, output rated minimum DC12V/1.5A or POE 48V/ 350mA, no more than 2000m altitude of operation and Tma=60 Deg.C.
- As for the modes with PoE function, the function of the ITE being investigated to IEC 60950-1 standard is considered not likely to require connection to an Ethernet network with outside plant routing, including campus environment and the ITE is to be connected only to PoE networks without routing to the outside plant.
- Improper handling and/or installation could run the risk of fire or electrical shock.
- The product must be grounded to reduce the risk of electric shock.
- ⚠ Warning: Wear anti-static gloves or discharge static electricity before removing the bubble or cover of the camera.
- ⚠ Caution: Do not provide two power supply sources at the same time for the device unless otherwise specified; it may result in device damage!

Environment

- Heavy stress, violent vibration or exposure to water is not allowed during transportation, storage and installation.
- Avoid aiming at the camera directly towards extremely bright objects, such as, sun, as this may damage the image sensor.
- Keep away from heat sources such as radiators, heat registers, stove, etc.
- Do not expose the product to direct airflow from an air conditioner.
- Do not block any ventilation openings and ensure proper ventilation around the camera.
- Do not place the device in a damp, dusty extremely hot or cold environment, or the locations with strong electromagnetic radiation or unstable lighting.
- Make sure that no reflective surface is too close to the camera lens. The IR light from the camera may reflect back into the lens, resulting in image blur.

Operation and Daily Maintenance

- There are no user-serviceable parts inside. Please contact the nearest service center if the product does not work properly.
- Please shut down the device and then unplug the power cable before you begin any maintenance work.
- ⚠ Warning: All the examination and repair work should be done by qualified personnel.
- Do not touch the CMOS sensor optic component. You can use a blower to clean the dust on the lens surface.
- Always use a dry soft cloth to clean the device. If there is too much dust, using a cloth cleaning (such as using cloth) may result in poor IR functionality and/or IR reflection.

-
- Dome cover is an optical device, please don't touch or wipe the cover surface directly during installation and use. For dust, use oil-free soft brush or hair dryer to remove it gently; for grease or fingerprint, use oil-free cloth or paper soaked with detergent to wipe from the lens center outward. Change the cloth and wipe several times if it is not clean enough.

Privacy Protection

- When installing cameras in public areas, a warning notice shall be given in a reasonable and effective manner and clarify the monitoring range.
- As the device user or data controller, you might collect the personal data of others, such as face, car plate number, etc. As a result, you should implement reasonable and necessary measures to protect the legitimate rights and interests of other people, avoiding data leakage, improper use, including but not limited to, setting up access control, providing clear and visible notice to inform people of the existence of the surveillance area, providing required contact information and so on.

Disclaimer

- With regard to the product with internet access, the use of the product shall be wholly at your own risks. Our company shall be irresponsible for abnormal operation, privacy leakage or other damage resulting from cyber-attack, hacker attack, virus inspection, or other internet security risks; however, our company will provide timely technical support if necessary.
- Surveillance laws vary from country to country. Check all laws in your local region before using this product for surveillance purposes. We shall not take responsibility for any consequences resulting from illegal operations.

Cybersecurity Recommendations

- Use a strong password. At least 8 characters or a combination of characters, numbers, and upper- and lower-case letters should be used in your password.
- Regularly change the passwords of your devices to ensure that only authorized users can access the system (recommended time is 90 days).
- It is recommended to change the service default ports (like HTTP-80, HTTPS-443, etc.) to reduce the risk of outsiders being able to access.
- It is recommended to set the firewall of your router. But note that some important ports cannot be closed (like HTTP port, HTTPS port, Data Port).
- It is not recommended to expose the device to the public network. When it is necessary to be exposed to the public network, please set the external hardware firewall and the corresponding firewall policy.

-
- It is not recommended to use the v1 and v2 functions of SNMP.
 - In order to enhance the security of WEB client access, please create a TLS certificate to enable HTTPS.
 - Use black- and whitelist to filter the IP address. This will prevent everyone, except those specified IP addresses, from accessing the system.
 - If you add multiple users, please limit the functions of guest accounts.
 - If you enable UPnP, it will automatically try to forward ports in your router or modem. It is really very convenient for users, but this will increase the risk of data leakage when the system automatically forwards ports. Disabling UPnP is recommended when the function is not used in real applications.
 - Check the log. If you want to know whether your device has been accessed by unauthorized users or not, you can check the log. The system log will show you which IP addresses were used to log in to your system and what was accessed.

Regulatory Information

FCC Information

Please take care that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

1. FCC compliance

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to the radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

2. FCC conditions:

- This device complies with part 15 of the FCC Rules. The operation of this product is subject to the following two conditions:
- This device may not cause harmful interface.
- This device must accept any interference received, including interference that may cause

undesired operation.

RoHS

The products have been designed and manufactured in accordance with Directive EU RoHS Directive 2011/65/EU and its amendment Directive EU 2015/863 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.



2012/19/EU (WEEE directive): The Directive on waste electrical and electronic equipment (WEEE Directive). To improve the environmental management of WEEE, the improvement of collection, treatment and recycling of electronics at the end of their life is essential. Therefore, the product marked with this symbol must be disposed of in a responsible manner.

Directive 94/62/EC: The Directive aims at the management of packaging and packaging waste and environmental protection. The packaging and packaging waste of the product in this manual refers to must be disposed of at designated collection points for proper recycling and environmental protection.

REACH(EC1907/2006): REACH concerns the Registration, Evaluation, Authorization and Restriction of Chemicals, which aims to ensure a high level of protection of human health and the environment through better and earlier identification of the intrinsic properties of chemical substances. The product in this manual refers to conforms to the rules and regulations of REACH. For more information of REACH, please refer to DG GROWTH or ECHA websites.

Table of Contents

1	Network Connection	1
1.1	LAN	1
1.1.1	Access through Panasonic IP Manager Tool	1
1.1.2	Directly Access via Web Browser	3
1.2	WAN	4
2	Live View.....	8
3	Fire Detection & Temp Measurement.....	11
3.1	Fire Detection.....	11
3.2	Temperature Measurement.....	13
4	Other Configurations.....	18
4.1	System Configuration	18
4.1.1	Basic Information	18
4.1.2	Date and Time	18
4.1.3	Local Config	19
4.1.4	Storage	19
4.2	Image Configuration	22
4.2.1	Display Configuration	22
4.2.2	Video / Audio Configuration	25
4.2.3	OSD Configuration.....	27
4.2.4	Video Mask.....	28
4.2.5	ROI Configuration	29
4.3	PTZ Configuration	29
4.4	Alarm Configuration.....	30
4.4.1	Motion Detection.....	30
4.4.2	Exception Alarm.....	31
4.4.3	Alarm In.....	33
4.4.4	Alarm Out.....	34
4.4.5	Alarm Server.....	35
4.4.6	Audio Alarm	36
4.4.7	Light Alarm	37
4.4.8	Video Exception	37
4.4.9	Audio Exception	39
4.4.10	Disarming.....	40
4.5	Event Configuration.....	41
4.5.1	Line Crossing (Optical/Thermal).....	41
4.5.2	Region Intrusion (Optical/Thermal)	46
4.5.3	Region Entrance(Optical/Thermal)	48
4.5.4	Region Exiting(Optical/Thermal).....	48
4.5.5	Object Abandoned/Missing	48
4.5.6	Target Counting by Line.....	50
4.5.7	Target Counting by Area.....	53

4.5.8	Loitering Detection.....	57
4.5.9	Illegal Parking Detection.....	58
4.5.10	Face Detection	60
4.6	Network Configuration	64
4.6.1	TCP/IP	64
4.6.2	Port.....	65
4.6.3	Server Configuration	65
4.6.4	ONVIF	66
4.6.5	DDNS	66
4.6.6	SNMP	68
4.6.7	802.1x	70
4.6.8	RTSP.....	70
4.6.9	UPNP	71
4.6.10	Email.....	71
4.6.11	FTP	72
4.6.12	HTTPS	74
4.6.13	HTTP POST.....	76
4.6.14	QoS	77
4.7	Security Configuration	77
4.7.1	User Configuration	77
4.7.2	Online User.....	79
4.7.3	Block and Allow Lists	80
4.7.4	Security Management	80
4.8	Maintenance Configuration	81
4.8.1	Backup and Restore	81
4.8.2	Reboot.....	82
4.8.3	Upgrade	82
4.8.4	Operation Log.....	82
5	Search.....	83
5.1	Image Search.....	83
5.2	Video Search	84
Appendix		87
Appendix 1 Troubleshooting		87
Appendix 2 Common Material Emissivity.....		88

1 Network Connection

System Requirement

For proper operating the product, the following requirements should be met for your computer.

Operating System: Windows 7 Home basic or Higher

CPU: 2.0GHz or higher

RAM: 1G or higher

Display: 1920*1080 resolution or higher (recommended)

Web browser: IE (plug-in required)/ Firefox/Edge/Safari/Google Chrome

It is recommended to use the latest version of these web browsers.

The menu display and operation of the camera may be slightly different by using the browser with plug-in or without plug-in. Installing the plug-in will display more functions of the camera.


Connect IP-Cam via LAN or WAN. Here only take the IE browser for example. The details are as follows:

1.1 LAN

In LAN, there are two ways to access IP camera: 1. access through Panasonic IP Manager Tool; 2. direct access via Web browser.


1.1.1 Access through Panasonic IP Manager Tool

Network connection:

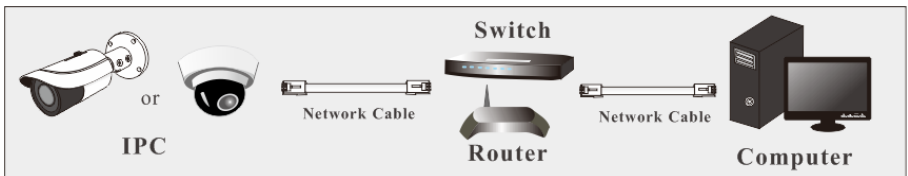

① Make sure the PC and IP camera are connected to the LAN and the Panasonic IP Manager Tool is installed in the PC.

② Double click the Panasonic IP Manager Tool icon on the desktop to run this software as shown below:

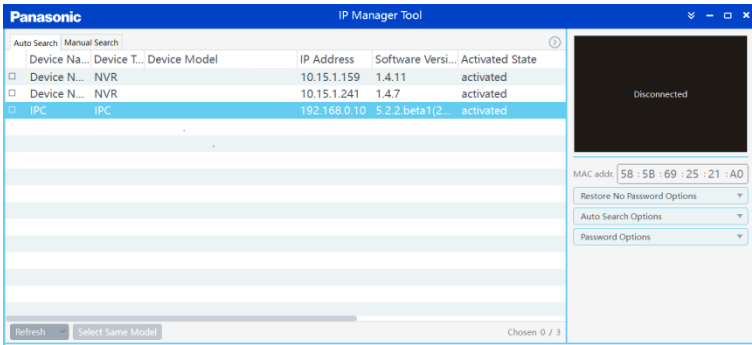

The default IP address of the camera is **192.168.0.10**.

③ Double click the IP address and then the system will open a web browser to connect IP camera. After you read the privacy statement, check and click “Already Read”. Then activate the device.

Device Activation

User Name

Activate Onvif User

If checked, the Onvif account (admin) will be activated and the password set here will be synchronized to it. If unchecked, you can modify the password of onvif account (admin) in the Onvif configuration interface via Web.

New Password

————— ————— —————

8~16 characters; Numbers, special characters, upper case letters and lower case letters must be included.


Confirm Password

Please self-define the password of admin according to the tip.

If “Activate Onvif User” is enabled, the ONVIF user can be activated simultaneously. When you connect the camera through the ONVIF protocol in the third-party platform, you can use the default username and the password set above to connect. If “Activate Onvif User” is not enabled, you can go to **Config** → **Network** → **Onvif** interface to modify the password of Onvif account (admin) or create other onvif users as needed.

After that, follow directions to download, install and run the plug-in if prompted.

Re-connect your camera via IE browser and then a login box will appear.

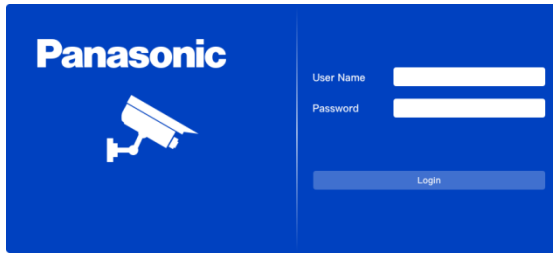

Please enter the username (admin) and password.

1.1.2 Directly Access via Web Browser

The default network settings are as shown below:

IP address: **192.168.0.10**


Subnet Mask: **255.255.255.0**

Gateway: **192.168.0.1**


HTTP: **80**

Data port: **9008**


Use the above default settings when logging in the camera for the first time. Directly connect the camera to the computer through network cable.

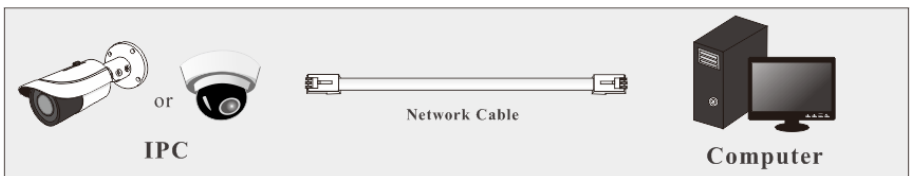

① Manually set the IP address of the PC and the network segment should be as the same as the default settings of the IP camera. Open the network and share center. Click “Local Area Connection” to pop up the following window.

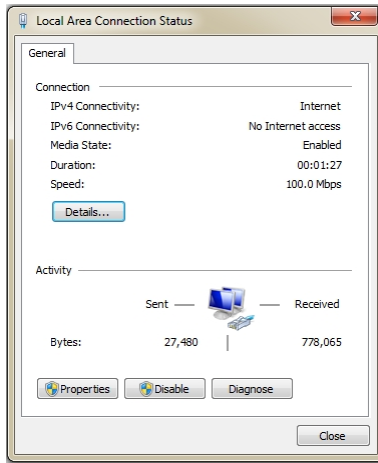


Select “Properties” and then select internet protocol according to the actual situation (for example: IPv4). Next, click the “Properties” button to set the network of the PC.

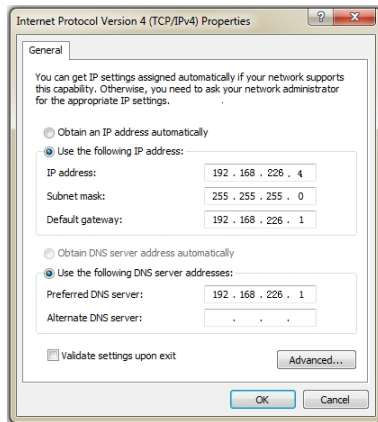

- ② Open a web browser and enter the default address of IP-CAM and confirm.
- ③ Follow directions to download and install the Active X control.
- ④ Enter the username and password in the login window and then enter to view.

1.2 WAN

- **Access through the router or virtual server**

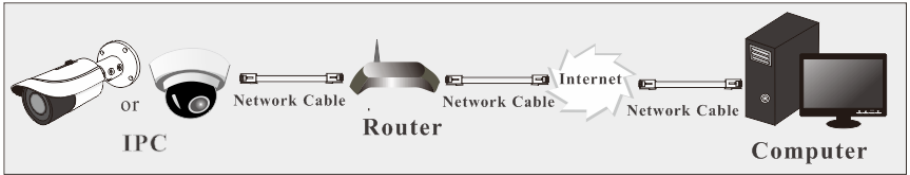

① Make sure the camera is connected to the local network and then log in the camera via LAN and go to Config→Network→Port to set the port number.

HTTP Port	<input type="text" value="80"/>
HTTPS Port	<input type="text" value="443"/>
Data Port	<input type="text" value="9008"/>
RTSP Port	<input type="text" value="554"/>
Persistent connection Port	<input type="text" value="8080"/> <input checked="" type="checkbox"/> Enable
WebSocket Port	<input type="text" value="7681"/>

Port Setup

② Go to Config →Network→TCP/IP to modify the IP address.

IPv4	IPv6	PPPoE Config	IP Change Notification Config
<input type="radio"/> Obtain an IP address automatically			
<input checked="" type="radio"/> Use the following IP address			
IP Address	<input type="text" value="192.168.226.201"/>	<input type="button" value="Test"/>	
Subnet Mask	<input type="text" value="255.255.255.0"/>		
Gateway	<input type="text" value="192.168.226.1"/>		
Preferred DNS Server	<input type="text" value="210.21.196.6"/>		
Alternate DNS Server	<input type="text" value="8.8.8.8"/>		

IP Setup

③ Go to the router’s management interface through a web browser to forward the IP address and port of the camera in the “Virtual Server”.


Port Range						
Application	Start	End	Protocol	IP Address	Enable	
1	9007	to 9008	Both	192.168.1.201	<input checked="" type="checkbox"/>	
2	80	to 81	Both	192.168.1.201	<input checked="" type="checkbox"/>	
3	10000	to 10001	Both	192.168.1.166	<input type="checkbox"/>	
4	21000	to 21001	Both	192.168.1.166	<input type="checkbox"/>	

Router Setup

④ Open a web browser and enter its WAN IP and http port to access. (for example, if the http port is changed to 81, please enter “192.198.1.201:81” in the address bar of web browser to access).

➤ **Access through PPPoE dial-up**

Network connection

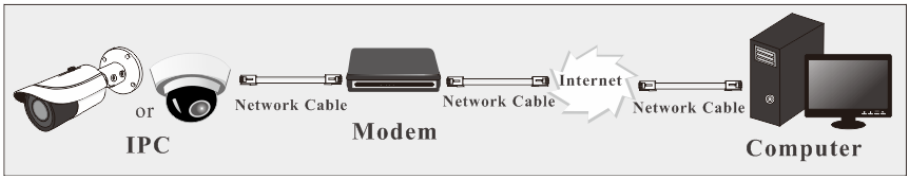

Access the camera through PPPoE auto dial-up. The setup steps are as follows:

- ① Go to Config→Network→Port to set the port number.
- ② Go to Config →Network→TCP/IP→PPPoE Config. Enable PPPoE and then enter the username and password from your internet service provider.


IPv4	IPv6	PPPoE Config	IP Change Notification Config
<input checked="" type="checkbox"/> Enable			
User Name	<input type="text" value="xxxxxxx"/>		
Password	<input type="password" value="•••••"/>		
<input type="button" value="Save"/>			

③ Go to Config →Network→DDNS. Before configuring the DDNS, please apply for a domain name first. Please refer to the DDNS configuration for detailed information.

④ Open a web browser and enter the domain name and http port to access.

➤ **Access through static IP**

Network connection

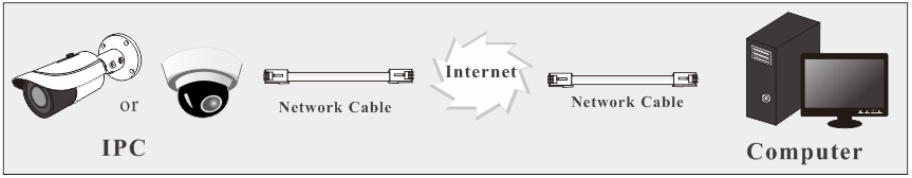

The setup steps are as follows:

- ① Go to Config→Network→Port to set the port number.
- ② Go to Config →Network→TCP/IP to set the IP address. Check “Use the following IP address” and then enter the static IP address and other parameters.
- ③ Open a web browser and enter its WAN IP and http port to access.

2 Live View

After logging in, the following window will be shown.

The live view interface of different cameras may be slightly different. The following pictures and descriptions are for reference only.



Plug-in free live view: when the mainstream is set over 1080P, only the sub stream or third-stream tab can be displayed on the above interface by default.

The following table is the instructions of the icons on the live view interface.

Icon	Description	Icon	Description
	Visible light image and thermal image display		SD card recording indicator
	Visible light image display		Motion alarm indicator
	Thermal image display		Alarm output indicator
	Start/stop live view		Light alarm indicator
	Enable/disable alarm output		Audio alarm indicator
	Enable/disable light alarm		Color abnormal indicator
	Enable or disable audio alarm		Abnormal clarity indicator
	Start/stop two-way audio		Scene changes indicator
	Enable/disable audio		Line crossing indicator
	Snapshot		Intrusion indicator
	Start/stop local recording		Region entrance indicator

Icon	Description	Icon	Description
	Zoom in		Region exiting indicator
	Zoom out		Object detection indicator (object abandoned/missing)
	PTZ control (only some models support)		Loitering detection indicator
	Rule information display		Illegal parking detection indicator
	Face Detection		Alarm input indicator
	Audio exception indicator		Target counting (by line) indicator
	Fire detection indicator		Target counting (by area) indicator
	Temperature indicator		Face detection indicator

*Those smart alarm indicators will flash only when the camera supports those functions and the corresponding events are enabled.

*Plug-in free live view: Two-way audio and local recording are not supported, and the preview mode switch (real-time/balanced/fluent mode) is not available too.




*After clicking the audio alarm icon, the sound warning will be triggered according to the set warning times (you can set the warning times by clicking **Config**→**Alarm**→**Audio Alarm**). Click this icon again. After the current warning voice is completely sounded, it will stop.

*After clicking the light alarm icon, the white light will flash alternatively according to the set flashing time (you can set the flashing time by clicking **Config**→**Alarm**→**Light Alarm**). Click this icon again to stop flashing.

Some cameras can be installed in a compatible external PTZ enclosure through RS485. Click the PTZ icon to reveal the PTZ control panel.

The descriptions of the control panel are as follows:

Icon	Description	Icon	Description
	Move upper left direction		Move upper right direction
	Move up		Stop movement
	Move left		Move right
	Move lower left direction		Move lower right direction
	Move down		Speed adjustment
	Zoom out		Zoom in
	Focus -		Focus +
	Iris -		Iris +
	Auto scan		Wiper
	Light		Radom scan
	Group scan		Preset

Select preset and click  to call the preset. Select and set the preset and then click  to save the position of the preset. Select the set preset and click  to delete it.

3 Fire Detection & Temp Measurement

3.1 Fire Detection

Please note this is only intended as a supplement to official fire detection methods and should not be relied on as a primary alert source.

Fire Detection: Alarms will be triggered when the camera detects a fire source through the thermal imaging.

Click **Config** → **Fire Detection** to enter the following interface.

Detection Config		Area	Schedule
<input checked="" type="checkbox"/> Enable			
Filter Alarm Time	<input type="text" value="0"/>	Seconds	
Alarm Holding Time	<input type="text" value="3"/>	Seconds	▼
Trigger Alarm Out			
<input checked="" type="checkbox"/> Alarm Out			
<input checked="" type="checkbox"/> Trigger Audio Alarm	<input type="text" value="Fire detected, please check"/> ▼		
<input checked="" type="checkbox"/> Trigger Light Alarm			
<input checked="" type="checkbox"/> Trigger SD Card Snapshot			
<input checked="" type="checkbox"/> Trigger SD Card Recording			
<input type="checkbox"/> Trigger Email			
<input type="checkbox"/> Trigger FTP			
<input type="button" value="Save"/>			

1. Click “Enable” and set the filter alarm time and alarm holding time.

Filter Alarm Time: For example: set it to “2 seconds” ; Alarms will be triggered when the fire source is detected for 2 seconds, or alarms will not be triggered.

Alarm Holding Time: it refers to the time that the alarm extends after an alarm ends.

2. Set alarm trigger options.

Alarm Out: If selected, this would trigger an external relay output that is connected to the camera when the fire source is detected. (Some models support multiple alarm out options.)

Trigger Audio Alarm: If selected, the warning voice will be played when the fire source is detected.

Trigger Light Alarm: If selected, the light of the camera will flash when the fire source is detected. (Please set the light flashing time and frequency first. See [Light Alarm](#) for details).

Trigger SD Card Snapshot: If selected, the system will capture images when the fire source is detected and save the images on an SD card.

Trigger SD Card Recording: If selected, the video will be recorded on an SD card when the fire source is detected.

Trigger Email: If “Trigger Email” and “Attach Picture” are checked (email address must be set first in the Email configuration interface), the captured pictures and triggered event will be sent to those addresses.

Trigger FTP: If “Trigger FTP” and “Attach Picture” are checked, the captured pictures will be sent to the FTP server address. Please refer to the FTP configuration section for more details.

3. Set the fire detection sensitivity and blocked areas.



Set the area number on the right side. Up to 4 blocked areas can be added.

Click the “Draw Area” button and then click around the area where you want to set as the blocked area in the image on the left side (the blocked area should be a closed area). Click the “Clear” button to delete the blocked area. Click the “Save” button to save the settings.

Fire Detection Sensitivity: the higher the value is, the easier a fire can be detected, but the false rate is higher. Please adjust the sensitivity as needed. In addition, you can view the fire detection sensitivity diagram as shown below.



You can set the fire detection sensitivity according to the above diagram. The real-time line shows the highest temperature in the screen. The closer the real-time line is to the red line, the more sensitive it is. For example, if the highest temperature in the screen is close to the alarm line or exceeds the red line, it means that the sensitivity needs to be adjusted lower to avoid false alarms. If it is far away from the sky-blue line, it means that you need to increase the sensitivity value to avoid missing alarms. It is recommended that the real-time line is near the

blue line but not above the blue line after the sensitivity is set.

4. Set the schedule of the fire detection. The setup steps of the schedule are the same as the schedule recording setup. (See [Schedule Recording](#)).

3.2 Temperature Measurement

Temperature Measurement: When a temperature of the pre-defined point/line/area exceeds the temperature threshold value, alarms will be triggered.

Click **Config** → **Temperature measurement** to enter the following interface.

Detection Config	Area	Schedule
<input checked="" type="checkbox"/> Enable		
Temperature Switch	Centigrade(°C) ▼	
Distance Unit	Meter(m) ▼	
Temperature Range	-20°C~150°C ▼	
<input checked="" type="checkbox"/> Display Max. Temperature		
<input checked="" type="checkbox"/> Display Avg. Temperature		
<input checked="" type="checkbox"/> Display Min. Temperature		
Temperature Bar	Open ▼	
Temp Reading by Clicking	Open ▼	
Emissivity	0.96	
Distance(m)	5	
Reflective Temperature(°C)	25	
Overlay Temperature Information		
<input type="checkbox"/> Thermal (Stream)	<input type="checkbox"/> Optical (Stream)	
<input checked="" type="checkbox"/> Thermal (Local)	<input checked="" type="checkbox"/> Optical (Local)	
Alarm Holding Time	20 Seconds ▼	
<input type="checkbox"/> Trigger Audio Alarm		
<input type="checkbox"/> Trigger Light Alarm		
<input type="checkbox"/> Trigger SD Card Snapshot		
<input type="checkbox"/> Trigger SD Card Recording		
<input type="checkbox"/> Trigger Email		
<input type="checkbox"/> Trigger FTP		

1. Click “Enable” and set the temperature measurement parameters.

Temperature Switch: select the temperature unit (°C or °F).

Distance Unit: set the unit of the temperature measurement distance. “Meter” or “Foot” can

be selected.


Temperature Range: Two temperature ranges can be selected. Choose “-20°C~150°C” or “100°C~550°C” as needed.

Display Max. Temperature: if checked, the Max. Temperature in the set area/line will be displayed in real time.

Display Avg. Temperature: if checked, the Avg. Temperature in the set point/area/line will be displayed in real time.

Display Min. Temperature: if checked, the Min. Temperature in the set area/line will be displayed in real time.

Temperature Bar: if “Open” is selected, a color reference temperature bar will appear on the right of the thermal image in the live view interface as shown below.

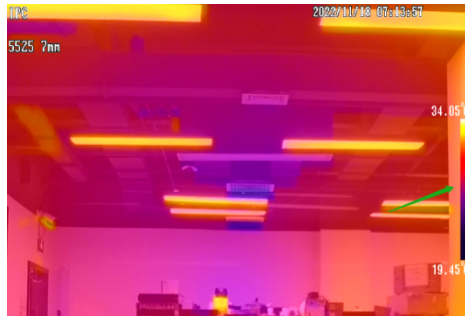

The current minimum and maximum temperature of the scene will display. The minimum temperature shows at the bottom of the bar; the maximum temperature shows on the top of the bar.

Temp Reading by Clicking: if checked, you can read the real-time temperature of any point you click on the thermal image in the live interface.

Emissivity: Set the emissivity of the target. The emissivity of each object is different. Please refer to [Common Material Emissivity](#) for details.

Distance: The distance between the target and the camera.

Reflective Temperature: If there is any object with high emissivity in the scene, set the reflective temperature to correct the ambient temperature. The reflective temperature should be set the same as the temperature of the high emissivity object.

Overlay temperature information:

Thermal/optical (local): if enabled, the temperature information shown in the live view interface will get locally. However, when playing back the recorded files, the temperature information will not be overlaid.

Thermal/optical (stream): if enabled, the temperature information will overlay on the video stream. When playing the live video or the recorded video, you can view the temperature information.

Note: a. for some models, if “Optical (stream)” is enabled, the max. resolution of the mainstream is 1080P; the temperature information can be overlaid on the third stream but cannot be overlaid on the sub stream.

b. for some models, if “Dual Image Fusion” is enabled, overlaying temperature on optical cannot be enabled. You need to disable “Dual Image Fusion” first and then enable “Optical (stream)”.


c. for some models, overlaying temperature on optical image and “OSD Content3” cannot be enabled simultaneously.

d. for some models, if “Thermal (stream) is enable, the max. resolution of the thermal image is D1;

e. for some models, “temperature bar” and “OSD Content3” cannot be enabled simultaneously.

2. Set the alarm holding time and alarm trigger options. The setup steps are the same as fire detection. Please refer to [Fire Detection](#) for details.


3. Set thermography rule. Click the “Area” tab to go to the following interface.

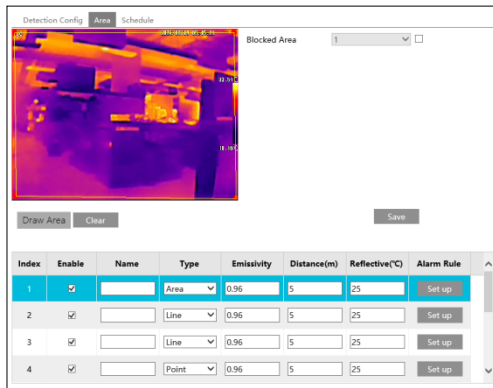


You can set the blocked area for temperature measurement as needed. Check “Blocked area” to set. Up to 4 blocked areas can be set. The setting steps are the same as the blocked area setup of fire detection. See [Fire Detection](#) for details.

Note: a. The set blocked area has no effect on the detection points (the rule type is set to “Point”).

b. If a detection area (the rule type is set to “Area”) is completely surrounded by a blocked area (below), the blocked area is invalid for this detection area. The temperature of the detection area still can be detected.

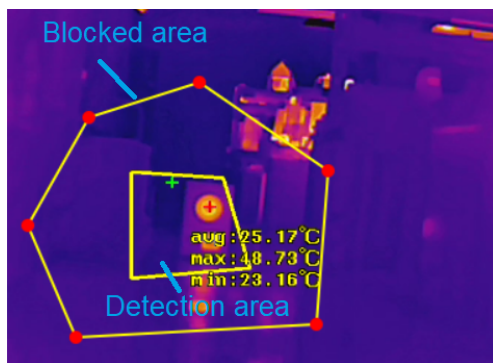

c. After the blocked area takes effect, the overlapping area (the area overlapped by the blocked area and the detection area) will not be detected. Only the remaining area of the detection area can be detected.

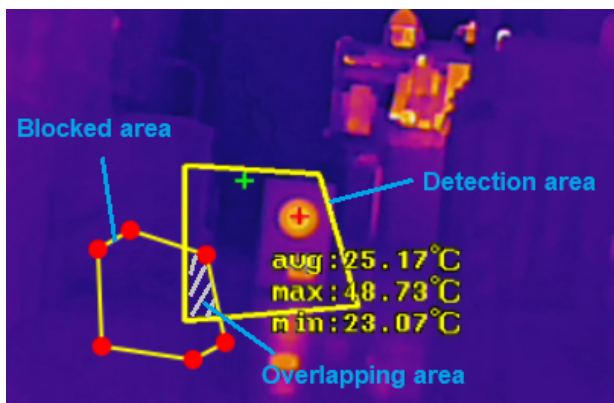

The thermography rule type includes Point, Line and Area.

Point setting: After the type is set to “Point”, click “Draw Area” and then drag the mouse in the image on the left side to move the point. Click the “Stop Draw” button to stop drawing. Up to 10 points can be set in the above interface.

Line setting: After the type is set to “Line”, click “Draw Area” and then drag the mouse in the image on the left side to draw a line. Click the “Stop Draw” button to stop drawing. To ensure the accuracy of temperature measurement, it is recommended to set not more than two lines at the same time.

Area setting: Click the “Draw Area” button and then click around the area where you want to set as the alarm area in the image on the left side (the alarm area should be a closed area). Click the “Stop Draw” button to stop drawing. Click the “Clear” button to delete the alarm area. Click the “Save” button to save the settings. To ensure the accuracy of temperature measurement, it is recommended to set not more than two areas at the same time.

4. Click “Set up” to set the alarm rule.

Alarm Rule ✕

Alarm Rule

Alarm Rule Above (Max. Tempe ▾)

Alarm Temperature 100 °C

Filter Alarm Time 0 Seconds

Alarm Out IO_0

Trigger Audio Alarm Temperature abnorm ▾ Enable


OK

Set the alarm rule and alarm temperature and enable alarm output or audio alarm as needed. For example, select Alarm Rule as Above (Average Temperature), set the alarm temperature to 100°C and check alarm output. Then alarms will be triggered when the average temperature of the target is higher than 100°C.

Filter Alarm Time: For example: set it to “2 seconds” ; Alarms will be triggered when the temperature exception is detected for 2 seconds, or alarms will not be triggered.

Note: Before enabling “Trigger Audio Alarm” here, you must enable “Trigger Audio Alarm” in the detection configuration interface of temperature measurement first. Additionally, “Trigger audio alarm” can be enabled respectively for each detection area you set.

5. Click “Live” to view the temperature and rule information.

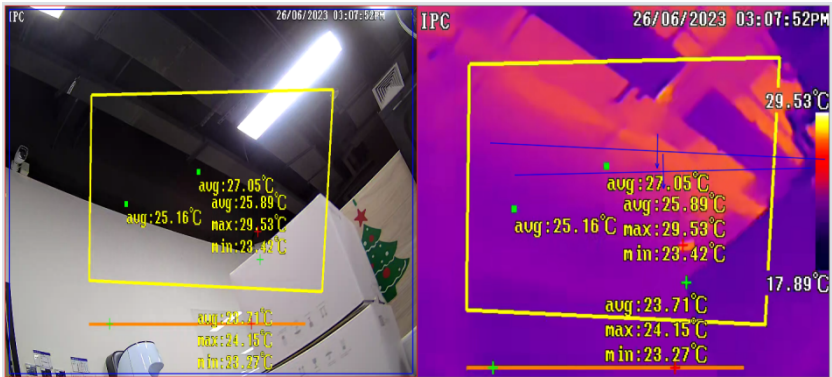

Requirements of fire detection and temperature measurement

1. The thermal camera should be used in a stable indoor environment without wind. Please make sure the monitoring field is far away from any objects that could produce airflow.
2. In order to avoid damage of the sensor, keep the lens of the camera away from the sun.
3. The thermal camera should be installed in the highest position of the detection area and the camera should face the detected object.

4 Other Configurations

In the Webcam client, choose “Config” to go to the configuration interface.

Note: Wherever applicable, click the “Save” button to save the settings.

4.1 System Configuration

4.1.1 Basic Information

In the “Basic Information” interface, the system information of the device is listed.

Device Name	IPC
Product Model	
Brand	
Software Version	5.1.3.0(59293)
Software Build Date	2024-08-08
Onvif Version	23.12
OCX Version	2.2.7.86
MAC	00:18:ae:00:d4:06
About this machine	View
Privacy Statement	View

4.1.2 Date and Time

Go to *Config* → *System* → *Date and Time*. Please refer to the following interface.

Zone	Date and Time				
Zone	GMT (Dublin, Lisbon, London, Reykjavik) ▼				
<input type="checkbox"/> DST					
<input checked="" type="radio"/> Auto DST					
<input type="radio"/> Manual DST					
Start Time	January ▼	First ▼	Sunday ▼	00 ▼	Hour
End Time	February ▼	First ▼	Monday ▼	00 ▼	Hour
Time Offset	120 Minutes ▼				
<input type="button" value="Save"/>					

Select the time zone and DST as needed.

Note: The time zone of the camera and the computer must be the same. It is recommended to modify the time zone of the camera according to the time zone of the computer. If the time zone of the computer is modified, the current web client needs to be closed. Then re-open it

and log in again.

Click the “Date and Time” tab to set the time mode and time format.

Zone	Date and Time
Time Mode:	
<input checked="" type="radio"/> Synchronize with NTP server	
NTP server:	<input type="text" value="time.windows.com"/> Update period: <input type="text" value="1440"/> Minutes
<input type="radio"/> Synchronize with computer time	
Date	<input type="text" value="2021-09-01"/> Time <input type="text" value="17:37:36"/>
<input type="radio"/> Set manually	
<input type="text" value="2021-09-01 09:37:32"/> <input type="button" value="📅"/>	
Time Format	<input type="text" value="24-Hour"/>
<input type="button" value="Save"/>	

4.1.3 Local Config

Go to *Config* → *System* → *Local Config* to set up the storage path of captured pictures and recorded videos on the local PC. There is also an option to enable or disable audio in the recorded files.

Picture Path	<input type="text" value="C:\Program Files\NetAIHotIPCamera"/>	<input type="button" value="Browse"/>
Record Path	<input type="text" value="C:\Program Files\NetAIHotIPCamera"/>	<input type="button" value="Browse"/>
Video Audio Settings	<input type="radio"/> Open	<input checked="" type="radio"/> Close
Show Bitrate	<input type="radio"/> Open	<input checked="" type="radio"/> Close
Local Smart Snapshot Storage	<input type="radio"/> Open	<input checked="" type="radio"/> Close
<input type="button" value="Save"/>		

Show Bitrate: enable or Disable Bitrate Display on the live video.

Additionally, “Local smart snapshot storage” can be enabled or disabled here. If enabled, the captured pictures triggered by smart events (like line crossing detection, region intrusion, etc.) will be saved to the local PC.

Note: when you access your camera by the web browser without the plug-in, only Show Bitrate can be set in the above interface.

4.1.4 Storage

Go to *Config* → *System* → *Storage* to go to the interface as shown below.

Management	Record	Snapshot
Total picture capacity	<input type="text" value="379 MB"/>	
Picture remaining space	<input type="text" value="379 MB"/>	
Total recording capacity	<input type="text" value="3329 MB"/>	
Record remaining space	<input type="text" value="2432 MB"/>	
State	<input type="text" value="Normal"/>	
Snapshot Quota	<input type="text" value="10"/> %	
Video Quota	<input type="text" value="90"/> %	
Changes in the quota ratio need to be formatted before they become effective.		
<input type="button" value="Eject"/> <input type="button" value="Format"/>		

● SD Card Management

Click the “Format” button to format the SD card. All data will be cleared by clicking this button.

Click the “Eject” button to stop writing data to the SD card. Then the SD card can be ejected safely.

Snapshot Quota: Set the capacity proportion of captured pictures on the SD card.

Video Quota: Set the capacity proportion of record files on the SD card.

● Schedule Recording Settings

1. Go to *Config* → *System* → *Storage* → *Record* to go to the interface as shown below.

Management	Record	Snapshot
Record Parameters		
Record Stream	<input type="text" value="Main stream"/>	▼
Pre Record Time	<input type="text" value="No Pre Record"/>	(H264,H265,MJPEG)
Cycle Write	<input type="text" value="Yes"/>	▼
Timing		
<input checked="" type="checkbox"/> Enable Schedule Record		
<input type="radio"/> Erase <input checked="" type="radio"/> Add		

2. Set record stream, pre-record time, cycle writing.

Pre Record Time: Set the time to record before the actual recording begins.

3. Set schedule recording. Check “Enable Schedule Record” and set the schedule.

Erase Add

Week Schedule

Sun.	00:00-24:00	Manual Input
Mon.	00:00-24:00	Manual Input
Tue.	00:00-24:00	Manual Input
Wed.	00:00-24:00	Manual Input
Thu.	00:00-24:00	Manual Input
Fri.	00:00-24:00	Manual Input
Sat.	00:00-24:00	Manual Input

Holiday Schedule

Date:

00:00-24:00 Manual Input

Weekly schedule

Set the alarm time from Monday to Sunday for a single week. Each day is divided into one-hour increments. Green means scheduled. Blank means unscheduled.

“Add”: Add the schedule for a special day. Drag the mouse to set the time on the timeline.

“Erase”: Delete the schedule. Drag the mouse to erase the time on the timeline.

Manual Input: Click it for a specific day to enter specific start and end times. This adds more granularities (minutes).

Day schedule

Set the alarm time for a special day, such as a holiday.

Note: Holiday schedule takes priority over weekly schedule.

● Snapshot Settings

Go to *Config* → *System* → *Storage* → *Snapshot* to go to the interface as shown below.

Management	Record	Snapshot
Snapshot Parameters		
Image Format	JPEG	▼
Resolution	704x576	▼
Image Quality	Low	▼
Event Trigger		
Snapshot Interval	1	Second
Snapshot Quantity	5	
Timing		
<input checked="" type="checkbox"/>	Enable Timing Snapshot	
Snapshot Interval	5	Second

Set the format, resolution and quality of the image saved on the SD card and the snapshot interval and quantity and the timing snapshot here.

Snapshot Quantity: The number you set here is the maximum quantity of snapshots. The actual quantity of snapshots may be less than this number. Supposing the occurrence time of an alarm event is less than the time of capturing pictures, the actual quantity of snapshots is less than the set quantity of snapshots.


Timing Snapshot: Enable timing snapshot first and then set the snapshot interval and schedule. The setup steps of schedule are the same as the schedule recording (See [Schedule Recording](#)).

4.2 Image Configuration

4.2.1 Display Configuration

Go to *Image* → *Display Settings* as shown below. The image's brightness, contrast, hue and saturation and so on for common, day and night mode can be set up separately. The image effect can be quickly seen by switching the configuration file.

Note: the camera parameters of different cameras may be slightly different. The following pictures and descriptions are for reference only. The real camera interface shall prevail.

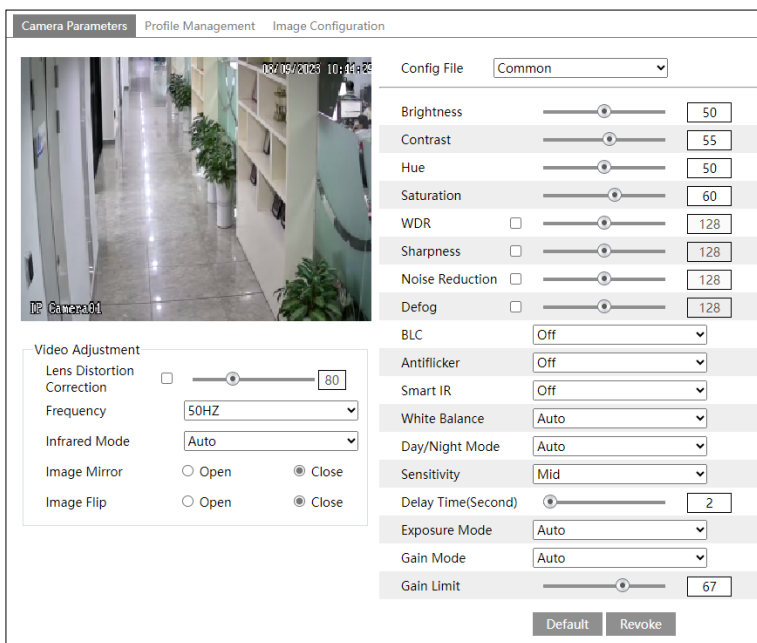

Brightness: Set the brightness level of the camera's image.

Contrast: Set the color difference between the brightest and darkest parts.

Hue: Set the total color degree of the image.

Saturation: Set the degree of color purity. The purer the color, the brighter the image is.

WDR: WDR can adjust the camera to provide a better image when there are both very bright and very dark areas simultaneously in the field of view by lowering the brightness of the bright area and increasing the brightness of the dark area.

Recording will be stopped for a few seconds while the mode is changing from non-WDR to WDR mode.

Sharpness: Set the resolution level of the image plane and the sharpness level of the image edge.

Noise Reduction: Decrease the noise and make the image more thorough. Increasing the value will make the noise reduction effect better but it will reduce the image resolution.

Defog: Activating this function and setting an appropriate value as needed in foggy, dusty, smoggy, or rainy environment to get clear images.

Backlight Compensation (BLC):

- Off: disables the backlight compensation function. It is the default mode.
- HLC: lowers the brightness of the entire image by suppressing the brightness of the image's bright area and reducing the size of the halo area.
- BLC: If enabled, the auto exposure will activate according to the scene so that the object of the image in the darkest area will be seen clearly.

Antiflicker:

- Off: disables the anti-flicker function. This is used mostly in outdoor installations.

- 50Hz: reduces flicker in 50Hz lighting conditions.
- 60Hz: reduces flicker in 60Hz lighting conditions.

Smart IR: Choose “ON” or “OFF”. This function can effectively avoid image overexposure to make the image more realistic. The higher the level is, the more overexposure compensation will be given.

White Balance: Adjust the color temperature according to the environment automatically.

Day/Night Mode: Choose “Auto”, “Day”, “Night” or “Timing”.

If “Timing” is selected, you need to set daytime and nighttime. For example: if “Daytime” is set to “7:00”, the camera will switch to Day mode at 7:00 o’clock; if “Nighttime” is set to “17:00”, the camera will switch from Day mode to Night mode at 17:00 o’clock.

Exposure Mode: Choose “Auto” or “Manual”. If manual is chosen, the digital shutter speed can be adjusted.

Gain Mode: Choose “Auto” or “Manual”. If “Auto” is selected, the gain value will be automatically adjusted (within the set gain limit value) according to the actual situation. If “Manual” is selected, the gain value shall be set manually. The higher the value is, the brighter the image is.

Lens Distortion Correction: When the image appears distortion to some extent, please enable this function and adjust the level according to the actual scene to correct the distortion.

Note: for some models, if “Dual Image Fusion” is enabled, “Lens Distortion Correction” cannot be enabled. You need to disable “Dual Image Fusion” first and then enable “Lens Distortion Correction”.

Frequency: 50Hz and 60Hz can be optional.


Infrared Mode: Choose “Auto”, “On” or “Off”. Some modes may not support this mode.

Image Mirror: Turn the current video image horizontally.


Image Flip: Turn the current video image vertically.

Schedule Settings of Image Parameters:

Click the “Profile Management” tab as shown below.

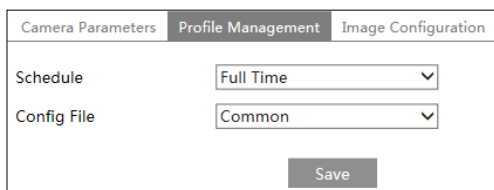


Set full time schedule for common, auto mode and specified time schedule for day and night. Choose “Schedule” in the drop-down box of schedule as shown below.

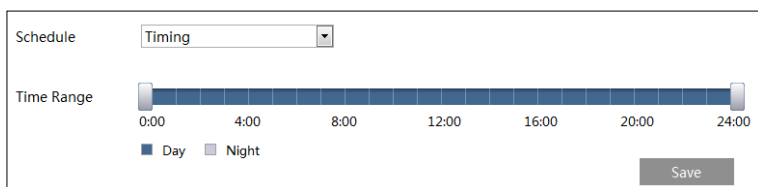

Drag “🕒” icons to set the time of day and night. Blue means daytime and blank means nighttime. If the current mode of camera parameters is set to schedule, the image configuration mode will automatically switch between day and night according to the schedule.

Thermal Image Configuration:

Click the “Image Configuration” tab to go to the thermal image configuration interface as shown below:

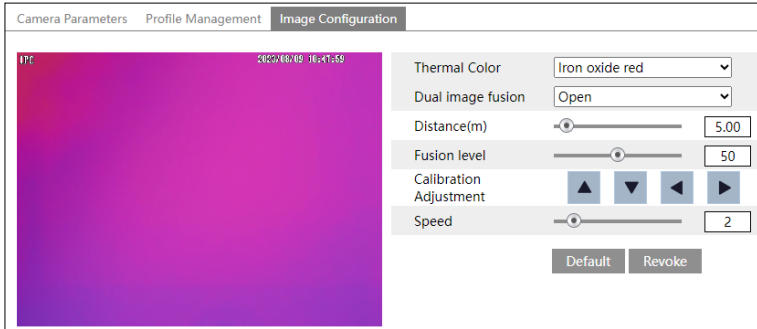

Thermal color: set the display color of the thermal image as needed. The thermal colors vary by model.

Dual image fusion: overlay the images of two channels (thermal and optical image channels).

Distance: set the value according to the distance between the lens of the camera and the main target. The fusion distance between optical image and thermal image will be adjusted along with the adjustment of the distance. The system will automatically adjust the image effect of fusion according to the fusion distance.

Fusion Level: the lower the value is, the clearer the optical image is. The higher the value is, the clearer the thermal image is.

Calibration Adjustment: correct the distance between optical image and thermal image by clicking the direction buttons.

Speed: the speed of image movement after clicking a direction button

4.2.2 Video / Audio Configuration

Go to **Image** → **Video / Audio** as shown below. In this interface, set the resolution, frame rate, bitrate type, video quality and so on subject to the actual network condition.

Note: the video stream parameters of different camera series may be different. The following pictures and descriptions are for reference only. The real camera interface shall prevail.

Video		Audio								
Index	Stream	Resolution	Frame Rate	Bitrate Type	Bitrate(Kbps)	Video	I Frame	Video	Profile	
1	Main stream	2592x1944	25	CBR	4096	Highest	100	H264	High Profile	
2	Sub stream	704x576	25	CBR	768	Highest	100	H264	High Profile	
3	Third stream	704x576	25	CBR	768	Higher	100	H264	High Profile	
4	Thermal	1280x720	25	CBR	1536	Higher	100	H264	High Profile	

Send Snapshot Sub stream Size: (704x576)

Video encode slice split

Watermark (Only support H264, H265) Watermark content:

Four video streams can be adjustable.

Resolution: The size of the image.

Frame rate: The higher the frame rate, the video is smoother.

Bitrate type: CBR and VBR are optional. Bitrate is related to image quality. CBR means that no matter how much change is seen in the video scene, the compression bitrate will be kept constant. VBR means that the compression bitrate will be adjusted according to scene changes. For example, for scenes that do not have much movement, the bitrate will be kept at a lower value. This can help optimize network bandwidth usage.

Bitrate: it can be adjusted when the mode is set to CBR. The higher the bitrate, the better the image quality will be.

Video Quality: It can be adjusted when the mode is set to VBR. The higher the image quality, the more bitrate will be required.

I Frame interval: It determines how many frames are allowed between a “group of pictures”. When a new scene begins in a video, until that scene ends, the entire group of frames (or pictures) can be considered as a group of pictures. If there is not much movement in the scene, setting the value higher than the frame rate is fine, potentially resulting in less bandwidth usage. However, if the value is set too high, and there is a high frequency of movement in the video, there is a risk of frame skipping.

Video Compression: MJPEG, H264 and H265 can be optional. MJPEG is not available for mainstream. Compared to H.264, H.265 reduces the transmission bitrate under the same resolution, frame rate, and image quality.

Profile: For H.264. Baseline, main and high profiles are selectable.

Send Snapshot: Set the snapshot stream.

Videos encode slice split: If this function is enabled, a smooth image can be obtained even though using the low-performance PC.

Watermark: When playing back the local recorded video in the search interface, the watermark can be displayed. To enable it, check the watermark box and enter the watermark text.

Click the “Audio” tab to go to the interface as shown below.

Video	Audio
<input checked="" type="checkbox"/> Enable	
Audio Encoding	G711A
Audio Type	LIN
Speaker	Warning
LIN In Volume	<input type="range"/> 80
Audio Out Volume	<input type="range"/> 32
<input type="button" value="Save"/>	

Audio Encoding: G711A and G711U are selectable.

Audio Type: LIN or MIC can be optional. (If the internal MIC is used, choose “MIC”. If you want to use an external line-level audio input device, choose “LIN”.)

Speaker: Talkback, warning or auto can be optional. If “Talkback” is selected, the built-in speaker will be used for two-way talk. If “Warning” is selected, the built-in speaker will be used to output the pre-defined audio alarm. If “Auto” is selected, the system will be used for two-way talk or audio alarm as needed. But when it is warning and two-way audio is being enabled simultaneously, two-way audio will be output first.

MIC/LIN In Volume: it ranges from 0~100. Please arrange it as needed. (Only some models support MIC)

Audio Out Volume: Please set as needed.

4.2.3 OSD Configuration

Go to **Image** → **OSD** as shown below.

	Date Format	YYYY-MM-DD	
	<input checked="" type="checkbox"/> Show Timestamp		
	Device Name	IP Camera01	
	<input checked="" type="checkbox"/> Show Device Name		
	<input type="checkbox"/> OSD Content1	<input type="text"/>	<input type="checkbox"/> Add One Line
	<input type="checkbox"/> OSD Content2	<input type="text"/>	<input type="checkbox"/> Add One Line
	<input type="checkbox"/> OSD Content3	<input type="text"/>	<input type="checkbox"/> Add One Line
	<input type="checkbox"/> OSD Content4	<input type="text"/>	<input type="checkbox"/> Add One Line
	<input type="button" value="Save"/>		

Set time stamp, device name, OSD content and picture overlap here. After enabling the corresponding display and entering the content, drag them to change their position. Then click the “Save” button to save the settings.

Note: 1. For some models, if “OSD Content3” is enabled, overlaying temperature on the thermal stream and/or optical stream will be disabled.


2. For some models, if “OSD Content3” is enabled, the temperature bar will be

disabled.

3. For some models, if “OSD Content4” is enabled, the statistical OSD will be disabled.

4.2.4 Video Mask

Go to *Image* → *Video Mask* as shown below. A maximum of 4 zones can be set up.

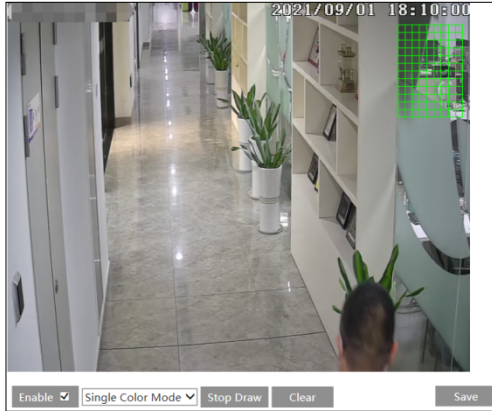

To set up a video mask:

1. Enable video mask.
2. Click the “Draw Area” button and then drag the mouse to draw the video mask area.
3. Click the “Save” button to save the settings.
4. Return to the live to verify that the area has been drawn as shown as blocked out in the image.




To clear the video mask:


Click the “Clear” button to delete the current video mask area.

4.2.5 ROI Configuration

Go to **Image** → **ROI Config** as shown below. An area in the image can be set as a region of interest. This area will have a higher bitrate than the rest of the image, resulting in better image quality for the identified area.

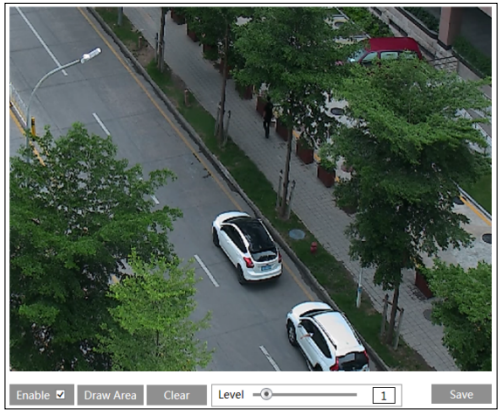

1. Check “Enable” and then click the “Draw Area” button.
2. Drag the mouse to set the ROI area.
3. Set the level.
4. Click the “Save” button to save the settings.

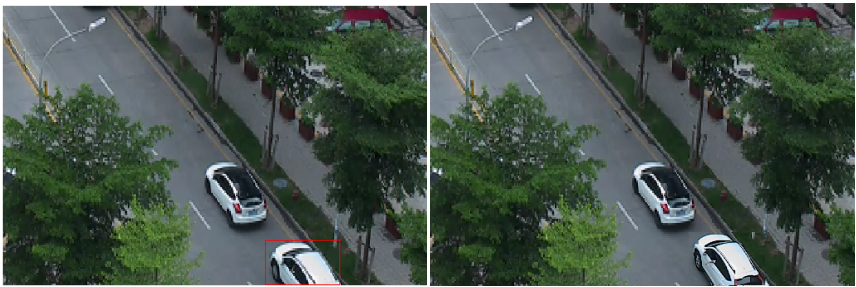

4.3 PTZ Configuration

This function is only available for the model with RS485 interface. It can be used with a compatible external PTZ enclosure. Go to **PTZ** → **Protocol** as shown below.

Protocol	PELCOD ▾
Address	1
Baud-Rate	2400 ▾
<input type="button" value="Save"/>	

4.4 Alarm Configuration

4.4.1 Motion Detection

Go to *Alarm* → *Motion Detection* to set the motion detection alarm.

Detection Config | Area and Sensitivity | Schedule

Enable

Alarm Holding Time: 20 Seconds

Trigger Alarm Out

Alarm Out

Trigger Audio Alarm | Alarm sound

Trigger SD Card Snapshot

Trigger SD Card Recording

Trigger Email

Trigger FTP

Save

1. Check “Enable” check box to activate motion-based alarms. If unchecked, the camera will not send out any signals to trigger motion-based recording to the NVR or CMS, even if there is motion in the video.

Alarm Holding Time: it refers to the time that the alarm extends after an alarm ends. For instance, if the alarm holding time is set to 20 seconds, once the camera detects a motion, it will go to alarm and will not detect any other motion in 20 seconds. If there is another motion detected during this period, it will be considered as continuous movement; otherwise, it will be considered as a single motion.

Alarm Out: If selected, this would trigger an external relay output that is connected to the camera on detecting a motion-based alarm (some models may support multiple alarm output interfaces. Please select alarm out according to the actual situation).

Trigger Audio Alarm: If selected, the warning voice will be played on motion detection. (Please set the warning voice first. See [Audio Alarm](#) for details).

Trigger SD Card Snapshot: If selected, the system will capture images on motion detection and save the images on an SD card.


Trigger SD Card Recording: If selected, the video will be recorded on an SD card on motion detection.

Trigger Email: If “Trigger Email” and “Attach Picture” are checked (email address must be

set first in the Email configuration interface), the captured pictures and triggered event will be sent to those addresses.

Trigger FTP: If “Trigger FTP” is checked, the captured pictures will be sent to the FTP server address. Please refer to the FTP configuration section for more details.

2. Set motion detection area and sensitivity. Click the “Area and Sensitivity” tab to go to the interface as shown below.

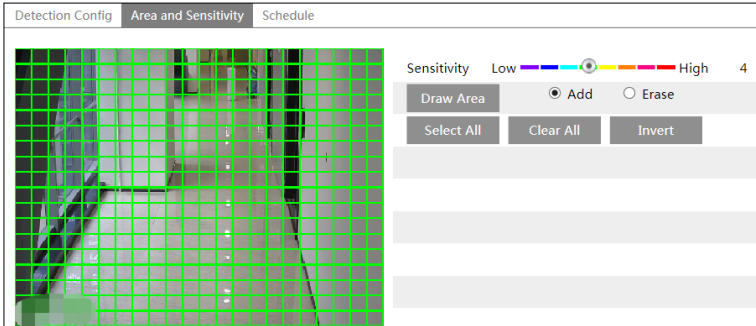

Move the “Sensitivity” scroll bar to set the sensitivity. A higher sensitivity value means that motion will be triggered more easily.

Select “Add” and click “Draw”. Drag the mouse to draw the motion detection area; Select “Erase” and drag the mouse to clear motion detection area.


After that, click the “Save” to save the settings.

3. Set the schedule for motion detection. The schedule setup steps of motion detection are the same as the schedule recording setup (See [Schedule Recording](#)).

4.4.2 Exception Alarm

- SD Card Full

1. Go to *Config* → *Alarm* → *Exception Alarm* → *SD Card Full*.

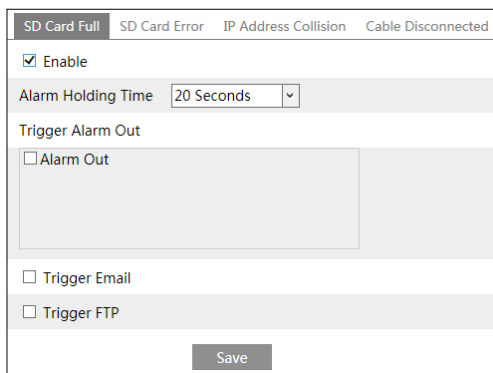

2. Click “Enable” and set the alarm holding time.
3. Set alarm trigger options. The setup steps are the same as motion detection. Please refer to the motion detection section for details.

● **SD Card Error**

When there are some errors in writing to the SD card, the corresponding alarms will be triggered.

1. Go to **Config** → **Alarm** → **Exception Alarm** → **SD Card Error** as shown below.

2. Click “Enable” and set the alarm holding time.
3. Set alarm trigger options. Trigger alarm out, Email, and FTP. The setup steps are the same as motion detection. Please refer to [Motion Detection](#) for details.


● **IP Address Conflict**

1. Go to **Config** → **Alarm** → **Exception Alarm** → **IP Address Collision** as shown below.

2. Click “Enable alarm” and set the alarm holding time.
3. Trigger alarm out. When the IP address of the camera conflicts with the IP address of other devices, the system will trigger the alarm out.

● Cable Disconnection

1. Go to *Config* → *Alarm* → *Exception Alarm* → *Cable Disconnected* as shown below.

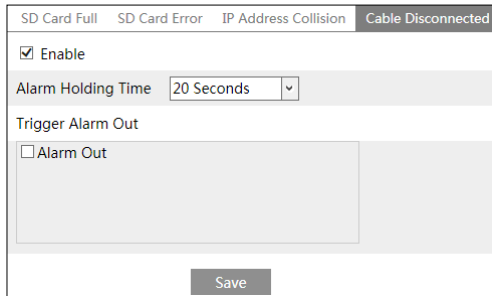


2. Click “Enable” and set the alarm holding time.

3. Trigger alarm out. When the camera is disconnected, the system will trigger the alarm out.

4.4.3 Alarm In

To set sensor alarm (alarm in):

Go to *Config* → *Alarm* → *Alarm In* as shown below.

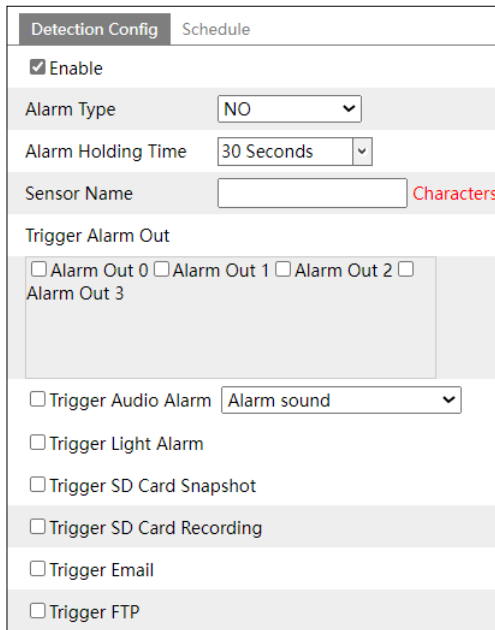

1. Click “Enable” and set the alarm type, alarm holding time, and sensor name.

2. Set alarm trigger options. The setup steps are the same as fire detection. Please refer to [Fire Detection](#) for details.

3. Click the “Save” button to save the settings.
 4. Set the schedule of the sensor alarm. The setup steps of the schedule are the same as the schedule recording setup. (See [Schedule Recording](#)).
- If there are multiple sensors, please select the sensor ID. Click “Apply settings to” to quickly apply the settings to the other alarm input. After that, click “Save” to save the settings.

The screenshot shows a configuration window titled "Detection Config" with a "Schedule" tab. The "Sensor ID" is set to "Alarm In1" and "Apply settings to" is set to "Alarm In2". The "Enable" checkbox is checked. "Alarm Type" is set to "NO" and "Alarm Holding Time" is set to "30 Seconds". The "Sensor Name" field is empty with a warning: "Characters such as &<> are prohibited". Under "Trigger Alarm Out", there are checkboxes for "Alarm Out 0", "Alarm Out 1", "Alarm Out 2", and "Alarm Out 3", all of which are unchecked. Below this, there are several unchecked checkboxes for "Trigger Audio Alarm", "Trigger Light Alarm", "Trigger SD Card Snapshot", "Trigger SD Card Recording", "Trigger Email", and "Trigger FTP". The "Trigger Audio Alarm" dropdown is set to "Alarm sound". A "Save" button is located at the bottom right.

4.4.4 Alarm Out

This function is only available for some models. Go to *Config* → *Alarm* → *Alarm Out*.

The screenshot shows a configuration window for "Alarm Out". It contains four main settings: "Alarm Out Mode" is set to "Alarm Linkage", "Alarm Out Name" is "alarmOut1", "Alarm Holding Time" is set to "20 Seconds", and "Alarm Type" is set to "NO". A "Save" button is located at the bottom right.

- Alarm Out ID:** Some models may support multiple alarm output interfaces. The alarm out can be set respectively by selecting alarm out ID.
- Alarm Out Mode:** Alarm linkage, manual operation, day/night switch linkage and timing are optional.
- Alarm Linkage:** Having selected this mode, select alarm out name, alarm holding time at the “Alarm Holding Time” pull down list box and alarm type.
- Manual Operation:** Having selected this mode, select the alarm type and click “Open” to trigger the alarm out immediately; click “Close” to stop alarm.

Alarm Out Mode	<input type="text" value="Manual Operation"/>
Alarm Type	<input type="text" value="NO"/>
Manual Operation	<input type="button" value="Open"/> <input type="button" value="Close"/>
<input type="button" value="Save"/>	

Day/Night Switch Linkage: Having selected this mode, select the alarm type and then choose to open or close alarm out when the camera switches to day mode or night mode.

Alarm Out Mode	<input type="text" value="Day/night switch linkage"/>
Alarm Type	<input type="text" value="NO"/>
Day	<input type="text" value="Close"/>
Night	<input type="text" value="Close"/>
<input type="button" value="Save"/>	

Timing: Select the alarm type. Then click “Add” and drag the mouse on the timeline to set the schedule of alarm out; click “Erase” and drag the mouse on the timeline to erase the set time schedule. After this schedule is saved, the alarm out will be triggered in the specified time.

Alarm Out Mode	<input type="text" value="Timing"/>
Alarm Type	<input type="text" value="NO"/>
<input type="radio"/> Erase <input checked="" type="radio"/> Add	
Time Range	<div style="display: flex; align-items: center;"> <div style="flex: 1;"> <p>0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24</p> <p>06:45-15:30</p> </div> <div style="flex: 1; border-left: 1px solid black; border-right: 1px solid black; background-color: #e0ffe0; margin: 0 5px;"></div> <div style="flex: 1; text-align: right;"> <p>Manual Input</p> </div> </div>
<input type="button" value="Save"/>	

4.4.5 Alarm Server

Go to *Alarm* → *Alarm Server* as shown below.

Set the server address, port, heartbeat and heartbeat interval. When an alarm occurs, the camera will transfer the alarm event to the alarm server. If an alarm server is not needed, there is no need to configure this section.

Server Address	<input type="text" value="0.0.0.0"/>
Port	<input type="text" value="8010"/>
Heartbeat	<input type="text" value="Disable"/>
Heartbeat interval	<input type="text" value="30"/> Second
<input type="button" value="OK"/>	

4.4.6 Audio Alarm

Go to *Alarm* → *Audio Alarm* as shown below.

The screenshot shows the 'Audio Alarm' configuration window. At the top, there are two tabs: 'Sound configuration' (selected) and 'Schedule'. Below the tabs, there is a checkbox labeled 'Enable' which is checked. The main section is titled 'Voice Configuration' and contains several settings: 'Warning voice' is set to 'English'; 'Customize' has a dropdown menu and a '+' button; 'Voice' is set to 'Alarm sound'; 'Warning Times' is set to '5 times'; 'Volume' is set to '100' with a speaker icon; 'Audio List' is set to 'Restricted area, leave as so' with a 'Listen' button. At the bottom right, there is a 'Save' button.

1. Enable audio alarm. If disabled, the warning voice will not sound when an event triggers audio alarm. Additionally, you need to enable audio in the audio configuration interface and the speaker type should be “Warning” or “Auto”, or the warning voice cannot be played too.
2. Select the warning voice. If you want to customize the voice, click **+** to extend the following interface. Click “Browse” to choose the audio file you want to upload and then enter the audio name. Finally, click “Upload” to upload the audio file. Note that the format of the audio file must meet the requirement (see Tips), or it will not be uploaded. After you upload the audio file, you can select the audio name from the audio list and click “Listen” to listen to it. Click “Delete” to delete the audio.

The screenshot shows two stacked interfaces. The top one is 'Upload Audio' and the bottom one is 'Voice Record'.
The 'Upload Audio' interface has: 'Upload Path' with a 'Browse' button; 'Audio Name' with an 'Upload' button; and a tip: 'Tips: audio format (WAV, 8000Hz, monophonic, 16bit , less than 300K)'.
The 'Voice Record' interface has: 'Save Path' with a 'Browse' button; 'Audio Name' with an empty text field; 'Record Audio' with a volume slider set to 10, a 'Start' button, and an 'Upload' button; and an 'Audio List' section with a dropdown menu, 'Listen' and 'Delete' buttons. A 'Save' button is at the bottom.

You can also record your own voice in the above interface and then upload.

- Insert the microphone into your PC.
- Click “Browse” to choose the save path of the audio you want to record.

- Set the record audio volume and then click “Start” to start recording your voice.
- Click “Upload” to upload your customized voice.

Note: The voice can be recorded only when you log in via IE browser.

3. Set the warning times and volume as needed.

Warning times: it ranges from 1 to 50.

4. Set the schedule of audio alarm. The setup steps of the schedule are the same as the schedule recording setup. (See [Schedule Recording](#)).

5. Click “OK” to save the settings.

4.4.7 Light Alarm

Go to **Alarm** → **Light Alarm** as shown below.

Enable light alarm as needed. If it is disabled, the flashing light will not be turned on when the light alarm is triggered.

Set the flashing time and frequency of the light.

<input checked="" type="checkbox"/> Enable	
Flashing Time	<input type="text" value="2"/> Second
Flashing Frequency	<input type="text" value="High"/> ▾
<input type="button" value="OK"/>	

Flashing time: the flashing time ranges from 1 second to 60 seconds.

Flashing Frequency: three options- low, middle and high

Set the schedule of light alarm. The setup steps of the schedule are the same as the schedule recording setup. (See [Schedule Recording](#)).

4.4.8 Video Exception

This function can detect changes in the surveillance environment affected by external factors.

To set video exception detection:

Go to **Config** → **Event** → **Video Exception** as shown below.

1. Enable the applicable detection that's desired.

Scene Change Detection: Alarms will be triggered if the scene of the monitor video has changed.

Video Blur Detection: Alarms will be triggered if the video becomes blurry.

Abnormal Color Detection: Alarms will be triggered if the image is abnormal caused by color deviation.

2. Set the alarm holding time and alarm trigger options. The setup steps are the same as motion detection. Please refer to the motion detection section for details.

3. Click the “Save” button to save the settings.

4. Set the sensitivity of the exception detection. Click “Sensitivity” tab to go to the interface as shown below.

Drag the slider to set the sensitivity value or directly enter the sensitivity value in the textbox. Click the “Save” button to save the settings.

The sensitivity value of Scene Change Detection: The higher the value is, the more sensitive the system responds to the amplitude of the scene change.

The sensitivity value of Video Blur Detection: The higher the value is, the more sensitive

the system responds to the blurriness of the image.

The sensitivity value of Abnormal Color Detection: The higher the value is, the more sensitive the system responds to the color shift of the image.

※ **The requirements of the camera and surrounding area**


1. Auto-focusing function should not be enabled for exception detection.
2. Try not to enable exception detection when light changes greatly in the scene.
3. Please contact us for more detailed application scenarios.

4.4.9 Audio Exception

Alarms will be triggered when the abnormal sound is detected in the surveillance scene, such as the sudden increase/decrease of the sound intensity.

To set audio exception detection:

1. Go to **Alarm** → **Audio Exception** as shown below.

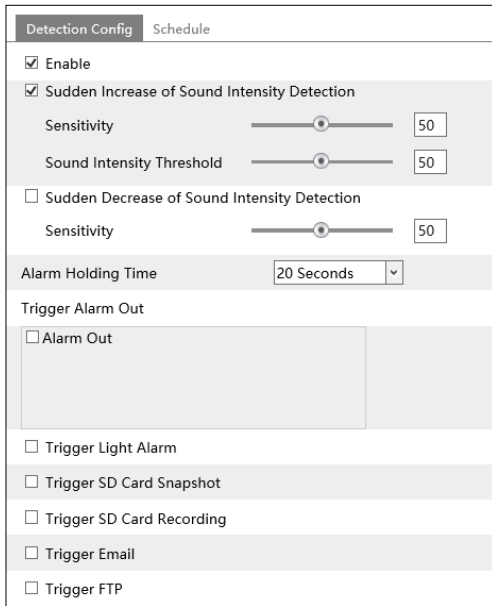

2. Enable audio exception.
3. Select the audio exception detection types.

Sudden Increase of Sound Intensity Detection: Detect sudden increase of sound intensity. If enabled, sensitivity and sound intensity threshold are configurable. Alarms will be triggered when the detected sound intensity exceeds the sound threshold.

Sensitivity: The higher the value is, the easier the alarm will be triggered.

Sound Intensity Threshold: It is the sound intensity reference for the detection. The lower the value is, the easier the alarm will be triggered. It is recommended to set the average sound intensity in the environment. The louder the environment sound, the higher the value should be. Please adjust it according to the actual environmental condition.

Sudden Decrease of Sound Intensity Detection: Detect sudden decrease of sound intensity. Please set the sensitivity as needed. The higher the value is, the easier the alarm will be triggered.


Real-time audio graphics:

Red wavy line stands for the current detected sound intensity.

Navy blue line stands for the environment (background) sound intensity.

Green line stands for the sound intensity threshold.

In order to reduce false alarms, it is recommended to set the sensitivity and sound intensity threshold according to the real-time audio graphics.

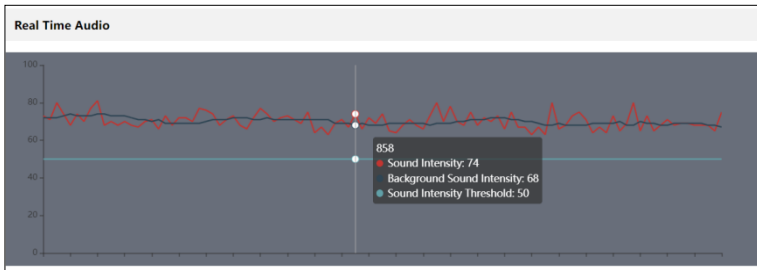

4. Set the alarm holding time and alarm trigger options. The setup steps are the same as fire detection. Please refer to [Fire Detection](#) for details.

5. Set the schedule of the audio exception detection. The setup steps of the schedule are the same as the schedule recording setup (See [Schedule Recording](#)).

Note: The alarm recording type triggered by an audio exception event is “Common”. In the search interface, you can search the recorded files of audio exception by selecting the “Common” event.

4.4.10 Disarming

You can disarm alarm linkage actions quickly in this interface.

The screenshot shows a configuration window with two tabs: "Disarming" and "Schedule". Under "Disarming", there are radio buttons for "Open" and "Close", with "Close" selected. Below that is a checkbox for "Scheduled Disarming" with a note: "Scheduled disarming" takes effect after disabling "Disarming". Under "Alarm Linkage Items", there is a checked checkbox for "Select All" and a list of items: Email, FTP, HTTP POST, Alarm Server, Alarm Out, Audio Alarm, and Light Alarm, all of which are checked. A "Save" button is located at the bottom right.

Disarming: The system stops triggering alarm linkage actions immediately.

Scheduled Disarming: The system stops triggering alarm linkage actions in the selected period. Click “Schedule” to set the schedule. The setup steps of the schedule are the same as

the schedule recording setup (See [Schedule Recording](#)).

Note: After “Disarming” or “Scheduled Disarming” is enabled, the reported general alarms (the alarm start time and end time of alarm out and audio alarm) will probably not match the actual situation. You need to handle it manually.

4.5 Event Configuration

For more accuracy, here are some recommendations for installation.

- Cameras should be installed on stable surfaces, as vibrations can affect the accuracy of detection.
- Avoid pointing the camera at the reflective surfaces (like shiny floors, mirrors, glass, lake surfaces and so on).
- Avoid places that are narrow or have too much shadowing.
- Avoid scenario where the object’s color is similar to the background color.
- At any time of day or night, please make sure the image of the camera is clear and with adequate and even light, avoiding overexposure or too much darkness on both sides.

You can enable the event type as needed. Go to *Config* → *Event* → *Enable Event* as shown below.



Event Type: 1- Face Event; 2- Smart Event

The default event type is smart event. If you want to switch to face event, please select face event and then click “Save”. After successful reboot, the corresponding event will be displayed. Select and set as needed.

Note: You can enable multiple smart detection events for optical channel and thermal channel simultaneously, but detecting multiple smart events at the same time will cause the reduction in performance. Please enable smart events according to the actual performance of your camera.

4.5.1 Line Crossing (Optical/Thermal)

Line Crossing: Alarms will be triggered if the target crosses the pre-defined alarm lines. Go to *Config* → *Event* → *Line Crossing* as shown below.

Detection Config
Area
Schedule

Enable

Save Original Picture To SD Card

Save Target Picture To SD Card

Detection target and sensitivity

Target	Sensitivity
<input checked="" type="checkbox"/> Human	<div style="display: flex; align-items: center;"> <div style="flex-grow: 1; border: 1px solid #ccc; position: relative;"> <div style="position: absolute; top: -5px; left: 50%; transform: translate(-50%, -50%);">●</div> </div> <div style="border: 1px solid #ccc; width: 30px; text-align: center; margin-left: 5px;">50</div> </div>
<input checked="" type="checkbox"/> Motor Vehicle	<div style="display: flex; align-items: center;"> <div style="flex-grow: 1; border: 1px solid #ccc; position: relative;"> <div style="position: absolute; top: -5px; left: 50%; transform: translate(-50%, -50%);">●</div> </div> <div style="border: 1px solid #ccc; width: 30px; text-align: center; margin-left: 5px;">50</div> </div>
<input checked="" type="checkbox"/> Motorcycle/Bicycle	<div style="display: flex; align-items: center;"> <div style="flex-grow: 1; border: 1px solid #ccc; position: relative;"> <div style="position: absolute; top: -5px; left: 50%; transform: translate(-50%, -50%);">●</div> </div> <div style="border: 1px solid #ccc; width: 30px; text-align: center; margin-left: 5px;">50</div> </div>

Alarm Holding Time 20 Seconds ▼

Trigger Alarm Out

Trigger Audio Alarm Alarm sound ▼

Trigger Light Alarm

Trigger SD Card Snapshot

Trigger SD Card Recording

Trigger Email

Trigger FTP

Save

1. Enable line crossing detection and select the snapshot type and the detection target.

Save Original Picture to SD Card: If it is enabled, the detected original pictures will be captured and saved to the SD card when the targets cross the alarm line.

Save Target Picture to SD Card: If it is enabled, the detected target pictures will be captured and saved to the SD card when the targets cross the alarm line.

Note: if the thermal events are triggered, the thermal target image will be saved, but the optical target image will not be captured simultaneously, and vice versa.

Detection Target:

Human: Select it and then alarms will be triggered if someone crosses the pre-defined alarm lines.

Motor Vehicle: Select it and then alarms will be triggered if a vehicle with four or more wheels (eg. a car, bus or truck) crosses the pre-defined alarm lines.


Motorcycle/Bicycle: Select it and then alarms will be triggered if a vehicle with two wheels (eg. a motorcycle or bicycle) crosses the pre-defined alarm lines.

All of the three types of objects can be selected simultaneously. Please select the detection objects as needed. If no object/target is selected, alarms will not be triggered even if line crossing detection is enabled.

Note: Optical detection target includes human, motor vehicle and motorcycle/bicycle. Thermal detection targets include human and motor vehicles.

2. Set the alarm time.

- Set alarm trigger options. The setup steps are the same as fire detection. Please refer to [Fire Detection](#) for details.
- Click the “Save” button to save the settings.
- Set area of the line crossing alarm. Click the “Area” tab to go to the interface as shown below.

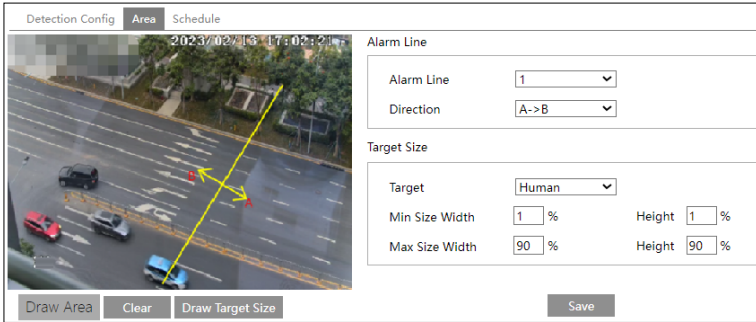

Set the alarm line number and direction. Up to 4 lines can be added. Multiple lines cannot be added simultaneously.

Direction: A<->B, A->B and A<-B optional. This indicates the direction of the intruder/vehicle crosses over the alarm line.

A<->B: The alarm will be triggered when the intruder/vehicle crosses over the alarm line from B to A or from A to B.

A->B: The alarm will be triggered when the intruder/vehicle crosses over the alarm line from A to B.

A<-B: The alarm will be triggered when the intruder/vehicle crosses over the alarm line from B to A.

Click the “Draw Area” button and then drag the mouse to draw a line in the image. Click the “Clear” button to delete the lines. Click the “Save” button to save the settings.

To set target size filter:

Click “Draw Target Size” to draw the maximum and minimum size of a specific target as shown below.

Select target.

The green box is the maximum target detection box; the yellow box is the minimum target detection box.


Click the green box to edit the maximum target detection box; click the yellow box to edit the minimum target detection box.

Drag one of four corners of the green or yellow box to change the box size. The corresponding size value on the right will be changed too. You can also enter the digital number to directly change the box size.

Click and drag the green or yellow box to move its position.

Finally, click “Save” to save the settings.

After the target size range is set, only the target whose size is between the minimum value and the maximum value can be detected.

Detection Config	Area	Schedule
		
Alarm Line		
Alarm Line: <input type="text" value="1"/>		
Direction: <input type="text" value="A->B"/>		
Target Size		
Target: <input type="text" value="Motor Vehicle"/>		
Min Size Width: <input type="text" value="11"/> %		Height: <input type="text" value="8"/> %
Max Size Width: <input type="text" value="98"/> %		Height: <input type="text" value="98"/> %
<input type="button" value="Draw Area"/> <input type="button" value="Clear"/> <input type="button" value="Draw Target Size"/> <input type="button" value="Save"/>		

6. Set the schedule of the line crossing alarm. The setup steps of the schedule are the same as the schedule recording setup (See [Schedule Recording](#)).

※ **Configuration requirements of the camera and surrounding area**

1. Avoid scenes with many trees or the scenes with various light changes (like many flashing headlights). The ambient brightness of the scenes shouldn't be too low.
 2. Cameras should be mounted at a height of 2.8 meters or above.
 3. The recommended depression angle of the camera is from 30° to 45°.
- For pedestrians, their heads and main bodies should be clearly visible on a video.



For vehicles, the depression angle should not be more than the recommended value. The sideways or horizontal viewing angle is recommended on a video (see below).




4. Make sure cameras can view objects for at least 2 seconds in the detected area for accurate detection.
5. Adequate light and clear scenery are crucial for line crossing detection.
6. Please adjust the installation position or focus to meet the requirements of the target recognition size.

The recommended target recognition size:


Percentage	Human	Motor Vehicle	Motorcycle/Bicycle
Minimum (Width × Height)	4% × 8%	8% × 8%	4% × 4%
Maximum (Width × Height)	50% × 50%	50% × 50%	50% × 50%

Note: The percentage means that a target occupies the percentage of the entire image. For example: In a 1080P(1920×1080) video image, the minimum resolution of human is 80×160 (w =1920x4%=80, h=1920x8%=160)

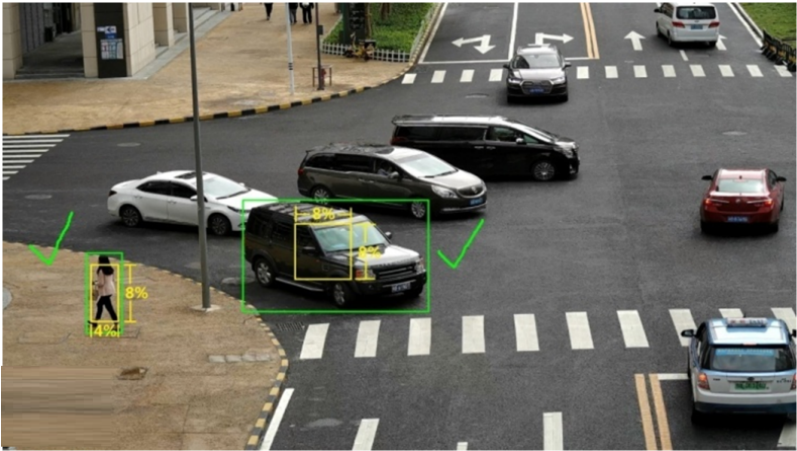

Correct example

The target recognition box meets the requirements of the minimum size. The yellow box stands for the minimum recognition size. The green box stands for the set target box.

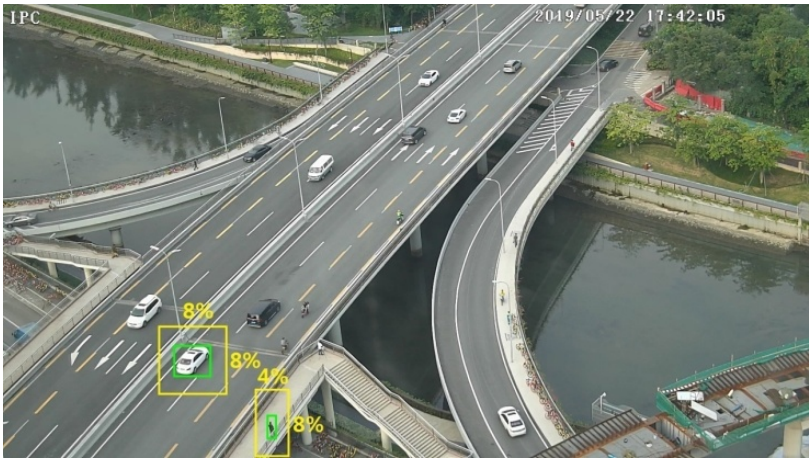

Wrong example

The yellow box stands for the minimum recognition size. The green box stands for the set target box. These two target recognition boxes don't meet the requirement of the minimum size. Therefore, you need to adjust the camera position or focus as needed.

4.5.2 Region Intrusion (Optical/Thermal)

Region Intrusion: Alarms will be triggered if the target intrudes into the pre-defined areas. This function can be applicable to important supervision places, danger areas and prohibited areas, like military administrative zones, high danger areas, no man's areas, etc. Go to *Config* → *Event* → *Region Intrusion* as shown below.

Detection Config
Area
Schedule

Enable

Save Original Picture To SD Card

Save Target Picture To SD Card

Detection target and sensitivity

Target	Sensitivity
<input checked="" type="checkbox"/> Human	<input style="width: 100%;" type="range"/> <input style="width: 30px; text-align: center; border: 1px solid #ccc;" type="text" value="50"/>
<input checked="" type="checkbox"/> Motor Vehicle	<input style="width: 100%;" type="range"/> <input style="width: 30px; text-align: center; border: 1px solid #ccc;" type="text" value="50"/>
<input checked="" type="checkbox"/> Motorcycle/Bicycle	<input style="width: 100%;" type="range"/> <input style="width: 30px; text-align: center; border: 1px solid #ccc;" type="text" value="50"/>

Filter Alarm Time Seconds

Alarm Holding Time Seconds

Trigger Alarm Out

Alarm Out 0
 Alarm Out 1
 Alarm Out 2
 Alarm Out 3

Trigger Audio Alarm

Trigger Light Alarm


Trigger SD Card Snapshot

Trigger SD Card Recording

Trigger Email

Trigger FTP

1. Enable regional intrusion detection and select the snapshot type and the detection target.
Note: Optical detection target includes human, motor vehicle and motorcycle/bicycle. Thermal detection targets include human and motor vehicles.
 2. Set the filter alarm time.
- Filter Alarm Time:** For example: set it to “2 seconds” ; Alarms will be triggered when a target intrudes into the pre-defined areas for 2 seconds, or alarms will not be triggered.
3. Set the alarm holding time and alarm trigger options. The setup steps are the same as fire detection. Please refer to [Fire Detection](#) for details.
 4. Click the “Save” button to save the settings.
 5. Set alarm areas and target size filter for regional intrusion detection. Click the “Area” tab to go to the interface as shown below.

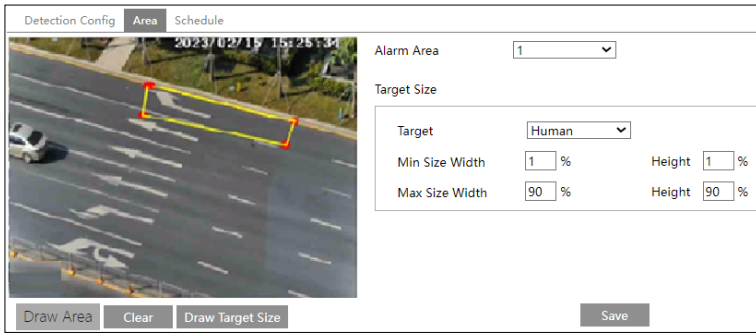

Set the alarm area number on the right side. Up to 4 alarm areas can be added. Click the “Draw Area” button and then click around the area where you want to set as the alarm area in the image on the left side (the alarm area should be a closed area). Click the “Clear” button to delete the alarm area. Click the “Save” button to save the settings.

Target size filter setup: The setup steps of the target size filter are the same as the line crossing target size filter setup (See [Line Crossing](#) for details).

6. Set the schedule of region intrusion detection. The setup steps of the schedule are the same as the schedule recording setup (See [Schedule Recording](#)).

※ **Configuration requirements of the camera and surrounding area**

The requirements are similar to line crossing detection. Please refer to [Configuration requirements of the camera and surrounding area](#) of line crossing detection for details.

4.5.3 Region Entrance (Optical/Thermal)

Region Entrance: Alarms will be triggered if the target enters the pre-defined areas. Go to *Config* → *Event* → *Region Entrance*. The setup steps of the region entrance are the same as Region Intrusion setup (See [Region Intrusion](#) for details).

4.5.4 Region Exiting (Optical/Thermal)

Region Exiting: Alarms will be triggered if the target exists from the pre-defined areas. Go to *Config* → *Event* → *Region Exiting*. The setup steps of the region exiting are the same as Region Intrusion setup (See [Region Intrusion](#) for details).

4.5.5 Object Abandoned/Missing

Alarms will be triggered when the objects are removed from or left at the pre-defined area. To set abandoned/missing object detection: Go to *Config* → *Event* → *Object Abandoned/Missing* as shown below.

Detection Config		Area	Schedule
<input checked="" type="checkbox"/>	Enable		
<input checked="" type="radio"/>	Enable Abandoned Object Detection		
<input type="radio"/>	Enable Missing Object Detection		
Duration of Delay	<input type="text" value="10"/>	Second	
Alarm Holding Time	<input type="text" value="20 Seconds"/>		
Trigger Alarm Out			
<input type="checkbox"/>	Alarm Out		
<input type="checkbox"/>	Trigger Audio Alarm	<input type="text" value="Alarm sound"/>	
<input type="checkbox"/>	Trigger SD Card Snapshot		
<input type="checkbox"/>	Trigger SD Card Recording		
<input type="checkbox"/>	Trigger Email		
<input type="checkbox"/>	Trigger FTP		
<input type="button" value="Save"/>			

1. Enable abandoned/missing object detection and then select the detection type.

Enable Abandoned Object Detection: Alarms will be triggered if there are items left in the pre-defined area.


Enable Missing Object Detection: Alarms will be triggered if items are missing in the pre-defined area.

Duration of Delay: it is the alarm delay time of the object left in the region (ranging from 10~3600s) or the alarm delay time of the object removed from the region (ranging from 3~3600s). For example, if “Enable Abandoned Object Detection” is selected and the duration of delay is set as 10, alarms will be triggered after the object is left and stay in the region for 10s, but when someone takes away the object within 10s, alarms will not be triggered.

2. Set the alarm holding time and alarm trigger options. The setup steps are the same as motion detection. Please refer to [Motion Detection](#) for details.

3. Click the “Save” button to save the settings.

4. Set the alarm area of the abandoned/missing object detection. Click the “Area” tab to go to the interface as shown below.

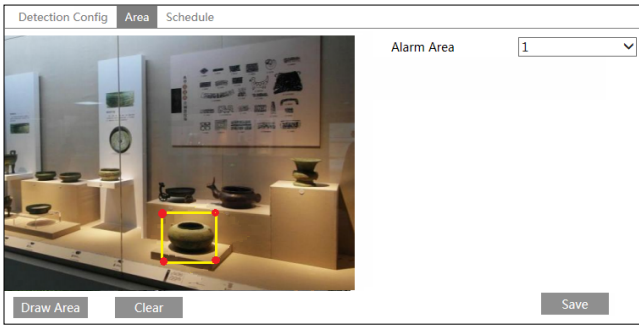

Set the alarm area number and then enter the desired alarm area name. Only one alarm area can be added. Click the “Draw Area” button and then click around the area where you want to set as the alarm area in the image (the alarm area should be a closed area). Click the “Clear” button to delete the alarm area. Click the “Save” button to save the settings.

5. Set the schedule of the abandoned/missing object detection. The setup steps of the schedule are the same as the schedule recording setup (See [Schedule Recording](#)).

※ **The configuration requirements of the camera and surrounding areas**

1. The range of the detection object should occupy from 1/50 to 1/3 of the entire image.
2. The detection time of objects in the camera shall be from 3 to 5 seconds.
3. The defined area cannot be covered frequently and continuously (like people and traffic flow).
4. It is necessary for missing object detection that the drawn frame must be very close to the margin of the object in enhancing the sensitivity and accuracy of the detection.
5. Abandoned/missing object detection cannot determine the objects’ ownership. For instance, there is an unattended package in the station. Abandoned object detection can detect the package itself, but it cannot determine whom it belongs to.
6. Try not to enable abandoned/missing object detection when light changes greatly in the scene.
7. Try not to enable abandoned/missing objects if there are complex and dynamic environments in the scene.
8. Adequate light and clear scenery are very important to abandoned/missing object detection.

4.5.6 Target Counting by Line

This function is to calculate the number of people or vehicles crossing the alarm line through detecting, tracking and counting the shapes of the people or vehicles.

1. Go to *Config* → *Event* → *Target Counting by Line* as shown below.

Detection Config		Area	Schedule
<input checked="" type="checkbox"/> Enable			
<input checked="" type="checkbox"/> Save Original Picture To SD Card			
<input checked="" type="checkbox"/> Save Target Picture To SD Card			
Detection target and sensitivity			
Target	Sensitivity		Staying Threshold
<input checked="" type="checkbox"/> Human	<input type="range" value="50"/>	<input type="text" value="50"/>	<input type="text" value="0"/>
<input checked="" type="checkbox"/> Motor Vehicle	<input type="range" value="50"/>	<input type="text" value="50"/>	<input type="text" value="0"/>
<input checked="" type="checkbox"/> Motorcycle/Bicycle	<input type="range" value="50"/>	<input type="text" value="50"/>	<input type="text" value="0"/>
Counting Reset			
Timing	<input type="text" value="Off"/> ▼		
Manual	<input type="button" value="Reset"/>		
Alarm Holding Time <input type="text" value="20 Seconds"/> ▼			
Trigger Alarm Out			
<input checked="" type="checkbox"/> Alarm Out			
<input type="checkbox"/> Trigger Audio Alarm <input type="text" value="Alarm sound"/> ▼			
<input type="checkbox"/> Trigger Light Alarm			
<input checked="" type="checkbox"/> Trigger SD Card Snapshot			
<input checked="" type="checkbox"/> Trigger SD Card Recording			
<input type="checkbox"/> Trigger Email			
<input type="checkbox"/> Trigger FTP			

2. Enable target counting and select the snapshot type and the detection target.


Detection Target: Select the target to calculate. Human, motor vehicles and motorcycle/bicycle can be selected.

Staying Threshold: When the targets (human/vehicle) staying in the specified area exceed the threshold, alarms will be triggered.

Counting Reset: The current number of the target counting can be reset. You can choose to reset the counting daily, weekly or monthly. Click “Reset” to manually reset the current number of crossing line people/motor vehicle/non-motor vehicle counting.

3. Set alarm trigger options. The setup steps are the same as fire detection. Please refer to [Fire Detection](#) for details.

4. Set alarm lines and target size filter. Click the “Area” tab to go to the interface as shown below.

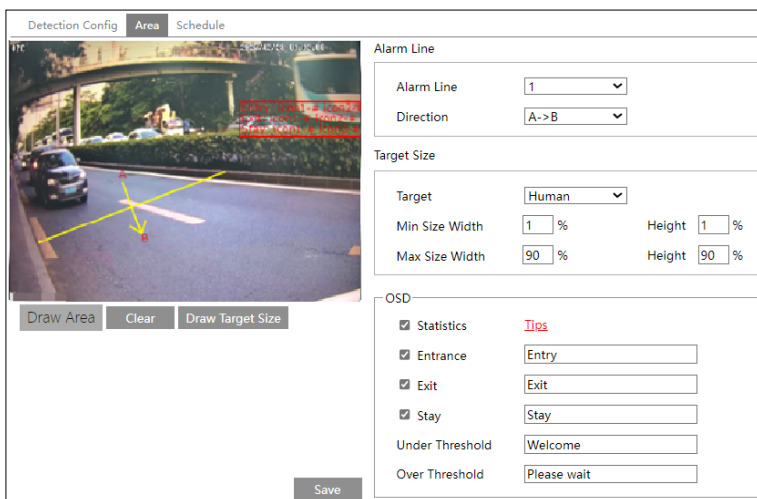

Set the alarm line number and direction. Only one alarm line can be added.

Direction: A->B and A<-B can be optional. The direction of the arrow is the entrance.

Click the “Draw Area” button and then drag the mouse to draw a line in the image. Click the “Clear” button to delete the lines.

Target size filter setup: The setup steps of the target size filter are the same as line crossing target size filter setup (See [Line Crossing](#) for details).

Statistics: If enabled, you can see the statistical information in the live view interface. If disabled, the statistical information will not be displayed in the live view interface. Check “Statistics” and then move the red box to change the position of the statistical information displayed on the screen.

Statistical OSD information can be customized as needed.

Note: If the statistical OSD is enabled, the OSD content4 will be disabled.

Click the “Save” button to save the settings.

5. Set the schedule of target counting by line. The setup steps of the schedule are the same as the schedule recording setup (See [Schedule Recording](#)).

6. View the statistical information in the live view interface.




7. View the statistical information of target counting by line. Click “Statistics” to enter the following interface.

Index	Count Time	Human	Motor Vehicle	Motorcycle/Bicycle
1	2023-02-28 00:00:00 – 2023-02-28 00:59:59	0	0	0
2	2023-02-28 01:00:00 – 2023-02-28 01:59:59	2	19	2
3	2023-02-28 02:00:00 – 2023-02-28 02:59:59	0	0	0

Select the report type. Daily report, weekly report, monthly report and annual report are selectable.

Select the count type. Entering or leaving can be optional.

Select the start time and then click “Count”. Then the counting result will be displayed in the statistical result area. Click Table or Statistics to display the result in different ways.

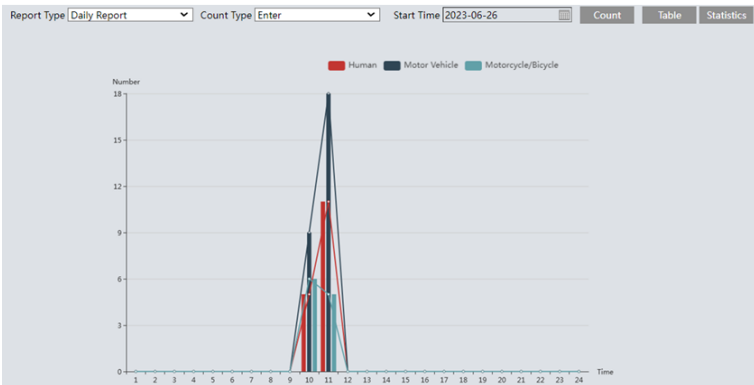

※ **Configuration requirements of the camera and surrounding area**

The requirements are similar to line crossing detection. Please refer to [Configuration requirements of the camera and surrounding area](#) of line crossing detection for details.

4.5.7 Target Counting by Area


This function is used to detect, track and count the number of people or vehicles intruding into a pre-defined area.

1. Go to *Config* → *Event* → *Target Counting by Area* as shown below.

Detection Config		Area	Schedule
<input checked="" type="checkbox"/> Enable			
<input type="checkbox"/> Save Original Picture To SD Card			
<input type="checkbox"/> Save Target Picture To SD Card			
Detection target and sensitivity			
Target	Sensitivity		Staying Threshold
<input checked="" type="checkbox"/> Human	<input type="range" value="50"/>	<input type="text" value="50"/>	<input type="text" value="100"/>
<input checked="" type="checkbox"/> Motor Vehicle	<input type="range" value="50"/>	<input type="text" value="50"/>	<input type="text" value="100"/>
<input checked="" type="checkbox"/> Motorcycle/Bicycle	<input type="range" value="50"/>	<input type="text" value="50"/>	<input type="text" value="100"/>
Counting Reset			
Timing	<input type="text" value="Off"/> ▼		
Manual	<input type="button" value="Reset"/>		
Alarm Holding Time	<input type="text" value="20 Seconds"/> ▼		
Trigger Alarm Out			
<input type="checkbox"/> Alarm Out			
<input type="checkbox"/> Trigger Audio Alarm	<input type="text" value="Alarm sound"/> ▼		
<input type="checkbox"/> Trigger Light Alarm			
<input type="checkbox"/> Trigger SD Card Snapshot			
<input type="checkbox"/> Trigger SD Card Recording			
<input type="checkbox"/> Trigger Email			
<input type="checkbox"/> Trigger FTP			

2. Enable target counting by area, select the snapshot type, the detection target, counting reset and alarm linkages. The setup steps are the same as the target counting by line.

3. Set the statistic area. Click the “Area” tab to go to the interface as shown below.

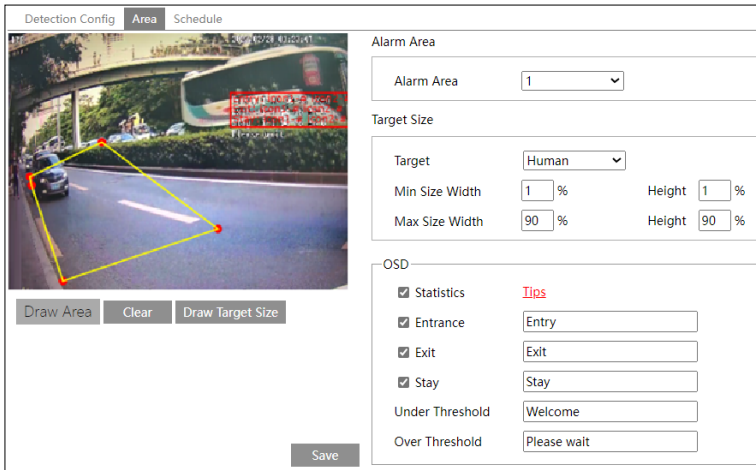

Select the alarm area number on the right side. Only one alarm area can be added. Click the “Draw Area” button and then click around the area where you want to set as the alarm area in the image on the left side (the alarm area should be a closed area). Click the “Clear” button to delete the alarm area. Click the “Save” button to save the settings.

Target size filter setup: The setup steps of the target size filter are the same as the line crossing target size filter setup (See [Line Crossing](#) for details).

Statistics: If enabled, you can see the statistical information in the live view interface. If disabled, the statistical information will not be displayed in the live view interface.

Check “Statistics” and then move the red box to change the position of the statistical information displayed on the screen.


Statistical OSD information can be customized as needed.

4. Set the schedule of target counting by area. The setup steps of the schedule are the same as the schedule recording setup (See [Schedule Recording](#)).

5. View the statistical information in the live view interface.



Note: When target counting by line and by area are enabled simultaneously, the OSD position shown in the image depends on the OSD position of target counting by area.

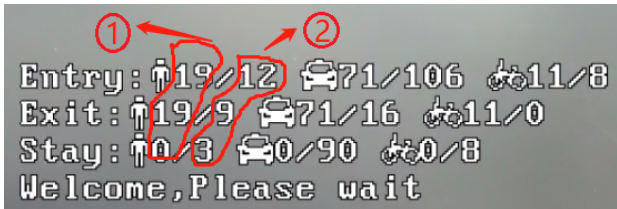

- ① : the statistical number of target counting by area
- ② : the statistical number of target counting by line

6. View the statistical information of target counting by area. Click Statistics→Target Counting by Area to enter the following interface.

Target Counting by Line		Heat Map		Target Counting by Area	
Report Type		Daily Report		Count Type	
				Enter	
				Table	
				Statistics	
				Count Time	
				2023 Year 2 Month 28 Day	
				Count	
Index	Count Time	Human	Motor Vehicle	Motorcycle/Bicycle	
1	2023-02-28 00:00:00 - 2023-02-28 00:59:59	0	0	0	
2	2023-02-28 01:00:00 - 2023-02-28 01:59:59	2	7	2	
3	2023-02-28 02:00:00 - 2023-02-28 02:59:59	0	0	0	

Please select report type, count type and start time as needed. Then click “Count” to search the statistic result. Click “Statistics” to view the statistic result intuitively.

✖ Configuration requirements of the camera and surrounding area

The requirements are similar to line crossing detection. Please refer to [Configuration requirements of the camera and surrounding area](#) of line crossing detection for details.

4.5.8 Loitering Detection

Loitering Detection: when someone entering and loitering in a pre-defined area exceeds the threshold, alarms will be triggered until the object leaves this area.

Go to **Event** → **Loitering Detection** as shown below. The setting steps are as follows:

1. Enable loitering detection and select the snapshot type.

Detection Config Area Schedule

Enable

Save Original Picture To SD Card

Save Target Picture To SD Card

Sensitivity 50

Time Threshold Second

Alarm Holding Time Seconds

Trigger Alarm Out

Alarm Out

Trigger Audio Alarm

Trigger Light Alarm

Trigger SD Card Snapshot

Trigger SD Card Recording

Trigger Email

Trigger FTP

Save

2. Set sensitivity, time threshold and alarm holding time.

Sensitivity: The higher the value is, the easier the alarm can be triggered.

Time Threshold: the time that a person is allowed to stay in the area. If a person staying and moving in the specified area exceeds the threshold, alarms will be triggered until this person leaves or stops moving.


For example: Set the threshold to “60seconds; when a person staying and moving in the specified area exceeds 60seconds, an alarm is triggered and continues. 2 minutes later, this person stops moving in the specified area, and then the alarm stops. However, the alarm will continue once this person moves again to the specified area unless the person leaves this area.

Alarm Holding Time: it is the time that the alarm extends after an alarm ends.

3. Set alarm trigger options. The setup steps are the same as fire detection. Please refer to [Fire Detection](#) for details.

4. Click the “Save” button to save the settings.

5. Set alarm areas and target size filter. Click the “Area” tab to go to the interface as shown below.

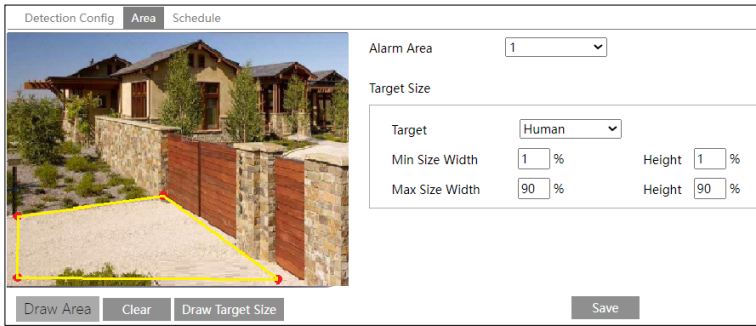

Select the alarm area number on the right side. Four alarm areas can be added. Click the “Draw Area” button and then click around the area where you want to set as the alarm area in the image on the left side (the alarm area should be a closed area). Click the “Clear” button to delete the alarm area. Click the “Save” button to save the settings.

Target size filter setup: The setup steps of the target size filter are the same as the line crossing target size filter setup (See [Line Crossing](#) for details).

6. Set the schedule of loitering detection. The setup steps of the schedule are the same as the schedule recording setup (See [Schedule Recording](#)).

※ **Configuration requirements of the camera and surrounding area**

1. Avoid enabling this function in complex scenes, such as a scene with a large flow of people and vehicles.
2. Other requirements are similar to line crossing detection. Please refer to [Configuration requirements of the camera and surrounding area](#) of line crossing detection for details.

4.5.9 Illegal Parking Detection

Illegal Parking Detection: when a vehicle (like a car, truck, motorcycle, etc.) stays in a no-parking zone exceeds the threshold, alarms will be triggered until the vehicle is driven away.

Go to **Event → Illegal Parking Detection**. The setting steps are as follows:

1. Enable illegal parking detection and select the snapshot type.

Detection Config		Area	Schedule
<input checked="" type="checkbox"/> Enable			
<input type="checkbox"/> Save Original Picture To SD Card			
<input type="checkbox"/> Save Target Picture To SD Card			
Detection target and sensitivity			
Target		Sensitivity	
<input checked="" type="checkbox"/> Motor Vehicle		<input type="text" value="50"/>	
<input checked="" type="checkbox"/> Motorcycle/Bicycle		<input type="text" value="50"/>	
Time Threshold	<input type="text" value="10"/>	Second	
Alarm Holding Time	<input type="text" value="20 Seconds"/> ▾		
Trigger Alarm Out			
<input type="checkbox"/> Alarm Out			
<input type="checkbox"/> Trigger Audio Alarm <input type="text" value="Alarm sound"/> ▾			
<input type="checkbox"/> Trigger Light Alarm			
<input type="checkbox"/> Trigger SD Card Snapshot			
<input type="checkbox"/> Trigger SD Card Recording			
<input type="checkbox"/> Trigger Email			
<input type="checkbox"/> Trigger FTP			

2. Set the detection target, sensitivity, time threshold and alarm holding time.

Motor Vehicle: a vehicle with four or more wheels

Motorcycle/Bicycle Vehicle: a vehicle with two wheels (eg. a motorcycle or bicycle)

Sensitivity: the higher the value is, the easier the alarm can be triggered.


Time Threshold: the time that a vehicle is allowed to stay in the specified area. If a vehicle staying in the area exceeds the threshold, alarms will be triggered until they are driven away. For example, the time threshold is set to 30s. When the system detects a vehicle stopping in the set no-parking zone, it will start counting. Alarms will be triggered after it stays for more than 30s. And the illegal parking alarm will not stop until the vehicle is driven away from the non-parking zone.

Alarm Holding Time: it is the time that the alarm extends after the overstaying vehicle leaves.

3. Set alarm trigger options. The setup steps are the same as fire detection. Please refer to [Fire Detection](#) for details.

4. Click the “Save” button to save the settings.

5. Set alarm areas and target size filter. Click the “Area” tab to go to the interface as shown below.

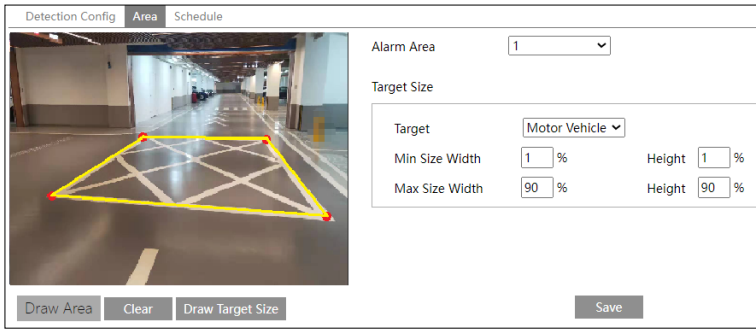

Select the alarm area number on the right side. Four alarm areas can be added. Click the “Draw Area” button and then click around the area where you want to set as the alarm area in the image on the left side (the alarm area should be a closed area). Click the “Clear” button to delete the alarm area. Click the “Save” button to save the settings.

Target size filter setup: The setup steps of the target size filter are the same as the line crossing target size filter setup (See [Line Crossing](#) for details).

6. Set the schedule of loitering detection. The setup steps of the schedule are the same as the schedule recording setup (See [Schedule Recording](#)).

※ **Configuration requirements of the camera and surrounding area**

1. Avoid enabling this function in complex scenes, such as the scene with a large flow of people and vehicles.
2. Other requirements are similar to line crossing detection. Please refer to [Configuration requirements of the camera and surrounding area](#) of line crossing detection for details.

4.5.10 Face Detection

Click **Config** → **Event** → **Enable Event**. Select the face event and then save the setting. After the camera restarts successfully, you can view the face detection menu.

Face detection function is to detect face appearing in the surveillance scene. Alarms will be triggered when a face is detected.

The setting steps are as follows:

1. Go to **Config** → **Event** → **Face Detection** as shown below.

Detection Config	Area	Advanced	Schedule
State	Working		
<input checked="" type="checkbox"/> Enable			
<input checked="" type="checkbox"/> Save Source Information To SD Card			
<input checked="" type="checkbox"/> Save Face Information To SD Card			
Trigger alarm condition	All		
Alarm Holding Time	20 Seconds		
Trigger Alarm Out	<input checked="" type="checkbox"/> Alarm Out		
<input type="checkbox"/> Trigger Audio Alarm	Alarm sound		
<input type="checkbox"/> Trigger Light Alarm			
<input checked="" type="checkbox"/> Trigger SD Card Snapshot			
<input checked="" type="checkbox"/> Trigger SD Card Recording			
<input type="checkbox"/> Trigger Email			
<input type="checkbox"/> Trigger FTP			
Save			

2. Enable the face detection function.

Save Source Information to SD Card: if checked, the whole picture will be saved to the SD card when detecting a face.

Save Face Information to SD Card: if checked, the captured face picture will be saved to the SD card when detecting a face.

Note: To save images to the local PC, please enable the local smart snapshot storage first (*Config*→*System*→*Local Config*). To save images to the SD card, please install an SD card first.


Trigger alarm condition: all or mask off can be selectable.

All: Alarms will be triggered when the camera detects a face (with/without a mask).

Mask off: Alarms will be triggered when the detected person is not wearing a mask on the face.


3. Set alarm holding time and alarm trigger options. The alarm trigger setup steps are the same as fire detection setup. Please refer to [Fire Detection](#) for details.

4. Set alarm detection area.

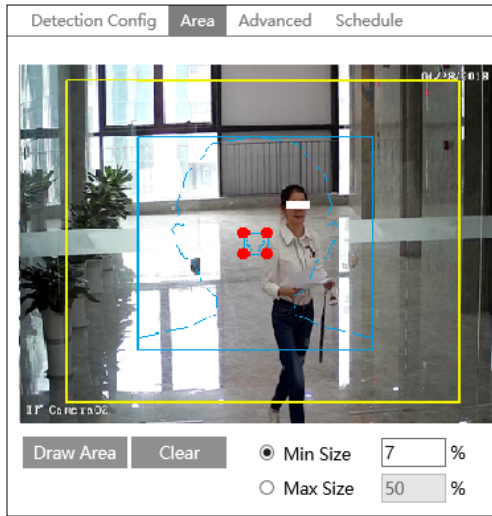

Click “Draw Area” and drag the border lines of the rectangle to modify its size. Move the rectangle to change its position. Click “Stop Draw” to stop drawing the area. Click “Clear” to clear the area. Then set the detectable face size by defining the maximum value and the minimum value (The default size range of a single face image occupies from 3% to 50% of the entire image).

5. Advanced settings. Choose the snapshot interval and number as needed to avoid capturing multiple similar pictures in a very short period of time.

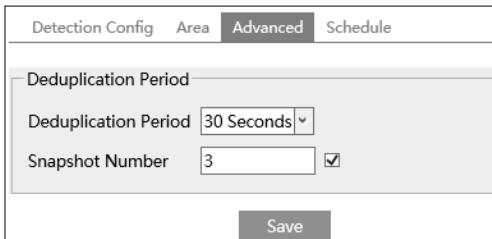


Deduplication Period: If 30 seconds is selected, the camera will capture the same target once every 30 seconds during its continuous tracking period.

Snapshot Number: If the snapshot number is enabled and set (eg. 3), the camera will capture the same target once every 30 seconds and it will capture this target 3 times at most during its continuous tracking period. If the snapshot number is disabled, the camera will capture the same target once every 30 seconds until the target disappears in the detected area.

6. Set the schedule of the face detection. The setup steps of the schedule are the same as the schedule recording setup (See [Schedule Recording](#)).

Face Capture View


After enabling face detection function, return to the live view interface. Click  to go to the following interface. When there are faces detected, the face pictures will be listed on the right.

The features of captured faces also can be displayed, such as gender, whether to wear a mask, whether to wear glasses, age group, etc.



※ Configuration requirements of the camera and surrounding area

1. Cameras must be installed in the area with stable and adequate light sources.
2. The installation height ranges from 2.0m to 3.5m, adjustable according to the focal-length of different lenses and object distances.
3. The depression angle of the camera shall be less than or equal to 15° .

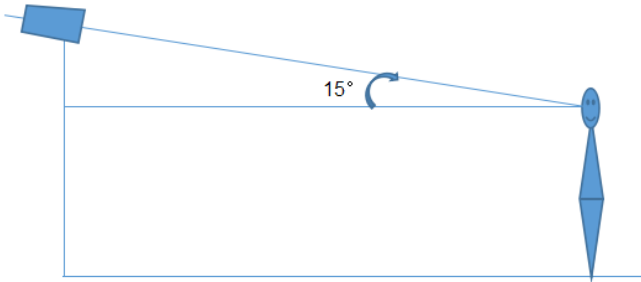

4. The object distance depends on the focal-length of the lens mounted in the camera.
5. To ensure the accuracy of face detection, the captured faces are only allowed to deviate less than 30° leftward or rightward or 20° upward or downward.
6. The following scenes are not applicable, like crowded scenes (airport, railway station, square, etc), backlight scenes, crossroads and so on.
7. When dealing with backlight scenarios, enabling BLC, HLC, or WDR can help improve video quality and visibility. These features compensate for extreme lighting conditions and ensure better surveillance results.

4.6 Network Configuration

4.6.1 TCP/IP

Go to Config→Network→TCP/IP as shown below. There are two ways for network connection.

IPv4	IPv6	PPPoE Config	IP Change Notification Config
<input type="radio"/> Obtain an IP address automatically			
<input checked="" type="radio"/> Use the following IP address			
IP Address	<input type="text" value="192.168.226.201"/>	<input type="button" value="Test"/>	
Subnet Mask	<input type="text" value="255.255.255.0"/>		
Gateway	<input type="text" value="192.168.226.1"/>		
Preferred DNS Server	<input type="text" value="210.21.196.6"/>		
Alternate DNS Server	<input type="text" value="8.8.8.8"/>		

Use IP address (take IPv4 for example)-There are two options for IP setup: obtain an IP address automatically by DHCP and use the following IP address. Please choose one of the options needed.

Test: Test the effectiveness of the IP address by clicking this button.

Use PPPoE-Click the “PPPoE Config” tab to go to the interface as shown below. Enable PPPoE and then enter the username and password from your ISP.

IPv4	IPv6	PPPoE Config	IP Change Notification Config
<input checked="" type="checkbox"/> Enable			
User Name	<input type="text" value="xxxxxxx"/>		
Password	<input type="password" value="•••••"/>		
<input type="button" value="Save"/>			

Either of these two network connection methods can be used. If PPPoE is used to connect to the internet, the camera will get a dynamic WAN IP address. This IP address will change frequently. To be notified, the IP change notification function can be used.

Click “IP Change Notification Config” to go to the interface as shown below.

IPv4	IPv6	PPPoE Config	IP Change Notification Config
<input type="checkbox"/> Trigger Email			
<input type="checkbox"/> Trigger FTP			
<input type="button" value="Save"/>			

Trigger Email: when the IP address of the device is changed, the new IP address will be sent

to the email address that has been set up.

Trigger FTP: when the IP address of the device is changed, the new IP address will be sent to the FTP server that has been set up.

4.6.2 Port

Go to **Config** → **Network** → **Port** as shown below. HTTP port, Data port and RTSP port can be set.

HTTP Port	<input type="text" value="80"/>	
HTTPS Port	<input type="text" value="443"/>	
Data Port	<input type="text" value="9008"/>	
RTSP Port	<input type="text" value="554"/>	
Persistent connection Port	<input type="text" value="8080"/>	<input checked="" type="checkbox"/> Enable
WebSocket Port	<input type="text" value="7681"/>	

HTTP Port: The default HTTP port is 80. It can be changed to any port which is not occupied.

HTTPS Port: The default HTTPS port is 443. It can be changed to any port which is not occupied.

Data Port: The default data port is 9008. Please change it as necessary.

RTSP Port: The default port is 554. Please change it as necessary.

Persistent Connection Port: The port is used for a persistent connection of the third-party platform to push smart data, like face pictures.

WebSocket Port: Communication protocol port for plug-in free preview.

4.6.3 Server Configuration

This function is mainly used for connecting network video management systems.

<input checked="" type="checkbox"/> Enable	
Server Port	<input type="text" value="2009"/>
Server Address	<input type="text"/>
Device ID	<input type="text" value="1"/>

1. Check “Enable”.
2. Check the IP address and port of the transfer media server in the NVMS. Then enable the auto report in the NVMS when adding a new device. Next, enter the remaining information of the device in the NVMS. After that, the system will automatically allot a device ID. Please

check it in the NVMS.


3. Enter the above-mentioned server address, server port and device ID in the corresponding boxes. Click the “Save” button to save the settings.

4.6.4 ONVIF

The camera can be searched and connected to the third-party platform via ONVIF/RTSP protocol.

If “Activate Onvif User” is enabled in the device activation interface, the ONVIF user can be activated simultaneously. When you connect the camera through the ONVIF protocol in the third-party platform, you can use this onvif user to connect.

You can also add new users in the Onvif interface.

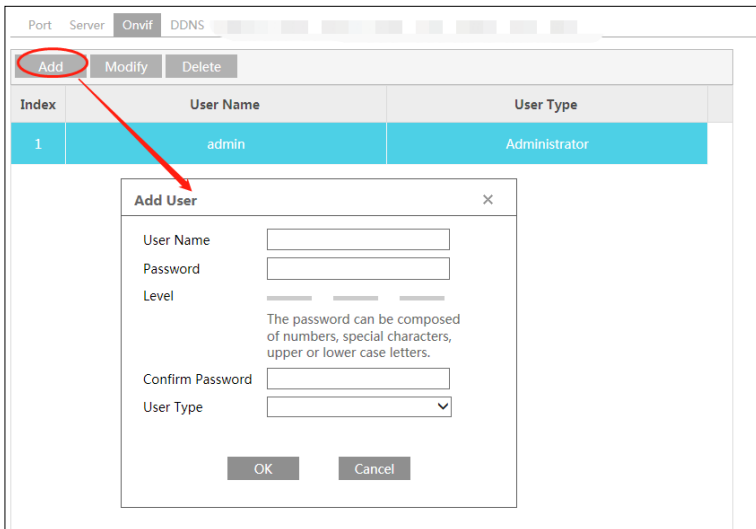

Note: when adding the device to the third-party platform with ONVIF/RTSP protocol, please use the onvif user in the above interface.


4.6.5 DDNS

If the camera is set up with a DHCP connection, DDNS should be set for the internet.

1. Go to **Config** → **Network** → **DDNS**.

<input checked="" type="checkbox"/> Enable	
Server Type	www.dyndns.com ▾
User Name	<input type="text"/>
Password	<input type="password"/>
Domain	<input type="text"/>
	<input type="button" value="Save"/>

2. Apply for a domain name. Take www.dvr dyndns.com for example. Enter www.dvr dyndns.com in the IE address bar to visit its website. Then Click the “Registration” button.

NEW USER REGISTRATION	
USER NAME	<input type="text" value="XXXX"/>
PASSWORD	<input type="password" value="•••••"/> ?
PASSWORD CONFIRM	<input type="password" value="•••••"/>
FIRST NAME	<input type="text" value="xxx"/>
LAST NAME	<input type="text" value="xxx"/>
SECURITY QUESTION.	My first phone number. ▾
ANSWER	<input type="text" value="XXXXXXXX"/>
CONFIRM YOU'RE HUMAN	 New Captcha <input type="text"/> Enter the text you see above
<input type="button" value="Submit"/> <input type="button" value="Reset"/>	

Create domain name.

<i>You must create a domain name to continue.</i>	
Domain name must start with (a-z, 0-9). Cannot end or start, but may contain a hyphen and is not case-sensitive.	
<input type="text"/>	dvr dyndns.com ▾ <input type="button" value="Request Domain"/>

After the domain name is successfully applied for, the domain name will be listed as below.

Search by Domain.

Click a name to edit your domain settings.

NAME	STATUS	DOMAIN
654321ABC	✔	654321abc.dvrdydns.com

Last Update: *Not yet updated* IP Address: 210.21.229.138

[Create additional domain names](#)

3. Enter the username, password, domain you apply for in the DDNS configuration interface.
4. Click the “Save” button to save the settings.

4.6.6 SNMP

To get camera status, parameters and alarm information and remotely manage the camera, the SNMP function can be used. Before using SNMP, please install an SNMP management tool and set the parameters of the SNMP, such as SNMP port, trap address.

1. Go to **Config** → **Network** → **SNMP**.

SNMP v1/v2	
<input type="checkbox"/> Enable SNMPv1	
<input type="checkbox"/> Enable SNMPv2	
Read SNMP Community	public
Write SNMP Community	private
Trap Address	192 . 168 . 226 . 201
Trap Port	162
Trap community	public
SNMP v3	
<input type="checkbox"/> Enable SNMPv3	
Read User Name	public
Security Level	auth, priv
Authentication Algorithm	<input checked="" type="radio"/> MD5 <input type="radio"/> SHA
Authentication Password	*****
Private-key Algorithm	<input checked="" type="radio"/> DES <input type="radio"/> AES
Private-key Algorithm	*****
Write User Name	private
Security Level	auth, priv
Authentication Algorithm	<input checked="" type="radio"/> MD5 <input type="radio"/> SHA
Authentication Password	*****
Private-key Algorithm	<input checked="" type="radio"/> DES <input type="radio"/> AES
Private-key Algorithm	*****
Other Settings	
SNMP Port	161

2. Check the corresponding version checkbox (Enable SNMPv1, Enable SNMPv2, Enable SNMPv3) according to the version of the SNMP software that will be used.
3. Set the values for “Read SNMP Community”, “Write SNMP Community”, “Trap Address”, “Trap Port” and so on. Please make sure the settings are the same as those of the SNMP software.

Note: Please use the different version in accordance with the security level you required. The higher the version is, the higher the level of security is.

4.6.7 802.1x

If it is enabled, the camera's data can be protected. When the camera is connected to the network protected by the IEEE802.1x, user authentication is needed.

<input checked="" type="checkbox"/> Enable	
Protocol Type	EAP_MD5
EAPOL Version	1
User Name	test
Password	••••••
Confirm Password	••••••

To use this function, the camera should be connected to a switch supporting 802.1x protocol. The switch can be reckoned as an authentication system to identify the device in a local network. If the camera connected to the network interface of the switch has passed the authentication of the switch, it can be accessed via the local network.

Protocol type and EAPOL version: Please use the default settings.

Username and password: The username and password must be the same as the username and password applied for and registered in the authentication server.

4.6.8 RTSP

Go to *Config* → *Network* → *RTSP*.

<input checked="" type="checkbox"/> Enable			
Port	554		
Address	rtsp://IP or domain name:port/profile1		
	rtsp://IP or domain name:port/profile2		
	rtsp://IP or domain name:port/profile3		
	rtsp://IP or domain name:port/profile4		
Multicast address			
Main stream	239.0.0.0	50554	<input type="checkbox"/> Automatic start
Sub stream	239.0.0.1	51554	<input type="checkbox"/> Automatic start
Third stream	239.0.0.2	52554	<input type="checkbox"/> Automatic start
Thermal	239.0.0.3	53554	<input type="checkbox"/> Automatic start
Audio	239.0.0.4	54554	<input type="checkbox"/> Automatic start
<input type="checkbox"/> Allow anonymous login (No username or password required)			
Save			

Select "Enable" to enable the RTSP function.

Port: Access port of the streaming media. The default number is 554.

RTSP Address: The RTSP address (unicast) format that can be used to play the stream in a media player.

Multicast Address

Mainstream: The address format is
“rtsp://IP address: rtsp port/profile1?transportmode=mcast”.

Sub stream: The address format is
“rtsp://IP address: rtsp port/profile2?transportmode=mcast”.

Third stream: The address format is
“rtsp://IP address: rtsp port/profile3?transportmode=mcast”.

Thermal stream: The address format is
“rtsp://IP address: rtsp port/profile4?transportmode=mcast”.

Audio: Having entered the main/sub stream in a VLC player, the video and audio will play automatically.

If “Allow anonymous login...” is checked, there is no need to enter the username and password to view the video.


If “auto start” is enabled, the multicast received data should be added into a VLC player to play the video.

Note:1. This camera supports local preview through a VLC player. Enter the RTSP address (unicast or multicast, eg. rtsp://192.168.226.201:554/profile1?transportmode=mcast) in a VLC player to realize the simultaneous preview with the web client.

- 2. The IP address mentioned above cannot be the address of IPv6.
- 3. Avoid the use of the same multicast address in the same local network.
- 4. When playing the video through the multicast streams in a VLC player, please pay attention to the mode of the VLC player. If it is set to TCP mode, the video cannot be played.
- 5. If the coding format of the video of the mainstream is MJPEG, the video may be disordered at some resolutions.

4.6.9 UPNP

If this function is enabled, the camera can be quickly accessed through the LAN. Go to **Config** → **Network** → **UPnP**. Enable UPNP and then enter UPnP name.

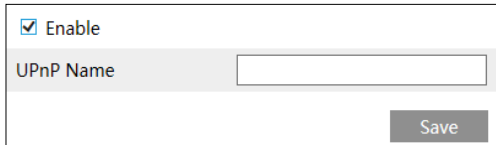

4.6.10 Email

If you need to trigger an Email when an alarm happens or IP address is changed, please set the Email here first.

Go to **Config** → **Network** → **Email**.

Sender	
Sender Address	<input type="text" value="xxx@126.com"/>
User Name	<input type="text"/> <input checked="" type="checkbox"/> Anonymous Login
Password	<input type="password"/>
Server Address	<input type="text" value="smtp.126.com"/>
Secure Connection	<input type="text" value="Unnecessary"/> ▼
SMTP Port	<input type="text" value="25"/> <input type="button" value="Default"/>
<input type="checkbox"/> Send Interval(S)	<input type="text" value="60"/> (10-3600)
	<input type="button" value="Clear"/> <input type="button" value="Test"/>
Recipient	
	<input type="text" value="xxx@126.com"/>
	<input type="text"/>
Recipient Address	<input type="text"/>
	<input type="button" value="Add"/> <input type="button" value="Delete"/>
	<input type="button" value="Save"/>

Sender Address: sender's e-mail address.

Username and password: sender's username and password (you don't have to enter the username and password if "Anonymous Login" is enabled).

Server Address: The SMTP IP address or host name.

Select the secure connection type at the "Secure Connection" pull-down list according to what's required.

SMTP Port: The SMTP port.

Send Interval(S): The time interval of sending an email. For example, if it is set to 60 seconds and multiple motion detection alarms are triggered within 60 seconds, they will be considered as only one alarm event and only one email will be sent. If one motion alarm event is triggered and then another motion detection alarm event is triggered after 60 seconds, two emails will be sent. When different alarms are triggered at the same time, multiple emails will be sent separately.


Click the "Test" button to test the connection of the account.

Recipient Address: receiver's e-mail address.

4.6.11 FTP

After an FTP server is set up, captured pictures from events will be uploaded to the FTP server.

1. Go to **Config** → **Network** → **FTP**.

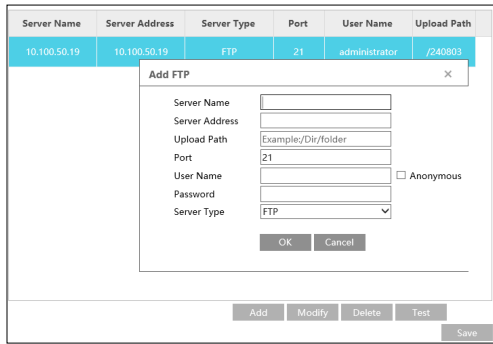

2. Click “Add” to add the information of the FTP. After that, click “Save” to save the settings.

Server Name: The name of the FTP server.

Server Address: The IP address or domain name of the FTP.


Upload Path: The directory where files will be uploaded to.

Port: The port of the FTP server.

User Name and Password: The username and password that are used to login to the FTP server.

Server Type: Choose FTP, FTPS, or SFTP as needed.

3. In the event setting interface (like intrusion, line crossing, etc.), trigger FTP as shown below.

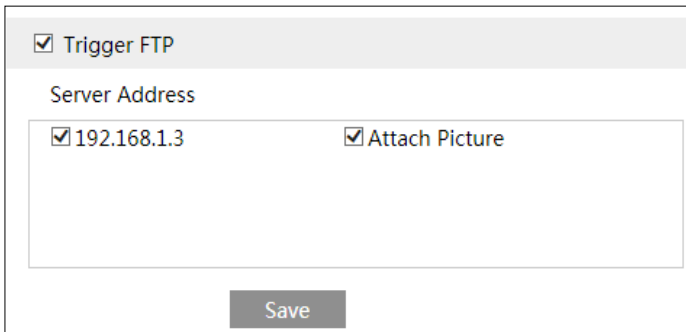

Please refer to [Storage-Snapshot Setting](#) for the parameter settings of the sending snapshots

Rule of FTP storage path: /device MAC address/event type/date/time/

For example: a face detection alarm occurs

FTP file path: \00-18-ae-a8-da-2a\VFD\2021-01-09\14\

Event name table:

File Name	Event Type
-----------	------------

IP	IP address change
MOTION	Motion Detection
SENSOR	Sensor Alarm
TRIPWIRE	Line Crossing Detection
PERIMETER	Region Intrusion Detection
OSC	Object Abandoned/Missing
AVD	Video Exception
VFD	Face Detection
AOENTRY	Region Entrance
AOILEAVE	Region Exiting
PASSLINECOUNT	Target Counting by Line Crossing
TRAFFIC	Target Counting by Area
LOITER	Loitering Detection
PVD	Illegal Parking Detection
SDFULL	SD Full
SDERROR	SD Error
ASD	Audio exception alarm

Jpg image naming rule:

Event type_Year (4digits)-Month (2digits)-Day (2 digits)-Hour (2 digits)-Minute (2 digits)-Second (2 digits)-Millisecond (3 digits)_index (3digits).jpg

Description:

1. Event type: refers to the above table.
2. A zero should be added if the digits are insufficient.

For example: MOTION_2021-03-16-16-20-07-529_032.jpg

Txt file naming rule:

Event type_Year (4digits)-Month (2digits)-Day (2 digits)-Hour (2 digits)-Minute (2 digits)-Second (2 digits)-Millisecond (3 digits)_index(3digits).txt

TXT file content:

device name: xxx mac: device MAC address Event Type time:


For example: device name: IPC mac: 00-18-ae-a8-da-2a motion time: 2021-03-16 12:20:07

Correspondence between txt file and jpeg file: the index of the txt file and jpeg file will be named as the same when the event is triggered each time.

4.6.12 HTTPS


HTTPS provides authentication of the web site and protects user privacy.

Go to **Config** → **Network** → **HTTPS** as shown below.

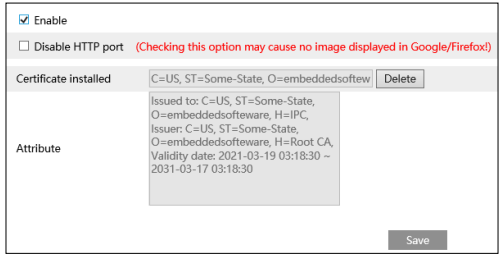


There is a certificate installed by default as shown above. Enable this function and save it. Then the camera can be accessed by entering `https://IP: https port` via the web browser (eg. `https://192.168.226.201:443`).

A private certificate can be created if users don't want to use the default one. Click "Delete" to cancel the default certificate. Then the following interface will be displayed.

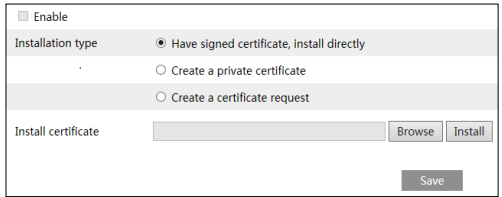

- * If there is a signed certificate, click "Browse" to select it and then click "Install" to install it.
- * Click "Create a private certificate" to enter the following creation interface.

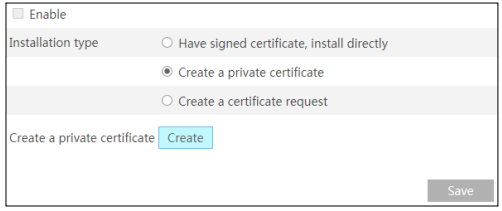

Click the "Create" button to create a private certificate. Enter the country (only two letters available), domain (camera's IP address/domain), validity date, password, province/state, region and so on. Then click "OK" to save the settings.

- * Click "Create a certificate request" to enter the following interface.

Enable

Installation type

Have signed certificate, install directly

Create a private certificate

Create a certificate request

Create a certificate request

Install Created Certificate

Click “Create” to create the certificate request. Then download the certificate request and submit it to the trusted certificate authority for signature. After receiving the signed certificate, import the certificate to the device.

4.6.13 HTTP POST

Go to *Config* → *Network* → *HTTP POST*.

Add		Modify	Delete	Test						
Index	Enable	IP address/domain	Port	Path	Connection	Connection	Send	Heartbeat	Smart Alarm T	
1	<input checked="" type="checkbox"/>	10.100.30.19	8082		---	Short conne...	---	---	Motion Detection, Alarm In, Res	

1. Click “Edit”.
2. Click “Add” to add HTTP POST.

Add HTTP POST

Enable

Protocol Type

Domain/IP

Server Port

Path

User Name Enable

Password

Connection Type

Heartbeat Interval(Second) Send heartbeat

Smart Alarm Data Select All

Alarm status data

Smart track data

Smart event data Original picture Target picture

Smart Alarm Type Select All

Motion Detection Alarm In Region Intrusion(Optical)

Line Crossing(Optical) Object Abandoned/Missing Video Exception

Region Entrance(Optical) Region Exiting(Optical) Target Counting by Line

Target Counting by Area Illegal Parking Detection Loitering Detection

Audio Exception Region Intrusion(Thermal) Line Crossing(Thermal)

Fire Detection Temperature Measurement Region Entrance(Thermal)

Region Exiting(Thermal)

Protocol type: HTTP

Domain/IP: the IP address/domain name of the third-party platform.

Server port: the server port of the third-party platform.

Path: enter the subdomain of the above server, for example, the URL of alarm information push: *"/SendAlarmStatus"* .

Username and password: Please enable and enter as needed.

Connection type: Choose *"Persistent connection"* or *"Short connection"* as needed.

Enable *"Send heartbeat"* and set heartbeat interval as needed.

After the above parameters are set, click *"Save"* to save the settings. Select one URL and click *"Test"* to test the connection of the URL. Then the camera will automatically connect to the third-party platform. The online state can be viewed in the above interface. After the camera is successfully connected, it will send the selected alarm data to the third-party platform once the selected smart alarm is triggered.

4.6.14 QoS

QoS (Quality of Service) function is used to provide different quality services for different network applications. With deficient bandwidth, the router or switch will sort the data streams and transfer them according to their priority to solve the network delay and network congestion by using this function.

Go to *Config → Network → QoS*.

Video/Audio DSCP	<input type="text" value="13"/>
Alarm DSCP	<input type="text" value="35"/>
Manager DSCP	<input type="text" value="53"/>

Video/Audio DSCP: The range is from 0 to 63.

Alarm DSCP: The range is from 0 to 63.

Manager DSCP: The range is from 0 to 63.

Generally speaking, the larger the number is, the higher the priority is.

4.7 Security Configuration

4.7.1 User Configuration

Go to *Config → Security → User* as shown below.

<input type="button" value="Add"/> <input type="button" value="Modify"/> <input type="button" value="Delete"/> <input type="button" value="Safety Question"/>		
Index	User Name	User Type
1	admin	Administrator

Add user:

1. Click the *"Add"* button to pop up the following textbox.

Add User [X]

User Name

Password

Level
 8~16 characters; Numbers, special characters, upper case letters and lower case letters must be included.

Confirm Password

User Type ▼

Select All

Remote System settings

Remote image settings

Remote PTZ control

Remote Alarm configuration

Remote intelligent event configuration

Remote network advanced configuration

Remote security management

OK Cancel

2. Enter username in “Username” textbox.
3. Enter the password in the “Password” and “Confirm Password” textbox. Please set the password according to the requirement of the password security level (Go to **Config → Security → Security Management → Password Security** to set the security level).
4. Choose the user type and select the desired user permissions.
5. Click the “OK” button and then the newly added user will be displayed in the user list.

Modify user:

1. Select a user to modify password in the user configuration list box.
2. The “Edit user” dialog box pops up by clicking the “Modify” button.

Admin can modify its password and change the user type and permission of other users here. Other users only can modify their password in this interface.

Delete user:

1. Select the user to be deleted in the user configuration list box.
2. Click the “Delete” button to delete the user.

Note: The default administrator account cannot be deleted.

Safety Question

You can set the safety questions and answers here for the default admin user.

4.7.2 Online User


Go to *Config* → *Security* → *Online User* to view the user who is viewing the live video.

Index	Client Address	Port	User Name	User Type	
1	192.168.17.232	55760	admin	Administrator	Kick Out

An administrator user can kick out all the other users (including other administrators).

4.7.3 Block and Allow Lists

Go to *Config* → *Security* → *Block and Allow Lists* as shown below.

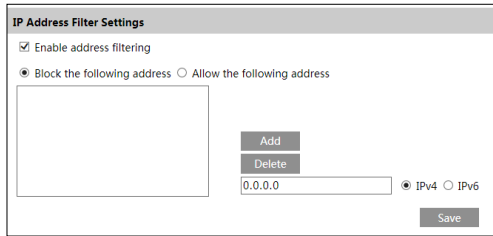


The setup steps are as follows:

Check the “Enable address filtering” check box.

Select “Block/Allow the following address”, IPv4/IPv6 and then enter IP address in the address box and click the “Add” button.

4.7.4 Security Management

Go to *Config* → *Security* → *Security Management* as shown below.

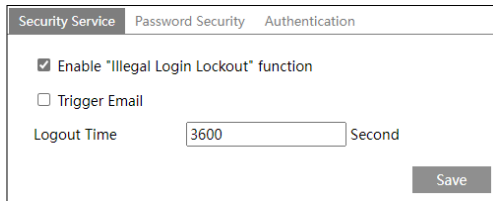


In order to prevent against malicious password unlocking, “Illegal Login Lockout” function can be enabled here. If this function is enabled, login failure after trying five times will make the login interface locked. The camera can be logged in again after a half hour or after the camera reboots.

Trigger Email: if enabled, e-mail will be sent when logging in/out or illegal login lock occurs.

Logout time: Set the logout time as needed. For example: 3600s, you will be automatically logged out after 3600s and then you need to enter the username and password again to log in.

● Password Security

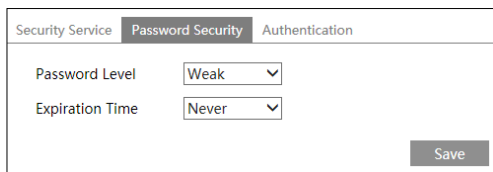

Please set the password level and expiration time as needed.

Password Level: Weak, Medium or Strong.

Weak level: Numbers, special characters, upper- or lower-case letters can be used. You can choose one of them or any combination of them when setting the password.

Medium Level: 8~16 characters, including at least two of the following categories: numbers, special characters, upper case letters and lower-case letters.

Strong Level: 8~16 characters. Numbers, special characters, upper case letters and lower-case letters must be included.

For your account security, it is recommended to set a strong password and change your password regularly.

HTTP/RTSP Authentication: Basic or Digest is selectable.

Security Service	Password Security	Authentication
RTSP Authentication	Digest	▼
HTTP Authentication	Basic	▼

4.8 Maintenance Configuration

4.8.1 Backup and Restore

Go to *Config* → *Maintenance* → *Backup & Restore*.

Import Setting	
Path	<input type="text"/> <input type="button" value="Browse"/>
<input type="button" value="Import Setting"/>	
Export Settings	
<input type="button" value="Export Settings"/>	
Default Settings	
Keep	<input type="checkbox"/> Network Config <input type="checkbox"/> Security Configuration <input type="checkbox"/> Image Configuration
<input type="button" value="Load Default"/>	

- **Import & Export Settings**

Configuration settings of the camera can be exported from one camera into another camera.

1. Click “Browse” to select the save path for import or export information on the PC.
2. Click the “Import Setting” or “Export Setting” button.

Note: The login password needs to be entered after clicking the “Import Setting” button.

- **Default Settings**

Click the “Load Default” button and then verify the password to restore all system settings to the default factory settings except those you want to keep.

4.8.2 Reboot

Go to *Config* → *Maintenance* → *Reboot*.


Click the “Reboot” button and then enter the password to reboot the device.

Timed Reboot Setting:

If necessary, the camera can be set up to reboot on a time interval. Enable “Time Settings”, set the date and time, click the “Save” button and then enter the password to save the settings.

4.8.3 Upgrade

Go to *Config* → *Maintenance* → *Upgrade*. In this interface, the camera firmware can be updated.

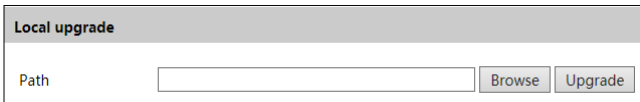

The screenshot shows a web interface titled "Local upgrade". It features a text input field labeled "Path" with a "Browse" button to its right. Below the input field and buttons is a "Upgrade" button.

1. Click the “Browse” button to select the save path of the upgrade file
2. Click the “Upgrade” button to start upgrading the firmware.
3. Enter the correct password and then the device will restart automatically

Caution! Do not close the browser or disconnect the camera from the network during the upgrade.

4.8.4 Operation Log

To query and export log:

1. Go to *Config* → *Maintenance* → *Operation Log*.
2. Select the main type, sub type, start and end time.
3. Click “Search” to view the operation log.
4. Click “Export” to export the operation log.


5 Search



5.1 Image Search

Click Search to go to the interface as shown below. Images that are saved on the SD card can be found here.



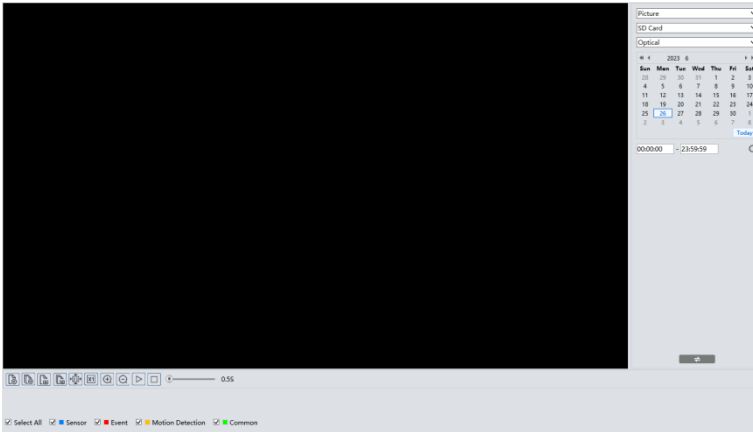





● SD Card Image Search




1. Choose “Picture”—“SD Card”.



2. Select optical or thermal, date and choose the start and end time.
 3. Choose the alarm events at the bottom of the interface.
 4. Click  to search the images.
 5. Double click a file name in the list to view the captured photos.
- Click  to return to the previous interface.


The descriptions of the buttons are shown as follows.


Icon	Description	Icon	Description
	Close: Select an image and click this button to close the image.		Close all: Click this button to close all images.
	Save: Click this button to select the path for saving the image on the PC.		Save all: Click this button to select the path for saving all pictures on the PC.
	Fit size: Click to fit the image on the screen.		Actual size: Click this button to display the actual size of the image.
	Zoom in: Click this button to digitally zoom in.		Zoom out: Click this button to digitally zoom out.

Icon	Description	Icon	Description
	Slide show play: Click this button to start the slide show mode.		Stop: Click this button to stop the slide show.
	Play speed: Play speed of the slide show.		


5.2 Video Search

Click Search to go to the interface as shown below. Videos that were recorded on the SD card can be played in this interface.

1. Choose “Record”—“SD Card”.
2. Select optical or thermal, date and choose the start and end time.
3. Click  to search the images.

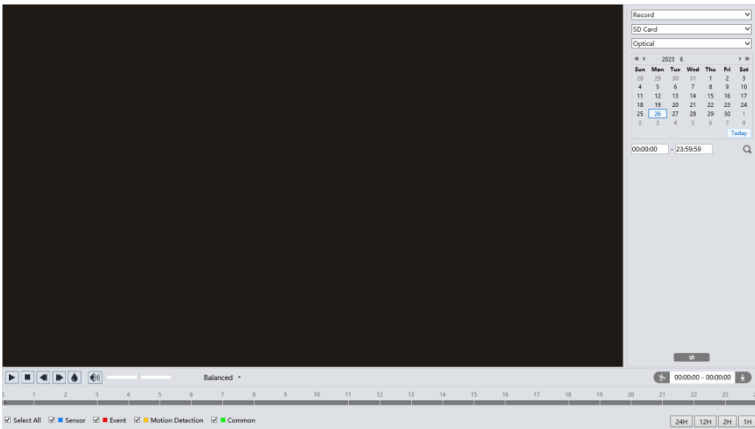

4. Select the alarm events at the bottom of the interface.
5. Select mix stream (video and audio stream) or video stream as needed.
6. Double click on a file name in the list to start playback.

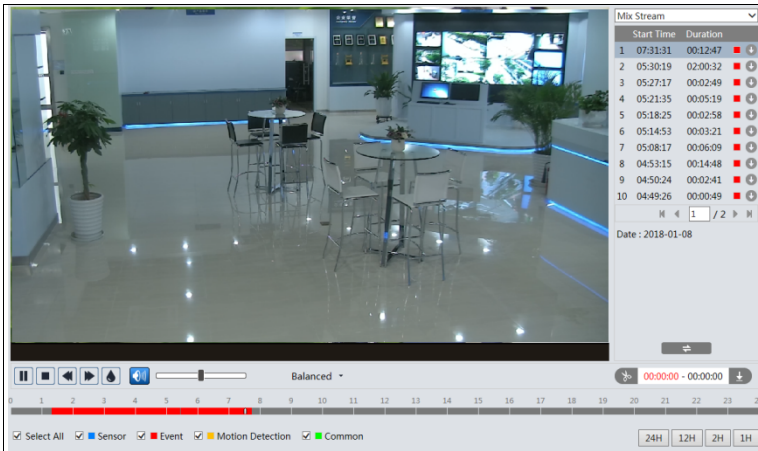

Icon	Description	Icon	Description
	Play button. After pausing the video, click this button to continue playing.		Pause button
	Stop button		Speed down
	Speed up		Watermark display
	Enable / disable audio; drag the slider to adjust the volume after enabling audio.		

Note: and cannot be displayed when videos are played via the plug-in free browser.

The timetable can be shown in 24H/12H/2H/1H format by clicking the corresponding buttons. Video clip and downloading

1. Search the video files according to the above-mentioned steps.
2. Select the start time by clicking on the timetable.
3. Click to set the start time and then this button turns blue ().
4. Select the end time by clicking on the timetable. Then click to set the end time.
5. Click to download the video file in the PC.

Index	Process	Record	Start Time	End Time	Path	Operate
1	100%	Cut	2018-01-16 01:1...	2018-01-16 01:1...	Favorites	Open

Set up D:\Favorites Clear List Close

Click “Set up” to set the storage directory of the video files.

Click “Open” to play the video.

Click “Clear List” to clear the downloading list.

Click “Close” to close the downloading window.

Appendix

Appendix 1 Troubleshooting

How do I find the password?

A: The password for *admin* can be reset through “Edit Safety Question” function.

Click “Forget Password” in the login window and then enter the corresponding answer to the selected question in the popup window. After you correctly answer all questions, you can reset the password for *admin*. If you forget the answer to the question, this way will be invalid, please contact your dealer for help.

B: The passwords of other users can be reset by *admin*.

Fail to connect devices via a web browser.

A: Network is not well connected. Check the connection and make sure it is connected well.

B: IP address is not available. Reset the IP address.

C: Web port number has been changed: contact administrator to get the correct port number.

D: Exclude the above reasons. Restore default setting by Panasonic IP Manager Tool.

Panasonic IP Manager Tool cannot search devices.

It may be caused by the anti-virus software on your computer. Please exit it and try to search for the device again.

No sound can be heard.

A: Audio input devices are not connected. Please connect and try again.

B: Audio function is not enabled at the corresponding channel. Please enable this function.

Appendix 2 Common Material Emissivity

Material	Emissivity	Material	Emissivity
Human Skin	0.98	Brick	0.95
Printed Circuit Board	0.91	Sand	0.90
Concrete	0.95	Soil	0.92
Ceramic	0.92	Cloth	0.98
Rubber	0.95	Hard Paperboard	0.90
Paint	0.93	White Paper	0.90
Wood	0.85	Water	0.96
Pitch	0.96	Flame	0.2-0.3

The material emissivity is also affected by the surface of the material.

Material Surface	Emissivity
Rough	0.95
Slightly Rough	0.8
Slightly Smooth	0.6
Smooth	0.3