

Panasonic

Air Conditioning
Cooling | Dehumidification

R32
REFRIGERANT

AIR IS LIFE

AIR IS COMFORT

AIR IS ENERGY

QUALITY AIR FOR LIFE

- Please read the Installation Instructions carefully before installing the unit, and the Operating Instructions before using it.
- Specifications are subject to change without prior notice.
- The contents of this catalogue are accurate as of May 2019.
- Due to printing considerations, the actual colours may vary slightly from those shown.
- All graphics are provided merely for the purpose of illustrating a point.



Do not add or replace refrigerant other than the specified type. Manufacturer is not responsible for the damage and deterioration in safety due to usage of other refrigerant.

Authorised Dealer

19RAC0501U

Panasonic Australia Pty. Limited

1 Innovation Road,
Macquarie Park,
NSW 2113
ACN 001 592 187
ABN 83 001 592 187
Website : aircon.panasonic.com.au



Panasonic
Air Conditioning

QUALITY AIR FOR LIFE

Class Leading Features



QUALITY AIR FOR LIFE

Quality Air for Life

At Panasonic, we're committed to delivering more than just cooling & heating solutions, we consistently strive to improve the quality of your air, so that you can improve the quality of your life.



Market Leading Connectivity

Control your air in more ways with Panasonic air conditioning's market leading connectivity; now Google Assistant & Amazon Alexa compatible*.

Refer to page 5 for terms and conditions.
*Time of release Quarter 3 2019. Google is a trademark of Google LLC.
Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

AEROWINGS

Superior Airflow

Panasonic's Air Conditioners utilise AEROWINGS technology to deliver precise control of airflow direction, as well as powerful cooling, for a comfortable environment.



Control, Comfort & Reassurance

As well as a cool comfortable home, a Panasonic air conditioner provides the ultimate peace of mind with our Anti-Bacterial Filter, quiet operation, and our 5 year warranty.

A Smarter Way to Control Your Air



The Panasonic Comfort Cloud App & WLAN Smart Adaptor deliver convenient control, connectivity and comfort. Seamlessly adjust temperature, monitor energy consumption, change modes, etc. all from just one mobile device*.

Now Google Assistant and Amazon Alexa Compatible*.



SMART Control
Control, monitor & analyse up to 200 units in multiple locations from just one device.



SMART Comfort
Control your comfort 24 hours a day with remote AC access features, air purification functionality and much more.



SMART Efficiency
Analyse and compare energy consumption, improving energy efficiency and cost effectiveness.



SMART Assist
Monitor & manage air conditioner troubleshooting effortlessly whilst assigning user control permissions.



Intuitive Voice Control

Introducing intuitive voice control with Google Assistant and Amazon Alexa control compatibility*. Using your existing Google assistant or Alexa devices, control your air conditioner with just your voice.

*CZ-TACG1 & updated firmware required.



Compatible Device and Browsers

1. iOS 9.0 or above
2. Android 4.4 or above




Please note: This is not a definitive list of all compatible devices, other similar devices which use supported Operating Systems should also work either via dedicated Apps. Please note that user experience may vary slightly depending on hardware and software combination.

* CZ-TACG1 WLAN Adaptor required per unit. Requires an Internet connection and the App downloaded from the App Store or GooglePlay Store on your smartphone or tablet with the latest Operating System available. * To use Amazon Alexa to control your air conditioner, you will need an Amazon Echo device. * To use Google Assistant to control your air conditioner, you will need a Google Assistant device. * Time of release Quarter 3 2019. Google is a trademark of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. * Wireless LAN Remote Control for Internet Connection required optional network adaptor. * Indoor temperature display and some special function are not available through the App for all models. * Indoor image displayed may not match with actual unit.


WALL-MOUNTED : AERO SERIES COOLING ONLY INVERTER Single -Split Type



CS-U25TKR | CS-U35TKR



CS-U50TKR | CS-U71TKR | CS-U80TKR

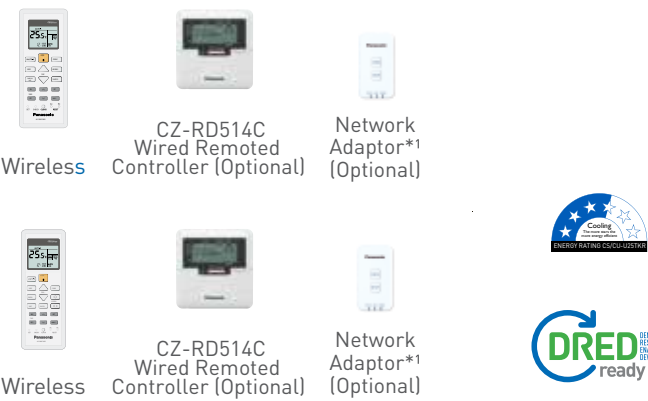

SPECIFICATIONS

MODEL [240V / 1 Phase / 50Hz]			CS-U25TKR [CU-U25TKR]	CS-U35TKR [CU-U35TKR]	CS-U50TKR [CU-U50TKR]	CS-U71TKR [CU-U71TKR]	CS-U80TKR [CU-U80TKR]
Cooling / Capacity	(min-max)	kW	2.50 [0.90~3.00]	3.50 [0.90~4.00]	5.00 [0.98~6.00]	7.10 [2.00~7.70]	8.00 [2.10~8.40]
	(min-max)	Btu/h	8,530 [3,070~10,200]	11,900 [3,070~13,600]	17,100 [3,340~20,500]	24,200 [6,820~26,300]	27,300 [7,160~28,600]
Air Flow	Indoor	L/s	182	192	345	362	400
Dehumidification		L/h	1.5	2.0	2.8	4.1	4.7
Electrical Data	Running Current	A	2.80	4.00	5.70	9.50	10.70
	Power Input (min-max)	kW	0.60 [0.21~0.78]	0.87 [0.21~1.13]	1.29 [0.29~1.85]	2.15 [0.47~2.40]	2.46 [0.43~2.60]
AEER / EER		W/W	4.09/4.17	3.97/4.02	3.84/3.88	3.28/3.30	3.24/3.25
Star Rating			3.5	3.0	3.0	2.0	1.5
Noise	Sound Pressure Level(*2) dB(A)	Indoor [H / L / Q-Lo]	42/25/19	43/26/19	47/34/31	49/38/35	52/38/35
		Outdoor [H / Q-Lo]	47/-	49/-	48/43	54/49	55/50
	Sound Power Level dB	Indoor [H / L / Q-Lo]	58/41/35	59/42/35	63/50/47	65/54/51	68/54/51
		Outdoor [H / Q-Lo]	62/-	64/-	63/58	68/63	69/64
Net Weight	Indoor [Outdoor]	kg	8[28]	8[30]	12[34]	13[48]	13[49]
Dimensions	Indoor [H x W x D]	mm	290 x 799 x 197	290 x 799 x 197	302 x 1,102 x 244	302 x 1,102 x 244	302 x 1,102 x 244
	Outdoor [H x W x D]	mm	542 x 780 x 289	542 x 780 x 289	619 x 824 x 299	695 x 875 x 320	695 x 875 x 320
Refrigerator Pipe Diameter	Liquid Side	mm/(inch)	6.35 [1/4]	6.35 [1/4]	6.35 [1/4]	6.35 [1/4]	6.35 [1/4]
	Gas Side	mm/(inch)	9.52 [3/8]	9.52 [3/8]	12.70 [1/2]	15.88 [5/8]	15.88 [5/8]
Pipe Extension Length	min-max [m]		3~20	3~20	3~30	3~30	3~30
Maximum Elevation Length	m		15	15	15	20	20
Pipe Length For Additional Gas	m		7.5	7.5	10	10	10
Additional Gas Amount	g/m		10	10	15	25	25
Power Supply			Outdoor	Outdoor	Outdoor	Outdoor	Outdoor
Operating Range [Outdoor]	Cooling Degree °C		+5~+46	+5~+46	+5~+46	+5~+46	+5~+46
Refrigerant Type			R32	R32	R32	R32	R32

*1 Indoor temperature display and some special function are not available through the App for all models.
*2 Sound pressure level specification is measured according to JIS C9612.

SPECIFICATIONS & FEATURES

Products in this brochure contain R32 refrigerant. Please refer to Panasonic’s installation instructions and service manuals before installation and servicing this product.

Only persons and/or companies qualified and experienced in the installation, service and repair of refrigerant products should be permitted to do so.

The purchaser must ensure that the person and/or company who is to install, service or repair this air conditioner has qualifications and experience in refrigerant products.

Suitable access for warranty and service is required.

Future improvement, specifications, designs of product and availability are subject to change without notice. Please check with your dealer.

ALL CAPACITY AND ENERGY EFFICIENCY RATINGS ARE BASED ON AS/NZS3823.1.1

COOLING	Indoor temperature Outdoor temperature	27°C DB/19°C WB 35°C DB
Running current is at rated conditions (AS3823) and does not include compressor start-up or variations in power supply and load conditions.		

FEATURES EXPLANATION

ENERGY SAVINGS			
INVERTER CONTROL Varies the rotation speed of the compressor for higher energy savings.		ECONOMY MODE More energy saving compared to the normal mode by automatically adjusting the set temperature by up to 2°C. It's ideal when you want to maintain room temperature for gentle cooling and heating.	
COMFORT			
iAUTO-X Come home to ultra-fast cooling, and then enjoy continuous comfort Shower Cooling that evenly distributes cool air.		FAN MODE Allows you to run the fan without any cooling or heating, thus giving just ventilation.	
POWERFUL MODE Pressing the Powerful button cools or heats the room quickly. It provides fast comfort, with full power and a strong airflow. This is perfect for use immediately after coming home, or when unexpected guests arrive.		SOFT DRY OPERATION MODE Starts with cooling to dehumidify, then provides continuous breeze at a low frequency to keep a room dry without much change to the temperature.	
QUIET MODE Enjoy the comfort of running your air conditioner at night and still have a relaxing sleep.		PERSONAL AIRFLOW CREATION Vertical and horizontal airflow patterns can be combined as desired to achieve optimum comfort, with operation possible by remote, even from a distance. *CS-U50TKR, CS-U71TKR & CS-U80TKR only	
CLEAN & HEALTHY AIR			
ANTI-BACTERIAL FILTER The Anti-Bacterial Filter combines three effects in one: anti-allergen, anti-virus and anti-bacterial protection to provide clean air.		ODOUR-REMOVING FUNCTION With this function, there's no unpleasant odor when the unit starts up. That's because the fan remains off momentarily, while the source of the odour inside the air conditioner is suppressed. The unit must be in cool or dry mode and the fan speed must be set to automatic.	
		REMOVABLE, WASHABLE PANEL Gives you easy access to the filter as well making the unit easy to clean.	
CONVENIENCE			
24-HOUR DUAL ON & OFF REAL SETTING TIMER This feature enables you to preset two different sets of start/stop operation timer (hour and minute) within a 24-hour time frame.		3RD PARTY CONNECTIVITY Allows limited control from an external source when wired to do so.	
DEMAND RESPONSE ENABLING DEVICE (DRED) Allows Electrical Utility Companies to regulate the power supply to the units if connected.		LCD WIRELESS REMOTE CONTROL Easy control of the unit from anywhere in the room.	
		WIRELESS LAN REMOTE CONTROL FOR INTERNET CONNECTION (OPTIONAL) Control air conditioners remotely by turning your mobile device into a remote controller using internet connection. * Network adaptor [CZ-TACG1] is required	
RELIABILITY			
BLUE FIN CONDENSER Extra protection from the elements with a longer lasting coil.		LONG PIPING Long piping offers more flexible installation options. *20m - CS-U25TKR, CS-U35TKR *30m - CS-U50TKR, CS-U71TKR, CS-U80TKR	
RANDOM AUTO RESTART When multiple units are connected and there is a power outage, they will turn on at different times in order to not spike the power supply.		TOP-PANEL MAINTENANCE ACCESS Easy access for maintenance.	
		SELF-DIAGNOSTIC FUNCTION Should a malfunction occur, the unit diagnoses the problem and shows the corresponding alphanumeric code. This allows for quicker servicing.	

OUTDOOR



CU-U25TKR
CU-U35TKR



CU-U50TKR



CU-U71TKR
CU-U80TKR