



Hardware Series



Sophisticated Manufacturing
Stable Solid

FLOOR SPRING SERIES

- The door can be opened both in 2 directions, no matter you push or pull; and it can be hold-open at 90 degree, both the closing speed and the locking speed can be adjustable.
- Center reset is nearly to zero error, and product defect rate is less than 3‰.
- The 1.5mm stainless steel panel can prevent the depression and deformation.
- **Super quiet:** Lubricant imported for Germany, switching silent.
- **Long life:** The entire product is manufactured by imported CNC machines
The body of floor spring is manufactured by automatic modeling equipment, with pinhole-free gap, to prevent oil spills.
Main parts are made by heat treated alloy steel, which with wear resistance.

✓ Standard Configuration

Model	S-100
Standard Arm	✓
Cam Action	✓
Max Opening Angle	130°
Closing Speed Regulator	✓
Locking Speed Regulator	✓
Locating Device	hold-open at 90°
Shared With Both Sides-door	✓



S-100

Dimension: 275×108×40.5mm
Max Load-bearing: 100kg
Max Opening Angle: 130°



S-150

Dimension: 305×108×40.5mm
Max Load-bearing: 150kg
Max Opening Angle: 130°



S-250

Dimension: 306×108×40mm
Max Load-bearing: 250kg
Max Opening Angle: 130°




S-80

Dimension: 246.5×95×42mm
Max Load-bearing: 80kg
Max Opening Angle: 130°

DOOR CLAMP SERIES

- Panasonic door clamp series is artistic, applying to various glass doors of hotels, shopping malls and office buildings, all the key part of products are made of High strength Zinc-Alloy, the products are durable, safe and reliable.

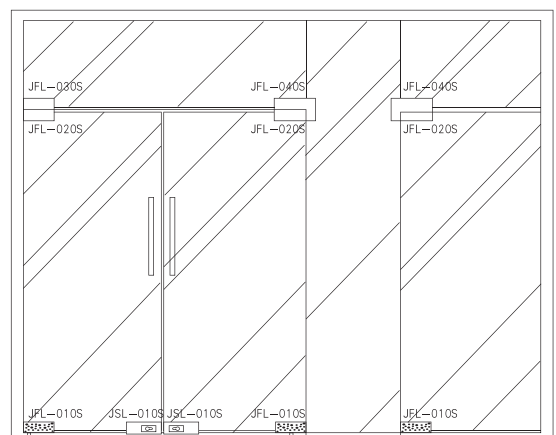

Remark: The suitable glass thickness is 10-12mm



Sophisticated Manufacturing
Stable Solid

HANDLE SERIES


■ Function and features: Used for wooden doors, glass doors and mental doors.

■ Material/ Finish


Grinded stainless steel

Polished stainless steel


Handle LS-Y01 Series

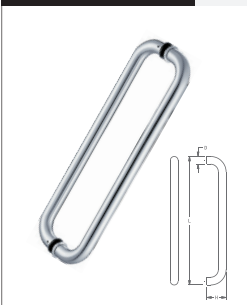


Handle LS-Y02 Series

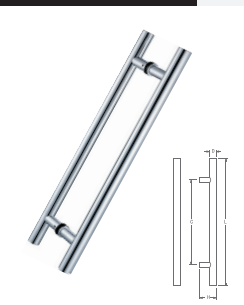


Handle LS-Y03 Series

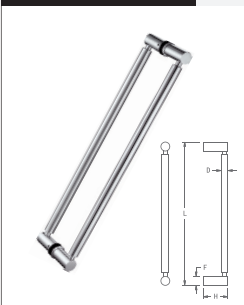


Handle LS-Y04 Series

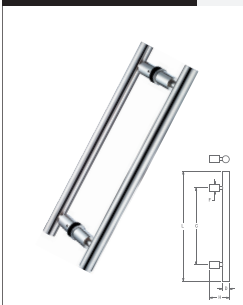


Handle LS-Y05 Series

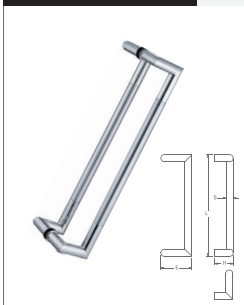


Handle LS-F01 Series

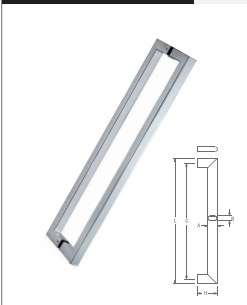

Handle LS-F02 Series

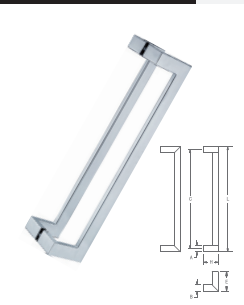

Handle LS-F04 Series

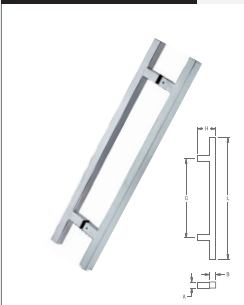

Model	A	B	C	D	E	F	H	L	δ (材料厚)
LS-Y01S328060	—	—	—	Φ32	—	—	80	600	1.5
LS-Y01S328080	—	—	—	Φ32	—	—	80	800	1.5
LS-Y01S3895180	—	—	—	Φ38	—	—	95	1800	1.5
LS-Y01S257540	—	—	—	Φ25	—	—	75	400	1.2
LS-Y01P328080	—	—	—	Φ32	—	—	80	800	1.5
LS-Y02S327760	—	—	450	Φ32	—	—	77	600	1.5
LS-Y02S327780	—	—	600	Φ32	—	—	77	800	1.5
LS-Y02S3883180	—	—	1600	Φ38	—	—	83	1800	1.5
LS-Y02S257040	—	—	300	Φ25	—	—	70	400	1.2
LS-Y02P327780	—	—	600	Φ32	—	—	77	800	1.5
LS-Y03S253260	—	—	—	Φ25	—	Φ32	70	600	1.2
LS-Y04S329260	—	—	450	Φ32	—	Φ32	92	600	1.5
LS-Y04P329280	—	—	600	Φ32	—	Φ32	92	800	1.5
LS-Y05S321460	—	—	—	Φ32	140	—	80	600	1.5
LS-Y05P321480	—	—	—	Φ32	140	—	80	800	1.5
LS-F01S251340	25	13	375	—	—	—	70	400	1.5
LS-F01S382560	38	25	562	—	—	—	83	600	1.5
LS-F01S382580	38	25	762	—	—	—	83	800	1.5
LS-F01S3825160	38	25	1562	—	—	—	83	1600	1.5
LS-F02S253860	25	38	575	—	110	—	70	600	1.5
LS-F04S253860	25	38	450	—	—	—	70	600	1.5
LS-F04S253880	25	38	600	—	—	—	70	800	1.5
LS-F04S2538120	25	38	1000	—	—	—	70	1200	1.5

PANIC EXIT DEVICE SERIES

Panic Exit Device (Horizontal Style)



Panic Exit Device (Vertical Style)



Function And Features

For swing doors, mental doors or glass doors with frame and any other Evacuation doors

Activity

The latch, lock cover, are made of high quality SUS304 stainless steel or steel casting, prevent rust and corrosion

Technical Parameters

Max. load-bearing: 200kg

Max. door height: 2125mm

Max. door weight: 1000mm

Product length: 808mm (Vertical style) ; 824mm (Horizontal style)

The height of installation recommended: 1024mm±10mm


Material / Finish

Grinded (NWFHS001S)
Stainless Steel (NWFHS002S)

Silver Paint (NWFHS001Q)
(NWFHS002Q)

CENTER LOCK SERIES

Center Lock (Single) ZYS-D001

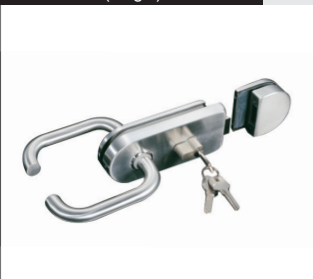

Function And Features

For double-leaf glass doors.
Visible part is made of grinded stainless steel.

Standard Configuration

Handle: 1, Lock body: 1,
Bolt plug box: 1, Lock cylinder: 1,
Copper key: 3


Technical Parameters

Glass Thickness: 10~12mm

Material / Finish

Grinded stainless steel

Center Lock (Double) ZYS-S001

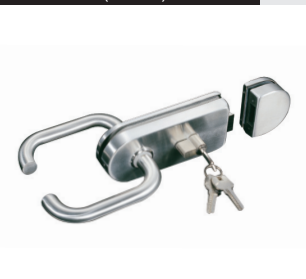

Function And Features

For double-leaf glass doors.
Visible part is made of grinded stainless steel.

Standard Configuration

Handle: 1, Lock body: 1,
Bolt plug box: 1, Lock cylinder: 1,
Copper key: 3

Technical Parameters

Glass Thickness: 10~12mm

Material / Finish

Grinded stainless steel


Sophisticated Manufacturing
Stable Solid

GLASS HINGE SERIES




Function And Features	Self-closing when the door stays at 25° approximately. Suitable glass thickness: 6~12mm
Technical Parameters	Two-glass hinges maximum load-bearing: 45KG
Standard Configuration	Glass Hinge: 1 Set, Pvc Spacer: 1 Set, Sus304 Stainless Steel Screw: 1 Set
Material / Finish	<div>Polished Stainless Steel</div> <div>Copper Chrome Plated</div>

GLASS CLIP SERIES

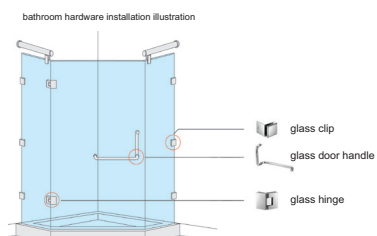


Function And Features	Suitable glass thickness: 6~12mm
Technical Parameters	Two-glass clips maximum load-bearing: 45KG
Standard Configuration	Glass Hinge: 1 Set, Pvc Spacer: 1 Set, Sus304 Stainless Steel Screw: 1 Set
Material / Finish	<div>Polished Stainless Steel</div> <div>Copper Chrome Plated</div>

GLASS DOOR HANDLE



Model	LS-0119500J LS-0125425J
Technical Parameter	Suitable glass thickness: 6~12mm
Material / Finish	Polished Stainless Steel



Model	LS-0219500J LS-0225425J
Technical Parameter	Suitable glass thickness: 6~12mm
Material / Finish	Polished Stainless Steel

「Sophisticated Manufacturing
Stable Solid」

MAGNETIC DOOR HOLDER SERIES

Function and features

- Positioned doors by magnetism can prevent the collision between the door and the wall.

Installation

- Screw, ground installation, wall mounting.

Magnetic Door Holder MX-004B Series



Magnetic Door Holder MX-001B Series



Magnetic Door Holder MX-002B Series



Modle	Material / Finish
MX-001B	Grinded Stainless Steel
MX-001BP	Polished stainless steel
MX-004B (Magnetic door holder)	Grinded Stainless Steel
MX-004BP (Floor holder)	Polished stainless steel
MX-002B	Grinded Stainless Steel
MX-002BP	Polished stainless steel

DOOR STOPPER SERIES

Function and features

- Positioned doors by magnetism can prevent the collision between the door and the wall.

Installation

- Screw, ground installation, wall mounting.

Standard configuration

- Fasten screw: 1 set

Door Stopper MD-001B Series



Door Stopper MD-002B Series



Door Stopper MD-003B Series



Modle	Material / Finish
MD-001B	Grinded Stainless Steel
MD-001BP	Polished Stainless Steel
MD-001BJ	Stainless Steel Satin Gold
MD-001BPJ	Stainless Steel Polished Gold
MD-002B	Grinded Stainless Steel
MD-002BP	Polished Stainless Steel
MD-002BJ	Stainless Steel Satin Gold
MD-002BPJ	Stainless Steel Polished Gold
MD-003B	Grinded Stainless Steel
MX-003BP	Polished Stainless Steel
MX-003BJ	Stainless Steel Satin Gold
MX-003BPJ	Stainless Steel Polished Gold



* Data about the products are for reference only. For detailed parameters please refer to the related product manual.

* The specifications of the product are subject to change without notice.

Panasonic Manufacturing (Beijing) Co., Ltd.

Add: No.1, Tongji North Road, Beijing Economic & Technological
Development Zone, Beijing, 100176, China

Tel: +86-10-87858585

Fax: +86-10-87858642

Http: pmfbj.panasonic.cn

Service Hotline: +86-400-810-4611

Distributor Contact: