# Installation Instructions

# N-SKT5
# N-SKT6





## Installation Guide:

- Installation may only be performed by our company' s after-sales service personnel.
- During installation, please use a Phillips screwdriver to manually tighten the screws. Using an electric screwdriver may strip the screw heads. (Be sure to use the screws provided in the accessories for installation.)
- For stacked installation, do not place the washing machine on any raised platform to avoid tipping.



Never stack the washing machine on top.



Never misalign them when stacking.



Never use a base for the washing machine.

## Packing List

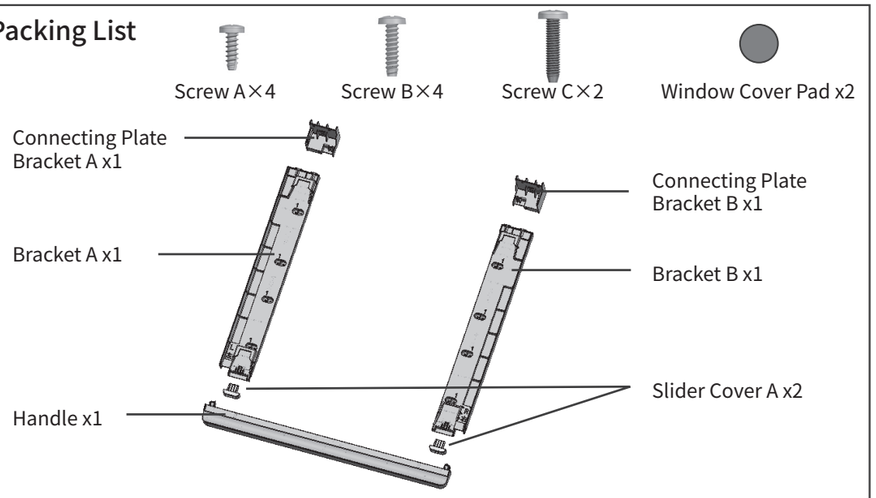


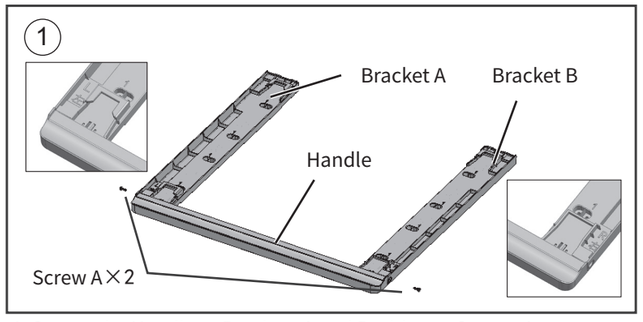


1. Secure the Handle to Brackets A and B with two Screws A. (Ensure correct left/right orientation.)

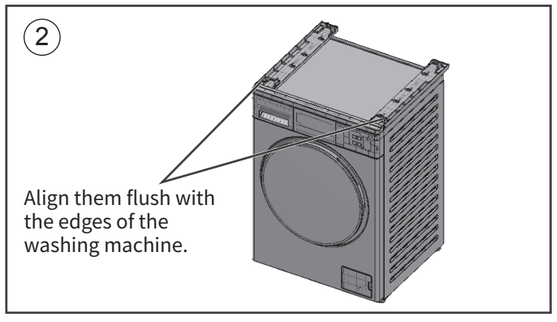


2. Place the assembled Bracket A, Bracket B and Handle on top of the washing machine, and align them flush with the edges of the washing machine.

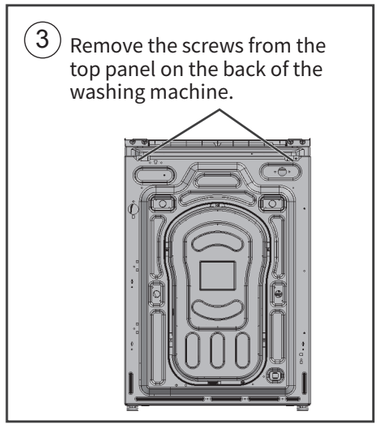


3.Remove the screws from the top panel on the back of the washing machine.

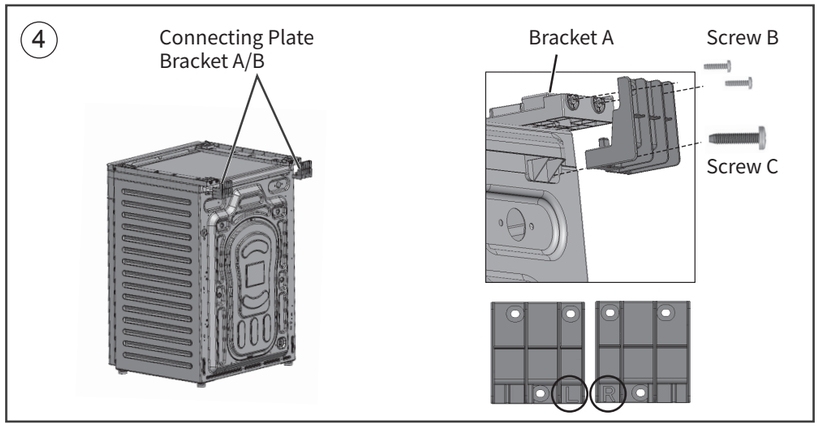


4.Engage the hooks of Connecting Plate Brackets A and B with the slots on the top panel of the washing machine. Fix them onto Brackets A and B with two Screws B, and then secure them onto the top panel of the washing machine with Screw C. (Please distinguish left from right during installation.)

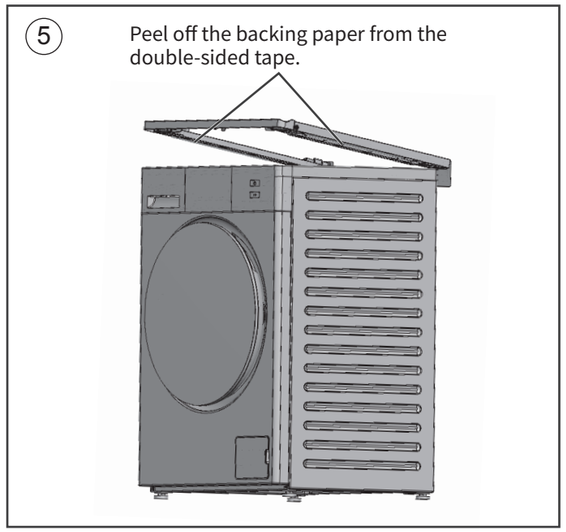


5.Gently lift the front side of the bracket assembly, peel off the backing paper of the double-sided tape, and then lower the bracket assembly to align it with the edges of the washing machine. Next, press the bracket assembly with your hand to ensure that it adheres completely to the top panel of the washing machine.

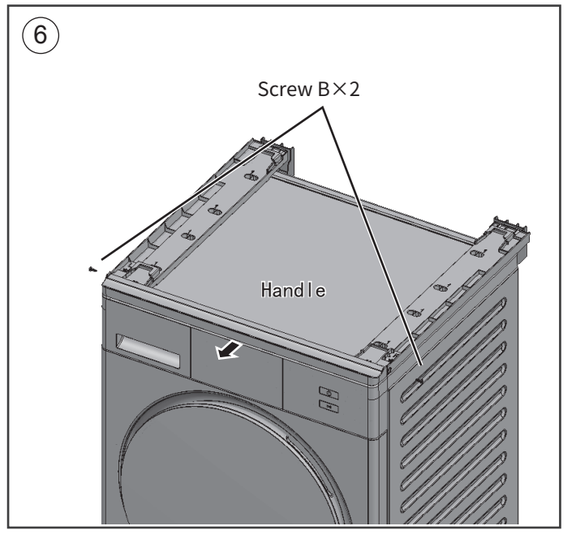


6. After securing the brackets, remove the two Flat Head Screws B used to fix the handle, and detach the handle.

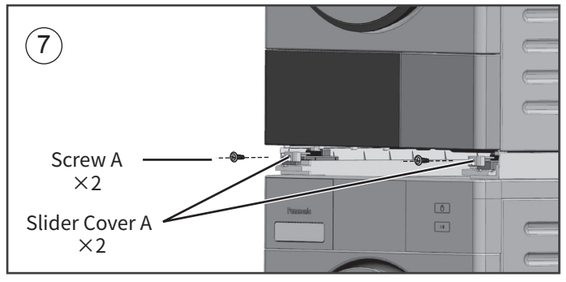


7. Place the drying machine on top of the washing machine, and secure the four leveling feet into the tracks of the brackets. Then, attach the Slider Covers A to the location as shown in the figure, and fix them with Screws A.

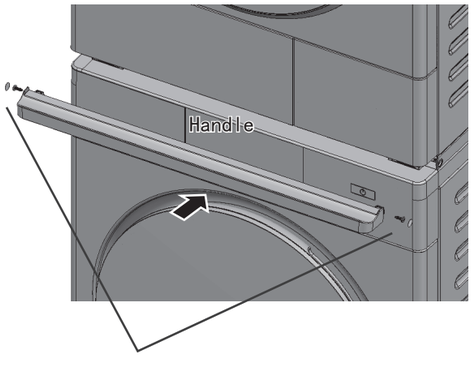


Screw A×2 Window Cover Pad×2

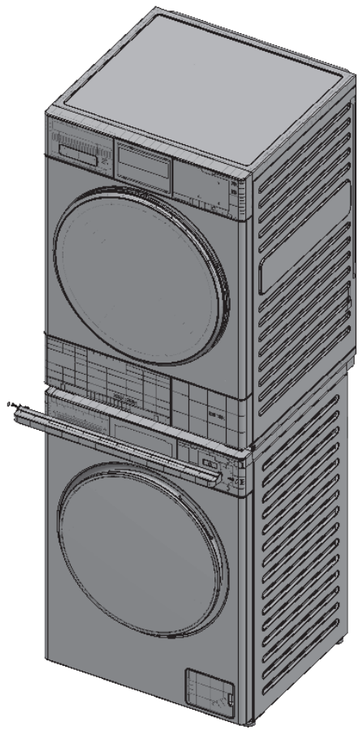

Reattach the handle to its original position, and secure it with Screws A.
Then, apply the window cover pads to the designated areas,
and check that the installation is secure.
Installation is now complete.
※When it is difficult to install the handle, it can be resolved by appropriately raising the foot pad.

12. 24
菅野
2025

# تعليمات التركيب
# N-SKT5
# N-SKT6

## دليل التركيب:

- لا يمكن إجراء عملية التركيب إلا من قبل موظفي خدمة ما بعد البيع في شركتنا.
- أثناء التركيب، يرجى استخدام مفك براغي فيليبس لربط البراغي يدويًا. قد يؤدي استخدام مفك البراغي الكهربائي إلى كشط رؤوس البراغي. (تأكد من استخدام البراغي المتوفرة في الملحقات الخاصة بالتركيب.)
- بالنسبة للتركيب المكدس، لا تضع الغسالة على أي منصة مرتفعة لتجنب الانقلاب.







لا تضع الغسالة في الأعلى أبدًا.



لا تقم أبدًا بمحاذاتهم بشكل خاطئ عند التكديس.



لا تستخدم قاعدة لغسالة الملابس أبدًا.

### قائمة التعبئة

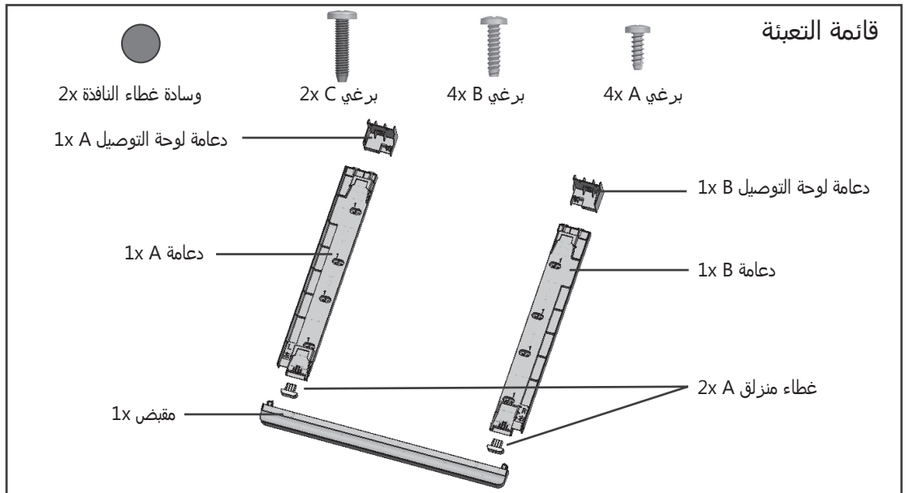

1. قم بتأمين المقبض على الدعامتين A وB باستخدام اثنين من البرغي A. (تأكد من الاتجاه الصحيح اليسار/اليمين.)

2. قم بوضع الدعامة A والدعامة B والمقبض المجمعين أعلى الغسالة، ثم قم بمحاذاتهم بحيث يكونون على نفس مستوى حواف الغسالة.

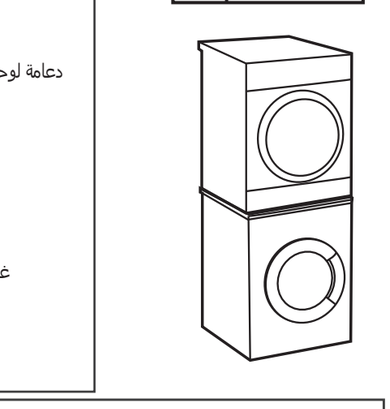


3. قم بإزالة البرغيين من اللوحة العلوية الموجودة في الجزء الخلفي من الغسالة.

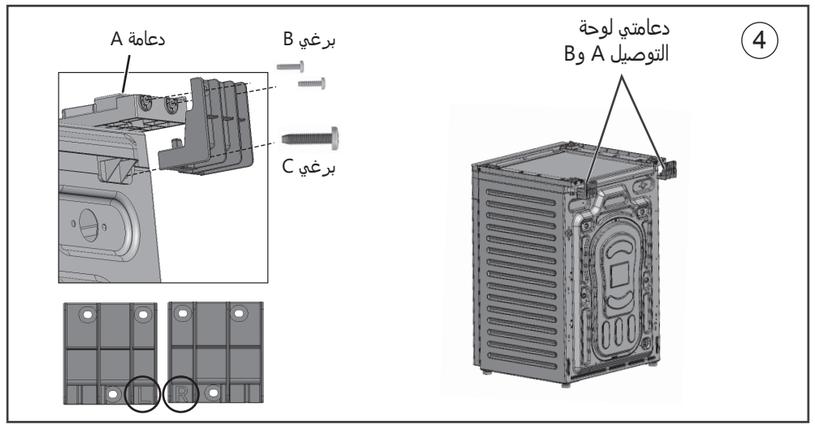


4. قم بربط خطافات دعامتي لوحة التوصيل A وB بالفتحات الموجودة في اللوحة العلوية للغسالة. قم بتثبيتهما على الدعامتين A وB باستخدام اثنين من البرغي B، ثم قم بتثبيتهما على اللوحة العلوية للغسالة باستخدام البرغي C. (يرجى التمييز بين اليسار واليمين أثناء التثبيت.)

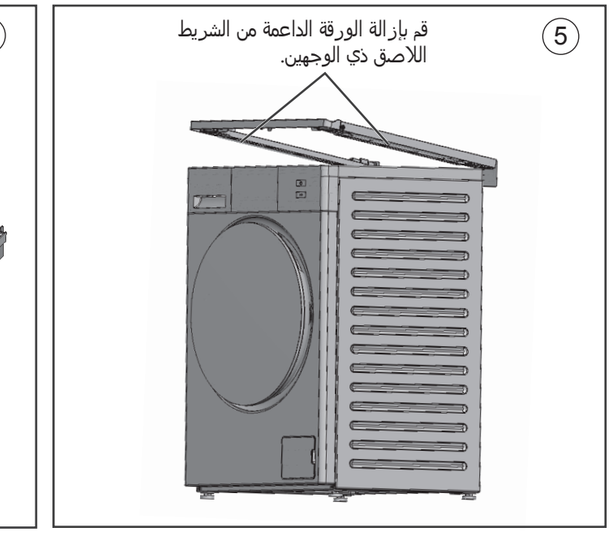


5. ارفع الجانب الأمامي من مجموعة الدعامة برفق، ثم قم بإزالة الورقة الداعمة من الشريط اللاصق ذو الوجهين، ثم قم بإنزال مجموعة الدعامة لمحاذاتها مع حواف الغسالة. بعد ذلك، اضغط على مجموعة الدعامة بيدك للتأكد من أنها تلتصق تمامًا باللوحة العلوية للغسالة.

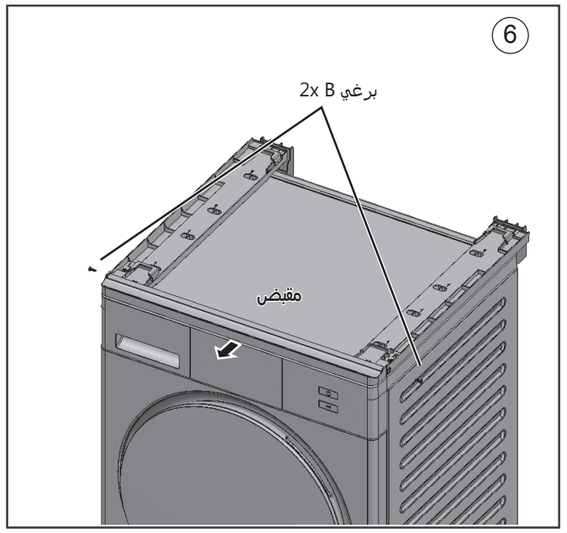


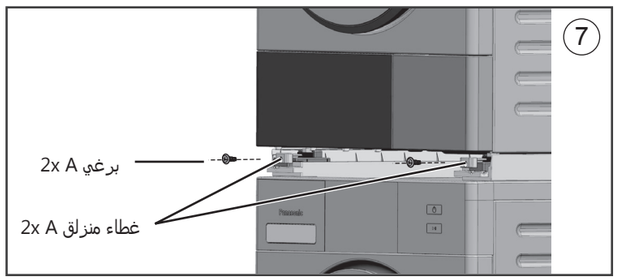


7. ضع مجفف الملابس أعلى الغسالة، ثم قم بتثبيت أقدام التسوية الأربعة في مسارات الدعامات. بعد ذلك، قم بتركيب الأغطية المنزلقة A في المكان الموضح في الشكل، وقم بتثبيتها باستخدام البراغي A.

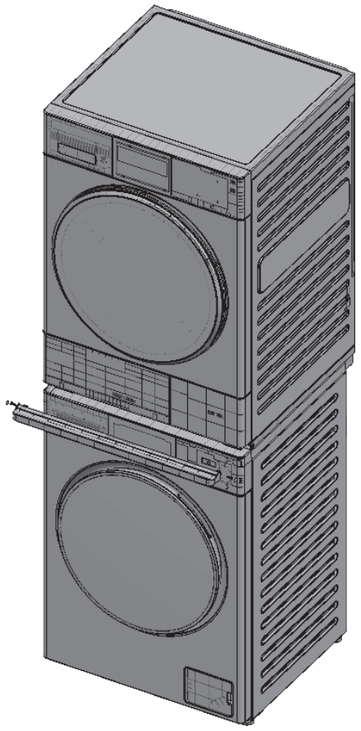

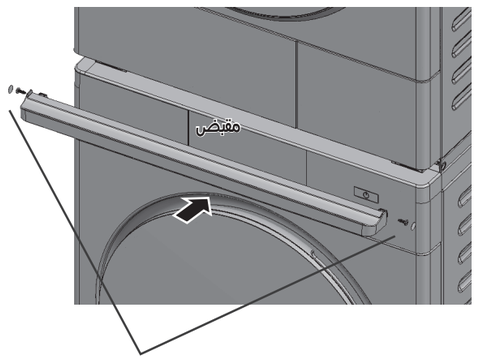


أعد تركيب المقبض في موضعه الأصلي، وثبته باستخدام البراغي A. بعد ذلك، قم بتركيب وسادات غطاء النافذة في المناطق المحددة، وتأكد من أن التركيب مؤمن. تم الآن الانتهاء من التركيب.
*عندما يكون من الصعب تركيب المقبض، يمكن حل ذلك عن طريق رفع وسادة القدم بشكل مناسب.