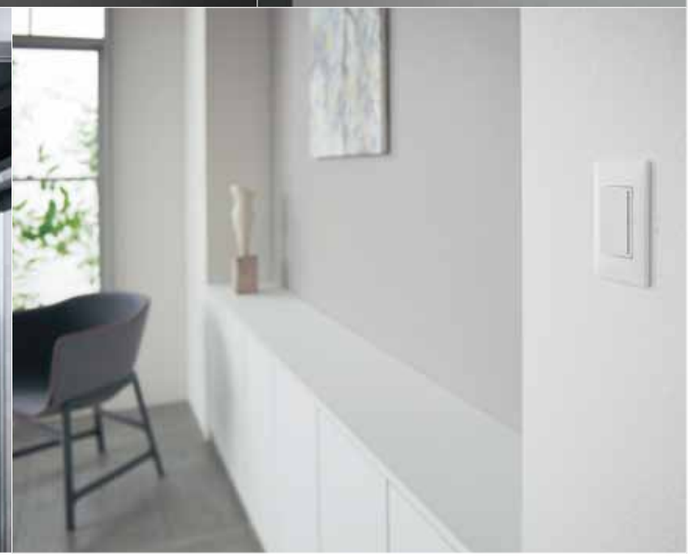

Download Catalog : www.panasonic.com/ph/business/ecosolutions.html

Please contact :

Panasonic Philippines
(Sales Division of Panasonic Manufacturing Philippines Corporation)
Eco Solutions Department

■ 14 Floor, 6788 Ayala Avenue, 1226 Makati City
■ Tel Nos: +63 2 886 6291 to 94 ■ Fax No.: +63 2 886 6295
www.panasonic.com/ph

Manufactured by
Panasonic Manufacturing Ayuthaya Co., Ltd.
Panasonic Corporation Eco Solutions Company

All Rights Reserved © 2014 COPYRIGHT Panasonic Philippines Co., Ltd.

Panasonic®

All Rights Reserved © 2016 COPYRIGHT Panasonic Philippines Co., Ltd.

■ PHENG2 09/2016-1XB

Panasonic

SlimArt

New Slim Designs to Harmonize
with Any Living Space

2016.9

Manufactured to Offer Safety and Reliability.

Flame-retardant Material

Incorporates Urea Resin* with high heat resistance.
*some exceptions



Polycarbonate Urea Resin

Durable, Smooth Action

Uses specially designed copper alloy for improved heat resistance, increasing safety when plugging or unplugging electrical products.

Direct Driving Mechanism

Panasonic proprietary direct driving mechanism maintains constant connector pressure to ensure low heat stability. Arcing is efficiently minimized because this mechanism with its quick, positive on/off switching action has reduced bounce as well.

Slimmer and Easier-to-use Setting the Standard for Advanced Wiring Device Designs

Design

LED Indicator

Includes gentle lighted indicator for better visibility in the dark.

Slim with Snow White Color

Simple and elegant design matches any room interior.

Operation

Soft-touch Operation

Advanced mechanism allows smoother ON/OFF switching.

Wide Switch

Designed for easiest possible operation.

Material

Resists Color Fading

material resists fading and discoloration.

*Yellowing of conventional products

Scratch-Resistant

Robust surface uses effective scratch-free material.

Quick Connect Terminal
Solid Wire : 1.5-2.5mm²

Global Terminal
Solid Wire : 1.5-4mm²
Standed Wire : 1.5-4mm²

Switches

WSAG5511-5
Switch "B",
Single Pole,
1-Device,
Quick Connect
Terminal
16AX 250V~

WSAG5521-5
Switch "B", Single Pole, 2-Device,
Quick Connect Terminal
16AX 250V~

WSAG5531-5
Switch "B", Single Pole, 3-Device,
Quick Connect Terminal
16AX 250V~

WSAG5512-5
Switch "C",
3-way, 1-Device,
Quick Connect
Terminal
16AX 250V~

WSAG5522-5
Switch "C", 3-way, 2-Device,
Quick Connect Terminal
16AX 250V~

WSAG5532-5
Switch "C", 3-way, 3-Device,
Quick Connect Terminal
16AX 250V~

WSAG5551-5
Illuminated Switch "B"
Single Pole,
1-Device,
Quick Connect
Terminal
16AX 250V~

WSAG5561-5
Illuminated Switch "B",
Single Pole, 2-Device,
Quick Connect Terminal
16AX 250V~

WSAG5571-5
Illuminated Switch "B",
Single Pole, 3-Device,
Quick Connect Terminal
16AX 250V~

WSAG5552-5
Illuminated Switch "C", 3-way,
1-Device, Quick Connect Terminal
16AX 250V~

WSAG5562-5
Illuminated Switch "C", 3-way,
2-Device, Quick Connect Terminal
16AX 250V~

WSAG5572-5
Illuminated Switch "C", 3-way,
3-Device, Quick Connect Terminal
16AX 250V~

Receptacles and Accessories

WSAG5004-5
Switch "E", 4-way,
Quick Connect Terminal
16AX 250V~

WSAG1091-5
Universal Receptacle,
Quick Connect Terminal
16A 250V~

WSAG1461-5
20A Tandem Grounding Receptacle
20A 250V~

These products conform to Philippine Standards with PS mark.

The product without PS mark is exempted model or with ICC sticker.

WSAG1181-5
Grounding Universal Receptacle with Safety Shutter,
Quick Connect Terminal
16A 250V~

IP20

WSAG1191-5*
Grounding Universal Receptacle,
Quick Connect Terminal
16A 250V~

WSAG1582-5
Grounding Duplex Universal Receptacle
with Safety Shutter, Quick Connect Terminal
16A 250V~

IP20

WSAG1592-5
Grounding Duplex Universal Receptacle,
Quick Connect Terminal
16A 250V~

WSAG1592-5
Grounding Duplex Universal Receptacle,
Quick Connect Terminal
16A 250V~

WEGP1741SW-5
EL Guard Grounding Receptacle (Snow White)
10A 220V~

WSAG2488
CAT5E Data Modular Jack

WSAG24886
CAT6 Data Modular Jack

WSAG2701
Television Terminal (Current Passing Type)

WSAG2731
F Type Television Terminal (Current Passing Type)

WSAG2164
Telephone Modular Jack (6P4C)

WSAG5411-011
Entrance Bell, 1-Device
10A 250V~

WSAG5431-011
Entrance Bell, 3-Device
10A 250V~

Dimmer Switches

WSAG3020
Blank Chip



WSAG575151
Dimmer Switch (Incandescent Light Control)
500W 220V~ (Off Function Type)

These products conform to Philippine Standards with PS mark.

The product without PS mark is exempted model or with ICC sticker.

*Product is not suitable for aircon with tandem plug.
This can result to loose contact between plug and socket.

Plates

Unit: mm

Slim Art	1-Touch Plate, 1-Gang 1-Device	1-Touch Plate, 1-Gang 2-Device	1-Touch Plate, 1-Gang 3-Device
	WSAG6801-1	WSAG6802-1	WSAG6803-1
	1-Touch Plate, 1-Gang Center 2-Device	1-Touch Plate, 1-Gang Cover	F-Plate (Plate for EL Guard) (Snow White)
	WSAG68029-1	WSAG6891-1	WSAG1813

Compare WIDE series with Slim Art series

Unit: mm

	Switch	Socket
Slim Art		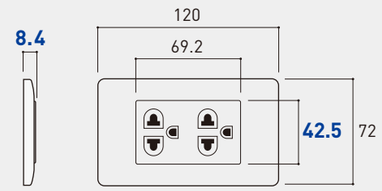
WIDE series		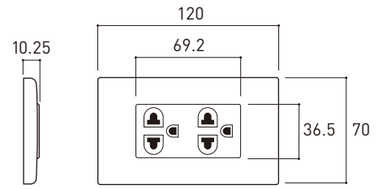

DIMENSIONS

Unit : mm

WSAG5511-5, WSAG5551-5
WSAG5552-5



WSAG5521-5
WSAG5561-5
WSAG5562-5



WSAG5531-5
WSAG5571-5
WSAG5572-5



WSAG5512-5



WSAG5522-5



WSAG5532-5
WSAG5004-5



WSAG1091-5



WSAG1461-5



WSAG1181-5
WSAG1191-5



WSAG1582-5
WSAG1592-5



WEGP1741SW-5



WSAG2488
WSAG24886



WSAG2701



WSAG2731



WSAG2164



WSAG5411-011



WSAG5431-011



WSAG3020



WSAG575151