

# OUTDOOR UNITS Dimensions

## U-18PR1H5/U-21PR1H5/U-24PR1H5




2-way valve at Liquid side (High Pressure)  
3-way valve at Gas side (Low Pressure)

- |   |  |
|---|--|
| ① | Refrigerant tubing (liquid tube), flared connection (φ6.35"/9.52") |
| ② | Refrigerant tubing (gas tube), flared connection (φ12.70"/15.88")  |

\*1 U-18/21PR1H5  
\*2 U-24PR1H5  
\*Mounting hole (4-R6.5), anchor bolt : M10


## U-30PR1H5/U-34PR1H5

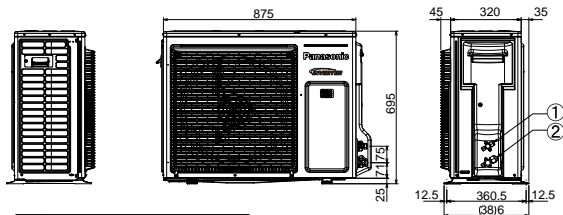

- |   |   |
|---|---|
| ① | Refrigerant tubing (liquid tube), flared connection (φ9.52) |
| ② | Refrigerant tubing (gas tube), flared connection (φ15.88)   |

\*Mounting hole (4-R6.5), anchor bolt : M10

## U-43PR1H5/U-43PR1H8/U-48PR1H5/U-48PR1H8

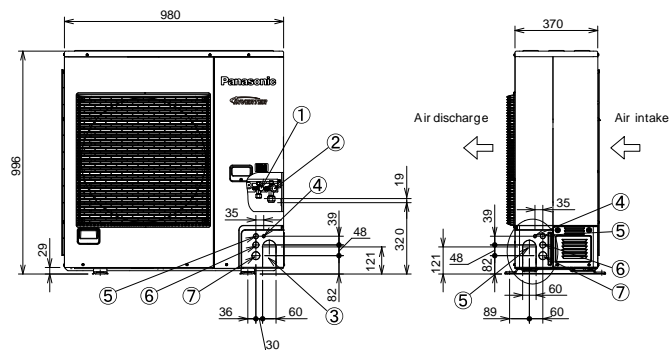

- |   |   |
|---|---|
| ① | Refrigerant tubing (liquid tube), flared connection (Ø9.52) |
| ② | Refrigerant tubing (gas tube), flared connection (Ø15.88)   |
| ③ | Refrigerant tubing port                                     |
| ④ | Electrical wiring port (Ø13)                                |
| ⑤ | Electrical wiring port (Ø22)                                |
| ⑥ | Electrical wiring port (Ø27)                                |
| ⑦ | Electrical wiring port (Ø35)                                |

\*Mounting hole (4-R6.5), anchor bolt : M10

unit:mm