

4-WAY CASSETTE

- Industry-leading Powerful, 360° Wide & Comfortable Airflow.
- The drain pump can pump water up to a height of 850 mm, making drain pipe layout easy.



Panel (Accessory) (Optional Wired Remote Controller)
 CZ-RTC6W*1/6
 CZ-RTC6WBL*1*2/6BL*2
 CZ-RTC6WBLW*1*3/6BLW*3
 CZ-RTC5B CZ-RTC4 CZ-CAPWFC1
 *1 Scheduled release date of 4th Quarter in CY23. *2 BL=BLE, *3 BLW=BLE&WLAN

Capacity [Btu/h(Phase)]		17,100	20,500	24,200	29,000	34,100	42,700	42,700 (3)	47,800	47,800(3)	
Power Source		220-240V, 10 Phase - 50Hz					380-415V, 30 Phase - 50Hz		220-240V, 10 Phase - 50Hz		380-415V, 30 Phase - 50Hz
Indoor		S-1821PU3H	S-1821PU3H	S-2430PU3H	S-2430PU3H	S-3448PU3H	S-3448PU3H	S-3448PU3H	S-3448PU3H	S-3448PU3H	
Outdoor		U-18PR1H5	U-21PR1H5	U-24PR1H5	U-30PR1H5	U-34PR1H5	U-43PR1H5	U-43PR1H5	U-48PR1H5	U-48PR1H5	
Panel		CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	
Cooling Capacity: Rated [Min-Max]	kW	5.00 (2.00-5.60)	6.00 (2.00-6.30)	7.10 (2.10-8.00)	8.50 (2.10-10.00)	10.00 (3.20-11.20)	12.50 (3.80-14.00)	12.50 (3.80-14.00)	14.00 (3.80-14.71)	14.00 (3.80-14.71)	
	Btu/h	17,100 (6,820-19,100)	20,500 (6,820-21,500)	24,200 (7,170-27,300)	29,000 (7,170-34,100)	34,100 (10,900-38,200)	42,700 (13,000-47,800)	42,700 (13,000-47,800)	47,800 (13,000-50,200)	47,800 (13,000-50,200)	
Current: Rated [Min-Max]	A	5.2-5.5	7.5-8.0	8.5-9.2	10.7-11.7	13.7-15.0	16.9-18.5	5.6-6.1	21.9-23.9	7.2-7.9	
Power Input: Rated [Min-Max]	kW	1.14 (0.38-1.50)	1.71 (0.38-2.10)	1.99 (0.30-2.26)	2.52 (0.28-3.33)	3.23 (0.61-3.73)	3.74 (0.63-4.25)	3.74 (0.63-4.25)	4.83 (0.63-5.10)	4.83 (0.63-5.10)	
CSPF		6.27	5.89	6.08	5.97	5.89	5.80	5.80	5.23	5.23	
COP/EER	W/W	4.39	3.51	3.57	3.37	3.10	3.34	3.34	2.90	2.90	
	Btu/hW	15.00	11.99	12.16	11.51	10.56	11.42	11.42	9.90	9.90	
Indoor Unit											
Air Volume	m ³ /min	25.0	25.0	25.0	25.0	36.4	36.4	36.4	36.4	36.4	
	cfm	882	882	882	882	1,285	1,285	1,285	1,285	1,285	
Sound Pressure Level [Hi/Lo]	dB [A]	42 / 35	42 / 35	42 / 35	42 / 35	47 / 41	47 / 41	47 / 41	47 / 41	47 / 41	
Sound Power Level [Hi/Lo]	dB	57 / 50	57 / 50	57 / 50	57 / 50	62 / 56	62 / 56	62 / 56	62 / 56	62 / 56	
Dimension	Indoor (HxWxD)	mm 256 x 840 x 840	256 x 840 x 840	256 x 840 x 840	256 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	
	Panel (HxWxD)	mm 44 x 950 x 950	44 x 950 x 950	44 x 950 x 950	44 x 950 x 950	44 x 950 x 950	44 x 950 x 950	44 x 950 x 950	44 x 950 x 950	44 x 950 x 950	
Net Weight	Indoor	kg 21	21	21	21	24	24	24	24	24	
	Panel	kg 5	5	5	5	5	5	5	5	5	
Outdoor											
Sound Pressure Level	dB [A]	49	50	51	53	55	57	57	58	58	
Sound Power Level	dB	68	69	70	72	74	76	76	77	77	
Dimension	Outdoor (HxWxD)	mm 619 x 824 x 299	619 x 824 x 299	619 x 824 x 299	695 x 875 x 320	695 x 875 x 320	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	
Net Weight		kg 29	29	33	39	48	68	67	68	67	
Piping Connection	Gas Pipe	mm (inch) 12.70 (1/2)	12.70 (1/2)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	
	Liquid Pipe	mm (inch) 6.35 (1/4)	6.35 (1/4)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	
Pipe Length	Min-Max	m 5 - 30	5 - 30	5 - 30	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50	
Elevation Difference	m	20	20	20	30	30	30	30	30	30	
Maximum Chargeless Length	Max	m 15	15	15	25	25	25	25	25	25	
Additional Gas	g/m	10	10	10	30	30	30	30	30	30	
Operation Range, Outdoor	Min-Max	°C 16-46	16-46	16-46	16-46	16-46	16-46	16-46	16-46	16-46	


* Specifications are subject to change without notice. Please refer to technical documents for more details. * The sound pressure level is measured in accordance with JIS C 9612 and JIS B 8616.

ADAPTIVE DUCTED

- Air intake from rear as standard. Industry-leading horizontal and vertical design.
- Powerful 150Pa ESP and space saving 250 mm height, filter included.
- Built-in Drain pump and selectable air inlet position (Bottom and Rear).



Selectable Remote Controller

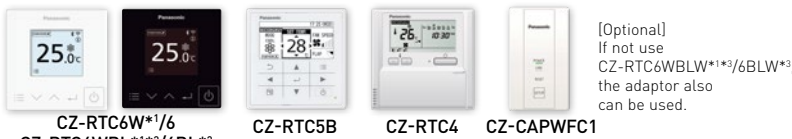

CZ-RTC6W*1/6
 CZ-RTC6WBL*1*2/6BL*2
 CZ-RTC6WBLW*1*3/6BLW*3
 CZ-RTC5B CZ-RTC4 CZ-CAPWFC1
 *1 Scheduled release date of 4th Quarter in CY23. *2 BL=BLE, *3 BLW=BLE&WLAN

Capacity [Btu/h(Phase)]		17,100	20,500	24,200	27,600	34,100	42,700	42,700 (3)	47,000	47,000(3)	
Power Source		220-240V, 10 Phase - 50Hz					380-415V, 30 Phase - 50Hz		220-240V, 10 Phase - 50Hz		380-415V, 30 Phase - 50Hz
Indoor		S-1821PF3H	S-1821PF3H	S-2430PF3H	S-2430PF3H	S-3448PF3H	S-3448PF3H	S-3448PF3H	S-3448PF3H	S-3448PF3H	
Outdoor		U-18PR1H5	U-21PR1H5	U-24PR1H5	U-30PR1H5	U-34PR1H5	U-43PR1H5	U-43PR1H5	U-48PR1H5	U-48PR1H5	
Cooling Capacity: Rated [Min-Max]	kW	5.00 (2.00-5.60)	6.00 (2.00-6.30)	7.10 (2.00-7.60)	8.10 (2.00-8.90)	10.00 (3.20-11.20)	12.50 (3.80-13.50)	12.50 (3.80-13.50)	13.77 (3.80-14.20)	13.77 (3.80-14.20)	
	Btu/h	17,100 (6,820-19,100)	20,500 (6,820-21,500)	24,200 (6,820-25,900)	27,600 (6,820-30,400)	34,100 (10,900-38,200)	42,700 (13,000-46,100)	42,700 (13,000-46,100)	47,000 (13,000-48,500)	47,000 (13,000-48,500)	
Current: Rated [Min-Max]	A	6.8-7.2	8.6-9.1	9.7-10.5	11.1-12.1	13.3-14.5	17.9-19.6	5.9-6.5	21.6-23.6	7.1-7.8	
Power Input: Rated [Min-Max]	kW	1.54 (0.41-1.75)	1.95 (0.41-2.30)	2.27 (0.34-2.48)	2.60 (0.33-2.90)	3.12 (0.59-3.65)	3.96 (0.65-4.35)	3.96 (0.65-4.35)	4.77 (0.65-4.95)	4.77 (0.65-4.95)	
CSPF		5.02	4.65	5.21	5.21	4.74	5.02	5.02	4.74	4.74	
COP/EER	W/W	3.25	3.08	3.13	3.12	3.21	3.16	3.16	2.89	2.89	
	Btu/hW	11.10	10.51	10.66	10.62	10.93	10.78	10.78	9.85	9.85	
Indoor Unit											
Air Volume	m ³ /min	16.0	16.0	21.0	21.0	36.0	36.0	36.0	36.0	36.0	
	cfm	565	565	740	740	1,270	1,270	1,270	1,270	1,270	
External static pressure	Pa	30 [10-150]	30 [10-150]	30 [10-150]	30 [10-150]	50 [10-150]	50 [10-150]	50 [10-150]	50 [10-150]	50 [10-150]	
Sound Pressure Level [Hi/Lo]	dB [A]	35 / 29	35 / 29	35 / 29	35 / 29	40 / 30	40 / 30	40 / 30	40 / 30	40 / 30	
Sound Power Level [Hi/Lo]	dB	58 / 52	58 / 52	58 / 52	58 / 52	63 / 53	63 / 53	63 / 53	63 / 53	63 / 53	
Dimension	Indoor (HxWxD)	mm 250 x 800 x 730	250 x 800 x 730	250 x 1,000 x 730	250 x 1,000 x 730	250 x 1,400 x 730	250 x 1,400 x 730	250 x 1,400 x 730	250 x 1,400 x 730	250 x 1,400 x 730	
Net Weight	Indoor	kg 25	25	30	30	39	39	39	39	39	
Outdoor											
Sound Pressure Level	dB [A]	50	51	51	53	55	57	57	58	58	
Sound Power Level	dB	69	70	70	72	74	76	76	77	77	
Dimension	Outdoor (HxWxD)	mm 619 x 824 x 299	619 x 824 x 299	619 x 824 x 299	695 x 875 x 320	695 x 875 x 320	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	
Net Weight		kg 29	29	33	39	48	68	67	68	67	
Piping Connection	Gas Pipe	mm (inch) 12.70 (1/2)	12.70 (1/2)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	
	Liquid Pipe	mm (inch) 6.35 (1/4)	6.35 (1/4)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	
Pipe Length	Min-Max	m 5 - 30	5 - 30	5 - 30	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50	
Elevation Difference	m	20	20	20	30	30	30	30	30	30	
Maximum Chargeless Length	Max	m 15	15	15	25	25	25	25	25	25	
Additional Gas	g/m	10	10	10	30	30	30	30	30	30	
Operation Range, Outdoor	Min-Max	°C 16-46	16-46	16-46	16-46	16-46	16-46	16-46	16-46	16-46	

* Specifications are subject to change without notice. Please refer to technical documents for more details. * The sound pressure level is measured in accordance with JIS C 9612 and JIS B 8616.

CEILING EXPOSED

- The slim design makes thickness only 235 mm.
- Compact Looking, Stylish, One-Motion Design.
- Comfortable, Long-Distance Airflow Distribution.



(Accessory)

(Optional Wired Remote Controller)



[Optional]
If not use
CZ-RTC6WBLW*1*/3/6BLW*3,
the adaptor also
can be used.

CZ-RTC6W*1/6
CZ-RTC6WBL*1*/2/6BL*2
CZ-RTC6WBLW*1*/3/6BLW*3

CZ-RTC5B

CZ-RTC4

CZ-CAPWFC1

*1 Scheduled release date of 4th Quarter in CY23. *2 BL=BLE, *3 BLW=BLE&WLAN

Capacity [Btu/h(Phase)]		17,100	20,500	24,200	29,000	34,100	42,700	42,700 (3)	45,500	45,500(3)
Power Source	V/Phase Hz	220-240V, 10 Phase - 50Hz								
Indoor		S-1821PT3H	S-1821PT3H	S-2430PT3H	S-2430PT3H	S-3448PT3H	S-3448PT3H	S-3448PT3H	S-3448PT3H	S-3448PT3H
Outdoor		U-18PR1H5	U-21PR1H5	U-24PR1H5	U-30PR1H5	U-34PR1H5	U-43PR1H5	U-43PR1H5	U-48PR1H5	U-48PR1H5
Cooling Capacity: Rated (Min-Max)	kW	5.00 [2.00-5.60]	6.00 [2.00-6.30]	7.10 [2.00-7.80]	8.50 [2.00-9.60]	10.00 [3.20-11.20]	12.50 [3.80-13.54]	12.50 [3.80-13.54]	13.33 [3.80-14.00]	13.33 [3.80-14.00]
	Btu/h	17,100 [6,820-19,100]	20,500 [6,820-21,500]	24,200 [6,820-26,600]	29,000 [6,820-32,800]	34,100 [10,900-38,200]	42,700 [13,000-46,200]	42,700 [13,000-46,200]	45,500 [13,000-47,800]	45,500 [13,000-47,800]
Current: Rated (Min-Max)	A	5.9-6.2	8.4-9.0	8.9-9.7	11.7-12.8	14.3-15.6	18.6-20.3	18.6-20.3	20.4-22.2	6.7-7.4
Power Input: Rated (Min-Max)	kW	1.33 [0.39-1.65]	1.92 [0.39-2.25]	2.00 [0.32-2.36]	2.75 [0.29-3.31]	3.36 [0.58-3.77]	4.10 [0.68-4.50]	4.10 [0.68-4.50]	4.50 [0.68-4.80]	4.50 [0.68-4.80]
CSPF		6.18	5.65	5.51	5.86	5.04	5.08	5.08	4.98	4.98
COP/EER	W/W	3.76	3.13	3.38	3.09	2.98	3.05	3.05	2.96	2.96
	Btu/hW	12.86	10.68	11.52	10.55	10.15	10.41	10.41	10.11	10.11
Indoor Unit										
Air Volume	m ³ /min	15.0	15.0	21.0	21.0	35.0	35.0	35.0	35.0	35.0
	cfm	530	530	740	740	1,235	1,235	1,235	1,235	1,235
Sound Pressure Level (Hi/Lo)	dB (A)	38 / 29	38 / 29	40 / 32	40 / 32	46 / 38	46 / 38	46 / 38	46 / 38	46 / 38
Sound Power Level (Hi/Lo)	dB	56 / 47	56 / 47	58 / 50	58 / 50	64 / 56	64 / 56	64 / 56	64 / 56	64 / 56
Dimension	Indoor (HxWxD)	mm	235 x 960 x 690	235 x 960 x 690	235 x 1,275 x 690	235 x 1,275 x 690	235 x 1,590 x 690	235 x 1,590 x 690	235 x 1,590 x 690	235 x 1,590 x 690
Net Weight	Indoor	kg	26	26	34	34	40	40	40	40
Outdoor										
Sound Pressure Level	dB (A)	50	51	51	53	55	57	57	58	58
Sound Power Level	dB	69	70	70	72	74	76	76	77	77
Dimension	Outdoor (HxWxD)	mm	619 x 824 x 299	619 x 824 x 299	619 x 824 x 299	695 x 875 x 320	695 x 875 x 320	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net Weight		kg	29	29	33	39	48	68	68	67
Piping Connection	Gas Pipe	mm (inch)	12.70 [1/2]	12.70 [1/2]	15.88 [5/8]	15.88 [5/8]	15.88 [5/8]	15.88 [5/8]	15.88 [5/8]	15.88 [5/8]
	Liquid Pipe	mm (inch)	6.35 [1/4]	6.35 [1/4]	9.52 [3/8]	9.52 [3/8]	9.52 [3/8]	9.52 [3/8]	9.52 [3/8]	9.52 [3/8]
Pipe Length	Min-Max	m	5 - 30	5 - 30	5 - 30	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50
Elevation Difference		m	20	20	20	30	30	30	30	30
Maximum Chargeless Length	Max	m	15	15	15	25	25	25	25	25
Additional Gas		g/m	10	10	10	30	30	30	30	30
Operation Range, Outdoor	Min-Max	°C	16-46	16-46	16-46	16-46	16-46	16-46	16-46	16-46

* Specifications are subject to change without notice. Please refer to technical documents for more details. * The sound pressure level is measured in accordance with JIS C 9612 and JIS B 8616.