


8CH 4K Mini 1U Digital Video Recorder

Key Features

- Y Support HDCVI/AHD/TVI/CVBS/IP video inputs
- Y H.264+/H.264 dual-stream Video compression
- Y Max 12 channels IP camera inputs
- Y Max. 48Mbps Incoming Bandwidth
- Y HDMI/VGA simultaneous video output
- Y Support 1SATA HDDs up to 8 TB, 2 USB Ports
- Y Multiple network monitoring: Web viewer, CMS(PVMS) & Smart Phone (PMOB)

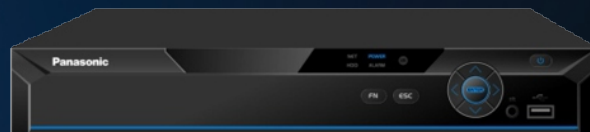

Technical Specifications

Model	PI-HL4108XK
System	
Main Processor	Embedded Processor
Operating System	Embedded LINUX
Video & Audio	
IP Camera Input	8+4 each channel up to 8MP
Two-way Talk	Reuse audio 1/1Ch. In/Out, RCA
Display	
Interface	1 HDMI, 1 VGA
Resolution	HDMI:3840×2160, 2560×1440,1920×1080,1280×1024,1280×720,1024×768,VGA:1920×1080,1280×1024
Display Split	1/4/8/9/16
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
Recording	
Compression	H.264+/H.264
Resolution	4K, 5MP, 4MP, 3MP, 1080P, 720P, 960H, D1, CIF, QCIF
Record Rate	4K(1~7fps); 5MP(1~12fps); 4MP/3MP(1~15fps);1080P/720P/960H/D1/CIF(1~25/30fps),Substream:960H(1~15fps)
Bit Rate	1Kbps ~ 6144Kbps Per Channel
Record Mode	Manual, Schedule (Regular, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop
Record Interval	1 ~ 60 min (default: 60 min), Pre-record: 1 ~ 30 sec, Post-record: 10 ~ 300 sec
Video Detection & Alarm	
Trigger Events	Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss, Tampering and Diagnosis
Alarm Input	N/A
Relay Output	N/A
Playback & Backup	
Sync Playback	1/4/9
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second)
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file,Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom
Backup Mode	USB Device/Network
Network	
Interface	1 RJ-45 port (1000Mbps)
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P,IP Search, ONVIF 2.42, CGI Conformant
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android
Storage	
Internal HDD	1 SATA port, up to 8TB
External HDD	N/A
Auxiliary Interface	
USB	2USB Ports (1 USB 2.0 , 1 USB 3.0)
eSATA	N/A
Rs232	N/A
Rs485	1 Port, for PTZ Control

General	
Power Supply	DC12V/2A
Power Consumption	<10W (Without HDD)
Working Environment	-10°C ~+55°C/10%~90%RH
Dimension(W×D×H)	Mini 1U, 325mm×255mm×55mm
Weight	1.5kg (without HDD)