


PROFESSIONAL DISPLAYS TO ENHANCE YOUR BUSINESS

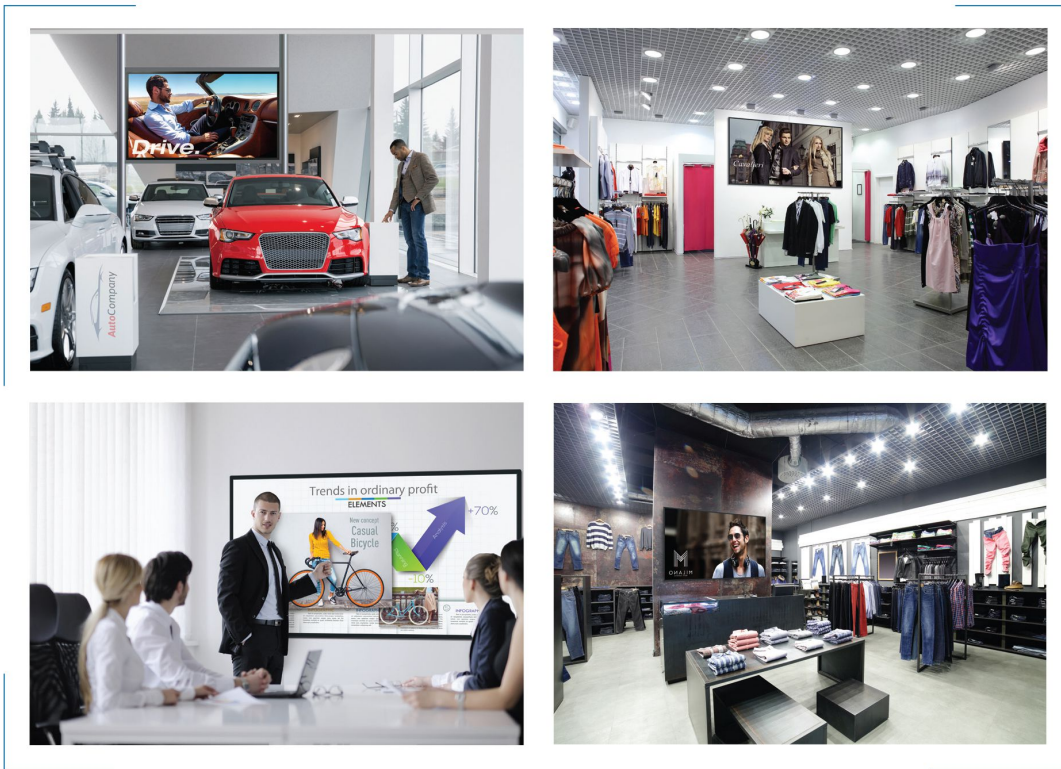

LH Series			
	LH-65QM1KD	LH-86QM1KD	LH-98QM1KD
Screen Size	65-inch	86-inch	98-inch
Panel Type	IPS Panel/DLED		IPS Panel/ELED
Resolution	3840 x 2160		
Brightness	450 cd/m ²	400 cd/m ²	500 cd/m ²

4K Professional Display

- 4K Ultra HD panels express texture and detail for clear and natural images
- Suitable for multiple applications: Retails, Public Space, Showrooms, Offices & Schools
- Easy Installation / Easy Configuration
- Generous connectivity for professional use
- Wall Brackets included

LH-Series				
Category		4K Business Lite		
Model		LH-65QM1KD	LH-86QM1KD	LH-98QM1KD
Display Panel	Screen size	65-inch	86-inch	98-inch
	Panel Type	IPS Panel/DLED		VA Panel/ELED
	Resolution (H x V)	3840x2160 (UHD)		
	Brightness	450cd/m ²	400cd/m ²	500cd/m ²
	Contrast Ratio	1200:1		1300:1
	Response Time	6.0 ms (G to G)	8.0 ms (G to G)	5.0 ms (G to G)
	Viewing Angle (Horizontal / Vertical)	178(H)/178(V)		
	Panel Surface Treatment	Anti-Glare (Haze 1%)		
Terminal	Video-In	1		
	Audio-In (L/R)	1		
	HDMI-In	3		
	USB Input	3		
	YPBPR	1		
	DVI-In	1		
	VGA-In	1		
	PC Audio-In	1		
	MC	1		
	DP-In	DP 1.2x1		
	Video-Out	1		
	HDMI-Out	1		
	S/PDIF-Out	1		
Control	RS232/RJ45	RJ45 (LAN) RS232-INx1		
Power	Voltage	100-240V AC, 50/60 Hz		
	P-Consumption	170W	440W	480W
OSD	Stand-by	≤0.5W		
	Language	English/Arabic		
Weight	Net	Approx. 37kg	Approx. 59kg	Approx. 107kg
	Gross	Approx. 47kg	Approx. 79kg	Approx. 156kg
General	Orientation	Landscape		
	Built-in Speaker	20W (10W+10W)		
	Dimensions (mm)(W x D x H)	1487.5mm x 94.45mm x 862.5mm	1962.0mm x 102.6mm x 1133.0mm	2198.8mm x 109.5mm x 1253.8mm
Carton Size (mm)(W x D x H)	1660mm x 245mm x 1045mm	2125mm x 275mm x 1275mm	2525mm x 435mm x 1750mm	
Bezel	Width	28.7mm	32.5mm	20.3mm
Environment	Operating Environment	Temperature 0°C to 40°C Humidity 20% to 85%		
	Storage Environment	Temperature -10°C to 60°C Humidity 10% to 60%		
	Continuous Operation	18 hours/day		