



**Building Passion,
Building Solutions.**
Panasonic Air Conditioning Systems

We face a time in which “quality air” differentiates business. It’s a time for Panasonic to fully display its strengths. Our ability to assemble and build superior systems isn’t just due to the rich resources we have as a comprehensive electronics manufacturer, but also to Panasonic’s 100 years of tradition, where each person thinks and acts on their own initiative while working in a team to reach further heights. We do not compromise. Each of our independent selves is a one stop solution. We face our customers’ challenges together with our customers and do all that we can to build effective systems. As a true partner for our customers, we strive to always be at the forefront of business.

- Please read the Installation Instructions carefully before installing the unit, and the Operating Instructions before using it.
- Specifications are subject to change without prior notice.
- The contents of this catalogue are accurate as of February 2025.
- Due to printing considerations, actual colours may vary slightly from those shown.
- All graphics are provided solely for the purpose of illustrating a point.



Do not add or replace refrigerant other than the specified type. Manufacturer is not responsible for damage or deterioration in safety due to usage of other refrigerant.

Authorised Dealer

OCNZ_R32 PAC_CAT_2025_V1

Panasonic NZ Ltd

18 Sir Woolf Fisher Drive Highbrook,
East Tamaki Auckland 2013, New Zealand
www.panasonic.com/nz
Customer Care Phone: (09) 272 0178



Panasonic Heating & Cooling Solutions

Global site: aircon.panasonic.com
PRO Club: panasonicproclub.global

[airconpanasonicglobal](https://www.youtube.com/airconpanasonicglobal)

R32 RESIDENTIAL & LIGHT COMMERCIAL
AIR CONDITIONING



Scan for more Panasonic Air Conditioning information.
Connect with your smartphone using this QR code.

HVAC Site



Product information

PRO Club



Technical documents



QUALITY AIR FOR LIFE

The new Panasonic NX series

The next generation is now

The new CONEX remote controller (CZ-RTC6WBLW2*1/CZ-RTC6BLW2/CZ-RTC6WZ2*1/CZ-RTC6Z2) multiplies the benefits of a standard nanoe™ X installation, letting you create clean, healthy air in your living spaces 24 hours a day, anytime, anywhere. Choose your quality of air - a new era in air conditioning solutions is here.

CONTENTS

Product Line-up	4 - 5	Indoor Unit	
Better Air Quality	6 - 9	High Static Pressure Ducted	22 - 25
Panasonic IoT Solution	10 - 11	High Static Pressure Splittable Ducted	26 - 27
CONEX & CONEX Zone Controller Comparison	12 - 13	High Static Pressure Adaptive Ducted	28 - 31
CONEX	14 - 17	4-WAY Cassette	32 - 35
CONEX Zone Controller	18 - 19	Low Profile Mini Cassette	36 - 37
Outdoor Unit	20 - 21	Under Ceiling	38 - 41
		Wall Mounted	42 - 43
		Ultra Slim Ducted	44 - 45
		Floor Console	46 - 47
		Smart Control Management Solutions	48 - 49
		Panasonic Comfort Cloud	50 - 51
		Home Automation	52 - 53
		PAC Smart Connectivity+	54 - 59
		Panasonic AC Smart Cloud	60 - 61
		Controllers	62 - 67



24-hour^{*2}
nanoe™ X Air purification



24-hour nanoe™ X Air Purification
Unlike the general filters found in an air purifier, nanoe™ X achieves a powerful inhibiting effect on not only airborne, but also adhered bacteria and viruses.

P. 6-9



P. 14-17

Make comfort more accessible with CONEX
CONEX goes beyond simple remote control to combine sophistication with simplicity, offering IoT integration that connects directly to a variety of apps for next-generation solutions.



P. 22-25 / P. 28-31

Maximum versatility adaptive ducted unit
Designed to deliver flexibility, performance, and comfort, Panasonic introduces an industry-leading horizontal/vertical design featuring powerful 150Pa static pressure in a compact unit.
Note: PF3 range only.

2

*1 Black models (CZ-RTC6/CZ-RTC6BL/CZ-RTC6BLW2/CZ-RTC6Z2) are also available.
*2 The nanoe™ X mode can be run independently from cooling or heating mode, and needs to be on for the 24 hour air purification to function.

3

Product Line-up

For
Medium
Sized
Project

Cooling Capacity		2.5 kW	3.6 kW	5.0 kW	6.0 kW	7.1 kW	10.0 kW	12.5 kW	14.0 kW	16.0 kW	18.0 kW	20.0 kW	22.4 kW	
Indoor Unit	Ducted	NX Series High Static Ducted High Static Pressure Model Page 22-25 for 6.0kW to 16.0kW					S-60PE3R	S-71PE3R	S-100PE3R	S-125PE3R	S-140PE3R	S-160PE3R		
		NX Series Splittable Ducted High Static Pressure Model Page 26-27 for 18kW - 22.4kW										S-180PE4R	S-200PE4R	S-224PE4R
		NX Series Adaptive Ducted High Static Pressure Model Page 28-31		S-3650PF3E	S-3650PF3E	S-6071PF3E	S-6071PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E				
	Cassette	NX Series 4-WAY Cassette * Panel is provided as an option (CZ-KPU3H/CZ-KPU3A) Page 32-35					S-6071PU3E	S-6071PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E			
		NX Series Low Profile Mini Cassette Page 36-37	S-25PY3E	S-36PY3E	S-50PY3E	S-60PY3E								
	Under Ceiling	NX Series Page 38-41					S-6071PT3E	S-6071PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E			
	Wall Mounted	NX Series Page 42-43						S-100PK3R						
Outdoor Unit	NX Series	R32 Deluxe Model Page 20-21 					U-71PZH3R5	U-100PZH3R5 U-100PZH3R8*1	U-125PZH3R5 U-125PZH3R8*1	U-140PZH3R5 U-140PZH3R8*1	U-160PZH3R5 U-160PZH3R8*1	U-180PZH3R5 U-180PZH3R8*1	U-200PZH3R8*1	U-224PZH3R8*1
		R32 Compact Model Page 20-21 	U-25PZ3R5	U-36PZ3R5	U-50PZ3R5	U-60PZ3R5	U-71PZ3R5	U-100PZ3R5 U-100PZ3R8*1	U-125PZ3R5 U-125PZ3R8*1	U-140PZ3R5 U-140PZ3R8*1				*1 3 phase

For
Small
Sized
Project

Indoor Unit	Ducted	Ultra Slim Ducted Page 45-45	CS-Z25UD3RAW	CS-Z35UD3RAW	CS-Z50UD3RAW	CS-Z60UD3RAW							
		Floor Console Page 46-47	CS-Z25UFRAW	CS-Z35UFRAW	CS-Z50UFRAW								
	R32 Model	 	CU-Z25UBRA	CU-Z35UBRA	CU-Z50UBRA	CU-Z60UBRA							

24-hour nanoe™ X Air Purification*1



Technical information






nanoe™ X works to inhibit longer-living, adhered bacteria and viruses. The CONEX remote control (CZ-RTC6WBLW2/CZ-RTC6BLW2/CZ-RTC6WZ2/CZ-RTC6Z2) gives you access to your air conditioner anywhere, anytime, so you can turn nanoe™ X on even while you're out and enjoy 24-hour quality air in your home.



*1 The nanoe™ X mode can be run independently from cooling or heating mode, and needs to be on for the 24 hour air purification to function.

nanoe™ X Device Evolution

Dramatically increased release of hydroxyl radicals and making the high concentration of nanoe™ X in the space. The latest device, nanoe™ X Generator Mark 3, can be used in large spaces of more than 100 m² with greater effectiveness.

nanoe™ X	nanoe™ X Generator Mark 1	nanoe™ X Generator Mark 2	nanoe™ X Generator Mark 3
			
10x times			
20x times			
100x times			
Hydroxyl radicals			
0.48 Trillion*3 hydroxyl radicals/sec	4.8 Trillion*3 hydroxyl radicals/sec	9.6 Trillion*3 hydroxyl radicals/sec	48 Trillion*3 hydroxyl radicals/sec
Device status			
			
Electrostatic atomisation Multi-leader discharge		Electrostatic atomisation Circular discharge	

*3 Measured using the ESR method (amount of hydroxyl radicals immediately after release from the generator. (Source: Panasonic internal research))




nanoe™ X works even in larger spaces*4



nanoe™ X technology is used in a wide range of product lines, with proven effects*5 in both large and small spaces.


*4 Depends upon the actual system installed and varies depending upon room configuration.
*5 Please refer to P.8 for more information

Standard ducted air conditioning system without nanoe™ X

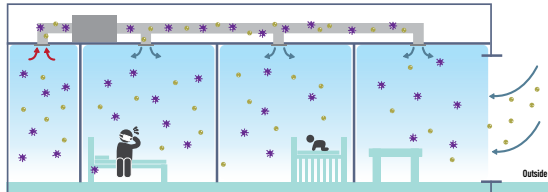

Viruses or bacteria carried by a room's occupants, as well as external pollutants from open windows, may actually be circulated around a home by conventional air conditioning.

Panasonic ducted air conditioning system with nanoe™ X

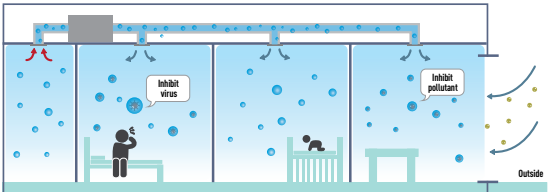

With a nanoe™ X-equipped ducted unit, it's not only viruses and bacteria that are circulated, the ducted unit itself produces a massive 9.6 trillion hydroxyl radicals per second which are delivered to rooms throughout the house, inhibiting viruses and bacteria.

24hr nanoe™ X comfort, wherever you are, anywhere, anytime

Get 24 hr Quality Air for you and your loved ones by turning nanoe™ X on using Panasonic Comfort Cloud*6 even when you're out, and enjoying clean air when you're at home. nanoe™ X functions in both cooling and heating modes and is maintenance-free, helping you keep your costs down with cleaner air.

Clean air independently when you are away (Fan Mode + nanoe™ X ON)



Comfort and Clean air when you are at home (Cooling or Heating Mode + nanoe™ X ON)



Only at 70W/Hour*7
Low energy consumption with fan mode 70W per hour for a single unit.

Maintenance-Free
No maintenance required for nanoe™ X generator device.

*6 Wireless LAN Remote Control for Internet Connection required optional network adaptor. Indoor temperature display and some special function are not available through the App for some models.
*7 Energy consumption may vary depending on models and the external static pressure.



Verification tests for nanoe™ X effects in large spaces



Hazardous substances

The nanoe™ X inhibited hexadecane, a chemical contained in PM2.5 (267m²)


3rd party

A third-party certification organization SIRIM Berhad (SIRIM)^{*1}, conducted the performance experiment using a 4-Way Cassette equipped with a nanoe™ X device to inhibit hexadecane^{*2}, a chemical contained in PM2.5.



^{*1} SIRIM is a premier industrial research and technology organisation in Malaysia, a wholly-owned company of the Malaysian Government under the Ministry of International Trade and Industry (MITI).

^{*2} Hexadecane is a hazardous substance contained in gasoline and diesel exhaust gas.

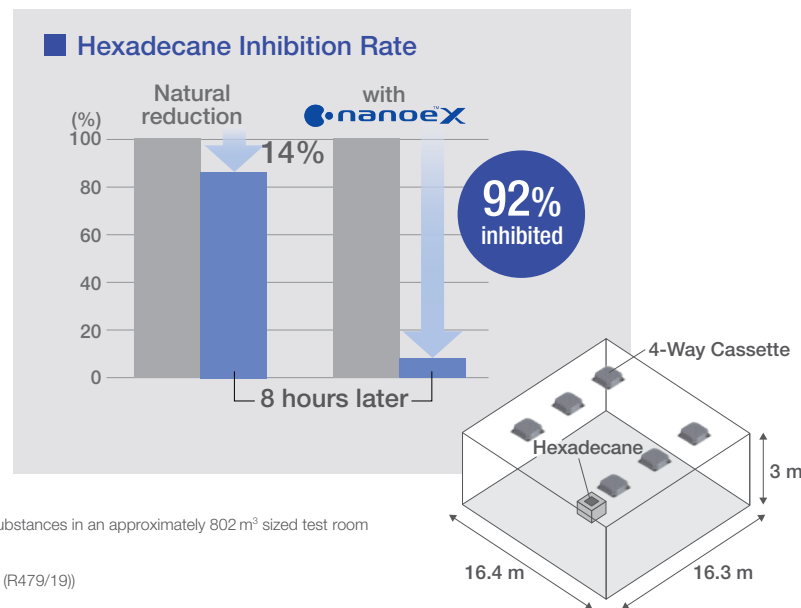

Testing method: Measured the amount of attached organic substances in an approximately 802 m³ sized test room
Inhibition method: nanoe™ X Generator Mark 1 released
Test substance: Hexadecane
Test result: Broken down 92% in 8 hours (ETRC257/16/1402 (R479/19))



odours

The nanoe™ X reduced the odours adhering to fibres such as curtains and carpets (139m²)

3rd party


Cigarette smoke odour

Results

Compared to natural reduction, the nanoe™ X blast reduced the odour intensity by more than approximately 0.7 after two hours.

Testing organization

KAKEN TEST CENTER General Incorporated Foundation in Japan, international testing institute.

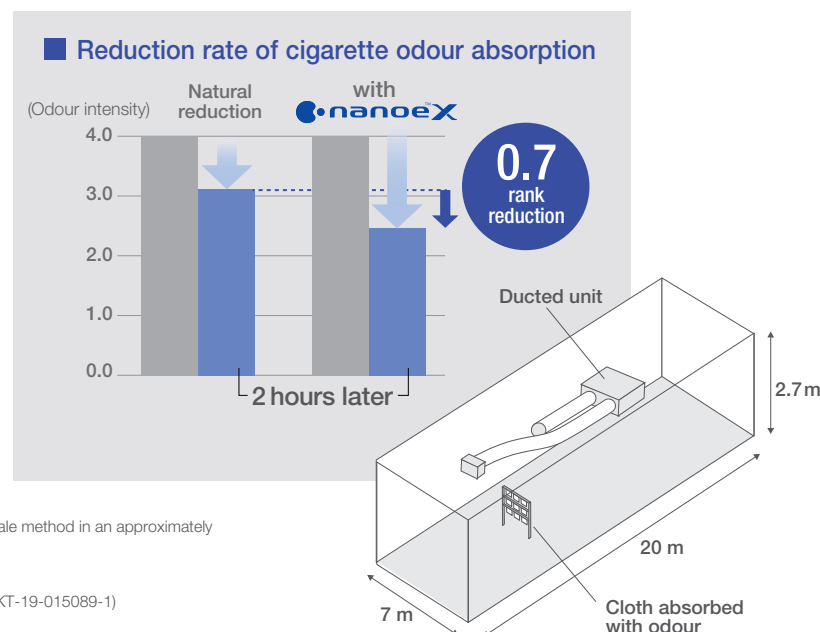


Testing method: Verified using the six-level odour intensity scale method in an approximately 378 m³ sized test room
Inhibition method: nanoe™ X Generator Mark 2 released
Test substance: Surface-attached cigarette smoke odour
Test result: Odour intensity reduced by 0.7 levels in 2 hours (KT-19-015089-1)

The effects of nanoe™ X are recognised by experts in each field



Professor
Masafumi Mukamoto

Osaka Prefecture University
Veterinary Infectious Disease Studies

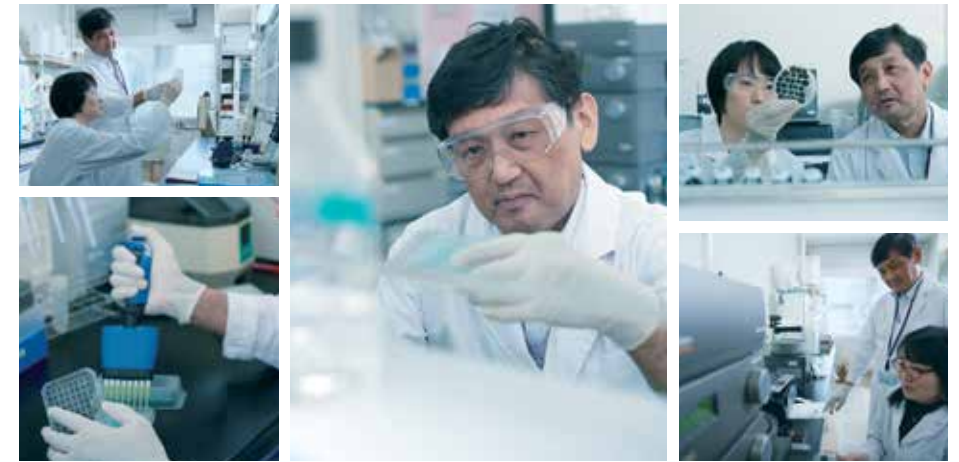


Various types of moulds enter houses along with people and air. Even if preventive action is taken in our everyday lives, it is often very difficult to inhibit the growth of mould, especially in humid environments. With nanoe™ X, we have experimental results^{*3*} that show we can inhibit the growth of the types of mould and bacteria commonly found in various places in the house.

Hope for the creation of more comfortable spaces for those who have problems with asthma or atopic dermatitis



Professor
Masahiro Sakaguchi

Azabu University
School of Veterinary Medicine
Laboratory of Veterinary Microbiology I

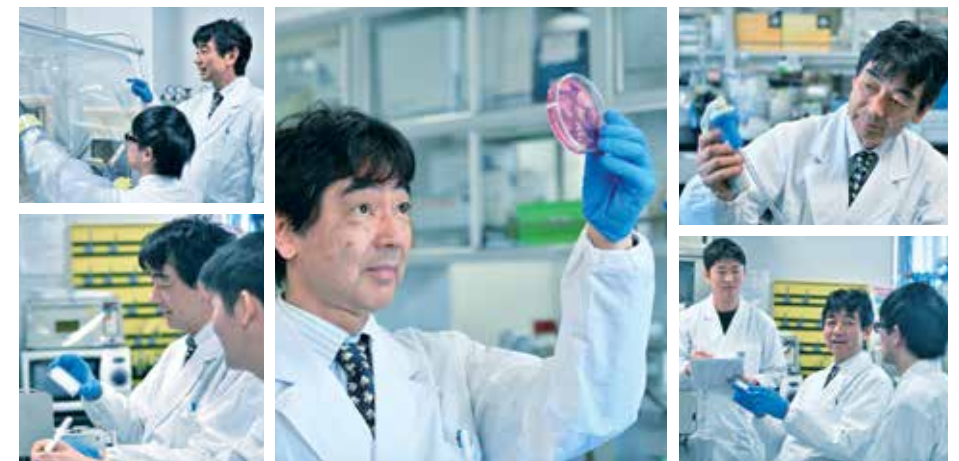

We have experimental results that show nanoe™ X is capable of inhibiting allergens, such as pollen and dust mites. It is important to take precautions against the allergens that we inadvertently inhale in our daily lives. As nanoe™ X is effective in inhibiting invisible allergens, we can expect it will create a cleaner environment. As the safety of nanoe™ X has also been verified, nanoe™ X gives peace of mind to families with small children.

^{*3} Experimental results show that nanoe™ X is effective in inhibiting the growth of the following types of mould and bacteria commonly found in homes:
Mould: Trichophyton, Cladosporium, Malassezia furfur, Sporothrix schenckii, Exophiala jeikei, Absidia corymbifera, Rhodotorula rubra, Neurospora sitophila, Schizophyllum commune
Bacteria: Methicillin-resistant Staphylococcus aureus (MRSA), Listeria monocytogenes, Bacillus subtilis, Mycobacterium smegmatis, Nocardia asteroides, Neisseria gonorrhoeae, Salmonella enterica subsp. Enterica, Haemophilus influenza, Campylobacter jejuni.
^{*4} This verification was designed to generate basic research data on the effects of nanoe™ X on the mould and bacteria in laboratory conditions different from those found in living spaces. It was not designed to evaluate product performance.

Provide a New Gateway that Creates New Value for the Air Conditioning Business

Panasonic utilises advanced IoT technology and cloud service to provide new values that go beyond just cooling and heating solutions.



Employee



Biz Owner



Controller*/Adaptor



Administrator



Owner's family



Shop Owner



Bldg. Owner



House Owner

Panasonic
AC Smart Cloud

Panasonic
AC Service Cloud

Cloud
(New Gateway)

Panasonic IoT Solution (Remote Controllers & App)

Delivering new value with heating and cooling and air quality solutions.

Comfort Cloud × CONEX Zone Controller — For Residential

For Residential


For Apartments

Comfort Cloud × CONEX — For Light Commercial


Single site

Multi site



CZ-RTC6WZ2*



For Home Owners

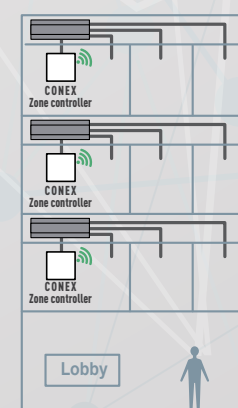


For Small Business Owners



For Small Business Owners

Panasonic
AC Service Cloud

Panasonic
AC Smart Cloud



*If owners have a multisite business, they can also use Smart/Service Cloud for total management.

Comfort Cloud x CONEX* — For Light Commercial



Comfort Cloud x CONEX Zone Controller* — For Residential



Pre-Cool Your Office Before Arriving

To enjoy the most comfortable day at work, pre-cool it before reaching and be greeted with a cool and pleasant office.

Conveniently Turn All OFF/ON Easily

Never have to worry about individually switching OFF/ON your air conditioner units. With a tap, you can turn all your air conditioner OFF/ON.

Purifies Your Office with nanoe™ X

With the Comfort Cloud App, you can easily turn on the nanoe™ mode anytime, anywhere.

Group Status

Statistics

Requirements for Connecting with Panasonic Comfort Cloud App

External Adapter, Remote Controller Network

CZ-CAPWFC2

Individual Comfort and Energy Saving
Airflow Volume Control

The damper opening can be controlled with the Comfort Cloud app. Adjust the air volume conveniently according to your daily life.

The living room damper opening is increased.

For daily naps, reduce the air volume so that it doesn't get too cold.

Auto-optimised Comfort for Your Lifestyle
Weekly Timer

Able to set 6 timers/day. Realise optimal control day & night for your lifestyle with timers.

Pre-cool 30 minutes before going to bed, living zone off 30 minutes later.

Cool your bedroom on weekend mornings to suit your oversleep.

Purifies Your Room with nanoe™ X
24hr Clean Air

When you go out, clean the air with the nanoe™ mode. Pre-cool the living zone according to the time you return home.

Zone Status

Statistics

Other Hardware Requirements*

Router - Internet - Smartphone
(Required 2.4GHz transmission channel)
*Purchase and subscribe separately

Compatible Device and Browsers

1. iOS 9.0 or above
2. Android™ 5.0 Lollipop or later

Download Free App

Panasonic Comfort Cloud app

Smart comfort with CONEX

CONEX goes beyond simple remote control to combine sophistication with simplicity, offering IoT integration that connects directly to a variety of apps for next-generation solutions.



Simple and sophisticated design in-and-out

User friendly interface with stylish design measuring just 86 x 86 mm, CONEX is an extremely compact remote controller which looks great in any room.




Easy control and access for end users, installers, and service partners with just one remote

User-friendly day-to-day operation for end users, simplified set up for installers, and convenient after-sales service access for service partners - all with one remote control.




A next-generation remote control solution optimised for usability, whatever your needs

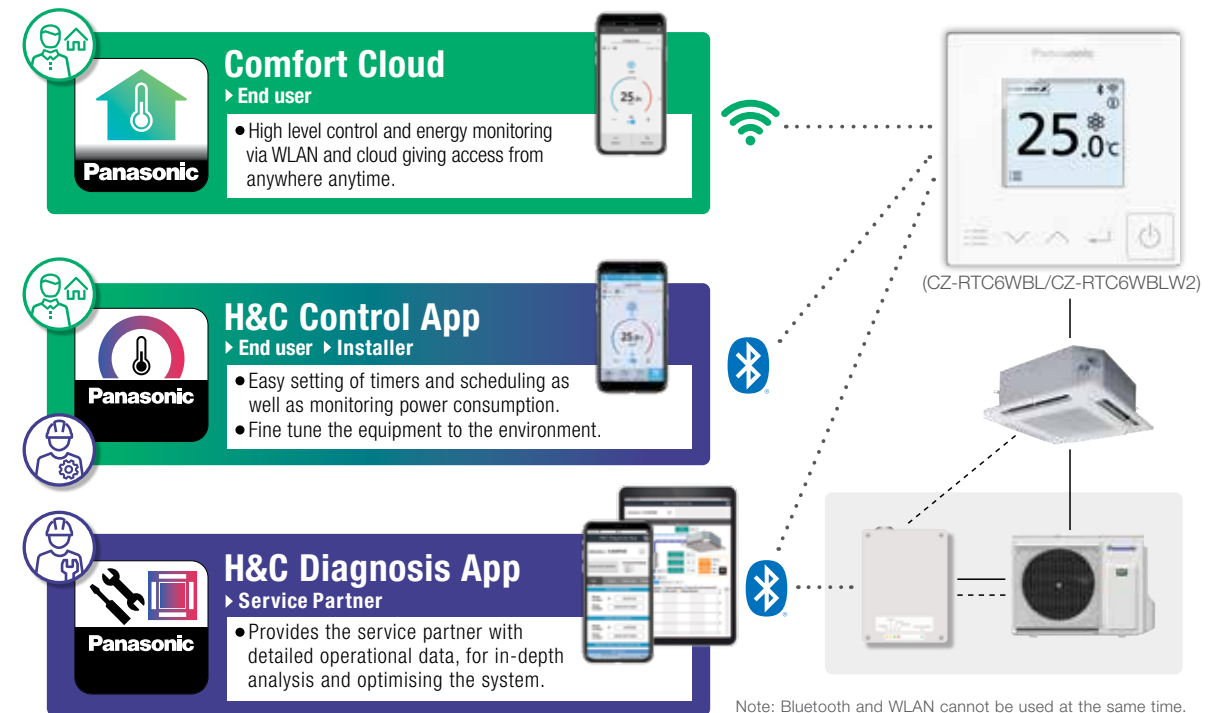

True-comfort for end user— Comfort Cloud App

With Comfort Cloud, even when you are out, at anytime, you can maintain air quality as you please.

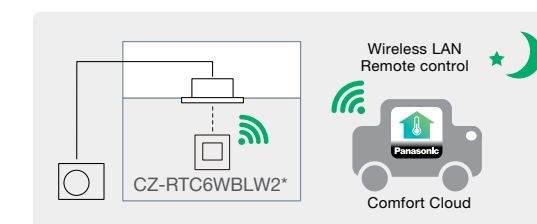

For restaurant owners

Remote control makes 24-hr nanoe™ X air purification*1 in restaurants a reality, even when they're closed.



For shop owners

Air conditioning before opening and give visitors a more comfortable experience.

For boutique hotel owners

Air conditioning before your guests arrive and give them the welcome they deserve.

*1 The nanoe™ X mode can be run independently from cooling or heating mode, and needs to be on for the 24 hour air purification to function.

Note: Product images not to scale.

True-comfort for end user and installer – H&C Control App

H&C Control App makes complex initial set-up easy and allows you to respond swiftly to clients' requests via Bluetooth using a smartphone or tablet.



Advantages

Comfort day-to day operations

It's now simpler than ever for end users to further customise settings to meet their needs and perform operations including basic settings.

Intuitive operation for easy configuration

Simplified initial controller configuration together with easy access to comprehensive settings including weekly timer and maintenance.

Straightforward suggestions to clients

Share a single screen with your customer and together tailor, everything to meet their needs, from basic setup to weekly timers, all in real time.

Quicker configuration for multiple controllers

Save time with templates - Copy weekly timers and settings to multiple controllers.




True-comfort for service partners – H&C Diagnosis App

The H&C Diagnosis App allows users to intuitively browse current stats and information about an air conditioner via Bluetooth® using a smartphone or tablet and without the need to use a PC.



Outdoors



Indoors



Advantages

Acquire diagnostic information from both outside and inside

Outdoor diagnosis is now possible via a new service checker interface^{*1}. With CONEX, operation status can be checked and failure can be diagnosed from indoors too. The information you need is now available via both indoor and outdoor units even when site access may be difficult for either indoor or outdoor unit.

^{*1} Available as a spare part, compatible with new NX series only.


Acquire the information you need intuitively and quickly

Easy access to real-time service parameters and service checker data allows for more accurate repairs. Actual real-time operation data can be toggled between system and refrigerant circuit views, and previously recorded data can be viewed in the history.

A comprehensive error code table and guide gives details of error codes and how to handle them.



Refrigerant circuit view

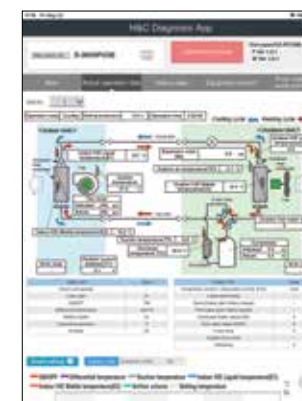

Real time data



History data



New service checker interface

Next Generation One-touch Control, Anytime, Anywhere

Air conditioning for each zone anytime, anywhere according to your needs. Enabled by the fusion of Panasonic's IoT technology and cloud service.



Comfortable Zone Air Conditioning with Stress-free Operation



Individual comfort

•Airflow volume control

The damper opening can be controlled with the Comfort Cloud App. Easily adjust airflow volume according to your lifestyle.

NEW



(CZ-RTC6WZ2*)



(CZ-RTC6Z2)

CONEX
Zone controller



Auto optimised comfort for your lifestyle

•Weekly timer

You can set 6 timers per day. Use timers to enjoy optimal control day and night to match your lifestyle.




Enable comfort for whole family

•Target temperature control

The temp targeted zone can be switched easily according to how you and your family spend time, making the whole family comfortable.

Manage Up to 8 Zones with an Advanced Zone Control System

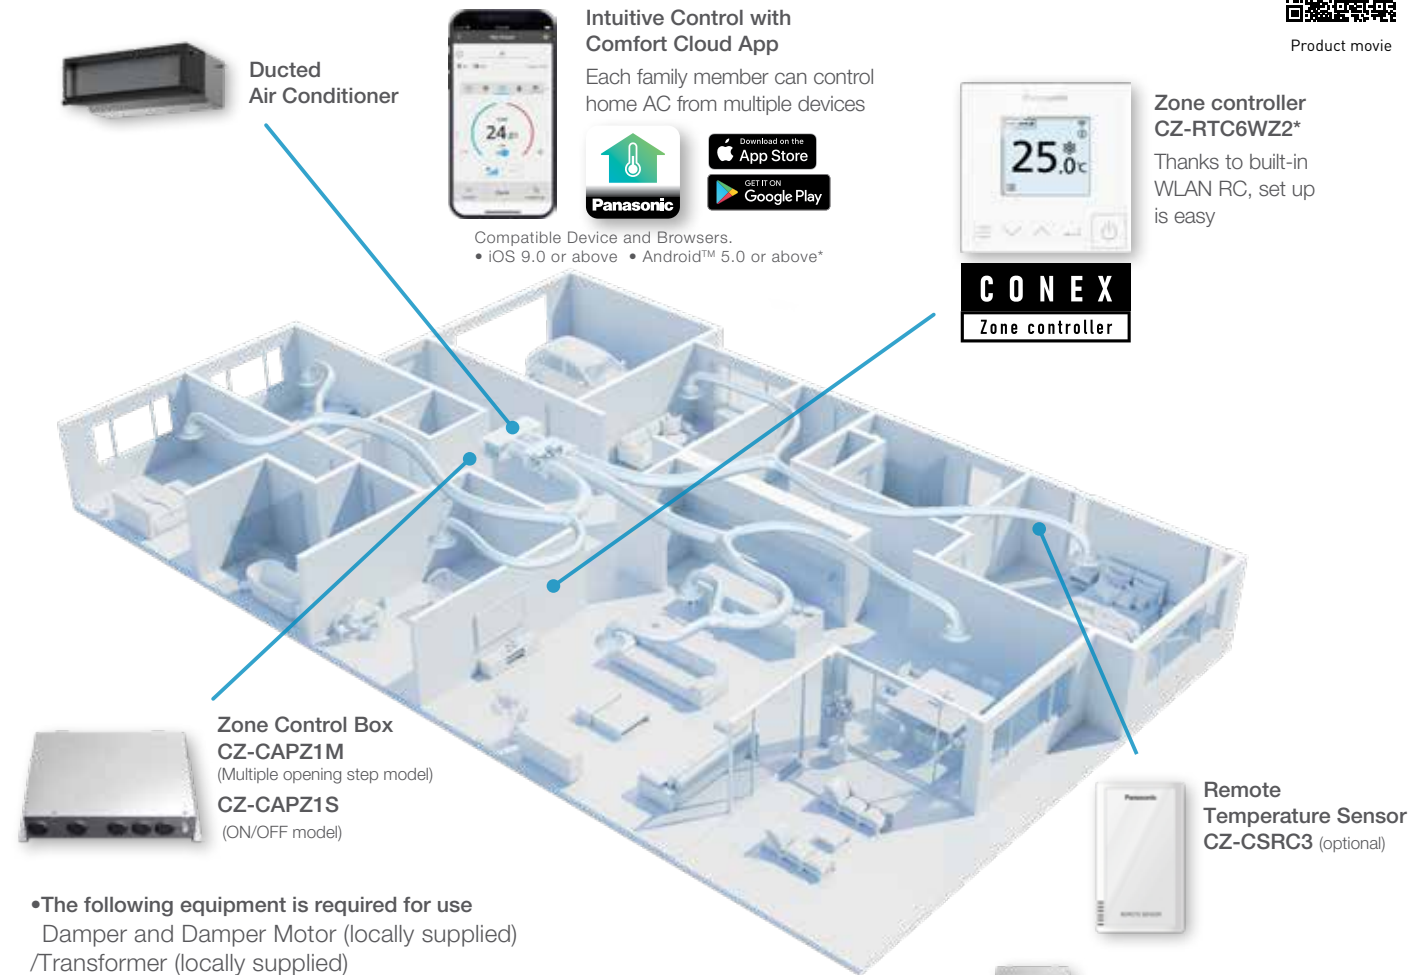

•The following equipment is required for use
Damper and Damper Motor (locally supplied)
/Transformer (locally supplied)

Zone Remote Controller

Spec & dimensions

Model No.	CZ-RTC6WZ2*
Dimensions	(H) 86 mm x (W) 86 mm x (D) 25 mm
Weight	0.10 kg
Temperature / Humidity range	0°C to 40°C / 20% to 80% (No condensation) • Indoor use only.
Power Source	DC16 V (supplied from indoor unit)
Wireless LAN standard	IEEE 802.11 b/g/n
Frequency range	2.4 GHz band
Encryption	WPA2-PSK (TKIP/AES)
OS version on the mobile device for CFC	iOS: 9.0 or later Android™: 5.0 or later

Zone Control Box

Spec & dimensions

Model No.	CZ-CAPZ1S/CZ-CAPZ1M
Dimensions	(H) 250 mm x (W) 342 mm x (D) 70 mm
Weight	1.9 kg

Remote Temperature Sensor

Spec & dimensions

Model No.	CZ-CSRC3
Dimensions	(H) 120 mm x (W) 70 mm x (D) 17 mm
Weight	70 g
Temperature / Humidity range	0°C to 40°C / 20% to 80% (No condensation) • Indoor use only.

Usable indoor units

Zone Controller can be connected with 3.6 kW to 22.4 kW Ducted (PE3, PF3 and PF4) Indoors and VRF Ducted units (M1, E1, E2, E1R, F2, F3 and Z1).

*Connectable to selected Panasonic ducted models only, please consult Panasonic for more details.

Series	PE4	PE3	PF3	MM1	ME1	ME2	ME1R	MF2	MF3	MZ1
Capacity	18.0 kW-22.0 kW	6.0 kW-22.4 kW	3.6 kW-14.0 kW	2.2 kW-5.6 kW	7.3 kW-14.0 kW	18.0 kW-28.0 kW	9.0 kW-16.0 kW	2.2 kW-16.0 kW		2.2 kW-7.3 kW

Note: Product images not to scale.

* iOS is the name of the OS of Apple Inc. iOS is a trademark or registered trademark of Cisco in the US and other countries where it is licensed for use. Apple and the Apple logo are trademarks of Apple Inc. that are registered in the US and other countries. App Store is a service mark of Apple Inc.

* Android™, Google Play™ and Google Play™ logos are registered trademarks of Google LLC.

All side discharge R32 outdoor units

Panasonic's new range of outdoor units feature intuitive technology and thoughtful engineering. The two innovative ranges of R32 units, both Deluxe and Compact, feature energy and space saving technologies, permitting installation in even the tightest and most demanding conditions.



R32
REFRIGERANT

DRED
ready

INVERTER

MEPS
COMPLIANT



Blue Fin
Condenser

More Efficient, Less Space

Whilst maintaining its strong power, new R32 outdoor units get smaller. This enables them to fit into tighter spaces. Thus you can install these units in a vast variety of areas.

All side discharge from 6.0kw to 22.4kW

R32 Deluxe



Industry-leading Small Body with All 1-fan Models


R32 Compact



*1 3 phase

NX Series - Refurbishing Made Easy

The new NX series has been developed to use 3-wired communication, making it simple to replace the three wire systems often used in older installations.

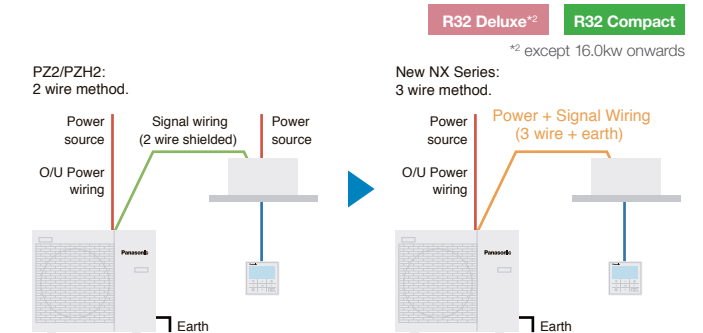

Next Generation Refrigerant: R32

R32, an innovative refrigerant in all ways imaginable: it is easy to install, and compared to most other refrigerants it has a much lower environmental impact and saves energy.

- Low Global Warming Potential (GWP): 75% less impact on global warming vs R410A
- Energy Efficient: Higher energy efficiency than R410A
- Easy Installation: This refrigerant is 100% pure which makes it easier to recycle and reuse.

Other Advanced Technology


Increased Piping Length for Greater Design Flexibility

R32 Deluxe

Adaptable to various building types and sizes

Max. piping length :

50m (7.1kW),
85m (10.0kW-14.0kW),
75m (16.0kW, 18.0kW)
60m (20.0kW, 22.4kW)



Product Quality and Safety

R32 Compact

R32 Deluxe

All Panasonic air conditioners undergo strict quality and safety tests before sale. This rigorous process includes obtaining all necessary Safety Approvals, to ensure that all air conditioners we sell are not only built to the highest market standards, but are also completely safe.



Quiet Mode

R32 Compact

R32 Deluxe

Quiet mode reduces outdoor operating sound by 2dB. External input signal is also available.


Demand Response Compliant

R32 Compact

R32 Deluxe

Panasonic air conditioners are equipped with a Demand Response Enabling Device (DRED) which complies to both AS 4755 and AS 3823. Panasonic continues to design and develop products that are tailored to local needs and requirements.

The Equipment Energy Efficiency (E3) program has been supporting the development of DRED standards for air-conditioners which should comply with AS 4755. The functionality will be required for all installations in the very near future.

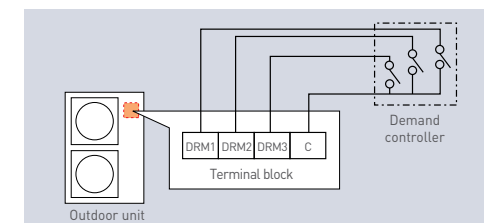

Demand control terminal is available to control 0-50-75-100% of capacities.

Indoor Unit High Static Pressure Ducted

High static and large airflow ducted for exceptional installation flexibility.

nanoe™ X
Generator Mark2
nanoe™ X as a standard



S-60PE3R

S-71PE3R
S-100PE3RS-125PE3R
S-140PE3R
S-160PE3R

NEW

NEW

CZ-RTC6W*1
CZ-RTC6WBL*1
CZ-RTC6WBLW2*1

CZ-RTC6WZ2*1*2

CZ-RTC5B

CZ-RTC4A

CZ-CAPWFC2

*1 Black models are also available.
*2 Zone Controller for residential use.
Note: Product image not to scale.

HSP Ducted




Product movie

Technical focus

- Design flexibility thanks to high static pressure and large air volume
- Configurable air temperature control
- Accurate temperature control to reduce cold drafts during operation


Compact Body Size

Hidden in the ceiling, ideal when interior decor is an important consideration such as in residences with many rooms and light commercial buildings.

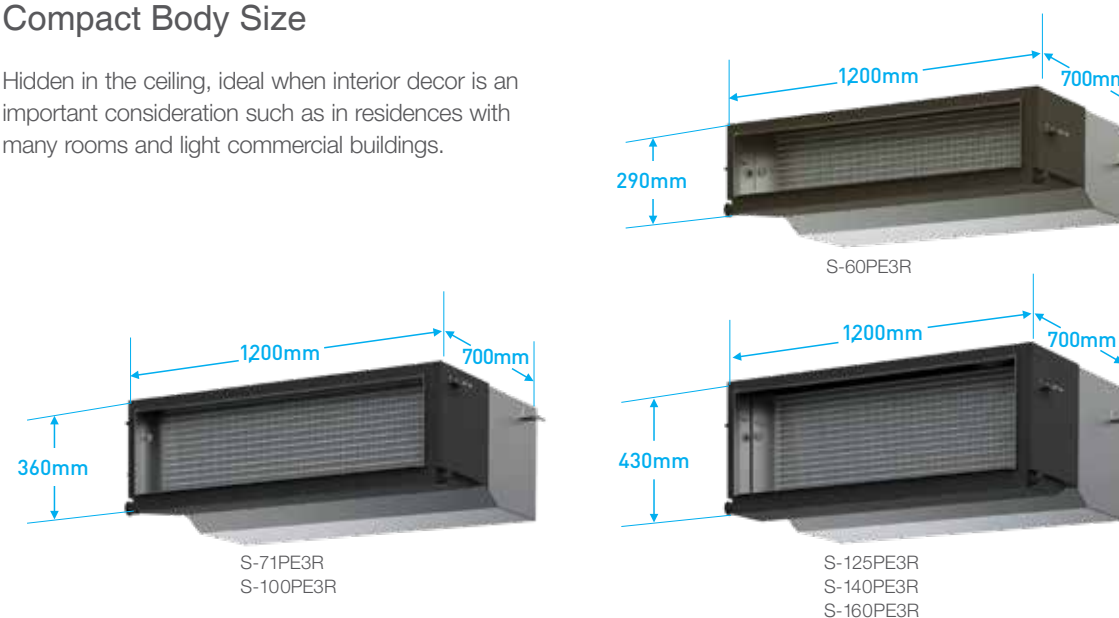

System Example

An inspection port (450 mm x 450 mm or more) is required at the control-box side of the indoor unit body.

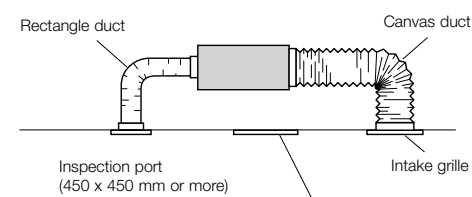

Clean air. Ducts that deliver

Testing has verified that even with three bends and a total length of up to 10m, the effectiveness of nanoe™ X is maintained right through the duct to deliver clean, fresh air where it's needed.




Bend once Bend twice Bend three times

As the experiments demonstrate, even with a total ductwork length of up to 10m, effectiveness of nanoe™ X is maintained.

Note: PF3 and PE3 (16.0kW and below) ranges only.

Cold Drafts Reduced During Heating Operation

- Accurate temperature measurement by E1/E2 sensor to reduce cold drafts during heating operation.

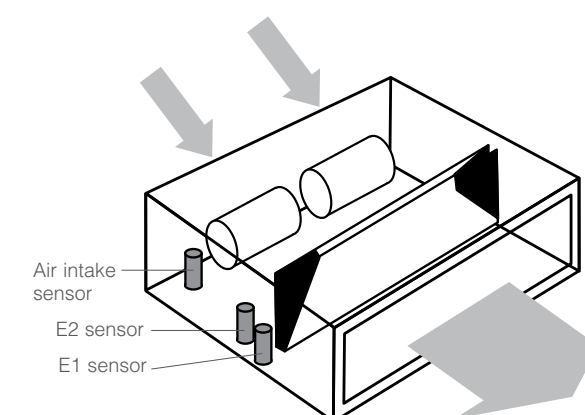

Indoor Unit: High Static Pressure Ducted

High Static Pressure Duct R32 Deluxe model



Capacity			7.1kW		10.0kW		12.5kW		14.0kW		16.0kW	
Model Name	Indoor Unit		S-71PE3R	S-100PE3R	S-100PE3R	S-125PE3R	S-125PE3R	S-140PE3R	S-140PE3R	S-160PE3R	S-160PE3R	
	Outdoor Unit		U-71PZH3R5	U-100PZH3R5	U-100PZH3R8	U-125PZH3R5	U-125PZH3R8	U-140PZH3R5	U-140PZH3R8	U-160PZH3R5	U-160PZH3R8	
Cooling capacity : Heating capacity	kW		7.1 (2.2 - 9.0) 8.0 (2.0 - 9.0)	10.0 (3.1 - 12.5) 11.2 (3.1 - 14.0)	10.0 (3.1 - 12.5) 11.2 (3.1 - 14.0)	12.5 (3.2 - 14.0) 14.0 (3.2 - 16.0)	12.5 (3.2 - 14.0) 14.0 (3.2 - 16.0)	14.0 (3.3 - 16.0) 16.0 (3.3 - 18.0)	14.0 (3.3 - 16.0) 16.0 (3.3 - 18.0)	16.0 (5.2-18.0) 18.0 (5.5-20.0)	16.0 (5.5 - 18.0) 18.0 (5.5 - 20.0)	
		BTU/h	24,200 (7,500 - 30,700) 27,300 (6,800 - 30,700)	34,100 (10,600 - 42,700) 38,200 (10,600 - 47,800)	34,100 (10,600 - 42,700) 38,200 (10,600 - 47,800)	42,700 (10,900 - 47,800) 47,800 (10,900 - 54,600)	42,700 (10,900 - 47,800) 47,800 (10,900 - 54,600)	47,800 (11,300 - 54,600) 54,600 (11,300 - 61,400)	47,800 (11,300 - 54,600) 54,600 (11,300 - 61,400)	54,600 (17,700-61,400) 61,400 (18,800-68,200)	54,600 (17,700 - 61,400) 61,400 (18,800 - 68,200)	
EER : COP	W/W		3.48 : 3.88	3.79 : 3.78	3.79 : 3.78	3.57 : 3.80	3.57 : 3.80	3.26 : 3.68	3.26 : 3.68	3.29 : 3.53	3.29 : 3.53	
COP@H2 condition	W/W		2.80	2.77	2.77	2.72	2.72	2.65	2.65	2.81	2.81	
Total power input	Cooling : Heating	kW	2.04 : 2.06	2.64 : 2.96	2.64 : 2.96	3.50 : 3.68	3.50 : 3.68	4.30 : 4.35	4.30 : 4.35	4.86 : 5.10	4.86 : 5.10	
		Hot Climate	4.68 : 4.82	5.04 : 5.10	5.04 : 5.10	4.92 : 5.17	4.92 : 5.17	4.29 : 4.69	4.29 : 4.69	4.48 : 4.43	4.48 : 4.43	
		Average Climate	4.11 : 4.22	4.46 : 4.34	4.46 : 4.34	4.49 : 4.40	4.49 : 4.40	3.92 : 4.07	3.92 : 4.07	4.03 : 3.89	4.03 : 3.89	
		Cold Climate	4.19 : 3.79	4.54 : 3.93	4.54 : 3.93	4.60 : 3.90	4.60 : 3.90	4.03 : 3.62	4.03 : 3.62	4.08 : 3.49	4.08 : 3.49	
		Hot Climate	5.15 : 4.85	5.55 : 5.15	5.55 : 5.15	5.36 : 5.23	5.36 : 5.23	4.63 : 4.74	4.63 : 4.74	5.03 : 4.43	5.03 : 4.43	
		Average Climate	5.00 : 4.52	5.47 : 4.73	5.47 : 4.73	5.55 : 4.80	5.55 : 4.80	4.60 : 4.39	4.60 : 4.39	5.22 : 4.13	5.22 : 4.13	
Commercial	Cold Climate	5.37 : 4.11	5.87 : 4.32	5.87 : 4.32	5.97 : 4.31	5.97 : 4.31	4.91 : 3.96	4.91 : 3.96	5.79 : 3.77	5.79 : 3.77		
	Indoor Unit											
Power source	Phase/Hz		1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1Phase / 50Hz	1 Phase / 50Hz	
	V		230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	
Current (rated)	Cooling : Heating		—*1	—*1	—*1	—*1	—*1	—*1	—*1	2.41 : 2.41 2.38 : 2.38	2.41 : 2.41 2.38 : 2.38	
Dimension	H x W x D	Indoor	mm	360 x 1,200 x 700	360 x 1,200 x 700	360 x 1,200 x 700	430 x 1,200 x 700	430 x 1,200 x 700	430 x 1,200 x 700	430 x 1200 x 700	430 x 1,200 x 700	
Net weight		Indoor	kg	36	37	37	41	41	50	50	50	
Air volume (H/M/L)	Cooling : Heating	L/s	501 / 434 / 367 : 501 / 434 / 367	668 / 584 / 484 : 668 / 584 / 484	668 / 584 / 484 : 668 / 584 / 484	835 / 768 / 601 : 835 / 768 / 601	835 / 768 / 601 : 835 / 768 / 601	1,002 / 835 / 701 : 1,002 / 835 / 701	1,002 / 835 / 701 : 1,002 / 835 / 701	1,002 / 835 / 701 : 1,002 / 835 / 701	1,002 / 835 / 701 : 1,002 / 835 / 701	
External static pressure		Pa	100 (10 - 150)	100 (10 - 150)	100 (10 - 150)	100 (10 - 150)	100 (10 - 150)	100 (50 - 150*)	100 (50 - 150*)	100 (Max 150)	100 (Max 150)	
Sound pressure level (H/M/L)	Cooling : Heating	dB(A)	45 / 44 / 43 : 45 / 44 / 43	48 / 46 / 44 : 48 / 46 / 44	48 / 46 / 44 : 48 / 46 / 44	49 / 47 / 45 : 49 / 47 / 45	49 / 47 / 45 : 49 / 47 / 45	51 / 49 / 47 : 51 / 49 / 47	51 / 49 / 47 : 51 / 49 / 47	51 / 49 / 47 : 51 / 49 / 47	51 / 49 / 47 : 51 / 49 / 47	
Sound power level (H/M/L)	Cooling : Heating	dB	62 / 61 / 60 : 62 / 61 / 60	70 / 68 / 66 : 70 / 68 / 66	70 / 68 / 66 : 70 / 68 / 66	71 / 69 / 67 : 71 / 69 / 67	71 / 69 / 67 : 71 / 69 / 67	73 / 71 / 69 : 73 / 71 / 69	73 / 71 / 69 : 73 / 71 / 69	73 / 71 / 69 : 73 / 71 / 69	73 / 71 / 69 : 73 / 71 / 69	
Number of fan speeds			3	3	3	3	3	3	3	3	3	
Drain piping		mm	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	
Outdoor Unit												
Power source	Phase/Hz		1 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1Phase / 50Hz	3 Phase / 50Hz	
	V		230V 240V	230V 240V	400V 415V	230V 240V	400V 415V	230V 240V	400V 415V	230V 240V	400V 415V	
Current (rated)	Cooling : Heating	A	9.85 : 9.95 9.55 : 9.65	12.8 : 14.3 12.2 : 13.7	4.25 : 4.75 4.15 : 4.60	16.7 : 17.6 16.0 : 16.8	5.60 : 5.90 5.40 : 5.70	19.7 : 19.9 18.9 : 19.1	6.60 : 6.70 6.35 : 6.45	22.5 : 23.6 21.5 : 22.6	7.80 : 8.20 7.50 : 7.90	
Dimension	H x W x D	mm	996 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	1500 x 980 x 370	1,500 x 980 x 370	
Net weight		kg	66	99	99	99	99	99	99	117	115	
Air volume	Cooling : Heating	L/s	1,018 : 1,002	1,970 : 1,803	1,970 : 1,803	2,087 : 1,870	2,087 : 1,870	2,154 : 1,937	2,154 : 1,937	2,738 : 2,738	2,738 : 2,738	
Sound pressure level (Silent mode)	Cooling : Heating	dB(A)	48 (46) : 50 (48)	52 (50) : 52 (50)	52 (50) : 52 (50)	53 (51) : 53 (51)	53 (51) : 53 (51)	54 (52) : 54 (52)	54 (52) : 54 (52)	58 : 60	58 : 60	
Sound power level (Silent mode)	Cooling : Heating	dB	64 (62) : 66 (64)	68 (66) : 68 (66)	68 (66) : 68 (66)	69 (67) : 69 (67)	69 (67) : 69 (67)	70 (68) : 70 (68)	70 (68) : 70 (68)	76 : 78	76 : 78	
Piping connections	Liquid / Gas	mm	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø19.05	Ø9.52 / Ø19.05	
Pipe length range	min. - max.	m	5 - 50	5 - 85	5 - 85	5 - 85	5 - 85	5 - 85	5 - 85	5 - 100	5 - 100	
Elevation difference (OU located lower, OU located higher)		m	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	30, 30	30, 30	
Maximum chargeless length		m	30	30	30	30	30	30	30	30	30	
Refrigerant at shipping / Additional gas amount		g	R32 1,950 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,200 / 63.5 (g/m)	R32 3,200 / 63.5 (g/m)	
Operating range	Cooling : Heating	°C	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 52 : -20 to 24	-15 to 52 : -20 to 24	

Specifications of R32 Compact Model



Capacity			6.0kW		7.1kW		10.0kW		12.5kW		14.0kW	
Model Name		Indoor Unit	S-60PE3R		S-71PE3R		S-100PE3R		S-100PE3R		S-125PE3R	
		Outdoor Unit	U-60PZ3R5		U-71PZ3R5		U-100PZ3R5		U-100PZ3R8		U-125PZ3R5	
Cooling capacity : Heating capacity		kW	6.0 (2.0 - 7.1) 6.0 (1.8 - 7.0)		7.1 (2.6 - 7.7) 7.1 (2.1 - 8.1)		10.0 (3.0 - 11.5) 10.0 (3.0 - 14.0)		10.0 (3.0 - 11.5) 10.0 (3.0 - 14.0)		12.5 (3.2 - 13.5) 12.5 (3.3 - 15.0)	
			20,500 (6,800 - 24,200) 20,500 (6,100 - 23,900)		24,200 (8,900 - 26,300) 24,200 (7,200 - 27,600)		34,100 (10,200 - 39,200) 34,100 (10,200 - 47,800)		34,100 (10,200 - 39,200) 34,100 (10,200 - 47,800)		42,700 (10,900 - 46,100) 42,700 (11,300 - 51,200)	
EER : COP		W/W	3.26 : 4.08		3.21 : 4.25		3.58 : 4.08		3.58 : 4.08		3.55 : 4.03	
COP@H2 condition		W/W	3.00		3.11		2.88		2.88		2.56	
Total power input		Cooling : Heating kW	1.84 : 1.47		2.21 : 1.67		2.79 : 2.45		2.79 : 2.45		3.52 : 3.10	
TCSPF : HSPF	Residential	Hot Climate	3.98 : 3.95		3.96 : 4.05		4.64 : 3.95		4.64 : 3.95		4.60 : 3.93	
		Average Climate	3.56 : 3.88		3.59 : 4.00		4.17 : 3.81		4.17 : 3.81		4.16 : 3.79	
		Cold Climate	3.58 : 3.59		3.63 : 3.70		4.23 : 3.55		4.23 : 3.55		4.26 : 3.47	
	Commercial	Hot Climate	4.25 : 3.83		4.22 : 3.91		4.99 : 3.90		4.99 : 3.90		4.96 : 3.84	
		Average Climate	4.16 : 3.74		4.19 : 3.83		4.98 : 3.80		4.98 : 3.80		4.88 : 3.73	
		Cold Climate	4.38 : 3.58		4.41 : 3.67		5.28 : 3.61		5.28 : 3.61		5.20 : 3.52	
Indoor Unit												
Power source		Phase/Hz	1 Phase / 50Hz		1 Phase / 50Hz		1 Phase / 50Hz		1 Phase / 50Hz		1 Phase / 50Hz	
Dimensions	H x W x D	Indoor	230V 240V		230V 240V		230V 240V		230V 240V		230V 240V	
Net weight		Indoor / Panel	mm		mm		mm		mm		mm	
Air volume (H/M/L)		Cooling : Heating	kg		kg		kg		kg		kg	
External static pressure		Pa	31		36		37		37		41	
Sound pressure level (H/M/L)		L/s	367 / 334 / 267 : 367 / 334 / 267		501 / 434 / 367 : 501 / 434 / 367		668 / 584 / 484 : 668 / 584 / 484		668 / 584 / 484 : 668 / 584 / 484		835 / 768 / 601 : 835 / 768 / 601	
Sound power level (H/M/L)		dB(A)	367 / 334 / 267 : 367 / 334 / 267		501 / 434 / 367 : 501 / 434 / 367		668 / 584 / 484 : 668 / 584 / 484		668 / 584 / 484 : 668 / 584 / 484		835 / 768 / 601 : 835 / 768 / 601	
Number of fan speeds		mm	3		3		3		3		3	
Drain piping		mm	VP-25		VP-25		VP-25		VP-25		VP-25	
Outdoor Unit												
Power source		Phase/Hz	1 Phase / 50Hz		1 Phase / 50Hz		1 Phase / 50Hz		3 Phase / 50Hz		1 Phase / 50Hz	
Current (rated)		V	230V 240V		230V 240V		230V 240V		400V 415V		230V 240V	
Dimensions	H x W x D	mm	8.50 : 6.85 8.15 : 6.60		10.3 : 8.00 9.90 : 7.65		13.9 : 12.4 13.4 : 11.9		4.45 : 3.90 4.25 : 3.70		17.0 : 15.0 16.3 : 14.4	
Net weight		kg	695 x 875 x 320		695 x 875 x 320		996 x 980 x 370		996 x 980 x 370		996 x 980 x 370	
Air volume		L/s	701 : 701		746 : 766		1,219 : 1,219		1,219 : 1,219		1,369 : 1,336	
Sound pressure level (Silent mode)		dB(A)	48 (46) : 49 (47)		49 (47) : 49 (47)		52 (50) : 52 (50)		52 (50) : 52 (50)		55 (53) : 55 (53)	
Sound power level (Silent mode)		dB	66 (64) : 67 (65)		67 (65) : 67 (65)		70 (68) : 70 (68)		70 (68) : 70 (68)		73 (71) : 73 (71)	
Piping connections		mm	Ø6.35 / Ø12.7*3		Ø6.35 / Ø15.88*4		Ø9.52 / Ø15.88		Ø9.52 / Ø15.88		Ø9.52 / Ø15.88	
Pipe length range		m	3 - 40		3 - 40		5 - 50		5 - 50		5 - 50	
Elevation difference (OU located lower, OU located higher)		m	15, 30		15, 30		15, 30		15, 30		15, 30	
Maximum chargeless length		m	30		30		30		30		30	
Refrigerant at shipping, Additional gas amount		g	R32 1,130 / 15 (g/m)		R32 1,320 / 17 (g/m)		R32 2,400 / 45 (g/m)		R32 2,400 / 45 (g/m)		R32 2,800 / 45 (g/m)	
Operating range		°C	-10 to 46 : -15 to 24		-10 to 46 : -15 to 24		-10 to 46 : -15 to 24		-10 to 46 : -15 to 24		-10 to 46 : -15 to 24	

- Notes:
- In the case of nanoe X OFF
 - In case it is necessary to indicate the air flow volume in (l/s), the value in (m³/min.) shall be multiplied by 16.7 and rounded down the decimal point.
 - AEER and ACOP classification is at 230V(400V) only in accordance with GEMS2019.
 - TCSPF, HSPF and Total Energy consumption indicate the value of average temperature zone.
 - Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions.
- *1 Outdoor power supply.
- *2 Not adjustable, refer to "Indoor Fan Performance" section of technical data.
- *3 For piping connection for 6.0kW unit, connect the gas socket tube (Ø12.7-Ø15.88) to the gas tubing side indoor unit and connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.
- *4 For piping connection for 7.1kW unit, connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.

Indoor Unit

High Static Pressure

Splittable Ducted

High static and large airflow ducted for exceptional installation flexibility.

nanoe™ X
Generator Mark3
nanoe™ X as a standard



Self-diagnosing Function



Automatic Fan Operation



Dry Mode



Automatic Restart Function



DC Motor



S-180PE4R
S-200PE4R
S-224PE4R



CZ-RTC6W*1 CZ-RTC6WBL*1 CZ-RTC6WBLW2*1 CZ-RTC6WZ2*1*2 CZ-RTC5B CZ-RTC4A CZ-CAPWFC2

*1 Black models are also available.
*2 Zone Controller for residential use.
Note: Product image not to scale.

Technical focus


- Easy installation with splittable chassis design
 - Max. 200Pa static pressure setting*1
 - Design flexibility thanks to high static pressure and large air volume
 - DC motor equipped
- Low power input
 - Accurate temperature control to reduce cold drafts during operation
 - Configurable air temperature control

*1 In case of S-224PE4R

New Ducted Model Key Factors

 Bell Shaped Keyhole for Weight Support

Part of the keyhole is newly designed with a bell shape to reduce the burden of installation. It also enables temporary attachment.




 2 Wire Connectors for Easy Installation

With only 2 wire connectors, installation has become much easier and faster.



 12 Bolts & Screws for Easy Assembly

Only 12 screws and bolts need to be attached, allowing for a shorter installation time.

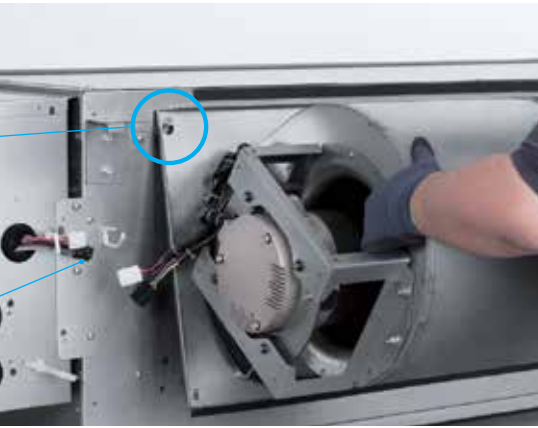

Easy Assembly Steps

Assembly takes three easy steps, even in limited spaces.



1 Install the fan to the heat exchanger and tighten the screws and bolts.

2 Assemble the connectors.

3 Install the chassis and tighten the screws and bolts.



Note: Above images are for the 22.4kW model.

Specifications of R32 Deluxe Model

Capacity			18.0kW		20.0kW		22.4kW			
Model Name		Indoor Unit	S-180PE4R		S-180PE4R		S-200PE4R		S-224PE4R	
		Outdoor Unit	U-180PZH3R5		U-180PZH3R8		U-200PZH3R8		U-224PZH3R8	
Cooling Capacity : Heating Capacity	kW		18.0 (5.5-20.0) 20.0 (5.5-22.4)		18.0 (5.5-20.0) 20.0 (5.5-22.4)		20.0 (5.7-22.4) 22.4 (5.0-25.0)		22.4 (5.7-25.0) 25.0 (4.9-28.0)	
		BTU/h	61,400 (18,800-68,200) 68,200 (18,800-76,400)		61,400 (18,800-68,200) 68,200 (18,800-76,400)		68,200 (19,400-76,400) 76,400 (17,100-85,300)		76,400 (19,400-85,300) 85,300 (16,700-95,500)	
EER : COP	W/W		3.20 : 3.75		3.20 : 3.75		3.33 : 3.67		3.09 : 3.52	
COP@H2 condition	W/W		2.9		2.9		2.7		2.6	
Total power input	Cooling : Heating	kW	5.63 : 5.33		5.63 : 5.33		6.00 : 6.10		7.24 : 7.10	
TCSPF : HSPF	Residential	Hot Climate	4.33 : 4.95		4.33 : 4.95		4.33 : 4.42		4.00 : 4.55	
		Average Climate	3.93 : 4.24		3.93 : 4.24		3.97 : 3.90		3.69 : 3.87	
		Cold Climate	4.03 : 3.72		4.03 : 3.72		4.05 : 3.45		3.79 : 3.38	
	Commercial	Hot Climate	4.73 : 4.99		4.73 : 4.99		4.65 : 4.44		4.27 : 4.68	
		Average Climate	4.76 : 4.58		4.76 : 4.58		4.71 : 4.14		4.31 : 4.29	
		Cold Climate	5.12 : 4.10		5.12 : 4.10		5.01 : 3.74		4.57 : 3.78	
Indoor Unit										
Power source	Phase/Hz		1 Phase / 50Hz		1 Phase / 50Hz		1 Phase/ 50Hz		1 Phase / 50Hz	
		V	230V 240V		230V 240V		230V 240V		230V 240V	
Current (rated)	Cooling : Heating		3.30 : 3.30 3.20 : 3.20		3.30 : 3.30 3.20 : 3.20		3.40 : 3.40 3.30 : 3.30		4.20 : 4.20 4.10 : 4.10	
Dimension	H x W x D	Indoor	mm 486 x 1456 x 916		mm 486 x 1456 x 916		mm 486 x 1456 x 916		mm 486 x 1,456 x 916	
Net Weight	Indoor	kg	82		82		83		87	
Air volume (H/M/L)	Cooling : Heating	L/s	1,202 / 1,052 / 885 : 1,202 / 1,052 / 885		1,202 / 1,052 / 885 : 1,202 / 1,052 / 885		1,202 / 1,052 / 885 : 1,202 / 1,052 / 885		1,402 / 1,202 / 985 : 1,402 / 1,202 / 985	
External static pressure		Pa	60 (100 / 150)		60 (100 / 150)		75 (120 / 180)		75 (130 / 200)	
Sound Pressure Level (H/M/L)	Cooling : Heating	dB(A)	46 / 44 / 41 : 46 / 44 / 41		46 / 44 / 41 : 46 / 44 / 41		46 / 44 / 41 : 46 / 44 / 41		47 / 45 / 42 : 47 / 45 / 42	
Sound Power Level (H/M/L)	Cooling : Heating	dB	78 / 76 / 73 : 78 / 76 / 73		78 / 76 / 73 : 78 / 76 / 73		78 / 76 / 73 : 78 / 76 / 73		79 / 77 / 74 : 79 / 77 / 74	
Number of fan speeds			3		3		3		3	
Drain piping		mm	VP-25		VP-25		VP-25		VP-25	
Outdoor										
Power source	Phase/Hz		1 Phase / 50Hz		3 Phase / 50Hz		3 Phase / 50Hz		3 Phase / 50Hz	
		V	230V 240V		400V 415V		400V 415V		400V 415V	
Current (rated)	Cooling : Heating	A	23.3 : 21.9 22.3 : 21.0		8.00 : 7.50 7.70 : 7.25		8.45 : 8.60 8.15 : 8.30		9.95 : 9.75 9.60 : 9.40	
Dimension	H x W x D	mm	1,500 x 980 x 370		1,500 x 980 x 370		1,500 x 980 x 370		1,500 x 980 x 370	
Net weight		kg	117		115		127		127	
Air volume	Cooling : Heating	L/s	2,738 : 2,738		2,738 : 2,738		2,672 : 2,672		2,672 : 2,672	
Sound Pressure Level (Silent mode)	Cooling : Heating	dB(A)	58 : 60		58 : 60		58 : 62		58 : 62	
Sound Power Level (Silent mode)	Cooling : Heating	dB	76 : 78		76 : 78		77 : 81		77 : 81	
Piping Connection	Liquid / Gas	mm	Ø9.52 / Ø19.05		Ø9.52 / Ø19.05		Ø12.7 / Ø19.05		Ø12.7 / Ø19.05	
Pipe Length range	min. - max.	m	5 - 100		5 - 100		5 - 100		5 - 100	
Elevation Difference (OU located lower, OU located higher)		m	30, 30		30, 30		30, 30		30, 30	
Maximum Chargeless length		m	30		30		30		30	
Refrigerant at shipping / Additional gas amount		g	R32 3,400 / 76.0 (g/m)		R32 3,400 / 76.0 (g/m)		R32 5,200 / 108.0 (g/m)		R32 5,200 / 80 (g/m)	
Operation Ranges	Cooling : Heating	℃	-15 to 46 : -20 to 24		-15 to 52 : -20 to 24		-15 to 52 : -20 to 24		-15 to 46 : -20 to 24	

Notes:
• In the case of nanoe X OFF
• In case it is necessary to indicate the air flow volume in (l/s), the value in (m³/min.) shall be multiplied by 16.7 and rounded down the decimal point.
• AEER and ACOP classification is at 230V(400V) only in accordance with GEMS2019.
• TCSPF, HSPF and Total Energy consumption indicate the value of average temperature zone.
• Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
*1 For U-160PZH3R8 *2 For U-180PZH3R8

Indoor Unit

High Static Pressure

Adaptive Ducted

Control all aspects of your environment with exceptional performance and quiet operation. Vertical installation flexibility offers the perfect solution when ceiling heights are restricted.

nanoe™ X
Generator Mark2
nanoe™ X as a standard




Technical focus

- Space saving 250mm height
- DC fan motor for variable external static pressure control
- Easy to install and maintain
- Accurate temperature control to reduce cold drafts during operation
- Configurable air temperature control

Powerful 150Pa ESP in an industry-leading vertical installation

Our groundbreaking drain pan design delivers a ducted unit that can be mounted horizontally or vertically without the need for alterations*1. Even when ceiling space for ductwork is limited, the slim design and powerful 150Pa static pressure allow for discrete placement away from rooms for total installation flexibility.



*1 Please refer to Installation Manual for full details.

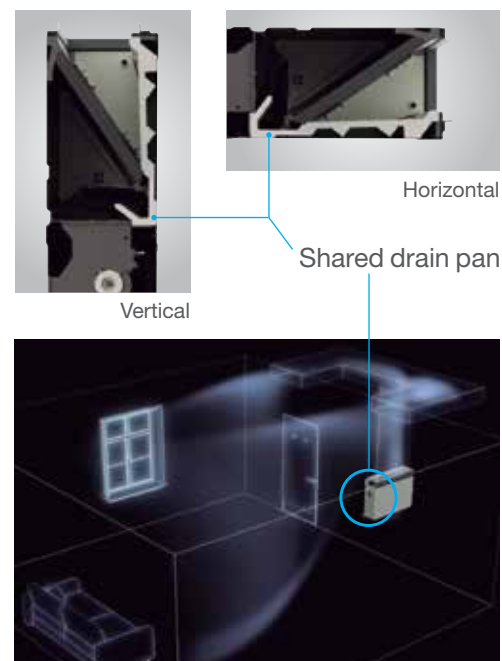

Drain pan is shared in both cases horizontal and vertical installation.

Selectable air inlet position


A removable panel allows air inlet position to be adjusted to enable rear or bottom entry, depending on ductwork installation.

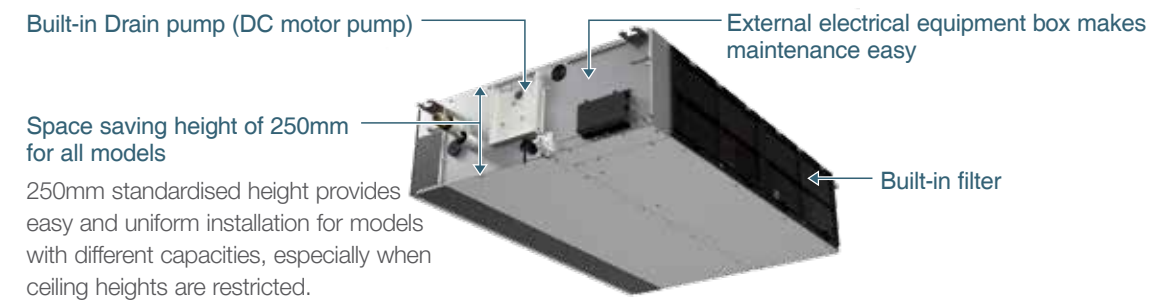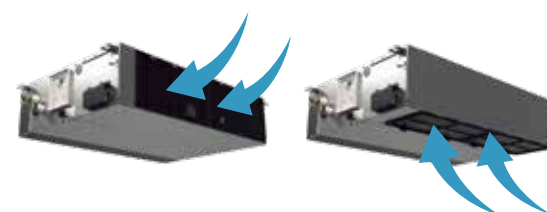

Top-class noise level performance

A proprietary improved casing design realises an even smoother airflow and low noise (22dB - 29dB) operation while effortlessly maintaining enough pressure*2 to deliver quiet comfort ideal for hotel and guest rooms.


*2 Operating at 50Pa static pressure in Low fan mode.

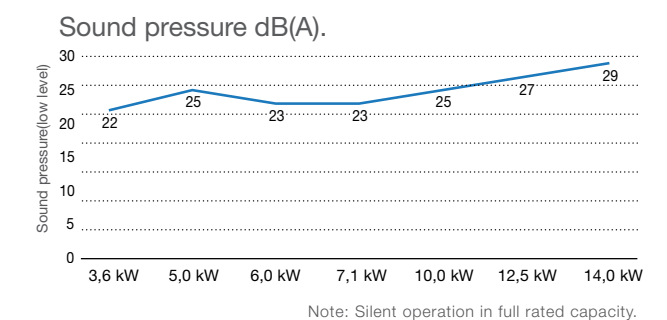

Superior air quality

The new ducted models are equipped with nanoe™ X as standard, a unique air quality improvement technology producing twice the amount of hydroxyl radicals compared to previous generations. Combined with the strong static pressure this ensures pristine nanoe™ X air travels unaffected even through multiple duct shapes at lengths of 10m, as well as making them ideal for use in larger spaces.

Note: PF3 and PE3 (16.0kW and below) ranges only.

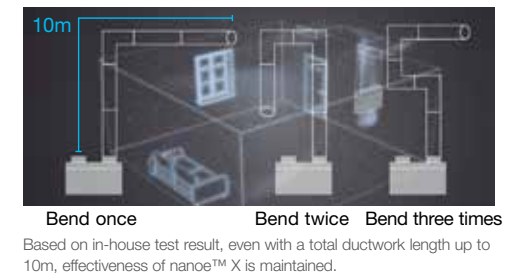

Indoor Unit: High Static Pressure Adaptive Ducted

Specifications of R32 Deluxe Model



Capacity			6.8kW	9.5kW	12.1kW	13.4kW			
Model Name	Indoor Unit	S-6071PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E		
	Outdoor Unit	U-71PZH3R5	U-100PZH3R5	U-100PZH3R8	U-125PZH3R5	U-125PZH3R8	U-140PZH3R5	U-140PZH3R8	
Cooling capacity : Heating capacity	kW	6.8 (2.2 - 7.8) 7.5 (2.0 - 9.0)	9.5 (3.1 - 11.4) 10.8 (3.1 - 13.5)	9.5 (3.1 - 11.4) 10.8 (3.1 - 13.5)	12.1 (3.2 - 13.6) 13.5 (3.2 - 15.4)	12.1 (3.2 - 13.6) 13.5 (3.2 - 15.4)	13.4 (3.3 - 15.3) 15.5 (3.3 - 17.4)	13.4 (3.3 - 15.3) 15.5 (3.3 - 17.4)	
		BTU/h	23,200 (7,500 - 26,600) 25,600 (6,800 - 30,700)	32,400 (10,600 - 38,900) 36,800 (10,600 - 46,100)	32,400 (10,600 - 38,900) 36,800 (10,600 - 46,100)	41,300 (10,900 - 46,400) 46,100 (10,900 - 52,500)	41,300 (10,900 - 46,400) 46,100 (10,900 - 52,500)	45,700 (11,300 - 52,200) 52,900 (11,300 - 59,400)	45,700 (11,300 - 52,200) 52,900 (11,300 - 59,400)
EER : COP	W/W	3.74 : 4.03	4.17 : 3.97	4.17 : 3.97	3.58 : 3.46	3.58 : 3.46	3.38 : 3.44	3.38 : 3.44	
COP@H2 condition	W/W	2.96	2.90	2.90	2.60	2.60	2.68	2.68	
Total power input	Cooling : Heating	kW	1.82 : 1.86	2.28 : 2.72	2.28 : 2.72	3.38 : 3.90	3.38 : 3.90	3.96 : 4.51	3.96 : 4.51
		Hot Climate	5.40 : 5.49	5.93 : 5.57	5.93 : 5.57	5.37 : 5.32	5.37 : 5.32	4.98 : 4.97	4.98 : 4.97
		Average Climate	4.75 : 4.67	5.21 : 4.70	5.21 : 4.70	4.86 : 4.32	4.86 : 4.32	4.55 : 4.15	4.55 : 4.15
	Residential	Cold Climate	4.82 : 4.13	5.29 : 4.21	5.29 : 4.21	5.03 : 3.79	5.03 : 3.79	4.72 : 3.65	4.72 : 3.65
		Hot Climate	6.02 : 5.54	6.59 : 5.61	6.59 : 5.61	5.95 : 5.44	5.95 : 5.44	5.49 : 5.05	5.49 : 5.05
		Average Climate	6.25 : 5.08	6.75 : 5.13	6.75 : 5.13	6.30 : 4.87	6.30 : 4.87	5.74 : 4.58	5.74 : 4.58
Commercial	Cold Climate	6.76 : 4.56	7.28 : 4.65	7.28 : 4.65	6.88 : 4.31	6.88 : 4.31	6.25 : 4.08	6.25 : 4.08	
	Indoor Unit								
Power source	Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	
	V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	
Dimension	H x W x D	Indoor	mm	250 x 1,000 x 730	250 x 1,400 x 730	250 x 1,400 x 730	250 X 1,400 X 730	250 X 1,400 X 730	
Net weight	Indoor	kg	30	39	39	39	39	39	
Air volume (H/M/L)	Cooling : Heating	L/s	350 / 317 / 250 : 350 / 317 / 250	534 / 434 / 350 : 534 / 434 / 350	534 / 434 / 350 : 534 / 434 / 350	567 / 484 / 384 : 567 / 484 / 384	601 / 534 / 417 : 601 / 534 / 417	601 / 534 / 417 : 601 / 534 / 417	
External static pressure	Pa	30 (10 - 150)		40 (10 - 150)	40 (10 - 150)	50 (10 - 150)	50 (10 - 150)	50 (10 - 150)	
Sound pressure level (H/M/L)	Cooling : Heating	dB(A)	30 / 26 / 23 : 30 / 26 / 23	33 / 29 / 25 : 33 / 29 / 25	33 / 29 / 25 : 33 / 29 / 25	35 / 31 / 27 : 35 / 31 / 27	39 / 35 / 29 : 39 / 35 / 29	39 / 35 / 29 : 39 / 35 / 29	
Sound power level (H/M/L)	Cooling : Heating	dB	53 / 49 / 46 : 53 / 49 / 46	56 / 52 / 48 : 56 / 52 / 48	56 / 52 / 48 : 56 / 52 / 48	58 / 54 / 50 : 58 / 54 / 50	62 / 58 / 52 : 62 / 58 / 52	62 / 58 / 52 : 62 / 58 / 52	
Number of fan speeds		5	5	5	5	5	5	5	
Drain piping	mm	VP-20		VP-20	VP-20	VP-20	VP-20	VP-20	
Outdoor Unit									
Power source	Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	
	V	230V 240V	230V 240V	400V 415V	230V 240V	400V 415V	230V 240V	400V 415V	
Current (rated)	Cooling : Heating	A	8.60 : 8.60 8.25 : 8.35	10.8 : 12.7 10.3 : 12.2	3.60 : 4.30 3.50 : 4.15	15.8 : 18.2 15.1 : 17.5	18.7 : 21.1 17.9 : 20.2	6.30 : 7.15 6.05 : 6.90	
Dimensions	H x W x D	mm	996 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	
Net weight		kg	66	99	99	99	99	99	
Air volume	Cooling : Heating	L/s	1,018 : 1,002	1,970 : 1,803	1,970 : 1,803	2,087 : 1,870	2,087 : 1,870	2,154 : 1,937	
Sound pressure level (Silent mode)	Cooling : Heating	dB(A)	48 (48) : 50 (48)	52 (50) : 52 (50)	52 (50) : 52 (50)	53 (51) : 53 (51)	53 (51) : 53 (51)	54 (52) : 54 (52)	
Sound power level (Silent mode)	Cooling : Heating	dB	64 (62) : 66 (64)	68 (66) : 68 (66)	68 (66) : 68 (66)	69 (67) : 69 (67)	70 (68) : 70 (68)	70 (68) : 70 (68)	
Piping connections	Liquid / Gas	mm	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	
Pipe length range	min. - max.	m	5 - 50	5 - 85	5 - 85	5 - 85	5 - 85	5 - 85	
Elevation difference (OU located lower, OU located higher)	m	15, 30		15, 30	15, 30	15, 30	15, 30	15, 30	
Maximum chargeless length	m	30		30	30	30	30	30	
Refrigerant at shipping / Additional gas amount	g	R32 1,950 / 45 (g/m)		R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	
Operation ranges	Cooling : Heating	°C	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	

- Notes:
- In the case of standard installation (Horizontal installation in the ceiling, rear side air intake)
 - In the case of nance X OFF
 - In case it is necessary to indicate the air flow volume in (l/s), the value in (m³/min.) shall be multiplied by 16.7 and rounded down the decimal point.
 - AEER and ACOP classification is at 230V(400V) only in accordance with GEMS2019.
 - TCSPF, HSPF and Total Energy consumption indicate the value of average temperature zone.
 - Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
 - H : High at setting 5 stage (Level 5), M : Middle at setting 5 stage (Level 3), L : Low at setting 5 stage (Level 1) Noise of L is indicated by the values at FAN mode.

*1 For piping connection for 6.0kW unit, connect the gas socket tube (Ø12.7-Ø15.88) to the gas tubing side indoor unit and connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.

*2 For piping connection for 7.1kW unit, connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.

Specifications of R32 Compact Model



Capacity			3.4kW	4.6kW	5.7kW	6.8kW	9.5kW	12.1kW	13.4kW
Model Name	Indoor Unit		S-3650PF3E	S-3650PF3E	S-6071PF3E	S-6071PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E
	Outdoor Unit		U-36PZ3R5	U-50PZ3R5	U-71PZ3R5	U-100PZ3R5	U-100PZ3R8	U-125PZ3R5	U-140PZ3R8
Cooling capacity : Heating capacity	kW		3.4 (1.3 - 4.0) 3.6 (1.3 - 4.6)	4.6 (1.5 - 5.3) 5.0 (1.5 - 5.9)	5.7 (2.0 - 6.3) 5.7 (1.8 - 7.0)	6.8 (2.6 - 7.7) 6.8 (2.1 - 8.1)	9.5 (3.0 - 11.4) 9.5 (3.0 - 13.5)	9.5 (3.0 - 11.4) 9.5 (3.0 - 13.5)	12.1 (3.2 - 13.5) 12.1 (3.3 - 15.0)
		BTU/h	11,600 (4,400 - 13,600) 12,300 (4,400 - 15,700)	15,700 (5,100 - 18,100) 17,100 (5,100 - 20,100)	19,400 (6,800 - 21,500) 19,400 (6,100 - 23,900)	23,200 (8,900 - 26,300) 23,200 (7,200 - 27,600)	32,400 (10,200 - 38,900) 32,400 (10,200 - 46,100)	32,400 (10,200 - 38,900) 32,400 (10,200 - 46,100)	41,300 (10,900 - 46,100) 41,300 (11,300 - 51,200)
EER : COP	W/W		3.78 : 4.29	3.19 : 3.62	3.54 : 4.04	3.18 : 4.00	3.57 : 4.09	3.40 : 3.56	3.16 : 3.76
COP@H2 condition	W/W		3.09	3.33	3.09	2.84	2.88	2.82	2.73
Total power input	Cooling : Heating	kW	0.900 : 0.840	1.44 : 1.38	1.61 : 1.41	2.14 : 1.70	2.66 : 2.32	2.66 : 2.32	3.56 : 3.40
TCSPF : HSPF	Residential	Hot Climate	5.11 : 5.05	4.67 : 5.09	5.19 : 5.76	4.57 : 5.26	5.24 : 5.04	5.24 : 5.04	4.90 : 5.01
		Average Climate	4.36 : 4.57	4.23 : 4.31	4.67 : 4.83	4.23 : 4.42	4.52 : 4.52	4.52 : 4.52	4.42 : 4.21
		Cold Climate	4.36 : 4.06	4.29 : 3.79	4.82 : 4.13	4.34 : 3.82	4.62 : 4.06	4.62 : 4.06	4.52 : 3.68
	Commercial	Hot Climate	5.77 : 5.01	5.22 : 5.13	5.69 : 5.77	5.01 : 5.33	5.87 : 4.99	5.87 : 4.99	5.40 : 5.06
		Average Climate	5.84 : 4.72	5.96 : 4.69	6.00 : 5.23	5.53 : 4.86	5.91 : 4.68	5.91 : 4.68	5.81 : 4.60
		Cold Climate	6.41 : 4.31	6.69 : 4.19	6.54 : 4.60	6.11 : 4.27	6.49 : 4.31	6.49 : 4.31	6.36 : 4.10
Indoor Unit									
Power source	Phase/Hz		1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
Dimensions	H x W x D	Indoor	mm	250 x 800 x 730	250 x 800 x 730	250 x 1,000 x 730	250 x 1,000 x 730	250 x 1,400 x 730	250 x 1,400 x 730
Net weight		Indoor	kg	25	25	30	30	39	39
Air volume (H/M/L)	Cooling : Heating	L/s	233 / 217 / 167 : 233 / 217 / 167	267 / 250 / 200 : 267 / 250 / 200	350 / 317 / 250 : 350 / 317 / 250	350 / 317 / 250 : 350 / 317 / 250	534 / 434 / 350 : 534 / 434 / 350	534 / 434 / 350 : 534 / 434 / 350	567 / 484 / 384 : 567 / 484 / 384
External static pressure	Pa		30 (10 - 150)	30 (10 - 150)	30 (10 - 150)	30 (10 - 150)	40 (10 - 150)	40 (10 - 150)	50 (10 - 150)
Sound pressure level (H/M/L)	Cooling : Heating	dB(A)	30 / 27 / 22 : 30 / 27 / 22	34 / 30 / 25 : 34 / 30 / 25	30 / 26 / 23 : 30 / 26 / 23	30 / 26 / 23 : 30 / 26 / 23	33 / 29 / 25 : 33 / 29 / 25	33 / 29 / 25 : 33 / 29 / 25	35 / 31 / 27 : 35 / 31 / 27
Sound power level (H/M/L)	Cooling : Heating	dB	53 / 50 / 45 : 53 / 50 / 45	57 / 53 / 48 : 57 / 53 / 48	53 / 49 / 46 : 53 / 49 / 46	53 / 49 / 46 : 53 / 49 / 46	56 / 52 / 48 : 56 / 52 / 48	56 / 52 / 48 : 56 / 52 / 48	58 / 54 / 50 : 58 / 54 / 50
Number of fan speeds			5	5	5	5	5	5	5
Drain piping	mm		VP-20	VP-20	VP-20	VP-20	VP-20	VP-20	VP-20
Outdoor Unit									
Power source	Phase/Hz		1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz
	V		230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	400V 415V	230V 240V
Current (rated)	Cooling : Heating	A	4.00 : 3.80 3.85 : 3.55	6.40 : 6.20 6.10 : 5.95	7.15 : 6.25 6.85 : 6.00	9.50 : 7.55 9.10 : 7.25	12.7 : 11.1 12.2 : 10.6	4.20 : 3.70 4.05 : 3.55	16.5 : 15.7 15.8 : 15.1
Dimensions	H x W x D	mm	619 x 824 x 299	619 x 824 x 299	695 x 875 x 320	695 x 875 x 320	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net weight		kg	31	35	43	50	83	83	87
Air volume	Cooling : Heating	L/s	561 : 567	546 : 532	701 : 701	746 : 766	1,219 : 1,219	1,219 : 1,219	1,369 : 1,336
Sound pressure level (Silent mode)	Cooling : Heating	dB(A)	48 (46) : 49 (47)	48 (46) : 49 (47)	48 (46) : 49 (47)	49 (47) : 49 (47)	52 (50) : 52 (50)	52 (50) : 52 (50)	55 (53) : 55 (53)
Sound power level (Silent mode)	Cooling : Heating	dB	66 (64) : 67 (65)	66 (64) : 67 (65)	66 (64) : 67 (65)	67 (65) : 67 (65)	70 (68) : 70 (68)	70 (68) : 70 (68)	73 (71) : 73 (71)
Piping connections	Liquid / Gas	mm	Ø6.35 / Ø12.7	Ø6.35 / Ø12.7	Ø6.35 / Ø12.7 ^{*1}	Ø6.35 / Ø15.88 ^{*2}	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
Pipe length range	min. - max.	m	3 - 20	3 - 30	3 - 40	3 - 40	5 - 50	5 - 50	5 - 50
Elevation difference (OU located lower, OU located higher)	m		15, 15	15, 15	15, 30	15, 30	15, 30	15, 30	15, 30
Maximum chargeless length	m		7.5	10	30	30	30	30	30
Refrigerant at shipping, Additional gas amount	g		R32 870 / 10 (g/m)	R32 1,140 / 15 (g/m)	R32 1,130 / 15 (g/m)	R32 1,320 / 17 (g/m)	R32 2,400 / 45 (g/m)	R32 2,400 / 45 (g/m)	R32 2,800 / 45 (g/m)
Operating range	Cooling : Heating	°C	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24

Indoor Unit

4-WAY Cassette

Featuring uniform cooling, easy installation, and with a sleek exterior, this unit is the perfect match for all commercial applications.

nanoe™ X
Generator Mark1
nanoe™ X as a standard

- 
Self-diagnosing Function
- 
Automatic Fan Operation
- 
Dry Mode
- 
Intelligent Auto Swing
- 
Automatic Restart Function
- 
Auto Swing (Auto Flap Control)
- 
Built-in Drain Pump
- 
DC Motor



S-6071PU3E
S-1014PU3E

AIR INTAKE CHAMBER



1 Air intake flange (ø100) (field supply).
2 Air intake box CZ-ATU2*1 for Air intake plenum.
3 Air intake plenum CZ-FDU3

*1 When using Air intake box (CZ-ATU2), Air intake plenum (CZ-FDU3) required.

PANEL (CZ-KPU3H/3A)



Normal Panel : CZ-KPU3H

NEW



CZ-RTC6W*2 CZ-RTC5B CZ-RTC4A CZ-CAPWFC2
CZ-RTC6WBL*2
CZ-RTC6WBLW2*2


*2 Black models are also available.
Note: Product image not to scale.

Technical focus

- Compact design
 - Low sound levels
 - DC fan motor for increased efficiency
 - Powerful drain pump gives 850 mm lift
- Lightweight design
 - Fresh air knockout
 - Branch duct connection
 - Optional air-intake plenum CZ-FDU3


360° Wide & Comfortable Airflow

Our design features wide-angle outlets and flaps that were designed through expert mechanics and prototype tests. Air from the centre is sent farther and the air blown out of the larger, side flaps spreads throughout the room. The air comes from all for sides of the unit and expands gently in a circle centred on the indoor unit.

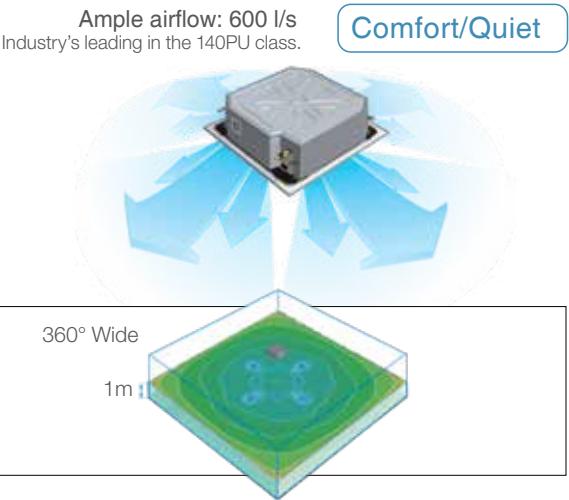


Wide Flap

Adding a sub flap and widening the main flap have reduced turbulence and increased airflow. Also, setting the jetting port at a wider angle allows the airflow to reach the corners of the room more quickly.

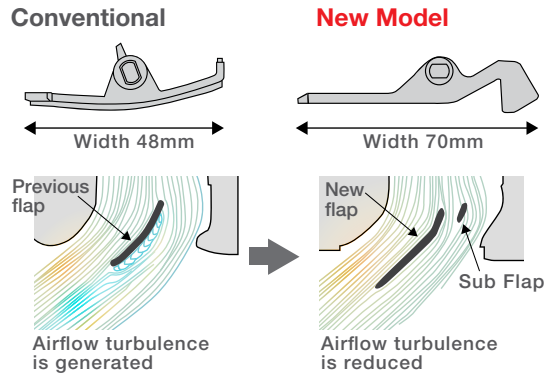


3D Turbo Fan

Using a twisted 3D blade made the unit slimmer and more compact, while also increasing the airflow. A 5-Speed mode allows the airflow to be adjusted in 5 steps to suit the situation.

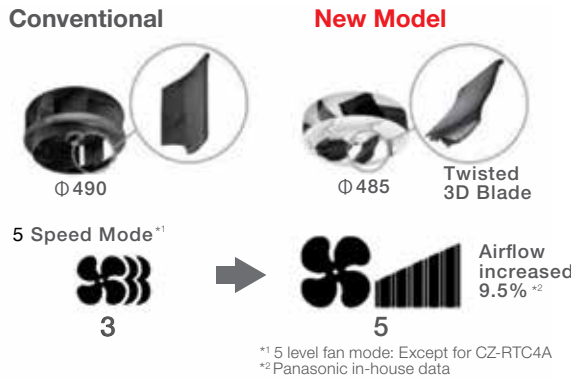

High-Ceiling Installation (Up to 5 m for 10.0kW+ models)

The units can be installed in rooms with high ceilings, where they provide ample floor-level heating in the winter. (See ceiling height guidelines below.)

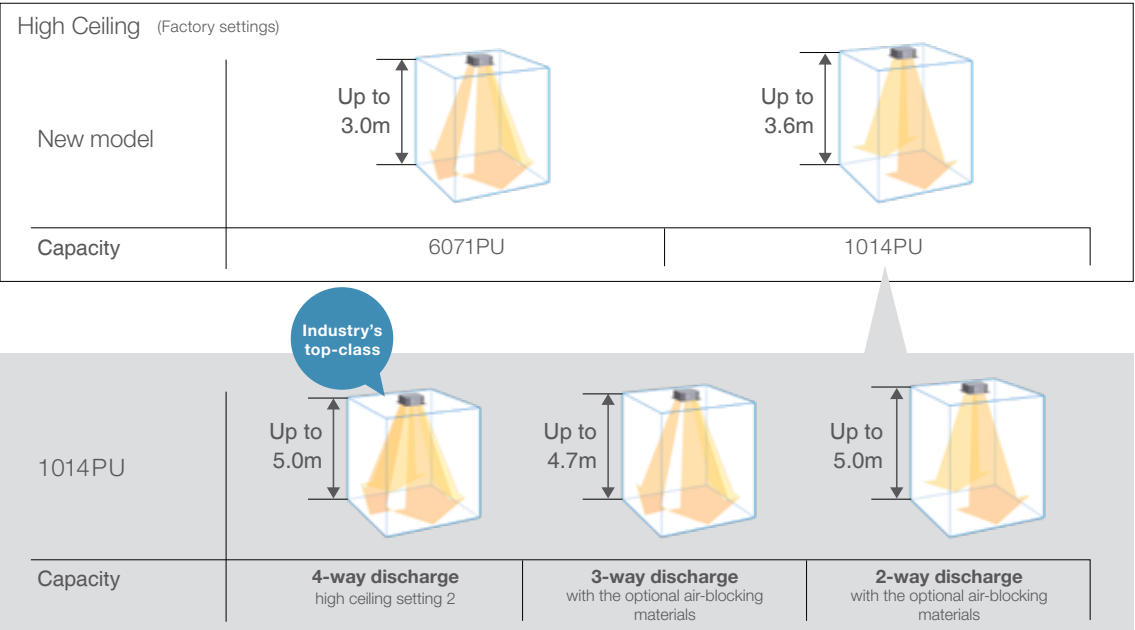

Ceiling height guidelines

Indoor unit	*3 settings			3-way discharge (optional air-blocking materials)	2-way discharge (optional air-blocking materials) *4
	4-way discharge	Standard (Factory setting)	High ceiling setting 1		
6071PU	3.0	3.0	3.3	3.8	4.2
1014PU	3.6	3.6	4.3	4.7	5.0

*3 When using the unit in a configuration other than the factory settings, it is necessary to make settings on site to increase airflow.

*4 Use air-blocking materials (CZ-CFU3) to completely block two discharge outlets for 2-way airflow.

Indoor Unit: 4-WAY Cassette

Specifications of R32 Deluxe Model



Capacity			7.1kW		10.0kW		12.5kW		14.0kW	
Model Name	Indoor Unit		S-6071PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E
	Outdoor Unit		U-71PZH3R5	U-100PZH3R5	U-100PZH3R8	U-125PZH3R5	U-125PZH3R8	U-140PZH3R5	U-140PZH3R8	
	Panel		Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	
Cooling capacity	kW		7.1 (2.2 - 9.0)	10.0 (3.1 - 12.5)	10.0 (3.1 - 12.5)	12.5 (3.2 - 14.0)	12.5 (3.2 - 14.0)	14.0 (3.3 - 16.0)	14.0 (3.3 - 16.0)	
Heating capacity			8.0 (2.0 - 9.0)	11.2 (3.1 - 14.0)	11.2 (3.1 - 14.0)	14.0 (3.2 - 16.0)	14.0 (3.2 - 16.0)	16.0 (3.3 - 18.0)	16.0 (3.3 - 18.0)	
EER : COP	COP@H2 condition	W/W	4.06 : 4.30	4.41 : 5.00	4.41 : 5.00	3.80 : 4.61	3.80 : 4.61	3.41 : 4.30	3.41 : 4.30	
Total power input	kW	Cooling : Heating	2.60	2.90	2.90	2.70	2.70	2.50	2.50	
TCSPF : HSPF	Residential	Hot Climate	1.75 : 1.86	2.27 : 2.24	2.27 : 2.24	3.29 : 3.04	3.29 : 3.04	4.11 : 3.72	4.11 : 3.72	
		Average Climate	5.86 : 5.68	6.24 : 5.68	6.24 : 5.68	5.71 : 5.63	5.71 : 5.63	5.35 : 5.60	5.35 : 5.60	
		Cold Climate	5.10 : 4.77	5.53 : 5.15	5.53 : 5.15	5.20 : 4.88	5.20 : 4.88	4.93 : 4.71	4.93 : 4.71	
	Commercial	Cold Climate	5.16 : 4.11	5.64 : 4.63	5.64 : 4.63	5.39 : 4.28	5.39 : 4.28	5.17 : 4.01	5.17 : 4.01	
		Hot Climate	6.58 : 5.81	6.96 : 5.66	6.96 : 5.66	6.36 : 5.74	6.36 : 5.74	5.96 : 5.76	5.96 : 5.76	
		Average Climate	6.83 : 5.30	7.09 : 5.35	7.09 : 5.35	6.72 : 5.32	6.72 : 5.32	6.43 : 5.25	6.43 : 5.25	
Cold Climate	7.41 : 4.63	7.69 : 4.92	7.69 : 4.92	7.37 : 4.72	7.37 : 4.72	7.10 : 4.53	7.10 : 4.53			
Indoor Unit										
Power source	Phase/Hz		1 Phase / 50Hz	1 Phase/ 50Hz	1 Phase/ 50Hz	1 Phase/ 50Hz	1 Phase/ 50Hz	1 Phase/ 50Hz	1 Phase/ 50Hz	
	V		230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	
Dimensions	H x W x D	Indoor	mm	256 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	
		Panel	mm	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	
Net weight	Indoor / Panel		kg	20 / 5	25 / 5	25 / 5	25 / 5	25 / 5	25 / 5	
Air volume (H/M/L)	Cooling : Heating		L/s	367 / 267 / 217 : 367 / 267 / 217	601 / 434 / 300 : 601 / 434 / 300	601 / 434 / 300 : 601 / 434 / 300	617 / 450 / 317 : 617 / 450 / 317	617 / 450 / 317 : 617 / 450 / 317	634 / 484 / 334 : 634 / 484 / 334	
Sound pressure level (H/M/L)	Cooling : Heating		dB(A)	37 / 31 / 28 : 37 / 31 / 28	45 / 38 / 32 : 45 / 38 / 32	45 / 38 / 32 : 45 / 38 / 32	46 / 39 / 33 : 46 / 39 / 33	46 / 39 / 33 : 46 / 39 / 33	47 / 40 / 34 : 47 / 40 / 34	
Sound power level (H/M/L)	Cooling : Heating		dB	52 / 46 / 43 : 52 / 46 / 43	60 / 53 / 47 : 60 / 53 / 47	60 / 53 / 47 : 60 / 53 / 47	61 / 54 / 48 : 61 / 54 / 48	61 / 54 / 48 : 61 / 54 / 48	62 / 55 / 49 : 62 / 55 / 49	
Number of fan speeds				5	5	5	5	5	5	
Drain pipe size			mm	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	
Outdoor Unit										
Power source	Phase/Hz		1 Phase / 50Hz	1 Phase/ 50Hz	3 Phase / 50Hz	1 Phase/ 50Hz	3 Phase/ 50Hz	1 Phase/ 50Hz	3 Phase/ 50Hz	
	V		230V 240V	230V 240V	400V 415V	230V 240V	400V 415V	230V 240V	400V 415V	
Current (rated)	Cooling : Heating		A	8.25 : 8.70 7.95 : 8.35	10.7 : 10.6 10.3 : 10.1	3.60 : 3.55 3.45 : 3.40	15.4 : 14.2 14.7 : 13.6	5.15 : 4.80 5.00 : 4.65	19.2 : 17.4 18.4 : 16.7	
Dimension	H x W x D		mm	996 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	
Net weight			kg	66	99	99	99	99	99	
Air volume	Cooling : Heating		m³/min	1,018 : 1.002	1.970 : 1.803	1,970 : 1,803	2,087 : 1,870	2,087 : 1,870	2,154 : 1.937	
Sound pressure level (Silent mode)	Cooling : Heating		dB(A)	48 (46) : 50 (48)	52 (50) : 52 (50)	52 (50) : 52 (50)	53 (51) : 53 (51)	53 (51) : 53 (51)	54 (52) : 54 (52)	
Sound power level (Silent mode)	Cooling : Heating		dB	64 (62) : 66 (64)	68 (66) : 68 (66)	68 (66) : 68 (66)	69 (67) : 69 (67)	69 (67) : 69 (67)	70 (68) : 70 (68)	
Piping connections	Liquid / Gas		mm	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	
Pipe length range	min. - max.		m	5 - 50	5 - 85	5 - 85	5 - 85	5 - 85	5 - 85	
Elevation difference (OU located lower, OU located higher)			m	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	
Maximum chargeless length			m	30	30	30	30	30	30	
Refrigerant at shipping, Additional gas amount			g	R32 1,950 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	
Operating range	Cooling : Heating		°C	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	

- Notes:
- In the case of nanoe X OFF
 - In case it is necessary to indicate the air flow volume in (l/s), the value in (m³/min.) shall be multiplied by 16.7 and rounded down the decimal point.
 - AER and ACOP classification is at 230V(400V) only in accordance with GEMS2019.
 - TCSPF, HSPF and Total Energy consumption indicate the value of average temperature zone.
 - Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
 - H:High at setting 5 stage (Level 5), M:Middle at setting 5 stage (Level 3), L:Low at setting 5 stage (Level 1)

*1 For piping connection for 6.0kW unit, connect the gas socket tube (Ø12.7-Ø15.88) to the gas tubing side indoor unit and connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.

*2 For piping connection for 7.1kW unit, connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.

Specifications of R32 Compact Model





Capacity			6.0kW	7.1kW	10.0kW	12.5kW	14.0kW		
Model Name	Indoor Unit		S-6071PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E		
	Outdoor Unit		U-60PZ3R5	U-71PZ3R5	U-100PZ3R5	U-100PZ3R8	U-125PZ3R5		
	Panel		Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A		
Cooling capacity Heating capacity	kW		6.0 (2.0- 7.1) 6.0 (1.8 - 7.0)	7.1 (2.6 - 7.7) 7.1 (2.1 - 8.1)	10.0 (3.0 - 11.5) 10.0 (3.0 - 14.0)	10.0 (3.0-11.5) 12.5 (3.2 - 13.5) 12.5 (3.3 - 15.0)	12.5 (3.2 - 13.5) 12.5 (3.2 - 15.0)	14.0 (3.3 - 15.0) 14.0 (3.4 - 16.0)	14.0 (3.3 - 15.0) 14.0 (3.4 - 16.0)
		BTU/h	20,500 (6,800 - 24,200) 20,500 (6,100 - 23,900)	24,200 (8,900 - 26,300) 24,200 (7,200 - 27,600)	34,100 (10,200 - 39,200) 34,100 (10,200 - 47,800)	34,100 (10,200-39,200) 34,100 (10,200 - 47,800)	42,700 (10,900 - 46,100) 42,700 (11,300 - 51,200)	42,700 (10,900 - 46,100) 42,700 (11,300 - 51,200)	47,800 (11,300 - 51,200) 47,800 (11,600 - 54,600)
EER : COP	W/W		3.82 : 4.48	3.40 : 4.23	3.82 : 4.93	3.82 : 4.93	3.58 : 4.43	3.58 : 4.43	3.23 : 4.18
COP@H2 condition	W/W		3.19	3.30	3.27	3.27	2.88	2.88	2.70
Total power input	Cooling : Heating	kW	1.57 : 1.34	2.09 : 1.68	2.62 : 2.03	2.62 : 2.03	3.49 : 2.82	3.49 : 2.82	4.34 : 3.35
TCSPF : HSPF	Residential	Hot Climate	5.65 : 6.69	5.12 : 5.75	5.78 : 5.43	5.78 : 5.43	5.27 : 5.56	5.27 : 5.56	4.94 : 5.52
		Average Climate	5.04 : 5.44	4.64 : 4.85	5.00 : 5.06	5.00 : 5.06	4.73 : 4.87	4.73 : 4.87	4.54 : 4.72
		Cold Climate	5.23 : 4.45	4.83 : 4.14	5.10 : 4.62	5.10 : 4.62	4.85 : 4.17	4.85 : 4.17	4.69 : 3.97
	Commercial	Hot Climate	6.17 : 6.71	5.73 : 5.78	6.60 : 5.34	6.60 : 5.34	5.84 : 5.51	5.84 : 5.51	5.46 : 5.51
		Average Climate	6.29 : 5.97	6.05 : 5.26	7.05 : 5.11	7.05 : 5.11	6.29 : 5.11	6.29 : 5.11	6.19 : 5.03
		Cold Climate	6.75 : 5.06	6.79 : 4.61	7.94 : 4.78	7.94 : 4.78	6.95 : 4.53	6.95 : 4.53	6.89 : 4.40
Indoor Unit									
Power source		Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
Dimensions	H x W x D	Indoor	V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V
		Panel	mm	256 x 840 x 840	256 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840
Net weight		kg	20 / 5	20 / 5	25 / 5	25 / 5	25 / 5	25 / 5	25 / 5
Air volume (H/M/L)	Cooling : Heating	L/s	350 / 267 / 217 : 350 / 267 / 217	367 / 267 / 217 : 367 / 267 / 217	601 / 434 / 300 : 601 / 434 / 300	601 / 434 / 300 : 601 / 434 / 300	617 / 450 / 317 : 617 / 450 / 317	617 / 450 / 317 : 617 / 450 / 317	634 / 484 / 334 : 634 / 484 / 334
Sound pressure level (H/M/L)	Cooling : Heating	dB(A)	36 / 31 / 28 : 36 / 31 / 28	37 / 31 / 28 : 37 / 31 / 28	45 / 38 / 32 : 45 / 38 / 32	45 / 38 / 32 : 45 / 38 / 32	46 / 39 / 33 : 46 / 39 / 33	46 / 39 / 33 : 46 / 39 / 33	47 / 40 / 34 : 47 / 40 / 34
Sound power level (H/M/L)	Cooling : Heating	dB	51 / 46 / 43 : 51 / 46 / 43	52 / 46 / 43 : 52 / 46 / 43	60 / 53 / 47 : 60 / 53 / 47	60 / 53 / 47 : 60 / 53 / 47	61 / 54 / 48 : 61 / 54 / 48	61 / 54 / 48 : 61 / 54 / 48	62 / 55 / 49 : 62 / 55 / 49
Number of fan speeds			5	5	5	5	5	5	5
Drain pipe size		mm	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25
Outdoor Unit									
Power source		Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	3 Phase / 50Hz
Current (rated)	Cooling : Heating	A	7.20 : 5.95 6.90 : 5.70	9.65 : 7.45 9.25 : 7.15	12.5 : 9.70 12.0 : 9.30	4.15 : 3.20 4.00 : 3.10	16.1 : 13.0 15.4 : 12.5	5.35 : 4.35 5.15 : 4.15	20.0 : 15.5 19.2 : 14.8
Dimensions	H x W x D	mm	695 x 875 x 320	695 x 875 x 320	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net weight		kg	43	50	83	83	87	87	87
Air volume	Cooling : Heating	m³/min	701 : 701	746 : 766	1,219 : 1,219	1,219 : 1,219	1,369 : 1,336	1,369 : 1,336	1,402 : 1,369
Sound pressure level (Silent mode)	Cooling : Heating	dB(A)	48 (46) : 49 (47)	49 (47) : 49 (47)	52 (50) : 52 (50)	52 (50) : 52 (50)	55 (53) : 55 (53)	55 (53) : 55 (53)	56 (54) : 56 (54)
Sound power level (Silent mode)	Cooling : Heating	dB	66 (64) : 67 (65)	67 (65) : 67 (65)	70 (68) : 70 (68)	70 (68) : 70 (68)	73 (71) : 73 (71)	73 (71) : 73 (71)	74 (72) : 74 (72)
Piping connections	Liquid / Gas	mm	Ø6.35 / Ø12.7*1	Ø6.35 / Ø15.88*2	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
Pipe length range	min. - max.	m	3 - 40	3 - 40	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50
Elevation difference (OU located lower, OU located higher)		m	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30
Maximum chargeless length		m	30	30	30	30	30	30	30
Refrigerant at shipping, Additional gas amount		g	R32 1,130 / 15 (g/m)	R32 1,320 / 17 (g/m)	R32 2,400 / 45 (g/m)	R32 2,400 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)
Operation ranges	Cooling : Heating	°C	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24

Indoor Unit

Low Profile Mini Cassette

Redesigned for a lower vertical profile, it fits easily into a standard 60 x 60cm ceiling grid without the need to alter bar configuration. This makes the Low Profile Mini Cassette ideal for small commercial and retrofit applications, in particular those with lower ceilings.

nanoe™ X
Generator Mark2
nanoe™ X as a standard

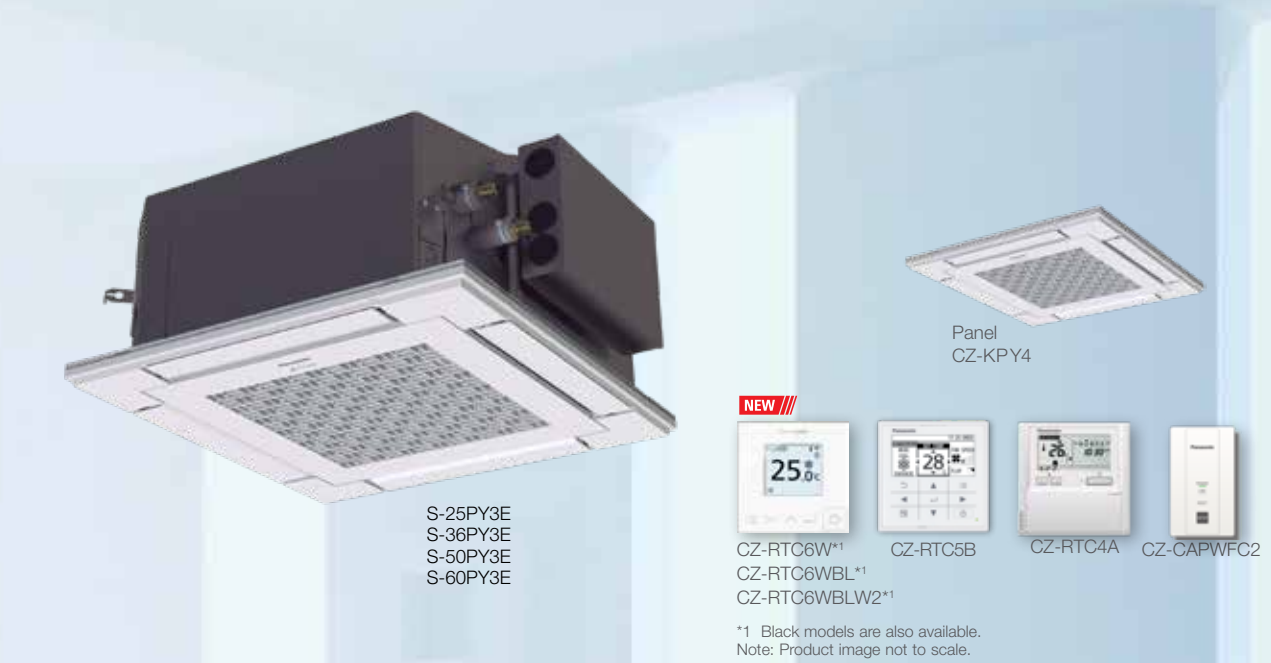


Technical focus

- Market-leading energy efficiency
- Compact design (230mm High)
- Easy installation
- Built-in drain pump
- Mini cassette fits into a 600 x 600mm ceiling grid
- Powerful drain pump gives 850mm lift
- DC fan motor with variable speed and a new heat exchanger ensures efficient power consumption
- Multi-directional air flow


Compact, stylish design

Thanks to advanced Panasonic design the panel is a compact 625 x 625mm, offering elegant, unobtrusive installation even where space is limited.

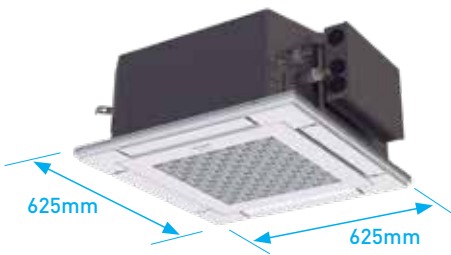


Lighter and slimmer for easier installation

When only 230mm of indoor body height, it can easily fit in limited spaces and tight spots. (Required 243mm from bottom of panel to top of the unit)




Individual flap control

Keep everyone comfortable by directing air where it's needed and away from where it isn't with individual flap control.



A drain height of up to 850mm from the ceiling surface

The internal pump allows the drain pipe to be elevated up to 850mm above the base of the unit.



Specifications

Capacity		2.5KW	3.5KW	5.0KW	6.0KW
model Name	Indoor Unit	S-25PY3E	S-36PY3E	S-50PY3E	S-60PY3E
	Outdoor Unit	U-25PZ3R5	U-36PZ3R5	U-50PZ3R5	U-60PZ3R5
	Panel	CZ-KPY4	CZ-KPY4	CZ-KPY4	CZ-KPY4
	Receiver	CZ-RWRY3	CZ-RWRY3	CZ-RWRY3	CZ-RWRY3
Cooling capacity :	kW	2.5 (1.3-3.9)	3.6 (1.5-4.0)	5.0 (1.5-6.4)	6.0 (2.0-7.0)
		3.2 (1.3-4.6)	3.6 (1.3-4.6)	5.0 (1.5-6.4)	6.0 (1.8-7.0)
Heating capacity :	BTU/h	8,500 (4,400-13,300)	12,300 (5,100-13,600)	17,100 (5,100-21,800)	20,500 (6,800-23,900)
		10,900 (4,400-15,700)	12,300 (4,400-15,700)	17,100 (5,100-21,800)	20,500 (6,100-23,900)
EER : COP	W/W	4.46 : 4.44	4.55 : 4.29	3.50 : 3.94	3.39 : 3.61
Power input (min - max)	Cooling : Heating	0.56(0.27-1.10):0.72(0.25-1.35)	0.91(0.28-1.12):0.84(0.25-1.36)	1.43(0.27-2.20):1.27(0.27-2.20)	1.77(0.34-2.53):1.66(0.39-2.45)
Indoor Unit					
Power source	Phase/Hz	1 Phase/ 50Hz	1 Phase/ 50Hz	1 Phase/ 50Hz	1 Phase/ 50Hz
	V	230V 240V	230V 240V	230V 240V	230V 240V
Current	Cooling, Heating A	2.55, 3.25 2.45, 3.10	4.05, 3.75 3.85, 3.60	6.35, 5.70 6.10, 5.45	8.10, 7.35 7.75, 7.05
Dimensions	H x W x D mm	243 x 575 x 575	243 x 575 x 575	243 x 575 x 575	243 x 575 x 575
Net weight	kg	15	15	15	15
Air volume	Cooling : Heating L/s	141 : 141	158 : 158	200 : 200	233 : 233
Sound pressure level (H/M/L)	Cooling : Heating dB(A)	31/28/25 : 31/28/25	34/30/25 : 34/30/25	39/34/27 : 39/34/27	43/37/31 : 43/37/31
Sound power level (H/M/L)	Cooling : Heating dB(A)	46/43/40 : 46/43/40	49/45/40 : 49/45/40	54/49/42 : 54/49/42	58/52/46 : 58/52/46
Outdoor Unit					
Power source	Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
	V	230V 240V	230V 240V	230V 240V	230V 240V
Dimensions	H x W x D mm	619 x 824 x 299	619 x 824 x 299	619 x 824 x 299	695 x 875 x 320
Net weight	kg	31	31	35	43
Piping connections	Liquid / Gas mm	Ø6.35 / Ø12.7	Ø6.35 / Ø12.7	Ø6.35 / Ø12.7	Ø6.35 / Ø12.7
Pipe length	min. - max. m	3 - 20	3 - 20	3 - 30	3 - 40
Elevation difference	m	15	15	15	30
Operation ranges	Cooling : Heating °C	-10 - +46 : -15 - +24	-10 - +46 : -15 - +24	-10 - +46 : -15 - +24	-10 - +46 : -15 - +24

Notes:
The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823
• Cooling: Indoor temperature: 27°C DB/ 19°C WB, Outdoor temperature: 35°C DB/ 24°C WB
• Heating: Indoor temperature: 20°C DB/ 15°C WB, Outdoor temperature: 7°C DB/ 6°C WB

Indoor Unit Under Ceiling

Providing outstanding energy-saving performance, comfort and long-distance airflow distribution, these units are perfect for retail stores and schools.

nanoe™X
Generator Mark2
nanoe™ X as a standard

- 
Self-diagnosing Function
- 
Automatic Fan Operation
- 
Automatic Restart Function
- 
DC Motor



NEW


CZ-RTC6W*1
CZ-RTC6WBL*1
CZ*RTC6WBLW*1


CZ-RTC5B


CZ-RTC4A


CZ-CAPWFC2

*1 Black models are also available.
Note: Product image not to scale.

Compact Looking, Stylish, One-motion Design

With its streamlined, one-motion form, the unit looks thin and compact when installed for a neat appearance in any room.
When not operating, the louver closes to provide an elegant look while also keeping the unit clean.



Energy-saving Technology Delivering Top-class Efficiency


Optimisation of the shape of the casing and fan assures bigger air flow and higher efficiency.
Energy-saving performance is top class in the industry.

Top Class Energy Saving

New DC fan motor




Large Diagonal Air Flow Fan

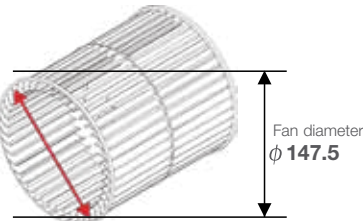

Comfortable, Long-Distance Airflow Distribution

The shape of the outlet has been optimised to provide long-distance air flow distribution.
Even in long rooms, air flow reaches every corner for exceptionally comfortable air conditioning.

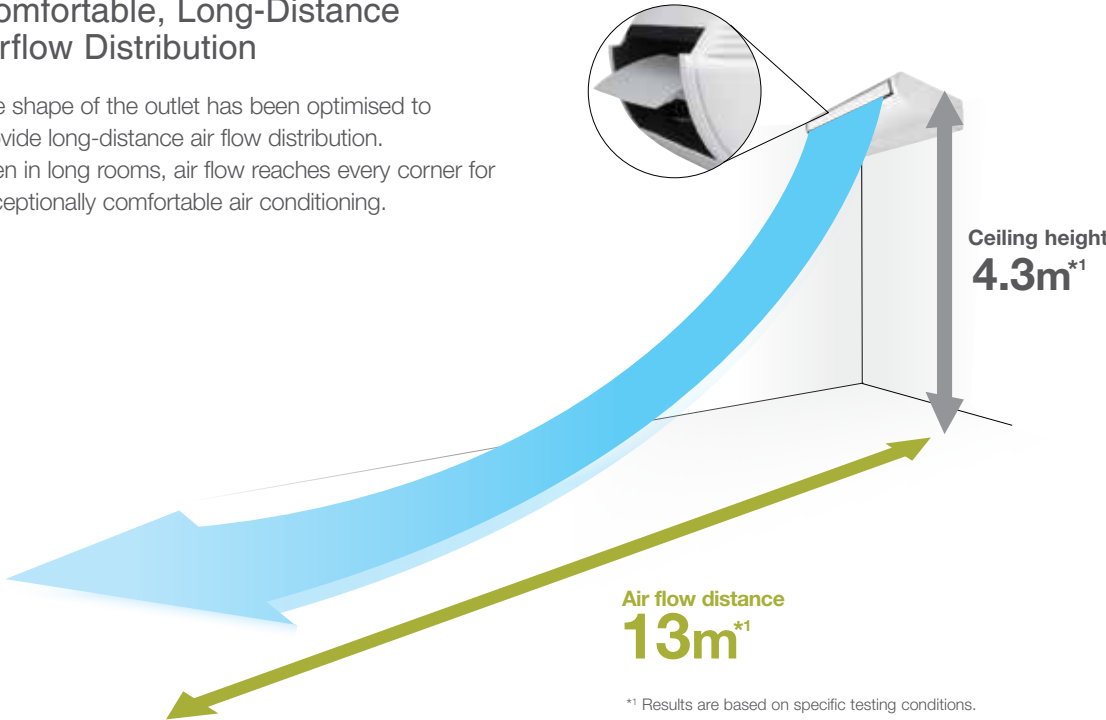

High Ceiling Setting*2	Air flow distance		
	100	125	140
4.3m	Up to 12m	Up to 13m	Up to 13m

*2 Dedicated fan speed setting required.



Indoor Unit: Under Ceiling

Specifications of R32 Deluxe Model



Capacity			6.8kW		9.5kW		12.1kW		13.4kW	
Model Name		Indoor Unit	S-6071PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E
		Outdoor Unit	U-71PZH3R5	U-100PZH3R5	U-100PZH3R8	U-125PZH3R5	U-125PZH3R8	U-140PZH3R5	U-140PZH3R8	U-140PZH3R8
Cooling capacity :	kW		6.8 (2.2 - 9.0)	9.5 (3.1 - 12.5)	9.5 (3.1 - 12.5)	12.1 (3.2 - 14.0)	12.1 (3.2 - 14.0)	13.4 (3.3 - 16.0)	13.4 (3.3 - 16.0)	13.4 (3.3 - 16.0)
		Heating capacity	8.0 (2.0 - 9.0)	11.2 (3.1 - 14.0)	11.2 (3.1 - 14.0)	14.0 (3.2 - 16.0)	14.0 (3.2 - 16.0)	16.0 (3.3 - 18.0)	16.0 (3.3 - 18.0)	16.0 (3.3 - 18.0)
	BTU/h		23,200 (7,500 - 30,700)	32,400 (10,600 - 42,700)	32,400 (10,600 - 42,700)	41,300 (10,900 - 47,800)	41,300 (10,900 - 47,800)	45,700 (11,300 - 54,600)	45,700 (11,300 - 54,600)	45,700 (11,300 - 54,600)
			27,300 (6,800 - 30,700)	38,200 (10,600 - 47,800)	38,200 (10,600 - 47,800)	47,800 (10,900 - 54,600)	47,800 (10,900 - 54,600)	54,600 (11,300 - 61,400)	54,600 (11,300 - 61,400)	54,600 (11,300 - 61,400)
EER : COP	W/W		3.91 : 3.96	4.15 : 4.09	4.15 : 4.09	3.51 : 3.78	3.51 : 3.78	3.21 : 3.48	3.21 : 3.48	3.21 : 3.48
COP@H2 condition	W/W		2.60	2.72	2.72	2.52	2.52	2.37	2.37	2.37
Total power input	Cooling : Heating	kW	1.74 : 2.02	2.29 : 2.74	2.29 : 2.74	3.45 : 3.70	3.45 : 3.70	4.17 : 4.60	4.17 : 4.60	4.17 : 4.60
	Residential	Hot Climate	5.96 : 5.61	6.07 : 5.59	6.07 : 5.59	5.42 : 5.37	5.42 : 5.37	5.07 : 5.26	5.07 : 5.26	5.07 : 5.26
		Average Climate	5.13 : 4.63	5.25 : 4.74	5.25 : 4.74	4.85 : 4.44	4.85 : 4.44	4.61 : 4.22	4.61 : 4.22	4.61 : 4.22
		Cold Climate	5.24 : 4.00	5.33 : 4.21	5.33 : 4.21	5.03 : 3.84	5.03 : 3.84	4.82 : 3.58	4.82 : 3.58	4.82 : 3.58
		Hot Climate	6.74 : 5.74	6.84 : 5.66	6.84 : 5.66	6.07 : 5.50	6.07 : 5.50	5.66 : 5.45	5.66 : 5.45	5.66 : 5.45
Commercial	Average Climate	6.92 : 5.18	6.95 : 5.18	6.95 : 5.18	6.41 : 4.97	6.41 : 4.97	6.10 : 4.83	6.10 : 4.83	6.10 : 4.83	
	Cold Climate	7.55 : 4.53	7.54 : 4.66	7.54 : 4.66	7.03 : 4.35	7.03 : 4.35	6.71 : 4.13	6.71 : 4.13	6.71 : 4.13	
Indoor Unit										
Power source		Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
		V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V
Dimension	H x W x D	Indoor	mm	235 X 1,275 X 690	235 X 1,590 X 690	235 X 1,590 X 690	235 X 1,590 X 690	235 X 1,590 X 690	235 X 1,590 X 690	235 X 1,590 X 690
Net weight		Indoor	kg	34	40	40	40	40	40	40
Air volume (H/M/L)	Cooling : Heating	L/s	350 / 300 / 258 : 350 / 300 / 258	501 / 417 / 384 : 501 / 417 / 384	501 / 417 / 384 : 501 / 417 / 384	567 / 467 / 400 : 567 / 467 / 400	567 / 467 / 400 : 567 / 467 / 400	584 / 484 / 417 : 584 / 484 / 417	584 / 484 / 417 : 584 / 484 / 417	584 / 484 / 417 : 584 / 484 / 417
Sound pressure level (H/M/L)	Cooling : Heating	dB(A)	39 / 35 / 30 : 39 / 35 / 30	42 / 37 / 34 : 42 / 37 / 34	42 / 37 / 34 : 42 / 37 / 34	46 / 40 / 35 : 46 / 40 / 35	46 / 40 / 35 : 46 / 40 / 35	47 / 41 / 36 : 47 / 41 / 36	47 / 41 / 36 : 47 / 41 / 36	47 / 41 / 36 : 47 / 41 / 36
Sound power level (H/M/L)	Cooling : Heating	dB	57 / 53 / 48 : 57 / 53 / 48	60 / 55 / 52 : 60 / 55 / 52	60 / 55 / 52 : 60 / 55 / 52	64 / 58 / 53 : 64 / 58 / 53	64 / 58 / 53 : 64 / 58 / 53	65 / 59 / 54 : 65 / 59 / 54	65 / 59 / 54 : 65 / 59 / 54	65 / 59 / 54 : 65 / 59 / 54
Number of fan speeds			5	5	5	5	5	5	5	5
Drain piping		mm	VP-20	VP-20	VP-20	VP-20	VP-20	VP-20	VP-20	VP-20
Outdoor Unit										
Power source		Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	3 Phase / 50Hz
		V	230V 240V	230V 240V	400V 415V	230V 240V	400V 415V	230V 240V	400V 415V	400V 415V
Current (rated)	Cooling : Heating	A	8.20 : 9.45 7.90 : 9.05	10.8 : 12.9 10.4 : 12.4	3.65 : 4.35 3.45 : 4.15	16.1 : 17.3 15.5 : 16.6	5.40 : 5.85 5.20 : 5.65	19.5 : 21.5 18.7 : 20.6	6.55 : 7.30 6.30 : 6.95	6.55 : 7.30 6.30 : 6.95
Dimension	H x W x D	mm	996 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340
Net weight		kg	66	99	99	99	99	99	99	99
Air volume	Cooling : Heating	L/s	1,018 : 1,002	1,970 : 1,803	1,970 : 1,803	2,087 : 1,870	2,087 : 1,870	2,154 : 1,937	2,154 : 1,937	2,154 : 1,937
Sound pressure level (Silent mode)	Cooling : Heating	dB(A)	48 (46) : 50 (48)	52 (50) : 52 (50)	52 (50) : 52 (50)	53 (51) : 53 (51)	53 (51) : 53 (51)	54 (52) : 54 (52)	54 (52) : 54 (52)	54 (52) : 54 (52)
Sound power level (Silent mode)	Cooling : Heating	dB	64 (62) : 66 (64)	68 (66) : 68 (66)	68 (66) : 68 (66)	69 (67) : 69 (67)	69 (67) : 69 (67)	70 (68) : 70 (68)	70 (68) : 70 (68)	70 (68) : 70 (68)
Piping connections	Liquid / Gas	mm	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
Pipe length range	min. - max.	m	5 - 50	5 - 85	5 - 85	5 - 85	5 - 85	5 - 85	5 - 85	5 - 85
Elevation difference (OU located lower, OU located higher)		m	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30
Maximum chargeless length		m	30	30	30	30	30	30	30	30
Refrigerant at shipping / Additional gas amount		g	R32 1,950 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)
Operating range	Cooling : Heating	°C	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24

Specifications of R32 Compact Model



Capacity			6.0kW		6.8kW		10.0kW		12.5kW		13.6kW	
Model Name		Indoor Unit	S-6071PT3E	S-6071PT3E	S-6071PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E
		Outdoor Unit	U-60PZ3R5	U-71PZ3R5	U-100PZ3R5	U-100PZ3R8	U-125PZ3R5	U-125PZ3R8	U-140PZ3R5	U-140PZ3R8	U-140PZ3R5	U-140PZ3R8
Cooling capacity : Heating capacity	kW		6.0 (2.0 - 7.1) 6.0 (1.8 - 7.0)	6.8 (2.6 - 7.7) 6.8 (2.1 - 8.1)	10.0 (3.0 - 11.5) 10.0 (3.0 - 14.0)	10.0 (3.0 - 11.5) 10.0 (3.0 - 14.0)	12.5 (3.2 - 13.5) 12.5 (3.3 - 15.0)	12.5 (3.2 - 13.5) 12.5 (3.3 - 15.0)	13.6 (3.3 - 15.0) 14.0 (3.4 - 16.0)	13.6 (3.3 - 15.0) 14.0 (3.4 - 16.0)	13.6 (3.3 - 15.0) 14.0 (3.4 - 16.0)	13.6 (3.3 - 15.0) 14.0 (3.4 - 16.0)
		BTU/h	20,500 (6,800 - 24,200) 20,500 (6,100 - 23,900)	23,200 (8,900 - 26,300) 20,500 (7,200 - 27,600)	34,100 (10,200 - 39,200) 34,100 (10,200 - 47,800)	34,100 (10,200 - 39,200) 34,100 (10,200 - 47,800)	42,700 (10,900 - 46,100) 42,700 (11,300 - 51,200)	42,700 (10,900 - 46,100) 42,700 (11,300 - 51,200)	46,400 (11,300 - 51,200) 47,800 (11,600 - 54,600)	46,400 (11,300 - 51,200) 47,800 (11,600 - 54,600)	46,400 (11,300 - 51,200) 47,800 (11,600 - 54,600)	46,400 (11,300 - 51,200) 47,800 (11,600 - 54,600)
EER : COP	W/W		3.82 : 4.41	3.33 : 4.22	3.64 : 4.24	3.64 : 4.24	3.32 : 3.89	3.32 : 3.89	3.15 : 3.70	3.15 : 3.70	3.15 : 3.70	3.15 : 3.70
COP@H2 condition	W/W		3.19	3.24	2.70	2.70	2.57	2.57	2.53	2.53	2.53	2.53
Total power input	kW	Cooling : Heating	1.57 : 1.36	2.04 : 1.61	2.75 : 2.36	2.75 : 2.36	3.76 : 3.21	3.76 : 3.21	4.32 : 3.78	4.32 : 3.78	4.32 : 3.78	4.32 : 3.78
		Hot Climate	5.18 : 5.97	5.02 : 5.60	5.24 : 5.58	5.24 : 5.58	4.98 : 5.36	4.98 : 5.36	4.81 : 5.25	4.81 : 5.25	4.81 : 5.25	4.81 : 5.25
TCSPF : HSPF	Residential	Average Climate	4.54 : 4.88	4.45 : 4.76	4.63 : 4.78	4.63 : 4.78	4.44 : 4.45	4.44 : 4.45	4.33 : 4.25	4.33 : 4.25	4.33 : 4.25	4.33 : 4.25
		Cold Climate	4.61 : 4.12	4.60 : 4.09	4.70 : 4.15	4.70 : 4.15	4.57 : 3.76	4.57 : 3.76	4.48 : 3.55	4.48 : 3.55	4.48 : 3.55	4.48 : 3.55
		Hot Climate	5.63 : 6.03	5.57 : 5.63	5.84 : 5.60	5.84 : 5.60	5.52 : 5.44	5.52 : 5.44	5.35 : 5.39	5.35 : 5.39	5.35 : 5.39	5.35 : 5.39
	Commercial	Average Climate	5.63 : 5.40	5.69 : 5.14	6.12 : 5.14	6.12 : 5.14	5.76 : 4.91	5.76 : 4.91	5.67 : 4.80	5.67 : 4.80	5.67 : 4.80	5.67 : 4.80
		Cold Climate	5.98 : 4.66	6.18 : 4.53	6.63 : 4.57	6.63 : 4.57	6.25 : 4.25	6.25 : 4.25	6.20 : 4.09	6.20 : 4.09	6.20 : 4.09	6.20 : 4.09
Indoor Unit												
Power source		Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
		V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V
Dimension	H x W x D	Indoor	mm	235 X 1,275 X 690	235 X 1,275 X 690	235 X 1,590 X 690	235 X 1,590 X 690	235 X 1,590 X 690	235 X 1,590 X 690	235 X 1,590 X 690	235 X 1,590 X 690	235 X 1,590 X 690
Net weight		Indoor	kg	34	34	40	40	40	40	40	40	40
Air volume (H/M/L)	Cooling : Heating	L/s	334 / 283 / 242 : 334 / 283 / 242	350 / 300 / 258 : 350 / 300 / 258	501 / 417 / 384 : 501 / 417 / 384	501 / 417 / 384 : 501 / 417 / 384	567 / 467 / 400 : 567 / 467 / 400	567 / 467 / 400 : 567 / 467 / 400	584 / 484 / 417 : 584 / 484 / 417	584 / 484 / 417 : 584 / 484 / 417	584 / 484 / 417 : 584 / 484 / 417	584 / 484 / 417 : 584 / 484 / 417
Sound pressure level (H/M/L)	Cooling : Heating	dB(A)	38 / 34 / 29 : 38 / 34 / 29	39 / 35 / 30 : 39 / 35 / 30	42 / 37 / 34 : 42 / 37 / 34	42 / 37 / 34 : 42 / 37 / 34	46 / 40 / 35 : 46 / 40 / 35	46 / 40 / 35 : 46 / 40 / 35	47 / 41 / 36 : 47 / 41 / 36	47 / 41 / 36 : 47 / 41 / 36	47 / 41 / 36 : 47 / 41 / 36	47 / 41 / 36 : 47 / 41 / 36
Sound power level (H/M/L)	Cooling : Heating	dB	56 / 52 / 47 : 56 / 52 / 47	57 / 53 / 48 : 57 / 53 / 48	60 / 55 / 52 : 60 / 55 / 52	60 / 55 / 52 : 60 / 55 / 52	64 / 58 / 53 : 64 / 58 / 53	64 / 58 / 53 : 64 / 58 / 53	65 / 59 / 54 : 65 / 59 / 54	65 / 59 / 54 : 65 / 59 / 54	65 / 59 / 54 : 65 / 59 / 54	65 / 59 / 54 : 65 / 59 / 54
Number of fan speeds			5	5	5	5	5	5	5	5	5	5
Drain piping		mm	VP-20	VP-20	VP-20	VP-20	VP-20	VP-20	VP-20	VP-20	VP-20	VP-20
Outdoor Unit												
Power source		Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz
		V	230V 240V	230V 240V	230V 240V	400V 415V	230V 240V	400V 415V	230V 240V	400V 415V	230V 240V	400V 415V
Current (rated)	Cooling : Heating	A	7.20 : 6.05 6.90 : 5.80	9.45 : 7.15 9.05 : 6.85	13.1 : 11.3 12.6 : 10.8	4.35 : 3.75 4.20 : 3.60	17.4 : 14.8 16.7 : 14.2	5.75 : 4.95 5.55 : 4.75	20.0 : 17.5 19.1 : 16.8	6.65 : 5.80 6.40 : 5.60	20.0 : 17.5 19.1 : 16.8	6.65 : 5.80 6.40 : 5.60
Dimension	H x W x D	mm	695 x 875 x 320	695 x 875 x 320	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net weight		kg	43	50	83	83	87	87	87	87	87	87
Air volume	Cooling : Heating	L/s	701 : 701	746 : 766	1,219 : 1,219	1,219 : 1,219	1,369 : 1,336	1,369 : 1,336	1,402 : 1,369	1,402 : 1,369	1,402 : 1,369	1,402 : 1,369
Sound pressure level (Silent mode)	Cooling : Heating	dB(A)	48 (46) : 49 (47)	49 (47) : 49 (47)	52 (50) : 52 (50)	52 (50) : 52 (50)	55 (53) : 55 (53)	55 (53) : 55 (53)	56 (54) : 56 (54)	56 (54) : 56 (54)	56 (54) : 56 (54)	56 (54) : 56 (54)
Sound power level (Silent mode)	Cooling : Heating	dB	66 (64) : 67 (65)	67 (65) : 67 (65)	70 (68) : 70 (68)	70 (68) : 70 (68)	73 (71) : 73 (71)	73 (71) : 73 (71)	74 (72) : 74 (72)	74 (72) : 74 (72)	74 (72) : 74 (72)	74 (72) : 74 (72)
Piping connections	Liquid / Gas	mm	Ø6.35 / Ø12.7*1	Ø6.35 / Ø15.88*2	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
Pipe length range	min. - max.	m	3 - 40	3 - 40	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50
Elevation difference (OU located lower, OU located higher)		m	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30
Maximum chargeless length		m	30	30	30	30	30	30	30	30	30	30
Refrigerant at shipping / Additional gas amount		g	R32 1,130 / 15 (g/m)	R32 1,320 / 17 (g/m)	R32 2,400 / 45 (g/m)	R32 2,400 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)
Operating range	Cooling : Heating	°C	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24

Notes:

- In the case of nanoe X OFF
- In case it is necessary to indicate the air flow volume in (l/s), the value in (m³/min.) shall be multiplied by 16.7 and rounded down the decimal point.
- AEER and ACOP classification is at 230V(400V) only in accordance with GEMS2019.
- TCSPF, HSPF and Total Energy consumption indicate the value of average temperature zone.

*1 For piping connection for 6.0kW unit, connect the gas socket tube (Ø12.7-Ø15.88) to the gas tubing side indoor unit and connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.

*2 For piping connection for 7.1kW unit, connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.

Wall Mounted

Providing small, lightweight and low noise level design, it is ideal for small offices and other commercial applications. It also has a stylish smooth design with a washable front panel.

nanoe™X
Generator Mark2
nanoe™X as a standard



S-100PK3R



CZ-RTC6W*1
CZ-RTC6WBL*1
CZ*RTC6WBLW*1
*1 Black models are also available.
Note: Product image not to scale.

Technical focus

- Closed discharge port when not in use
 - Lighter and smaller units make installation easy
 - Quiet operation
 - Smooth and durable design
- Piping outlet in six directions
 - Washable front panel
 - Air distribution is automatically altered depending on the operational mode of the unit

Closed discharge port

When the unit is turned off, the flap closes completely to prevent entry of dust into the unit and to keep the equipment clean.

Piping outlet in six directions

Piping outlet is possible in the six directions of right, right rear, right bottom, left, left rear, left bottom, making installation easier.

Air distribution is automatically adjusted depending on the operational mode of the unit


Air outlet angle is automatically adjusted for cooling and heating operation.

Quiet operation

Low operating noise level makes these units ideal for hotels and hospital applications.

Washable front panel

The indoor unit's front panel can be easily cleaned for trouble-free maintenance.



Heating: F1 to F5
Cooling: F1 to F3

Specifications

R32
REFRIGERANT

Capacity			9.5kW		9.0kW	
Model Name	Indoor Unit		S-100PK3R	S-100PK3R	S-100PK3R	S-100PK3R
	Outdoor Unit		U-100PZH3R5	U-100PZH3R8	U-100PZ3R5	U-100PZ3R8
Cooling capacity : Heating capacity	kW		9.5 (3.1 - 10.5) 9.5 (3.1 - 11.5)	9.5 (3.1 - 10.5) 9.5 (3.1 - 11.5)	9.0 (3.0 - 9.7) 9.0 (3.0 - 10.5)	9.0 (3.0 - 9.7) 9.0 (3.0 - 10.5)
		BTU/h	32,400 (10,600 - 35,800) 32,400 (10,600 - 39,200)	32,400 (10,600 - 35,800) 32,400 (10,600 - 39,200)	30,700 (10,200 - 33,100) 30,700 (10,200 - 35,800)	30,700 (10,200 - 33,100) 30,700 (10,200 - 35,800)
EER : COP	W/W		3.26 : 3.97	3.26 : 3.97	3.47 : 3.93	3.47 : 3.93
COP@H2 condition		W/W	2.50	2.50	2.53	2.53
Total power input	Cooling : Heating	kW	2.91 : 2.39	2.91 : 2.39	2.59 : 2.29	2.59 : 2.29
		Hot Climate	5.07 : 5.70	5.07 : 5.70	4.85 : 5.29	4.85 : 5.29
	Residential	Average Climate	4.52 : 4.74	4.52 : 4.74	4.21 : 4.55	4.21 : 4.55
		Cold Climate	4.72 : 4.10	4.72 : 4.10	4.27 : 3.99	4.27 : 3.99
	Commercial	Hot Climate	5.68 : 5.77	5.68 : 5.77	5.39 : 5.31	5.39 : 5.31
		Average Climate	5.85 : 5.20	5.85 : 5.20	5.42 : 4.87	5.42 : 4.87
TCSPF : HSPF	Cold Climate	6.42 : 4.59	6.42 : 4.59	5.82 : 4.37	5.82 : 4.37	
Indoor Unit						
Power source	Phase/Hz		1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase/ 50Hz
		V	230V 240V	230V 240V	230V 240V	230V 240V
Dimensions	H x W x D	Indoor	mm	302 x 1,120 x 236	302 x 1,120 x 236	302 x 1,120 x 236
Net weight			kg	14	14	14
Air volume (H/M/L)	Cooling : Heating	L/s	367 / 308 / 250 367 / 308 / 250	367 / 308 / 250 367 / 308 / 250	367 / 308 / 250 367 / 308 / 250	367 / 308 / 250 367 / 308 / 250
		Sound pressure level (H/M/L)	Cooling : Heating	dB(A)	49 / 45 / 41 : 49 / 45 / 41	49 / 45 / 41 : 49 / 45 / 41
Sound power level (H/M/L)	Cooling : Heating	dB	65 / 61 / 57 : 65 / 61 / 57	65 / 61 / 57 : 65 / 61 / 57	65 / 61 / 57 : 65 / 61 / 57	65 / 61 / 57 : 65 / 61 / 57
Number of fan speeds			5	5	5	5
Drain pipe size		mm	VP-16	VP-16	VP-16	VP-16
Outdoor Unit						
Power source	Phase/Hz		1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz
		V	230V 240V	400V 415V	230V 240V	400V 415V
Current (rated)	Cooling : Heating	A	13.8 : 11.3 13.2 : 10.8	4.60 : 3.80 4.40 : 3.60	12.4 : 10.9 11.9 : 10.5	4.10 : 3.65 3.95 : 3.50
Dimensions	H x W x D	mm	1,416 x 940 x 340	1,416 x 940 x 340	996 x 980 x 370	996 x 980 x 370
Net weight		kg	99	99	83	83
Air volume	Cooling : Heating	m³/min	1,970 : 1,803	1,970 : 1,803	1,219 : 1,219	1,219 : 1,219
Sound pressure level (Silent mode)	Cooling : Heating	dB(A)	52 (50) : 52 (50)	52 (50) : 52 (50)	52 (50) : 52 (50)	52 (50) : 52 (50)
Sound power level (Silent mode)	Cooling : Heating	dB	68 (66) : 68 (66)	68 (66) : 68 (66)	70 (68) : 70 (68)	70 (68) : 70 (68)
Piping connections	Liquid / Gas	mm	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
Pipe length range	min. - max.	m	5 - 85	5 - 85	5 - 50	5 - 50
Elevation difference (OU located lower, OU located higher)		m	15, 30	15, 30	15, 30	15, 30
Maximum chargeless length		m	30	30	30	30
Refrigerant at shipping, Additional gas amount		g	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 2,400 / 45 (g/m)	R32 2,400 / 45 (g/m)
Operating range	Cooling : Heating	°C	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24

Notes:
• In the case of nanoe X OFF
• In case it is necessary to indicate the air flow volume in (l/s), the value in (m³/min.) shall be multiplied by 16.7 and rounded down the decimal point.
• AEER and ACOP classification is at 230V(400V) only in accordance with GEMS2019.
• TCSPF, HSPF and Total Energy consumption indicate the value of average temperature zone.
• Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
• H:High at setting 5 stage (Level 5), M:Middle at setting 5 stage (Level 3), L:Low at setting 5 stage (Level 1)

Indoor Unit

Ultra Slim Ducted

With a height of only 200 mm, it provides greater flexibility and adaptability for various applications. In addition, high efficiency and extreme low noise level make it highly suitable for apartments and hotels.



Self-diagnosing Function



Automatic Fan Operation



Dry Mode



Automatic Restart Function



Built-in Drain Pump



DC Motor



CS-Z25UD3RAW
CS-Z35UD3RAW
CS-Z50UD3RAW
CS-Z60UD3RAW



Wired remote controller included.



CZ-TACG1*1

Note: Product image not to scale.

Technical focus

- Space saving 200mm height
- Rear or Bottom Return Air Options
- Built-in Drain Pump
- DC fan motor greatly reduces power consumption
- Easy maintenance and service by external electrical box
- 40 Pa static pressure enables ductwork to be fitted.


Ultra-slim profile for all models

200mm height for all models allows installation in very narrow ceilings.



Drain pump with increased power

Using the built-in high-lift drain pump, the drain piping rise height can be increased to 653 mm from the lower surface of the body.

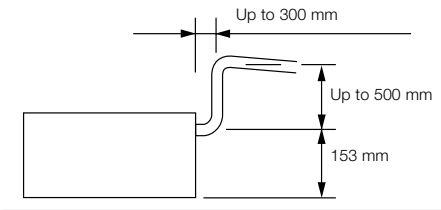

Specifications

Capacity		2.5KW	3.6KW	5.0KW	6.0KW
model Name	Indoor Unit	CS-Z25UD3RAW	CS-Z35UD3RAW	CS-Z50UD3RAW	CS-Z60UD3RAW
	Outdoor Unit	CU-Z25UBRA	CU-Z35UBRA	CU-Z50UBRA	CU-Z60UBRA
Cooling capacity :	kW	2.60 (0.85 - 3.20)	3.70 (0.85 - 4.00)	5.00 (0.90 - 5.70)	5.60 (0.90 - 6.50)
		3.30 (0.85 - 4.90)	4.20 (0.85 - 5.60)	6.10 (0.90 - 7.20)	7.00 (0.90 - 8.00)
Heating capacity	BTU/h	8,870 (2,900 - 10,900)	12,600 (2,900 - 13,600)	17,100 (3,070 - 19,400)	19,100 (3,070 - 22,200)
		11,300 (2,900 -16,700)	14,300 (2,900 -19,100)	20,800 (3,070 - 24,600)	23,900 (3,070 - 27,300)
EER : COP	W/W	4.48 : 4.23	3.85 : 4.08	3.57 : 3.63	3.29 : 3.24
Power input (min - max)	Cooling : Heating kW	0.58 (0.24 - 0.85) : 0.78 (0.23 - 1.25)	0.96 (0.24 - 1.12) : 1.03 (0.23 - 1.57)	1.40 (0.26 - 1.78) : 1.68 (0.26 - 2.20)	1.70 (0.26 - 2.30) : 2.16 (0.26 - 2.60)
Indoor Unit					
Power source	Phase/Hz V	1 Phase/ 50Hz 230V 240V	1 Phase/ 50Hz 230V 240V	1 Phase/ 50Hz 230V 240V	1 Phase/ 50Hz 230V 240V
Dimensions	H x W x D mm	200 x 750 x 640	200 x 750 x 640	200 x 750 x 640	200 x 750 x 640
Net weight	kg	19	19	19	19
Air volume	Cooling : Heating L/s	175 : 175	187 : 187	255 : 255	262 : 262
External static pressure	Pa	25 (15-45)	25 (15-45)	25 (15-50)	25 (15-50)
Sound pressure level (H/M/L)	Cooling : Heating dB(A)	33 / 27 / 24 : 34 / 27 / 24	33 / 26 / 23 : 35 / 27 / 24	39 / 29 / 26 : 39 / 30 / 27	41 / 30 / 27 : 41 / 32 / 29
Sound power level (H/M/L)	Cooling : Heating dB(A)	49 / 43 / 40 : 50 / 43 / 40	49 / 42 / 39 : 51 / 43 / 40	55 / 45 / 42 : 55 / 46 / 43	57 / 46 / 43 : 57 / 48 / 45
Outdoor Unit					
Power source	Phase/Hz V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V
Current (rated)	Cooling : Heating A	2.80 : 3.50 2.70 : 3.40	4.30 : 4.70 4.20 : 4.50	6.30 : 7.40 6.10 : 7.20	7.50 : 9.50 7.30 : 9.30
Dimensions	H x W x D mm	542 x 780 x 289	619 x 824 x 299	695 x 875 x 320	695 x 875 x 320
Net weight	kg	33	35	42	43
Piping connections	Liquid / Gas mm	Ø6.35 / Ø9.52	Ø6.35 / Ø9.52	Ø6.35 / Ø12.70	Ø6.35 / Ø12.70
Pipe length	min. - max. m	3 - 20	3 - 20	3 - 30	3 - 30
Elevation difference	m	15	15	20	20
Operation ranges	Cooling : Heating °C	-10 ~ +46 : -15 ~ +24	-10 ~ +46 : -15 ~ +24	-10 ~ +46 : -15 ~ +24	-10 ~ +46 : -15 ~ +24

Notes:
The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823
• Cooling: Indoor temperature: 27°C DB/ 19°C WB, Outdoor temperature: 35°C DB/ 24°C WB
• Heating: Indoor temperature: 20°C DB/ 15°C WB, Outdoor temperature: 7°C DB/ 6°C WB
• Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
• Sound levels are measured in default status which is rear return air, when changing to bottom return air, sounds levels may be higher.
• Ultra Slim Ducted is not supported by PAC Smart Connectivity+.
*1 If you connect WLAN adaptor (CZ-TACG1) to an indoor unit other than wall mounted type and operate from the smartphone with Panasonic Comfort Cloud App, airflow direction may not be operated as it is shown on the display.

Floor Console

This floor-type console’s slender profile integrates unobtrusively into any interior, in a position that’s also ideal when you want to warm your feet when it’s cold.

nanoe™X
Generator Mark1
nanoe™ X as a standard


Self-diagnosing Function


Automatic Fan Operation


Dry Mode


Automatic Restart Function


Auto Swing (Auto Flap Control)


DC Motor



CS-Z25UFW
CS-Z35UFW
CS-Z50UFW



Wireless remote controller included.



CZ-TACG1*1


Note: Product image not to scale.

Technical focus

- A breakthrough design that integrates perfectly with the most modern environments.
- Compact design fits 50mm wall recess

Upper & Lower Vane Blow

Optimum air flow from the top and bottom of the unit assures that even your feet are kept comfortably warm. (Only during heating)

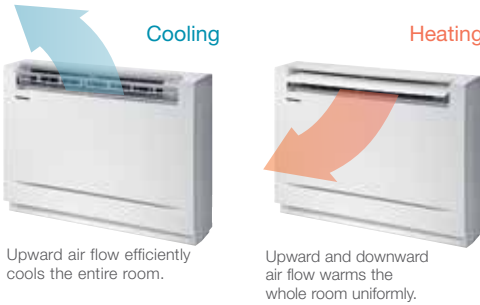

Compact Design

The design features a flat, elegant front panel that provides a neat appearance and the unit can be recessed into a wall up to 50mm.



Super Quiet

The indoor and outdoor units deliver quiet operation and pressing the Quiet mode button lowers operation noise even further to just 19dB for indoor unit with low fan speed.



19dB*1
Indoor

*1 CS-Z25UFW & CS-Z35UFW: In the Quiet mode during heating operation with low fan speed.

Specifications of Current Model



Capacity		2.5kW	3.5kW	5.0kW	
Model Name	Indoor Unit	CS-Z25UFW	CS-Z35UFW	CS-Z50UFW	
	Outdoor Unit	CU-Z25UBA	CU-Z35UBA	CU-Z50UBA	
Cooling capacity : Heating capacity	kW	2.50 (0.85~3.40) 3.40 (0.85~5.00)	3.50 (0.85~3.80) 4.30 (0.85~6.00)	5.00 (0.90~5.70) 5.60 (0.90~8.10)	
	BTU/h	8,530 (2,900~11,600) 11,600 (2,900~17,100)	11,900 (2,900~13,000) 14,700 (2,900~20,500)	17,100 (3,070~19,400) 19,100 (3,070~27,600)	
EER : COP	W/W	5.00 : 4.59	4.07 : 4.06	3.65 : 3.81	
Power input (min-max)	Cooling : Heating kW	0.50 (0.24-0.90) 0.74 (0.24-1.35)	0.86 (0.24-1.02) 1.06 (0.24-1.75)	1.37(0.26-1.81) : 1.47 (0.26-2.60)	
TCSPF : HSPF	Residential	Hot Climate	5.70 : 4.12	5.46 : 4.49	5.51 : 4.48
		Average Climate	5.05 : 4.21	5.01 : 4.29	5.20 : 4.18
		Cold Climate	4.97 : 3.94	5.07 : 3.78	5.37 : 3.69
	Commercial	Hot Climate	6.22 : 3.89	6.01 : 4.18	6.16 : 4.20
		Average Climate	6.40 : 3.85	6.60 : 4.00	7.34 : 3.99
		Cold Climate	6.97 : 3.78	7.31 : 3.80	8.46 : 3.76
Indoor Unit					
Power source	Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	
	V	230V 240V	230V 240V	230V 240V	
Dimensions	H x W x D	600 x 750 x 207	600 x 750 x 207	600 x 750 x 207	
Net weight	kg	13	13	13	
Air volume	Cooling : Heating L/s	163 : 173	170 : 182	198 : 227	
Sound pressure level (H/M/L)	Cooling : Heating dB(A)	38 / 25 / 20 : 38 / 25 / 19	39 / 26 / 20 : 39 / 25 / 19	44 / 31 / 27 : 46 / 33 / 29	
Sound power level (H/M/L)	Cooling : Heating dB(A)	54 / 41 / 36 : 54 / 41 / 35	55 / 42 / 36 : 55 / 41 / 35	60 / 47 / 43 : 62 / 49 / 45	
Outdoor Unit					
Power source	Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	
	V	230V 240V	230V 240V	230V 240V	
Current (rated)	Cooling : Heating A	2.40 : 3.40 2.30 : 3.25	3.90 : 4.80 3.70 : 4.60	6.20 : 6.60 6.00 : 6.40	
Dimensions	H x W x D	542 x 780 x 289	619 x 824 x 299	695 x 875 x 320	
Net weight	kg	33	35	42	
Piping connections	Liquid / Gas	m Ø6.35 / Ø9.52	Ø6.35 / Ø9.52	Ø6.35 / Ø9.52	
Pipe length	min. - max.	m 3 - 20	3 - 20	3 - 30	
Elevation difference	m	15	15	20	
Piping connections	Cooling : Heating °C	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	

Notes:
The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823
• Cooling: Indoor temperature: 27°C DB/ 19°C WB, Outdoor temperature: 35°C DB/ 24°C WB
• Heating: Indoor temperature: 20°C DB/ 15°C WB, Outdoor temperature: 7°C DB/ 6°C WB
• Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions.
• Floor console is not supported by PAC Smart Connectivity+.

*1 If you connect WLAN adaptor (CZ-TACG1) to an indoor unit other than wall mounted type and operate from the smartphone with Panasonic Comfort Cloud App, airflow direction may not be operated as it is shown on the display.

Smart Connectivity and Control Solutions

Panasonic offers a range of smart connectivity and control solutions for residential and commercial applications that allow you to conveniently manage and monitor air conditioning units in single or multiple locations from one mobile device. Add solutions for partners such as contractors and service providers that simplify everything from configuration to repair diagnosis and discover a streamlined, next-generation air conditioning ecosystem.



Wide Range of Smart Control Solutions for All Needs

Whether you're a contractor or service provider looking for solutions to streamline everything from configuration to repair diagnosis, a facility manager overseeing multiple sites or a single office, or you're simply managing a home system, we offer a range of innovative, next-generation smart control solutions to suit your needs.

For end users and facility managers			For contractors/service providers
Panasonic Comfort Cloud Intuitive and scalable air conditioning control solution using a personal mobile device.	PAC Smart Connectivity+ Offers efficient energy management with high indoor air quality (IAQ) control.	H&C Diagnosis APP H&C Control APP Connect to APP via Bluetooth for greatly improved convenience during configuration and repair diagnosis.	
Panasonic AC Smart Cloud Monitor and manage energy consumption of multiple location through a cloud computing system.			

For Residential

Panasonic Comfort Cloud
Home Automation Ready

Personal Control Solutions Panasonic Comfort Cloud

- Remotely manage and monitor multiple air conditioning units in your home**
Easily control and access all features of the air conditioning units with smart centralised control.
- Intuitive voice control**
Control air conditioning units by voice command connecting to smart speaker.



PLUG & PLAY FOR HOME AUTOMATION

Easily connect with integrated controllers to become part of your automated home network.



Note: For further information, please check CLIPSAL® website.

by Schneider Electric

For Light Commercial

Panasonic Comfort Cloud
PAC Smart Connectivity+

Cost Effective Energy Management Solution

Connectable
up to **200 Units**
with just 1 device

- Multiple location control at your convenience with Comfort Cloud**
Gain control of multiple zones and sites intuitively adjusting temperature by areas with differentiated user rights settings.
- Indoor Air Quality (IAQ) and efficient energy usage with PAC Smart Connectivity+**
 - Ultimate cooling comfort with sensing technology and automatic IAQ control.
 - Simplified Plug & Play installation with BMS connection for better energy consumption.

For Multiple Building Management

Panasonic AC Smart Cloud

Full Control of All Installations From A Single Internet Connection Panasonic AC Smart Cloud

- Manage and monitor energy consumption patterns**
Analyse energy usage, running time and optimise temperatures to reduce energy costs.
- Centralised control solution with zero downtime**
Receive real-time status updates to prevent breakdowns.
- Flexible and scalable solution for expanding businesses and multi sites**
Adaptable solutions that can easily be upgraded for new features, meet user demand and better IT management.

*1 CZ-TACG1 or CZ-CAPWFC2 Network Adaptor required per unit. Requires an Internet connection and the App downloaded from the App Store or GooglePlay Store on your smartphone or tablet with the latest Operating System available. To use Google Assistant to control your air conditioner, you will need a Google Assistant device. Google is a trademark of Google LLC. Google Home is compatible with the air conditioning systems shown on pages 4 and 5. Google functionality is only available with complete air conditioning systems (including Panasonic controllers).

Panasonic Comfort Cloud

Control air conditioning units from wherever and whenever with your smartphone, by using Panasonic Comfort Cloud and WLAN smart adaptor.

This scalable solution is ideal for one system, one site or multiple locations. Coupling the adapter with the already feature rich systems, makes it an ideal solution for both residential and commercial applications.

Panasonic Comfort Cloud features

Voice Control

Control air conditioning units by voice command intuitively connecting to smart speaker.*1




From 1 to 200 Units

User can control up to 200 indoor units. 10 different sites, with up to 20 units / groups per site.



Easy Scheduling

Complex weekly scheduling made simple. Not only for one units, but across multiple sites and from a smartphone.




Multiple User

The Panasonic Comfort Cloud App allows multiuser access control. Restrict user access to specific units.



Energy Monitor

See the estimated power consumption and compare with other periods to see how energy bill can be reduced even more.*2



Error Codes

Error code notification through the App, provides early notification and allows for faster repair.



Application Examples



Centralised control from reception.



Multiple location control for small business.

System Configuration

Network Adaptor

CZ-TACG1 CZ-CAPWFC2




CZ-TACG1: For products for small sized project.
CZ-CAPWFC2: Available for all types of VRF and PAC indoor unit.

Connection Diagram



Indoor Unit

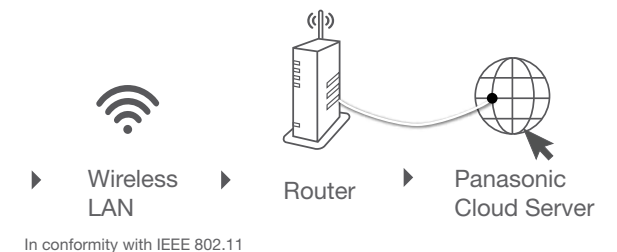

WLAN Smart Adaptor Specification

	CZ-TACG1	CZ-CAPWFC2
Input Voltage	DC 12V (Supplied from indoor unit)	
Power Consumption	Maximum 0.66W	Maximum 2.4W
Size [H x W x D]	66 x 36 x 12mm	120 x 70 x 25mm
Weight	Approx. 85g	190g (including communications lines)
Interface	Wireless LAN	
Wireless LAN Standard	IEEE 802.11 b/g/n	
Frequency range	2.4GHz band	
Encryption	WPA2-PSK(TKIP/AES)	
Operation range	0-55°C, 20 - 80RH%	

*1 CZ-TACG1 or CZ-CAPWFC2 Network Adaptor required per unit.
Requires an internet connection and the App downloaded from the App Store or GooglePlay Store on your smartphone or tablet with the latest Operating System available.
To use Google Assistant to control your air conditioner, you will need a Google Assistant device.
Google is a trademark of Google LLC.
Google Home is compatible with the air conditioning systems shown on pages 4 and 5.
Google functionality is only available with complete air conditioning systems (including Panasonic controllers).
*2 Function available depending on the model.



Comfort Cloud App



Compatible Device and Browsers

1. IOS 9.0 or above
2. Android 5.0 or above

For Residential

Remotely manage and monitor air conditioning units from anywhere anytime.

For Light Commercial

Gain control of multiple zones and sites intuitively up to 200 indoor units.