

ADAPTIVE DUCTED NEW Dimensions


S-1821PF3H/S-2430PF3H/S-3448PF3H

Detailed dimensions of indoor unit

Type	A	B	C	D	E	F
	mm	mm	mm	mm	mm	Q'ty
1821	867	800	450 (Pitch 150 × 3)	71	592	12
2430	1,067	1,000	750 (Pitch 150 × 5)	21	792	16
3448	1,467	1,400	1,050 (Pitch 150 × 7)	71	1,192	20




A (Suspension bolt pitch)



unit:mm

OUTDOOR UNITS NEW Dimensions

U-18PRH1Z5/U-18PRH1H5/U-24PRH1Z5/U-24PRH1H5

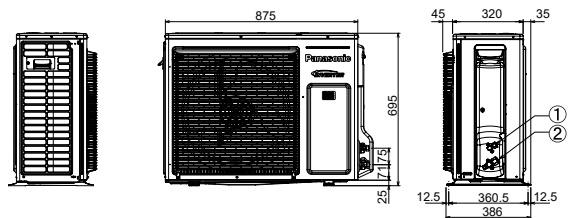


①	Refrigerant tubing (liquid tube), flared connection (φ6.35"/9.52")
②	Refrigerant tubing (gas tube), flared connection (φ12.70"/15.88")

*1 For U-18PRH

*2 For U-24PRH

*Mounting hole (4-R6.5), anchor bolt : M10

U-34PRH1Z5/U-43PRH1Z5/U-43PRH1H8/U-48PRH1H8

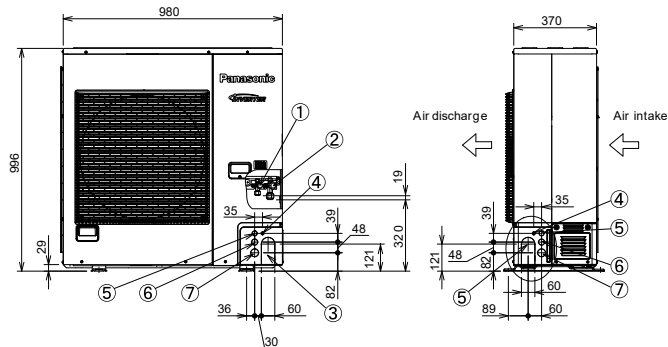

①	Refrigerant tubing (liquid tube), flared connection (Ø9.52)
②	Refrigerant tubing (gas tube), flared connection (Ø15.88)
③	Refrigerant tubing port
④	Electrical wiring port (Ø13)
⑤	Electrical wiring port (Ø22)
⑥	Electrical wiring port (Ø27)
⑦	Electrical wiring port (Ø35)

*Mounting hole (4-R6.5), anchor bolt : M10

unit:mm