

# CEILING EXPOSED

- Slim design with a thickness of only 235 mm. compact looking, stylish,
- Compact looking, stylish, one-motion design.
- Comfortable, long-distance airflow distribution.

(Accessory)



(Optional Wired Remote Controller)



CZ-RTC5B



CZ-RTC4



CZ-RTC6




Capacity [Btu/h(Phase)]		42,700 [3]	47,800[3]
Power Source	V/Phase Hz	380V, 3Ø	Phase - 50Hz
Indoor Unit		<b>S-3448PT3H</b>	<b>S-3448PT3H</b>
Outdoor Unit		<b>U-43PRH1H8</b>	<b>U-48PRH1H8</b>
Cooling Capacity: Rated [Min-Max]	kW	12.50 [3.80-14.00]	14.00 [5.30-15.50]
	Btu/h	42,700 [13,000-47,800]	47,800 [18,100-52,900]
Current: Rated	A	6.1-5.6 [10.5]	6.9-6.3 [11.5]
Power Input: Rated [Min-Max]	kW	3.75 [0.68-4.40]	4.24 [0.94-5.00]
CSPF		5.50	5.40
COP/EER	W/W	3.33	3.30
	Btu/hW	11.39	11.27
Indoor Unit			
Air Volume	m <sup>3</sup> /min	35.0	35.0
	cfm	1,235	1,235
Sound Pressure Level [Hi/L0]	dB [A]	46 / 38	46 / 38
Sound Power Level [Hi/L0]	dB [A]	64 / 56	64 / 56
Dimension	Indoor (H×W×D)	235 x 1,590 x 690	235 x 1,590 x 690
Net Weight	kg	40	40
Outdoor Unit			
Sound Pressure Level	dB [A]	57	58
Sound Power Level	dB [A]	76	77
Dimension	Outdoor (H×W×D)	996 x 980 x 370	996 x 980 x 370
Net Weight	kg	67	73
Piping Connection	Gas Pipe	mm (inch)	15.88 [5/8]
	Liquid Pipe	mm (inch)	9.52 [3/8]
Pipe Length	Min-Max	m	5 - 50
Elevation Difference	m	30	30
Maximum Chargeless Length	Max	m	30
Additional Gas	g/m	25	25
Operation Range, Outdoor	Min-Max	°C	16-52

## Advantages of Ceiling Exposed

### Comfortable, Long-Distance Airflow Distribution

The shape of the outlet has been optimised to provide long-distance air flow distribution.

Even in long rooms, air flow reaches every corner for exceptionally comfortable air conditioning.

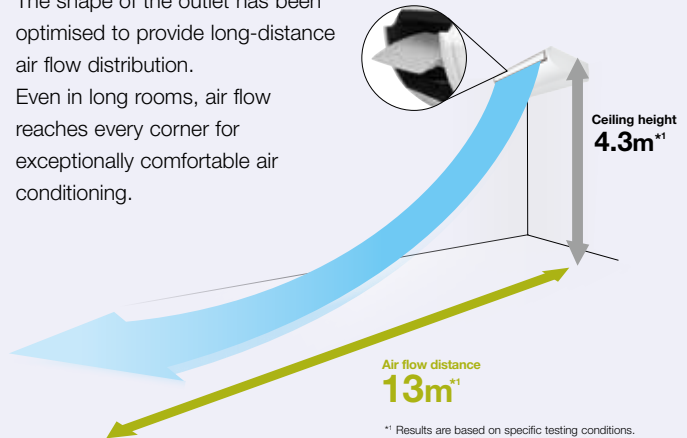

Air flow distance  
**13m<sup>\*1</sup>**

Ceiling height  
**4.3m<sup>\*1</sup>**

<sup>\*1</sup> Results are based on specific testing conditions.