


4-WAY CASSETTE

- With the further advanced air purification technology of nanoe™ X Generator Mark 3.
- Powerful industry-leading, 360° wide, comfortable airflow.
- The drain pump can pump water up to a height of 850 mm, making drain pipe layout easy.

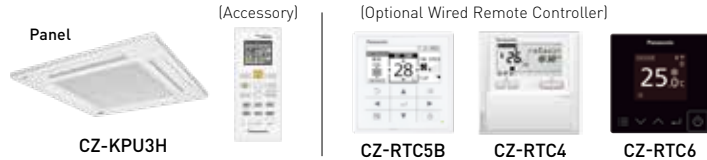

Capacity [Btu/h]		17,100	23,200	32,400	36,900
Power Source	V/Phase Hz			220-240V, 1Ø	Phase - 50Hz
Indoor Unit		S-18PU3ZA	S-24PU3ZA	S-3443PU3ZA	S-3443PU3ZA
Outdoor Unit		U-18PRH1Z5	U-24PRH1Z5	U-34PRH1Z5	U-43PRH1Z5
Panel		CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H
Cooling Capacity: Rated (Min-Max)	kW	5.00 [2.00-6.00]	6.80 [2.10-9.20]	9.50 [3.80-11.80]	10.80 [3.80-14.00]
	Btu/h	17,100 [6,820-20,500]	23,200 [7,170-31,400]	32,400 [13,000-40,300]	36,900 [13,000-47,800]
Current: Rated	A	4.7-4.5 [9.1]	7.3-6.7 [12.0]	11.3-10.3 [25.5]	13.8-12.7 [26.0]
Power Input: Rated (Min-Max)	kW	0.99 [0.26-1.35]	1.57 [0.28-2.50]	2.28 [0.62-3.00]	2.80 [0.63-4.10]
COP/EER	W/W	5.05	4.33	4.17	3.86
	Btu/hW	17.27	14.78	14.21	13.18
Weighted COP/EER*	W/W	6.08	5.46	5.15	4.92
	Btu/hW	20.74	18.63	17.57	16.79
Indoor Unit					
Air Volume	m³/min	25.0	25.0	36.4	36.4
	cfm	882	882	1,285	1,285
Sound Pressure Level [Hi/L0]	dB [A]	42 / 35	42 / 35	47 / 41	47 / 41
Sound Power Level [Hi/L0]	dB [A]	57 / 50	57 / 50	62 / 56	62 / 56
Dimension	Indoor [HxWxD]	mm 256 x 840 x 840	256 x 840 x 840	319 x 840 x 840	319 x 840 x 840
	Panel [HxWxD]	mm 44 x 950 x 950	44 x 950 x 950	44 x 950 x 950	44 x 950 x 950
Net Weight	Indoor	kg 21	21	24	24
	Panel	kg 5	5	5	5
Outdoor Unit					
Sound Pressure Level	dB [A]	50	53	54	57
Sound Power Level	dB [A]	69	72	73	76
Dimension	Outdoor [HxWxD]	mm 695 x 875 x 320	695 x 875 x 320	996 x 980 x 370	996 x 980 x 370
Net Weight		kg 39	39	69	69
Piping Connection	Gas Pipe	mm (inch) 12.70 (1/2)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)
	Liquid Pipe	mm (inch) 6.35 (1/4)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)
Pipe Length	Min-Max	m 5 - 50	5 - 50	5 - 50	5 - 50
Elevation Difference		m 30	30	30	30
Maximum Chargeless Length	Max	m 30	30	30	30
Additional Gas		g/m 15	25	25	25
Operation Range, Outdoor	Min-Max	°C 16-52	16-52	16-52	16-52

*Tested based on NEA energy labelling scheme. Please refer to technical documents for more details * The sound pressure level is measured in accordance with JIS C 9 612 and JIS B 8616. * DELUXE series indoor units can only be connected to outdoor units of the same series.