

# CEILING & CONSOLE

- The slim design makes thickness only 235mm.



A Wireless remote controller is in the same package with the indoor unit.

CZ-RWCB1H (Wireless)



(Optional)

CZ-RTCB1H (Wired)


NON-INVERTER



Capacity ( Btu/h )		36,000		48,000		60,000	
Power Source	V/Phase/Hz	380-415V~, 3phase, 50Hz					
Indoor		S-36PTB1H5		S-48PTB1H5		S-60PTB1H5	
Outdoor		U-36PVB1H8		U-48PVB1H8		U-60PVB1H8	
Cooling Capacity: Rated	kW	10.60	14.00	17.60			
	Btu/h	36,000	48,000	60,000			
Current	A	6.49	10.00	12.00			
Power Input: Rated	kW	3.73	5.00	5.71			
	W/W	2.84	2.80	3.08			
Efficiency Ratio	COP	2.84	2.80	3.08			
	EER (Btu/h)/W	9.70	9.55	10.52			
<b>Indoor Unit</b>							
Air Volume (Hi/Mi/Lo)	m <sup>3</sup> /min	25.3/21/13.3	33.3/30/20.8	33.3/30/20.8			
	cfm	894/741/470	1,176/1,058/735	1,176/1,058/735			
Sound Pressure Level (Hi/Mi/Lo)	dB (A)	50/46/42	52/47/44	52/47/44			
Sound Power Level (Hi/Mi/Lo)	dB	59/55/51	62/57/54	62/57/54			
Dimension (H×W×D)	Indoor	mm	690×1,280×235	690×1,600×235	690×1,600×235		
	Indoor Package	mm	770×1,360×325	770×1,680×325	770×1,680×325		
Weight (Net/Gross)	kg	36.0/42.0	44.0/50.5	44.0/50.5			
<b>Outdoor Unit</b>							
Sound Pressure Level	dB (A)	60	60	60			
Sound Power Level	dB	69	70	70			
Dimension (H×W×D)	Outdoor	mm	805×970×395	1,325×940×340	1,325×940×340		
	Outdoor Package	mm	890×1,105×495	1,435×1,070×450	1,435×1,070×450		
Weight (Net/Gross)	kg	68.0/72.5	95.0/105.0	104.5/109.5			
Piping Connection	Gas Pipe	mm [inch]	15.88 [5/8"]	19.05 [3/4"]	19.05 [3/4"]		
	Liquid Pipe	mm [inch]	9.52 [3/8"]	9.52 [3/8"]	9.52 [3/8"]		
Pipe Length (Max)	m	50	50	50			
Elevation Difference	m	30	30	30			
Maximum Chargeless Length (Max)	m	5	5	5			
Additional Gas	g/m	40	40	40			
Operating Range, Outdoor (Min-Max)	°C	17-49	17-49	17-49			

## Dimensions

36,000 Btu/h

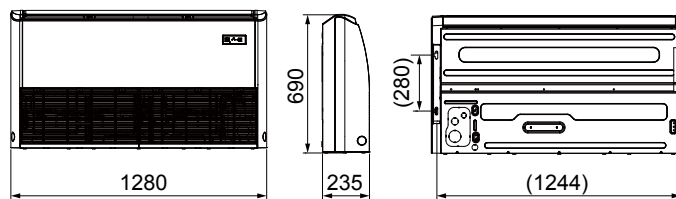

48,000 - 60,000 Btu/h

