

CEILING & CONSOLE

- The slim design makes thickness only 235mm.



A Wireless remote controller is in the same package with the indoor unit.

CZ-RWCB1H (Wireless)



(Optional)

CZ-RTCB1H (Wired)


NON-INVERTER



Capacity (Btu/h)		36,000		48,000		60,000	
Power Source	V/Phase Hz	380-415V~, 3phase, 50Hz					
Indoor		S-36PTB1H5B		S-48PTB1H5B		S-60PTB1H5B	
Outdoor		U-36PNB1H8		U-48PNB1H8		U-60PNB1H8	
Cooling Capacity: Rated	kW	10.55		14.07		17.58	
	Btu/h	36,000		48,000		60,000	
Current	A	6.69		8.35		10.00	
Power Input: Rated	kW	3.6		4.67		5.71	
	W/W	2.93		3.01		3.08	
Efficiency Ratio	COP						
	EER (Btu/h)/W	10.00		10.28		10.50	
Indoor Unit							
Air Volume (Hi/Mi/Lo)	m ³ /min	25.3/21/13.3		35.8/31.6/22.5		35.8/31.6/22.5	
	cfm	893/742/470		1,264/1,116/795		1,264/1,116/795	
Sound Pressure Level (Hi/Mi/Lo)	dB (A)	50/46/42		52/47/43		52/47/43	
Sound Power Level (Hi/Mi/Lo)	dB (A)	59/55/51		62/57/53		62/57/53	
Dimension (H×W×D)	Indoor	mm	235×1,280×690	235×1,600×690		235×1,600×690	
	Indoor Package	mm	325×1,360×770	325×1,680×770		325×1,680×770	
Weight (Net/Gross)	kg	36.0/42.0		41.0/48.0		41.0/48.0	
Outdoor Unit							
Sound Pressure Level	dB (A)	56		57		58	
Sound Power Level	dB (A)	66		67		68	
Dimension (H×W×D)	Outdoor	mm	805×970×395	805×970×395		1,325×940×370	
	Outdoor Package	mm	890×1,105×495	890×1,105×495		1,440×1,080×430	
Weight (Net/Gross)	kg	62.0/66.0		72.0/76.0		93.0/103.0	
Piping Connection	Gas Pipe	mm [inch]	15.88 [5/8"]	15.88 [5/8"]		19.05 [3/4"]	
	Liquid Pipe	mm [inch]	9.52 [3/8"]	9.52 [3/8"]		9.52 [3/8"]	
Pipe Length (Max)	m	50		50		50	
Elevation Difference	m	30		30		30	
Maximum Chargeless Length (Max)	m	5		5		5	
Additional Gas	g/m	50		50		50	
Operating Range, Outdoor (Min-Max)	°C	17-49		17-49		17-49	

Dimensions

36,000 Btu/h

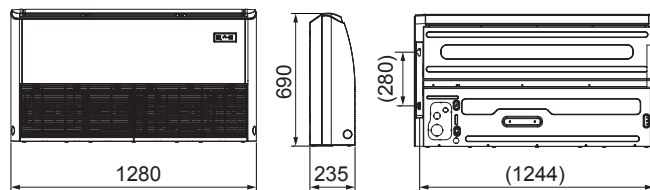

48,000 - 60,000 Btu/h

