
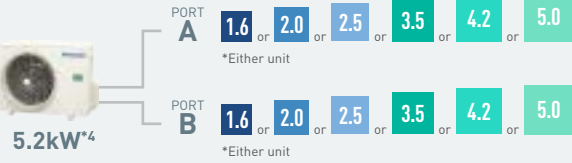


Connection of Outdoor and Indoor Units

	Models	Indoor Units: Possible Combination Patterns (Must be within capacity range)	Maximum Connectable Indoor Unit kW	Indoor unit combination			
				Capacity (kW class)	Wall- Mounted	Slim Ducted	Mini Cassette
Up to 2 rooms	CU-2Z52WBH-8	 5.2kW^{*4}	7.7kW	1.6	•		
				2.0	•		
				2.5	•	•	•
				3.5	•	•	•
				4.2	•		
				5.0	•	•	•
Up to 3 rooms	CU-3Z54WBH-8	 5.4kW^{*4}	9.5kW	1.6	•		
				2.0	•		
				2.5	•	•	•
				3.5	•	•	•
				4.2	•		
				5.0	•	•	•
Up to 4 rooms	CU-4Z71WBH-8	 7.1kW^{*4}	11.5kW	1.6	•		
				2.0	•		
				2.5	•	•	•
				3.5	•	•	•
				4.2	•		
				5.0	•	•	•

^{*4} To enable demand response management, an optional accessory needs to be installed [CZ-CAP2]

Outdoor

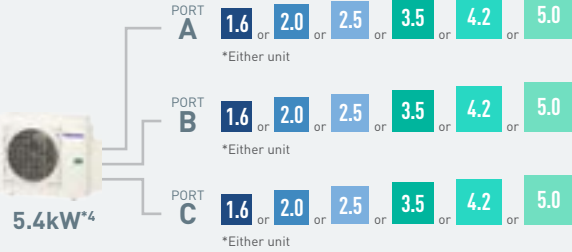

Up to 2 rooms
CU-2Z52WBH-8




Up to 3 rooms
CU-3Z54WBH-8



Up to 4 rooms
CU-4Z71WBH-8



Connection of Outdoor and Indoor Units

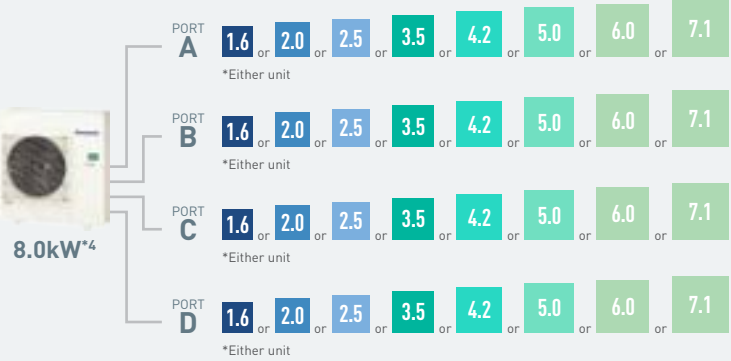	Models	Indoor Units: Possible Combination Patterns (Must be within capacity range)	Maximum Connectable Indoor Unit kW	Indoor unit combination			
				Capacity (kW class)	Wall- Mounted	Slim Ducted	Mini Cassette
Up to 4 rooms	CU-4Z80WBH-8	 8.0kW^{*4}	14.7kW	1.6	•		
				2.0	•		
				2.5	•	•	•
				3.5	•	•	•
				4.2	•		
				5.0	•	•	•
				6.0	•	•	•
				7.1	•		
Up to 5 rooms	CU-5Z100WBH-8	 10.0kW^{*4}	18.3kW	1.6	•		
				2.0	•		
				2.5	•	•	•
				3.5	•	•	•
				4.2	•		
				5.0	•	•	•
				6.0	•	•	•
				7.1	•		

^{*4} To enable demand response management, an optional accessory needs to be installed [CZ-CAP2]

Accessories				
 CZ-MA1P ^{*1} CZ-MA1P is to be used to reduce the connection size on the indoor unit from 1/2" to 3/8".	 CZ-MA2P ^{*2} CZ-MA2P is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2".	 CZ-MA3P ^{*3} CZ-MA3P is to be used to reduce the connection size on the indoor unit from 5/8" to 1/2".	 CZ-CAPR1 ^{*4} RAC Interface Adaptor	 CZ-TACG1 ^{*5} Network Adaptor (Optional)

Outdoor



Up to 4 rooms
CU-4Z80WBH-8



Up to 5 rooms
CU-5Z100WBH-8



Indoor Units

Cooling
Heating

Model			WALL-MOUNTED							
			CS-MRZ16WKH-8	CS-MRZ20WKH-8	CS-MRZ25WKH-8	CS-MRZ35WKH-8	CS-MRZ42WKH-8	CS-MRZ50WKH-8	CS-MRZ60WKH-8	CS-MRZ71WKH-8
Capacity	Cooling	kW	1.6	2.0	2.5	3.5	4.2	5.0	6.0	7.1
			2.6	3.2	3.6	4.5	5.0	5.3	8.5	8.7
	Cooling	Btu/h	5,460	6,820	8,530	11,900	14,300	17,100	20,500	24,200
			8,870	10,900	12,300	15,300	17,100	18,100	29,000	29,700
Power Source			Single Phase, 220V - 240V, 50Hz							
Sound Pressure Level (H/L)	Cooling	dB(A)	41 / 27	42 / 27	42 / 27	46 / 28	46 / 33	46 / 36	48 / 38	51 / 39
	Heating		41 / 29	42 / 29	42 / 29	46 / 31	46 / 35	46 / 35	48 / 38	51 / 39
Air Circulation (H)	Cooling	/min (cfm)	11.0 [390]	11.3 [400]	11.0 [390]	11.6 [410]	11.6 [410]	12.8 [455]	21.2 [750]	23.1 [815]
	Heating		11.6 [410]	11.9 [420]	12.0 [425]	12.1 [430]	12.1 [430]	13.5 [475]	21.2 [750]	23.7 [835]
Dimension	Height	mm	290	290	290	290	290	290	302	302
	Width	mm	779	779	779	779	779	779	1,102	1,102
	Depth	mm	209	209	209	209	209	209	244	244
Net Weight		kg	8	8	8	8	8	8	13	13
Refrigerant Pipe Diameter	Liquid Side	mm	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35
	Gas Side	mm	Ø 9.52	Ø 9.52	Ø 9.52	Ø 9.52	Ø 9.52 ^{*1}	Ø 9.52 ^{*1}	Ø 12.70 ^{*2}	Ø 12.70 ^{*2+3}
Power Supply			Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor

Model			SLIM DUCTED				4-WAY MINI CASSETTE			
			CS-MZ25WD3H8A	CS-MZ35WD3H8A	CS-MZ50WD3H8A	CS-MZ60WD3H8A	CS-MZ25WB4H8A	CS-MZ35WB4H8A	CS-MZ50WB4H8A	CS-MZ60WB4H8A
Capacity	Cooling	kW	2.5	3.5	5.0	6.0	2.5	3.5	5.0	6.0
			3.6	4.5	5.3	8.5	3.6	4.5	5.3	8.5
	Cooling	Btu/h	8,530	11,900	17,100	20,500	8,530	11,900	17,100	20,500
			12,300	15,300	18,100	29,000	12,300	15,300	18,100	29,000
Power Source			Single Phase, 220V - 240V, 50Hz							
Sound Pressure Level [H/L]	Cooling	dB[A]	35 / 29	35 / 28	41 / 31	43 / 32	36 / 27	36 / 28	40 / 30	45 / 34
	Heating		36 / 29	37 / 29	41 / 32	43 / 34	37 / 30	39 / 30	41 / 31	47 / 34
Air Circulation [H]	Cooling	/min [cfm]	10.5 [370]	11.2 [395]	15.3 [540]	15.7 [555]	10.5 [370]	10.5 [370]	11.5 [405]	14.2 [500]
	Heating		10.8 [380]	11.2 [395]	15.3 [540]	15.7 [555]	10.8 [380]	11.7 [415]	11.8 [415]	15.2 [535]
Dimension	Height	mm	200	200	200	200	260	260	260	260
	Width	mm	750	750	750	750	575	575	575	575
	Depth	mm	640	640	640	640	575	575	575	575
Net Weight		kg	19	19	19	19	18	18	18	18
Refrigerant Pipe Diameter	Liquid Side	mm	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35
	Gas Side	mm	Ø 9.52	Ø 9.52	Ø 9.52 ^{*1}	Ø 12.70 ^{*2}	Ø 9.52	Ø 9.52	Ø 9.52 ^{*1}	Ø 12.70 ^{*2}
Power Supply			Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor

*1 CZ-MA1P is to be used to reduce the connection size on the indoor unit from 1/2" to 3/8".
*2 CZ-MA2P is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2".
*3 CZ-MA3P is to be used to reduce the connection size on the indoor unit from 5/8" to 1/2".

Outdoor Units

Cooling
Heating

Model			(50Hz)	CU-2Z52WBH-8	CU-3Z54WBH-8	CU-4Z71WBH-8	CU-4Z80WBH-8	CU-5Z100WBH-8
Cooling Operation Capacity	(min - max)	kW		5.20 [1.50 - 6.00]	5.40 [1.80 - 7.30]	7.10 [1.90 - 8.80]	8.00 [2.30 - 9.20]	10.00 [2.30 - 11.50]
	(min - max)	Btu/h		17,700 [5,120 - 20,500]	18,400 [6,140 - 24,900]	24,200 [6,480 - 30,000]	27,300 [7,840 - 31,400]	34,100 [7,840 - 39,200]
Power Source				Single Phase 220 - 240V, 50Hz				
Maximum Connectable Capacity		kW		7.7	9.5	11.5	14.7	18.3
Maximum Connectable Indoors		Units		2	3	4	4	5
Electrical Data	Running Current	A		6.4 - 5.9	5.4 - 5.1	7.9 - 7.4	9.7 - 8.9	12.8 - 11.8
	Power Input (min - max)	W		1,350 [250 - 1,620]	1,120 [360 - 2,180]	1,660 [340 - 2,470]	1,980 [420 - 2,870]	2,600 [430 - 3,590]
	AEER/EER	W/W		3.79 / 3.85	4.74 / 4.82	4.23 / 4.28	4.00 / 4.04	3.81 / 3.85
EER	(min - max)	W/W		3.85 [6.00 - 3.70]	4.82 [5.00 - 3.35]	4.28 [5.59 - 3.56]	4.04 [5.48 - 3.21]	3.85 [5.35 - 3.20]
	(min - max)	Btu/hW		3.14 [20.47 - 12.62]	16.45 [17.06 - 11.43]	14.60 [19.07 - 12.15]	13.78 [18.70 - 10.95]	13.14 [18.25 - 10.92]
Noise (H)	Sound Pressure Level	dB(A)		51	48	49	51	53
Heating Operation Capacity	(min - max)	kW		6.10 [1.10-7.20]	7.00 [1.60-9.00]	8.50 [3.00-10.70]	9.40 [3.00-11.60]	12.00 [3.40-14.50]
	(min - max)	Btu/h		20,800[3,750-24,600]	23,900[5,460-30,700]	29,000[10,200-36,500]	32,100[10,200-39,600]	40,900[11,600-49,400]
Electrical Data	Running Current	A		6.7 - 6.2	7.3 - 6.8	9.2 - 8.6	10.2 - 9.3	13.1 - 12.1
	Power Input (min - max)	kW		1,430 [210 - 1,900]	1,540 [320 - 2,630]	1,950 [500 - 2,720]	2,030 [500 - 3,420]	2,760 [580 - 4,020]
COP	(min - max)	W/W		4.27 [5.24 - 3.79]	4.55 [5.00 - 3.42]	4.36 [6.00 - 3.93]	4.63 [6.00 - 3.39]	4.35 [5.86 - 3.61]
	(min - max)	Btu/hW		14.57 [17.88 - 12.93]	15.52 [17.06 - 11.67]	14.88 [20.47 - 13.41]	15.80 [20.47 - 11.57]	14.87 [19.99 - 12.32]
Noise (H)	Sound Pressure Level	dB(A)		53	49	51	52	56
Maximum Current		A		11.5	15.2	15.6	19.0	21.3
Starting Current		A		6.7	7.3	9.2	10.2	13.1
Compressor Output		W		900	1300	1300	1700	1700
Dimensions	Height	mm		619	795	795	999	999
	Width	mm		824 (+70)	875 (+95)	875 (+95)	940	940
	Depth	mm		299	320	320	340	340
Net Weight		kg		39	71	72	80	81
Refrigerant Pipe Diameter	Liquid Side	mm		ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35
	Gas Side	mm		ø 9.52	ø 9.52	ø 9.52	ø 9.52	ø 9.52
Pipe Extension **	Chargeless Pipe Length		m	20	30	30	45	45
	Maximum Pipe length	1 Room (m)		20	25	25	25	25
		Total (m)		30	50	60	70	80
	Maximum Elevation Length	m		10	15	15	15	15
Additional Refrigerant Gas		g/m		15	20	20	20	20
Operating Range	Cooling	Degree [°C]		-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46
	Heating	Degree [°C]		-15 ~ +24**	-15 ~ +24**	-15 ~ +24**	-15 ~ +24**	-15 ~ +24**

** Additional Gas might be required for some models. Refer to Page 32 for information on Additional Gas.
*** When pipes are not extended from the standard pipe length, the required amount of refrigerant is already in the unit.

Rating Conditions		
	Cooling	Heating
Inside air temperature	27°C DB /19°C WB	20°C DB
Outside air temperature	35°C DB	7°C DB /6°C WB

CU-2Z52WBH-8: Only Wall-Mounted Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
1 Room	16	1.60	-	-	-	-	1.60	1.1 ~ 2.3	430	220 ~ 620	2.20	2.00	2.60	-	-	-	-	2.60	0.7 ~ 3.8	730	170 ~ 1150	3.60	3.30
	20	2.00	-	-	-	-	2.00	1.1 ~ 2.9	540	220 ~ 790	2.70	2.50	3.20	-	-	-	-	3.20	0.7 ~ 4.8	890	170 ~ 1450	4.30	4.00
	25	2.50	-	-	-	-	2.50	1.1 ~ 3.5	690	220 ~ 1020	3.40	3.10	3.60	-	-	-	-	3.60	0.7 ~ 5.5	1070	170 ~ 1740	5.20	4.80
	35	3.50	-	-	-	-	3.50	1.1 ~ 4.0	1030	220 ~ 1240	5.10	4.60	4.50	-	-	-	-	4.50	0.7 ~ 6.2	1290	170 ~ 1850	6.30	5.70
	42	4.20	-	-	-	-	4.20	1.1 ~ 4.5	1380	220 ~ 1520	6.80	6.20	5.00	-	-	-	-	5.00	1.1 ~ 6.4	1590	210 ~ 2220	7.70	7.10
50	5.00	-	-	-	-	5.00	1.2 ~ 5.1	1710	230 ~ 1810	8.30	7.60	5.30	-	-	-	-	5.30	1.1 ~ 6.8	1680	210 ~ 2330	8.10	7.50	
2 Rooms	16 + 16	1.60	1.60	-	-	-	3.20	1.5 ~ 4.0	680	250 ~ 990	3.30	3.00	2.60	2.60	-	-	-	5.20	1.1 ~ 7.0	1210	210 ~ 1910	5.70	5.20
	16 + 20	1.60	2.00	-	-	-	3.60	1.5 ~ 4.5	780	250 ~ 1150	3.80	3.50	2.40	3.00	-	-	-	5.40	1.1 ~ 7.0	1260	210 ~ 1890	5.90	5.40
	16 + 25	1.60	2.50	-	-	-	4.10	1.5 ~ 5.2	900	250 ~ 1370	4.40	4.00	2.20	3.40	-	-	-	5.60	1.1 ~ 7.0	1310	210 ~ 1890	6.20	5.70
	16 + 35	1.65	3.55	-	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	1.90	4.20	-	-	-	6.10	1.1 ~ 7.0	1430	210 ~ 1890	6.70	6.20
	16 + 42	1.45	3.75	-	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	1.70	4.40	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20
	16 + 50	1.25	3.95	-	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	1.50	4.60	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20
	20 + 20	2.00	2.00	-	-	-	4.00	1.5 ~ 5.0	890	250 ~ 1310	4.30	4.00	2.80	2.80	-	-	-	5.60	1.1 ~ 7.0	1310	210 ~ 1870	6.20	5.70
	20 + 25	2.00	2.50	-	-	-	4.50	1.5 ~ 5.2	1030	250 ~ 1370	4.90	4.50	2.60	3.20	-	-	-	5.80	1.1 ~ 7.0	1360	210 ~ 1870	6.40	5.90
	20 + 35	1.90	3.30	-	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	2.20	3.90	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20
	20 + 42	1.70	3.50	-	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	1.95	4.15	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20
	20 + 50	1.50	3.70	-	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	1.75	4.35	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20
	25 + 25	2.60	2.60	-	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	3.05	3.05	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20
	25 + 35	2.15	3.05	-	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	2.55	3.55	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20
	25 + 42	1.95	3.25	-	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	2.30	3.80	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20
	25 + 50	1.75	3.45	-	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	2.05	4.05	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20
	35 + 35	2.60	2.60	-	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	3.05	3.05	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20
	35 + 42	2.35	2.85	-	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	2.75	3.35	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20

CU-2Z52WBH-8: Free Multi Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
1 Room	16	1.60	-	-	-	-	1.60	1.1 ~ 2.3	460	220 ~ 650	2.30	2.10	2.60	-	-	-	-	2.60	0.7 ~ 3.8	760	170 ~ 1180	3.70	3.40
	20	2.00	-	-	-	-	2.00	1.1 ~ 2.9	570	220 ~ 820	2.80	2.60	3.20	-	-	-	-	3.20	0.7 ~ 4.8	920	170 ~ 1480	4.50	4.10
	25	2.50	-	-	-	-	2.50	1.1 ~ 3.5	720	220 ~ 1050	3.60	3.30	3.60	-	-	-	-	3.60	0.7 ~ 5.5	1100	170 ~ 1770	5.30	4.90
	35	3.50	-	-	-	-	3.50	1.1 ~ 4.0	1060	220 ~ 1270	5.20	4.80	4.50	-	-	-	-	4.50	0.7 ~ 6.2	1320	170 ~ 1880	6.40	5.90
	42	4.20	-	-	-	-	4.20	1.1 ~ 4.5	1410	220 ~ 1550	6.90	6.40	5.00	-	-	-	-	5.00	1.1 ~ 6.4	1620	210 ~ 2250	7.90	7.20
	50	5.00	-	-	-	-	5.00	1.2 ~ 5.1	1740	230 ~ 1840	8.40	7.70	5.30	-	-	-	-	5.30	1.1 ~ 6.8	1710	210 ~ 2360	8.30	7.60
2 Rooms	16 + 16	1.60	1.60	-	-	-	3.20	1.5 ~ 4.0	740	250 ~ 1050	3.60	3.30	2.60	2.60	-	-	-	5.20	1.1 ~ 7.0	1270	210 ~ 1970	6.00	5.50
	16 + 20	1.60	2.00	-	-	-	3.60	1.5 ~ 4.5	840	250 ~ 1210	4.10	3.70	2.40	3.00	-	-	-	5.40	1.1 ~ 7.0	1320	210 ~ 1950	6.20	5.70
	16 + 25	1.60	2.50	-	-	-	4.10	1.5 ~ 5.2	960	250 ~ 1430	4.70	4.30	2.20	3.40	-	-	-	5.60	1.1 ~ 7.0	1370	210 ~ 1950	6.40	5.90
	16 + 35	1.65	3.55	-	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	1.90	4.20	-	-	-	6.10	1.1 ~ 7.0	1490	210 ~ 1950	7.00	6.40
	16 + 42	1.45	3.75	-	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	1.70	4.40	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40
	16 + 50	1.25	3.95	-	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	1.50	4.60	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40
	20 + 20	2.00	2.00	-	-	-	4.00	1.5 ~ 5.0	950	250 ~ 1370	4.60	4.20	2.80	2.80	-	-	-	5.60	1.1 ~ 7.0	1370	210 ~ 1930	6.40	5.90
	20 + 25	2.00	2.50	-	-	-	4.50	1.5 ~ 5.2	810	250 ~ 1430	3.90	3.50	2.60	3.20	-	-	-	5.80	1.1 ~ 7.0	1420	210 ~ 1930	6.70	6.10
	20 + 35	1.90	3.30	-	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	2.20	3.90	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40
	20 + 42	1.70	3.50	-	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	1.95	4.15	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40
	20 + 50	1.50	3.70	-	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	1.75	4.35	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40
	25 + 25	2.60	2.60	-	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	3.05	3.05	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40
	25 + 35	2.15	3.05	-	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	2.55	3.55	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40
	25 + 42	1.95	3.25	-	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	2.30	3.80	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40
	25 + 50	1.75	3.45	-	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	2.05	4.05	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40
	35 + 35	2.60	2.60	-	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	3.05	3.05	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40
	35 + 42	2.35	2.85	-	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	2.75	3.35	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40

CU-3Z54WBH-8: Only Wall-Mounted Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
1 Room	16	1.60	-	-	-	-	1.60	1.3 ~ 2.3	420	250 ~ 660	2.2	2.0	2.60	-	-	-	-	2.60	1.2 ~ 3.2	640	290 ~ 1000	3.3	3.0
	20	2.00	-	-	-	-	2.00	1.8 ~ 2.9	520	340 ~ 830	2.7	2.5	3.20	-	-	-	-	3.20	1.2 ~ 4.1	780	290 ~ 1270	4.0	3.7
	25	2.50	-	-	-	-	2.50	1.8 ~ 2.9	650	340 ~ 830	3.2	2.9	3.60	-	-	-	-	3.60	1.2 ~ 4.3	980	290 ~ 1270	4.9	4.5
	35	3.50	-	-	-	-	3.50	1.8 ~ 3.8	960	340 ~ 1380	4.5	4.2	4.50	-	-	-	-	4.50	1.2 ~ 5.8	1270	290 ~ 2140	6.3	5.8
	42	4.20	-	-	-	-	4.20	1.8 ~ 4.3	1390	340 ~ 2010	6.5	6.0	5.60	-	-	-	-	5.60	1.2 ~ 6.8	1760	290 ~ 2970	8.2	7.5
	50	5.00	-	-	-	-	5.00	1.9 ~ 5.4	1630	340 ~ 2150	7.9	7.3	6.80	-	-	-	-	6.80	1.2 ~ 6.9	2350	290 ~ 2840	11.3	10.4
2 Rooms	16 + 16	1.60	1.60	-	-	-	3.20	1.8 ~ 6.2	630	330 ~ 2130	3.2	3.0	2.60	2.60	-	-	-	5.20	1.4 ~ 7.0	1340	340 ~ 2070	6.4	5.9
	16 + 20	1.60	2.00	-	-	-	3.60	1.8 ~ 6.2	770	330 ~ 2090	3.8	3.5	2.58	3.22	-	-	-	5.80	1.4 ~ 7.0	1520	330 ~ 2030	7.3	6.8
	16 + 25	1.60	2.50	-	-	-	4.10	1.8 ~ 6.2	920	330 ~ 2090	4.5	4.1	2.42	3.78	-	-	-	6.20	1.4 ~ 7.0	1650	330 ~ 2030	7.9	7.2
	16 + 35	1.60	3.50	-	-	-	5.10	1.8 ~ 6.3	1350	330 ~ 2100	6.4	5.9	2.20	4.80	-	-	-	7.00	1.4 ~ 7.3	1900	290 ~ 2130	9.0	8.2
	16 + 42	1.49	3.91	-	-	-	5.40	1.9 ~ 6.4	1500	350 ~ 2140	7.2	6.6	1.93	5.07	-	-	-	7.00	1.4 ~ 7.3	1890	310 ~ 2120	8.9	8.2
	16 + 50	1.31	4.09	-	-	-	5.40	1.9 ~ 6.8	1320	340 ~ 2080	6.3	5.8	1.70	5.30	-	-	-	7.00	1.4 ~ 8.0	1710	270 ~ 2230	8.2	7.5
	20 + 20	2.00	2.00	-	-	-	4.00	1.8 ~ 6.2	890	330 ~ 2050	4.4	4.0	3.20	3.20	-	-	-	6.40	1.4 ~ 7.0	1710	320 ~ 2030	8.2	7.5
	20 + 25	2.00	2.50	-	-	-	4.50	1.8 ~ 6.2	1080	330 ~ 2050	5.2	4.8	3.02	3.78	-	-	-	6.80	1.4 ~ 7.0	1840	290 ~ 2030	8.7	8.0
	20 + 35	1.96	3.44	-	-	-	5.40	1.8 ~ 6.3	1470	330 ~ 2060	7.0	6.4	2.55	4.45	-	-	-	7.00	1.4 ~ 7.3	1890	280 ~ 2120	8.9	8.2
	20 + 42	1.74	3.66	-	-	-	5.40	1.9 ~ 6.4	1470	350 ~ 2100	7.0	6.4	2.26	4.74	-	-	-	7.00	1.4 ~ 7.3	1850	300 ~ 2080	8.7	8.0
	20 + 50	1.54	3.86	-	-	-	5.40	1.9 ~ 6.8	1280	340 ~ 2080	6.1	5.6	2.00	5.00	-	-	-	7.00	1.4 ~ 8.0	1700	270 ~ 2230	8.1	7.4
	25 + 25	2.50	2.50	-	-	-	5.00	1.8 ~ 6.2	1320	330 ~ 2050	6.3	5.8	3.50	3.50	-	-	-	7.00	1.4 ~ 7.2	1900	290 ~ 2100	9.0	8.2
	25 + 35	2.25	3.15	-	-	-	5.40	1.9 ~ 6.3	1470	350 ~ 2060	7.0	6.4	2.92	4.08	-	-	-	7.00	1.4 ~ 7.3	1890	280 ~ 2120	8.9	8.2
	25 + 42	2.01	3.39	-	-	-	5.40	1.9 ~ 6.4	1470	350 ~ 2100	7.0	6.4	2.61	4.39	-	-	-	7.00	1.4 ~ 7.3	1850	280 ~ 2080	8.7	8.0
	25 + 50	1.80	3.60	-	-	-	5.40	1.9 ~ 6.8	1280	340 ~ 2080	6.1	5.6	2.33	4.67	-	-	-	7.00	1.4 ~ 8.0	1700	240 ~ 2230	8.1	7.4
	35 + 35	2.70	2.70	-	-	-	5.40	1.9 ~ 6.4	1430	350 ~ 2060	6.8	6.3	3.50	3.50	-	-	-	7.00	1.4 ~ 7.5	1840	270 ~ 2140	8.7	8.0
	35 + 42	2.45	2.95	-	-	-	5.40	1.9 ~ 6.5	1430	350 ~ 2110	6.8	6.3	3.18	3.82	-	-	-	7.00	1.4 ~ 7.5	1830	260 ~ 2140	8.7	7.9
	35 + 50	2.22	3.18	-	-	-	5.40	1.9 ~ 6.9	1280	360 ~ 2080	6.1	5.6	2.88	4.12	-	-	-	7.00	1.4 ~ 8.0	1680	240 ~ 2160	8.0	7.4
	42 + 42	2.70	2.70	-	-	-	5.40	1.9 ~ 6.5	1430	350 ~ 2110	6.8	6.3	3.50	3.50	-	-	-	7.00	1.4 ~ 7.6	1790	260 ~ 2170	8.5	7.8
	42 + 50	2.47	2.93	-	-	-	5.40	1.9 ~ 6.9	1280	360 ~ 2080	6.1	5.6	3.20	3.80	-	-	-	7.00	1.4 ~ 8.0	1680	240 ~ 2160	8.0	7.4
3 Rooms	16 + 16 + 16	1.60	1.60	1.60	-	-	4.80	1.8 ~ 7.2	930	360 ~ 2140	4.5	4.2	2.33	2.33	2.33	-	-	6.99	1.5 ~ 8.1	1550	290 ~ 2270	7.3	6.9
	16 + 16 + 20	1.66	1.66	2.08	-	-	5.40	1.8 ~ 7.3	1120	360 ~ 2180	5.4	5.1	2.15	2.15	2.70	-	-	7.00	1.6 ~ 9.0	1540	320 ~ 2630	7.3	6.8
	16 + 16 + 25	1.52	1.52	2.36	-	-	5.40	1.9 ~ 7.2	1120	390 ~ 2090	5.4	5.1	1.96	1.96	3.08	-	-	7.00	1.6 ~ 9.0	1540	320 ~ 2630	7.3	6.8
	16 + 16 + 35	1.29	1.29	2.82	-	-	5.40	1.9 ~ 7.2	1120	390 ~ 2050	5.4	5.1	1.67	1.67	3.66	-	-	7.00	1.6 ~ 9.0	1520	340 ~ 2610	7.2	6.7
	16 + 16 + 42	1.17	1.17	3.06	-	-	5.40	1.8 ~ 7.3	1120	390 ~ 2090	5.4	5.1	1.51	1.51	3.98	-	-	7.00	1.6 ~ 9.0	1510	310 ~ 2560	7.1	6.7
	16 + 16 + 50	1.05	1.05	3.30	-	-	5.40	1.8 ~ 7.3	1050	420 ~ 1920	5.1	4.7	1.37	1.37	4.26	-	-	7.00	1.6 ~ 9.0	1410	330 ~ 2410	6.7	6.2
	16 + 20 + 20	1.54	1.93	1.93	-	-	5.40	1.9 ~ 7.2	1120	390 ~ 2090	5.4	5.1	2.00	2.50	2.50	-	-	7.00	1.6 ~ 9.0	1530	310 ~ 2620	7.2	6.8
	16 + 20 + 25	1.42	1.77	2.21	-	-	5.40	1.9 ~ 7.2	1120	390 ~ 2090	5.4	5.1	1.84	2.30	2.86	-	-	7.00	1.6 ~ 9.0	1530	310 ~ 2620	7.2	6.8
	16 + 20 + 35	1.22	1.52	2.66	-	-	5.40	1.9 ~ 7.2	1120	390 ~ 2010	5.4	5.1	1.58	1.97	3.45	-	-	7.00	1.6 ~ 9.0	1510	340 ~ 2560	7.1	6.7
	16 + 20 + 42	1.11	1.38	2.91	-	-	5.40	1.8 ~ 7.3	1120	390 ~ 2090	5.4	5.1	1.44	1.79	3.77	-	-	7.00	1.6 ~ 9.0	1510	310 ~ 2550	7.1	6.7
	16 + 20 + 50	1.00	1.26	3.14	-	-	5.40	1.8 ~ 7.3	1050	420 ~ 1880	5.1	4.7	1.30	1.63	4.07	-	-	7.00	1.6 ~ 9.0	1410	340 ~ 2400	6.7	6.2
	16 + 25 + 25	1.30	2.05	2.05	-	-	5.40	1.9 ~ 7.2	1120	390 ~ 2090	5.4	5.1	1.70	2.65	2.65	-	-	7.00	1.6 ~ 9.0	1530	310 ~ 2620	7.2	6.8
	16 + 25 + 35	1.14	1.78	2.48	-	-	5.40	1.8 ~ 7.3	1120	390 ~ 2090	5.4	5.1	1.47	2.30	3.23	-	-	7.00	1.6 ~ 9.0	1510	340 ~ 2560	7.1	6.7
	16 + 25 + 42	1.04	1.63	2.73	-	-	5.40	1.8 ~ 7.3	1120	390 ~ 2090	5.4	5.1	1.35	2.11	3.54	-	-	7.00	1.6 ~ 9.0	1510	310 ~ 2550	7.1	6.7
	16 + 25 + 50	0.95	1.48	2.97	-	-	5.40	1.8 ~ 7.3	1050	420 ~ 1880	5.1	4.7	1.23	1.92	3.85	-	-	7.00	1.6 ~ 9.0	1410	340 ~ 2400	6.7	6.2
	16 + 35 + 35	1.00	2.20	2.20	-	-	5.40	1.8 ~ 7.3	1090	390 ~ 2050	5.3	4.9	1.30	2.85	2.85	-	-	7.00	1.6 ~ 9.0	1500	320 ~ 2530	7.1	6.6
	16 + 35 + 42	0.93	2.03	2.44	-	-	5.40	1.8 ~ 7.3	1090	390 ~ 2050	5.3	4.9	1.20	2.63	3.17	-	-	7.00	1.6 ~ 9.0	1490	320 ~ 2520	7.0	6.6
	20 + 20 + 20	1.80	1.80	1.80	-	-	5.40	1.9 ~ 7.2	1120	390 ~ 2050	5.4	5.1	2.33	2.33	2.33	-	-	6.99	1.6 ~ 9.0	1530	310 ~ 2610	7.2	6.8
	20 + 20 + 25	1.66	1.66	2.08	-	-	5.40	1.9 ~ 7.2	1120	390 ~ 2050	5.4	5.1	2.15	2.15	2.70	-	-	7.00	1.6 ~ 9.0	1530	310 ~ 2610	7.2	6.8
	20 + 20 + 35	1.44	1.44	2.52	-	-	5.40	1.9 ~ 7.2	1120	390 ~ 2010	5.4	5.1	1.87	1.87	3.26	-	-	7.00	1.6 ~ 9.0	1510	340 ~ 2550	7.1	6.7
	20 + 20 + 42	1.32	1.32	2.76	-	-	5.40	1.8 ~ 7.3	1090	390 ~ 2050	5.3	4.9	1.71	1.71	3.58	-	-	7.00	1.6 ~ 9.0	1500	320 ~ 2540	7.1	6.6
	20 + 20 + 50	1.20	1.20	3.00	-	-	5.40	1.8 ~ 7.3	1050	420 ~ 1880	5.1	4.7	1.56	1.56	3.88	-	-	7.00	1.6 ~ 9.0	1400	340 ~ 2390	6.6	6.2
	20 + 25 + 25	1.54	1.93	1.93	-	-	5.40	1.9 ~ 7.2	1120	390 ~ 2050	5.4	5.1	2.00	2.50	2.50	-	-	7.00	1.6 ~ 9.0	1530	310 ~ 2610	7.2	6.8
	20 + 25 + 35	1.35	1.69	2.36	-	-	5.40	1.9 ~ 7.2	1120	390 ~ 2010	5.4	5.1	1.75	2.19	3.06	-	-	7.00	1.6 ~ 9.0	1510	340 ~ 2550	7.1	6.7
	20 + 25 + 42	1.24	1.55	2.61	-	-	5.40	1.8 ~ 7.3	1090	390 ~ 2050	5.3	4.9	1.61	2.01	3.38	-	-	7.00	1.6 ~ 9.0	1500	320 ~ 2540	7.1	6.6
	20 + 25 + 50	1.14	1.42	2.84	-	-	5.40	1.8 ~ 7.3	1050	420 ~ 1880	5.1	4.7	1.47	1.84	3.69	-	-	7.00	1.6 ~ 9.0	1400	340 ~ 2390	6.6	6.2
	20 + 35 + 35	1.20	2.10	2.10	-	-	5.40	1.8 ~ 7.3	1090	390 ~ 2010	5.3	4.9	1.56	2.72	2.72	-	-	7.00	1.6 ~ 9.0	1490	320 ~ 2520	7.0	6.6
	25 + 25 + 25	1.80	1.80	1.80	-	-	5.40	1.9 ~ 7.2	1120	390 ~ 2050	5.4	5.1	2.33	2.33	2.33	-	-	6.99	1.6 ~ 9.0	1530	310 ~ 2610	7.2	6.8
	25 + 25 + 35	1.59	1.59	2.22	-	-	5.40	1.9 ~ 7.2	1120	390 ~ 2010	5.4	5.1	2.06	2.06	2.88	-	-	7.00	1.6 ~ 9.0	1510	310 ~ 2550	7.1	6.7
	25 + 25 + 42	1.47	1.47	2.46	-	-	5.40	1.8 ~ 7.3	1090	390 ~ 2050	5.3	4.9	1.90	1.90	3.20	-	-	7.00	1.6 ~ 9.0	1500	680 ~ 2540	7.1	6.6
25 + 35 + 35	1.42	1.99	1.99	-	-	5.40	1.8 ~ 7.3	1090	390 ~ 2010	5.3	4.9	1.84	2.58	2.58	-	-	7.00	1.6 ~ 9.0	1490	680 ~ 2520	7.0	6.6	

CU-3Z54WBH-8: Free Multi Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
1 Room	16	1.60	-	-	-	-	1.60	1.3 ~ 2.3	450	250 ~ 690	2.4	2.2	2.60	-	-	-	-	2.60	1.2 ~ 3.2	700	290 ~ 1060	3.5	3.2
	20	2.00	-	-	-	-	2.00	1.8 ~ 2.9	550	340 ~ 860	2.8	2.6	3.20	-	-	-	-	3.20	1.2 ~ 4.1	840	290 ~ 1330	4.3	3.9
	25	2.50	-	-	-	-	2.50	1.8 ~ 2.9	680	340 ~ 860	3.4	3.1	3.60	-	-	-	-	3.60	1.2 ~ 4.3	1040	290 ~ 1330	5.2	4.7
	35	3.50	-	-	-	-	3.50	1.8 ~ 3.8	990	340 ~ 1410	4.7	4.3	4.50	-	-	-	-	4.50	1.2 ~ 5.8	1330	290 ~ 2200	6.6	6.1
	42	4.20	-	-	-	-	4.20	1.8 ~ 4.3	1420	340 ~ 2040	6.7	6.1	5.60	-	-	-	-	5.60	1.2 ~ 6.8	1820	290 ~ 3030	8.4	7.7
	50	5.00	-	-	-	-	5.00	1.9 ~ 5.4	1630	340 ~ 2150	7.9	7.3	6.80	-	-	-	-	6.80	1.2 ~ 6.9	2350	290 ~ 2840	11.3	10.4
2 Rooms	16 + 16	1.60	1.60	-	-	-	3.20	1.8 ~ 6.2	690	330 ~ 2190	3.5	3.2	2.60	2.60	-	-	-	5.20	1.4 ~ 7.0	1460	340 ~ 2190	7.0	6.4
	16 + 20	1.60	2.00	-	-	-	3.60	1.8 ~ 6.2	830	330 ~ 2150	4.1	3.7	2.58	3.22	-	-	-	5.80	1.4 ~ 7.0	1640	330 ~ 2150	7.8	7.2
	16 + 25	1.60	2.50	-	-	-	4.10	1.8 ~ 6.2	980	330 ~ 2150	4.8	4.4	2.42	3.78	-	-	-	6.20	1.4 ~ 7.0	1770	330 ~ 2150	8.4	7.7
	16 + 35	1.60	3.50	-	-	-	5.10	1.8 ~ 6.3	1410	330 ~ 2160	6.7	6.2	2.20	4.80	-	-	-	7.00	1.4 ~ 7.3	2020	290 ~ 2250	9.6	8.8
	16 + 42	1.49	3.91	-	-	-	5.40	1.9 ~ 6.4	1560	350 ~ 2200	7.5	6.8	1.93	5.07	-	-	-	7.00	1.4 ~ 7.3	2010	310 ~ 2240	9.5	8.7
	16 + 50	1.31	4.09	-	-	-	5.40	1.9 ~ 6.8	1380	340 ~ 2140	6.6	6.0	1.70	5.30	-	-	-	7.00	1.4 ~ 8.0	1830	270 ~ 2350	8.7	7.9
	20 + 20	2.00	2.00	-	-	-	4.00	1.8 ~ 6.2	950	330 ~ 2110	4.6	4.2	3.20	3.20	-	-	-	6.40	1.4 ~ 7.0	1830	320 ~ 2150	8.7	7.9
	20 + 25	2.00	2.50	-	-	-	4.50	1.8 ~ 6.2	1140	330 ~ 2110	5.5	5.0	3.02	3.78	-	-	-	6.80	1.4 ~ 7.0	1960	290 ~ 2150	9.3	8.5
	20 + 35	1.96	3.44	-	-	-	5.40	1.8 ~ 6.3	1530	330 ~ 2120	7.3	6.7	2.55	4.45	-	-	-	7.00	1.4 ~ 7.3	2010	280 ~ 2240	9.5	8.7
	20 + 42	1.74	3.66	-	-	-	5.40	1.9 ~ 6.4	1530	350 ~ 2160	7.3	6.7	2.26	4.74	-	-	-	7.00	1.4 ~ 7.3	1970	300 ~ 2200	9.3	8.5
	20 + 50	1.54	3.86	-	-	-	5.40	1.9 ~ 6.8	1340	340 ~ 2140	6.4	5.9	2.00	5.00	-	-	-	7.00	1.4 ~ 8.0	1820	270 ~ 2350	8.6	7.8
	25 + 25	2.50	2.50	-	-	-	5.00	1.8 ~ 6.2	1380	330 ~ 2110	6.6	6.0	3.50	3.50	-	-	-	7.00	1.4 ~ 7.2	2020	290 ~ 2220	9.6	8.8
	25 + 35	2.25	3.15	-	-	-	5.40	1.9 ~ 6.3	1530	350 ~ 2120	7.3	6.7	2.92	4.08	-	-	-	7.00	1.4 ~ 7.3	2010	280 ~ 2240	9.5	8.7
	25 + 42	2.01	3.39	-	-	-	5.40	1.9 ~ 6.4	1530	350 ~ 2160	7.3	6.7	2.61	4.39	-	-	-	7.00	1.4 ~ 7.3	1970	280 ~ 2200	9.3	8.5
	25 + 50	1.80	3.60	-	-	-	5.40	1.9 ~ 6.8	1340	340 ~ 2140	6.4	5.9	2.33	4.67	-	-	-	7.00	1.4 ~ 8.0	1820	240 ~ 2350	8.6	7.9
	35 + 35	2.70	2.70	-	-	-	5.40	1.9 ~ 6.4	1490	350 ~ 2120	7.1	6.5	3.50	3.50	-	-	-	7.00	1.4 ~ 7.5	1960	270 ~ 2260	9.3	8.5
	35 + 42	2.45	2.95	-	-	-	5.40	1.9 ~ 6.5	1490	350 ~ 2170	7.1	6.5	3.18	3.82	-	-	-	7.00	1.4 ~ 7.5	1950	260 ~ 2260	9.2	8.5
	35 + 50	2.22	3.18	-	-	-	5.40	1.9 ~ 6.9	1340	360 ~ 2140	6.4	5.9	2.88	4.12	-	-	-	7.00	1.4 ~ 8.0	1800	240 ~ 2280	8.5	7.8
	42 + 42	2.70	2.70	-	-	-	5.40	1.9 ~ 6.5	1490	350 ~ 2170	7.1	6.5	3.50	3.50	-	-	-	7.00	1.4 ~ 7.6	1910	260 ~ 2290	9.0	8.3
	42 + 50	2.47	2.93	-	-	-	5.40	1.9 ~ 6.9	1340	360 ~ 2140	6.4	5.9	3.20	3.80	-	-	-	7.00	1.4 ~ 8.0	1800	240 ~ 2280	8.5	7.8
3 Rooms	16 + 16 + 16	1.60	1.60	1.60	-	-	4.80	1.8 ~ 7.2	1020	360 ~ 2230	5.0	4.6	2.33	2.33	2.33	-	-	6.99	1.5 ~ 8.1	1730	290 ~ 2450	8.2	7.6
	16 + 16 + 20	1.66	1.66	2.08	-	-	5.40	1.8 ~ 7.3	1210	360 ~ 2270	5.8	5.5	2.15	2.15	2.70	-	-	7.00	1.6 ~ 9.0	1720	320 ~ 2810	8.1	7.6
	16 + 16 + 25	1.52	1.52	2.36	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2180	5.8	5.5	1.96	1.96	3.08	-	-	7.00	1.6 ~ 9.0	1720	320 ~ 2810	8.1	7.6
	16 + 16 + 35	1.29	1.29	2.82	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2140	5.8	5.5	1.67	1.67	3.66	-	-	7.00	1.6 ~ 9.0	1700	340 ~ 2790	8.0	7.5
	16 + 16 + 42	1.17	1.17	3.06	-	-	5.40	1.8 ~ 7.3	1210	390 ~ 2180	5.8	5.5	1.51	1.51	3.98	-	-	7.00	1.6 ~ 9.0	1690	310 ~ 2740	8.0	7.5
	16 + 16 + 50	1.05	1.05	3.30	-	-	5.40	1.8 ~ 7.3	1140	420 ~ 2010	5.5	5.1	1.37	1.37	4.26	-	-	7.00	1.6 ~ 9.0	1590	330 ~ 2590	7.5	7.0
	16 + 20 + 20	1.54	1.93	1.93	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2180	5.8	5.5	2.00	2.50	2.50	-	-	7.00	1.6 ~ 9.0	1710	310 ~ 2800	8.1	7.6
	16 + 20 + 25	1.42	1.77	2.21	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2180	5.8	5.5	1.84	2.30	2.86	-	-	7.00	1.6 ~ 9.0	1710	310 ~ 2800	8.1	7.6
	16 + 20 + 35	1.22	1.52	2.66	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2100	5.8	5.5	1.58	1.97	3.45	-	-	7.00	1.6 ~ 9.0	1690	340 ~ 2740	8.0	7.5
	16 + 20 + 42	1.11	1.38	2.91	-	-	5.40	1.8 ~ 7.3	1210	390 ~ 2180	5.8	5.5	1.44	1.79	3.77	-	-	7.00	1.6 ~ 9.0	1690	310 ~ 2730	8.0	7.5
	16 + 20 + 50	1.00	1.26	3.14	-	-	5.40	1.8 ~ 7.3	1140	420 ~ 1970	5.5	5.1	1.30	1.63	4.07	-	-	7.00	1.6 ~ 9.0	1590	340 ~ 2580	7.5	7.0
	16 + 25 + 25	1.30	2.05	2.05	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2180	5.8	5.5	1.70	2.65	2.65	-	-	7.00	1.6 ~ 9.0	1710	310 ~ 2800	8.1	7.6
	16 + 25 + 35	1.14	1.78	2.48	-	-	5.40	1.8 ~ 7.3	1210	390 ~ 2180	5.8	5.5	1.47	2.30	3.23	-	-	7.00	1.6 ~ 9.0	1690	340 ~ 2740	8.0	7.5
	16 + 25 + 42	1.04	1.63	2.73	-	-	5.40	1.8 ~ 7.3	1210	390 ~ 2180	5.8	5.5	1.35	2.11	3.54	-	-	7.00	1.6 ~ 9.0	1690	310 ~ 2730	8.0	7.5
	16 + 25 + 50	0.95	1.48	2.97	-	-	5.40	1.8 ~ 7.3	1140	420 ~ 1970	5.5	5.1	1.23	1.92	3.85	-	-	7.00	1.6 ~ 9.0	1590	340 ~ 2580	7.5	7.0
	16 + 35 + 35	1.00	2.20	2.20	-	-	5.40	1.8 ~ 7.3	1180	390 ~ 2140	5.7	5.3	1.30	2.85	2.85	-	-	7.00	1.6 ~ 9.0	1680	320 ~ 2710	7.9	7.4
	16 + 35 + 42	0.93	2.03	2.44	-	-	5.40	1.8 ~ 7.3	1180	390 ~ 2140	5.7	5.3	1.20	2.63	3.17	-	-	7.00	1.6 ~ 9.0	1670	320 ~ 2700	7.9	7.4
	20 + 20 + 20	1.80	1.80	1.80	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2140	5.8	5.5	2.33	2.33	2.33	-	-	6.99	1.6 ~ 9.0	1710	310 ~ 2790	8.1	7.6
	20 + 20 + 25	1.66	1.66	2.08	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2140	5.8	5.5	2.15	2.15	2.70	-	-	7.00	1.6 ~ 9.0	1710	310 ~ 2790	8.1	7.6
	20 + 20 + 35	1.44	1.44	2.52	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2100	5.8	5.5	1.87	1.87	3.26	-	-	7.00	1.6 ~ 9.0	1690	340 ~ 2730	8.0	7.5
	20 + 20 + 42	1.32	1.32	2.76	-	-	5.40	1.8 ~ 7.3	1180	390 ~ 2140	5.7	5.3	1.71	1.71	3.58	-	-	7.00	1.6 ~ 9.0	1680	320 ~ 2720	7.9	7.4
	20 + 20 + 50	1.20	1.20	3.00	-	-	5.40	1.8 ~ 7.3	1140	420 ~ 1970	5.5	5.1	1.56	1.56	3.88	-	-	7.00	1.6 ~ 9.0	1580	340 ~ 2570	7.5	7.0
	20 + 25 + 25	1.54	1.93	1.93	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2140	5.8	5.5	2.00	2.50	2.50	-	-	7.00	1.6 ~ 9.0	1710	310 ~ 2790	8.1	7.6
	20 + 25 + 35	1.35	1.69	2.36	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2100	5.8	5.5	1.75	2.19	3.06	-	-	7.00	1.6 ~ 9.0	1690	340 ~ 2730	8.0	7.5
	20 + 25 + 42	1.24	1.55	2.61	-	-	5.40	1.8 ~ 7.3	1180	390 ~ 2140	5.7	5.3	1.61	2.01	3.38	-	-	7.00	1.6 ~ 9.0	1680	320 ~ 2720	7.9	7.4
	20 + 25 + 50	1.14																					

CU-4Z71WBH-8: Only Wall-Mounted Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
3 Rooms	20 + 20 + 20	2.00	2.00	2.00	-	-	6.00	1.9 ~ 8.0	1540	270 ~ 2470	7.4	6.7	2.83	2.83	2.83	-	-	8.49	3.3 ~ 10.4	2290	630 ~ 3040	10.8	9.9
	20 + 20 + 25	2.00	2.00	2.50	-	-	6.50	1.9 ~ 8.0	1790	270 ~ 2470	8.5	7.8	2.62	2.62	3.26	-	-	8.50	3.3 ~ 10.4	2290	630 ~ 3040	10.8	9.9
	20 + 20 + 35	1.89	1.89	3.32	-	-	7.10	1.9 ~ 8.0	2100	270 ~ 2380	9.9	9.1	2.27	2.27	3.96	-	-	8.50	3.3 ~ 10.4	2270	620 ~ 2970	10.7	9.8
	20 + 20 + 42	1.73	1.73	3.64	-	-	7.10	1.9 ~ 8.1	2060	290 ~ 2480	9.7	8.9	2.07	2.07	4.36	-	-	8.50	3.3 ~ 10.5	2260	620 ~ 3010	10.7	9.8
	20 + 20 + 50	1.58	1.58	3.94	-	-	7.10	2.0 ~ 8.5	1920	340 ~ 2440	9.1	8.3	1.89	1.89	4.72	-	-	8.50	3.2 ~ 10.7	2120	600 ~ 2950	10.0	9.2
	20 + 20 + 60	1.42	1.42	4.26	-	-	7.10	2.0 ~ 8.5	1920	340 ~ 2440	9.1	8.3	1.70	1.70	5.10	-	-	8.50	3.2 ~ 10.7	2120	600 ~ 2950	10.0	9.2
	20 + 25 + 25	2.00	2.50	2.50	-	-	7.00	1.9 ~ 8.0	2060	270 ~ 2470	9.7	8.9	2.42	3.04	3.04	-	-	8.50	3.3 ~ 10.4	2290	630 ~ 3040	10.8	9.9
	20 + 25 + 35	1.78	2.22	3.10	-	-	7.10	1.9 ~ 8.0	2100	270 ~ 2380	9.9	9.1	2.12	2.66	3.72	-	-	8.50	3.3 ~ 10.4	2270	620 ~ 2970	10.7	9.8
	20 + 25 + 42	1.63	2.04	3.43	-	-	7.10	1.9 ~ 8.1	2060	290 ~ 2480	9.7	8.9	1.95	2.44	4.11	-	-	8.50	3.3 ~ 10.5	2260	620 ~ 3010	10.7	9.8
	20 + 25 + 50	1.49	1.87	3.74	-	-	7.10	2.0 ~ 8.5	1920	340 ~ 2440	9.1	8.3	1.79	2.24	4.47	-	-	8.50	3.2 ~ 10.7	2120	600 ~ 2950	10.0	9.2
	20 + 25 + 60	1.35	1.69	4.06	-	-	7.10	2.0 ~ 8.5	1920	340 ~ 2440	9.1	8.3	1.62	2.02	4.86	-	-	8.50	3.2 ~ 10.7	2120	600 ~ 2950	10.0	9.2
	20 + 35 + 35	1.58	2.76	2.76	-	-	7.10	1.9 ~ 8.1	2060	290 ~ 2390	9.7	8.9	1.88	3.31	3.31	-	-	8.50	3.3 ~ 10.5	2240	640 ~ 2990	10.6	9.7
	20 + 35 + 42	1.46	2.56	3.08	-	-	7.10	1.9 ~ 8.2	2010	290 ~ 2480	9.5	8.7	1.75	3.07	3.68	-	-	8.50	3.3 ~ 10.5	2230	640 ~ 2980	10.5	9.7
	20 + 35 + 50	1.35	2.37	3.38	-	-	7.10	2.0 ~ 8.5	1870	340 ~ 2390	8.8	8.1	1.62	2.83	4.05	-	-	8.50	3.2 ~ 10.7	2100	600 ~ 2920	9.9	9.1
	20 + 35 + 60	1.23	2.16	3.71	-	-	7.10	2.0 ~ 8.5	1870	340 ~ 2390	8.8	8.1	1.48	2.59	4.43	-	-	8.50	3.2 ~ 10.7	2100	600 ~ 2920	9.9	9.1
	20 + 42 + 42	1.36	2.87	2.87	-	-	7.10	1.9 ~ 8.2	2010	290 ~ 2430	9.5	8.7	1.64	3.43	3.43	-	-	8.50	3.3 ~ 10.5	2220	630 ~ 2980	10.5	9.6
	20 + 42 + 50	1.27	2.66	3.17	-	-	7.10	2.0 ~ 8.5	1870	340 ~ 2390	8.8	8.1	1.52	3.19	3.79	-	-	8.50	3.2 ~ 10.6	2090	620 ~ 2870	9.9	9.1
	25 + 25 + 25	2.36	2.36	2.36	-	-	7.08	1.9 ~ 8.0	2100	270 ~ 2470	9.9	9.1	2.83	2.83	2.83	-	-	8.49	3.3 ~ 10.4	2290	630 ~ 3040	10.8	9.9
	25 + 25 + 35	2.09	2.09	2.92	-	-	7.10	1.9 ~ 8.0	2100	270 ~ 2380	9.9	9.1	2.50	2.50	3.50	-	-	8.50	3.3 ~ 10.4	2270	620 ~ 2970	10.7	9.8
	25 + 25 + 42	1.93	1.93	3.24	-	-	7.10	1.9 ~ 8.1	2060	290 ~ 2480	9.7	8.9	2.31	2.31	3.88	-	-	8.50	3.3 ~ 10.5	2260	620 ~ 3010	10.7	9.8
	25 + 25 + 50	1.78	1.78	3.54	-	-	7.10	2.0 ~ 8.5	1920	340 ~ 2440	9.1	8.3	2.13	2.13	4.24	-	-	8.50	3.2 ~ 10.7	2120	600 ~ 2950	10.0	9.2
	25 + 25 + 60	1.61	1.61	3.88	-	-	7.10	2.0 ~ 8.5	1920	340 ~ 2440	9.1	8.3	1.93	1.93	4.64	-	-	8.50	3.2 ~ 10.7	2120	600 ~ 2950	10.0	9.2
	25 + 35 + 35	1.86	2.62	2.62	-	-	7.10	1.9 ~ 8.1	2060	290 ~ 2390	9.7	8.9	2.24	3.13	3.13	-	-	8.50	3.3 ~ 10.5	2240	640 ~ 2990	10.6	9.7
	25 + 35 + 42	1.74	2.44	2.92	-	-	7.10	1.9 ~ 8.2	2010	290 ~ 2480	9.5	8.7	2.08	2.92	3.50	-	-	8.50	3.3 ~ 10.5	2230	640 ~ 2980	10.5	9.7
	25 + 35 + 50	1.61	2.26	3.23	-	-	7.10	2.0 ~ 8.5	1870	340 ~ 2390	8.8	8.1	1.93	2.70	3.87	-	-	8.50	3.2 ~ 10.7	2100	600 ~ 2920	9.9	9.1
	25 + 42 + 42	1.62	2.74	2.74	-	-	7.10	1.9 ~ 8.2	2010	290 ~ 2430	9.5	8.7	1.94	3.28	3.28	-	-	8.50	3.3 ~ 10.5	2220	630 ~ 2980	10.5	9.6
	35 + 35 + 35	2.36	2.36	2.36	-	-	7.08	1.9 ~ 8.2	2010	290 ~ 2390	9.5	8.7	2.83	2.83	2.83	-	-	8.49	3.3 ~ 10.5	2180	630 ~ 2970	10.3	9.5
	35 + 35 + 42	2.22	2.22	2.66	-	-	7.10	1.9 ~ 8.2	2010	290 ~ 2390	9.5	8.7	2.66	2.66	3.18	-	-	8.50	3.3 ~ 10.5	2170	630 ~ 2920	10.3	9.4
4 Rooms	16 + 16 + 16 + 16	1.60	1.60	1.60	1.60	-	6.40	1.9 ~ 8.7	1390	340 ~ 2370	6.6	6.2	2.12	2.12	2.12	2.12	-	8.48	3.0 ~ 10.7	1960	500 ~ 2770	9.3	8.7
	16 + 16 + 16 + 20	1.67	1.67	1.67	2.09	-	7.10	1.9 ~ 8.8	1660	340 ~ 2470	7.9	7.4	2.00	2.00	2.00	2.50	-	8.50	3.0 ~ 10.7	1950	500 ~ 2720	9.2	8.6
	16 + 16 + 16 + 25	1.56	1.56	1.56	2.42	-	7.10	1.9 ~ 8.8	1660	340 ~ 2470	7.9	7.4	1.86	1.86	1.86	2.92	-	8.50	3.0 ~ 10.7	1950	500 ~ 2720	9.2	8.6
	16 + 16 + 16 + 35	1.37	1.37	1.37	2.99	-	7.10	1.9 ~ 8.8	1660	340 ~ 2380	7.9	7.4	1.64	1.64	1.64	3.58	-	8.50	3.0 ~ 10.7	1930	500 ~ 2700	9.1	8.5
	16 + 16 + 16 + 42	1.26	1.26	1.26	3.32	-	7.10	1.9 ~ 8.8	1660	340 ~ 2380	7.9	7.4	1.51	1.51	1.51	3.97	-	8.50	3.0 ~ 10.7	1930	500 ~ 2690	9.1	8.5
	16 + 16 + 16 + 50	1.16	1.16	1.16	3.62	-	7.10	1.9 ~ 8.8	1580	400 ~ 2240	7.5	7.1	1.39	1.39	1.39	4.33	-	8.50	3.0 ~ 10.7	1890	560 ~ 2590	8.9	8.4
	16 + 16 + 16 + 60	1.05	1.05	1.05	3.95	-	7.10	1.9 ~ 8.8	1580	400 ~ 2240	7.5	7.1	1.26	1.26	1.26	4.72	-	8.50	3.0 ~ 10.7	1890	560 ~ 2590	8.9	8.4
	16 + 16 + 20 + 20	1.58	1.58	1.97	1.97	-	7.10	1.9 ~ 8.8	1660	340 ~ 2420	7.9	7.4	1.89	1.89	2.36	2.36	-	8.50	3.1 ~ 10.7	1950	520 ~ 2710	9.2	8.6
	16 + 16 + 20 + 25	1.48	1.48	1.84	2.30	-	7.10	1.9 ~ 8.8	1660	340 ~ 2420	7.9	7.4	1.77	1.77	2.20	2.76	-	8.50	3.1 ~ 10.7	1950	520 ~ 2710	9.2	8.6
	16 + 16 + 20 + 35	1.31	1.31	1.63	2.85	-	7.10	1.9 ~ 8.8	1660	340 ~ 2380	7.9	7.4	1.56	1.56	1.95	3.43	-	8.50	3.0 ~ 10.7	1930	500 ~ 2690	9.1	8.5
	16 + 16 + 20 + 42	1.21	1.21	1.51	3.17	-	7.10	1.9 ~ 8.8	1620	370 ~ 2380	7.7	7.2	1.45	1.45	1.80	3.80	-	8.50	3.0 ~ 10.7	1920	520 ~ 2680	9.1	8.5
	16 + 16 + 20 + 50	1.11	1.11	1.39	3.49	-	7.10	1.9 ~ 8.8	1580	400 ~ 2200	7.5	7.1	1.33	1.33	1.67	4.17	-	8.50	3.0 ~ 10.7	1880	570 ~ 2580	8.9	8.3
	16 + 16 + 20 + 60	1.01	1.01	1.27	3.81	-	7.10	1.9 ~ 8.8	1580	400 ~ 2200	7.5	7.1	1.21	1.21	1.52	4.56	-	8.50	3.0 ~ 10.7	1880	570 ~ 2580	8.9	8.3
	16 + 16 + 25 + 25	1.39	1.39	2.16	2.16	-	7.10	1.9 ~ 8.8	1660	340 ~ 2420	7.9	7.4	1.66	1.66	2.59	2.59	-	8.50	3.1 ~ 10.7	1950	520 ~ 2710	9.2	8.6
	16 + 16 + 25 + 35	1.23	1.23	1.93	2.71	-	7.10	1.9 ~ 8.8	1660	340 ~ 2380	7.9	7.4	1.48	1.48	2.31	3.23	-	8.50	3.0 ~ 10.7	1930	500 ~ 2690	9.1	8.5
	16 + 16 + 25 + 42	1.15	1.15	1.79	3.01	-	7.10	1.9 ~ 8.8	1620	370 ~ 2380	7.7	7.2	1.37	1.37	2.15	3.61	-	8.50	3.0 ~ 10.7	1920	520 ~ 2680	9.1	8.5
	16 + 16 + 25 + 50	1.06	1.06	1.66	3.32	-	7.10	1.9 ~ 8.8	1580	400 ~ 2200	7.5	7.1	1.27	1.27	1.99	3.97	-	8.50	3.0 ~ 10.7	1880	570 ~ 2580	8.9	8.3
	16 + 16 + 35 + 35	1.11	1.11	2.44	2.44	-	7.10	1.9 ~ 8.8	1620	370 ~ 2330	7.7	7.2	1.33	1.33	2.92	2.92	-	8.50	3.0 ~ 10.7	1910	530 ~ 2660	9.0	8.4
	16 + 16 + 35 + 42	1.04	1.04	2.28	2.74	-	7.10	1.9 ~ 8.8	1620	370 ~ 2330	7.7	7.2	1.25	1.25	2.72	3.28	-	8.50	3.0 ~ 10.7	1900	530 ~ 2650	9.0	8.4
	16 + 20 + 20 + 20	1.49	1.87	1.87	1.87	-	7.10	1.9 ~ 8.8	1660	340 ~ 240													

CU-4Z71WBH-8: Free Multi Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION												
		Cooling Capacity (kW)							Input Power (W)			Current (A)		Heating Capacity (kW)							Input Power (W)		Current (A)	
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	
3 Rooms	16 + 16 + 16	1.60	1.60	1.60	-	-	4.80	1.9 ~ 8.0	1140	270 ~ 2650	5.5	5.0	2.60	2.60	2.60	-	-	7.80	3.3 ~ 10.4	2260	640 ~ 3250	10.7	9.8	
	16 + 16 + 20	1.60	1.60	2.00	-	-	5.20	1.9 ~ 8.0	1280	270 ~ 2610	6.1	5.6	2.58	2.58	3.24	-	-	8.40	3.3 ~ 10.4	2490	640 ~ 3240	11.8	10.8	
	16 + 16 + 25	1.60	1.60	2.50	-	-	5.70	1.9 ~ 8.0	1510	270 ~ 2610	7.2	6.6	2.39	2.39	3.72	-	-	8.50	3.3 ~ 10.4	2530	640 ~ 3240	12.0	11.0	
	16 + 16 + 35	1.60	1.60	3.50	-	-	6.70	1.9 ~ 8.0	1970	270 ~ 2520	9.3	8.5	2.03	2.03	4.44	-	-	8.50	3.3 ~ 10.4	2460	630 ~ 3220	11.6	10.7	
	16 + 16 + 42	1.54	1.54	4.02	-	-	7.10	1.9 ~ 8.1	2190	270 ~ 2610	10.4	9.5	1.84	1.84	4.82	-	-	8.50	3.3 ~ 10.5	2450	620 ~ 3250	11.6	10.6	
	16 + 16 + 50	1.39	1.39	4.32	-	-	7.10	2.0 ~ 8.5	2010	320 ~ 2570	9.5	8.7	1.66	1.66	5.18	-	-	8.50	3.2 ~ 10.7	2320	600 ~ 3150	11.0	10.1	
	16 + 16 + 60	1.23	1.23	4.64	-	-	7.10	2.0 ~ 8.5	2010	320 ~ 2570	9.5	8.7	1.48	1.48	5.54	-	-	8.50	3.2 ~ 10.7	2320	600 ~ 3150	11.0	10.1	
	16 + 20 + 20	1.60	2.00	2.00	-	-	5.60	1.9 ~ 8.0	1430	270 ~ 2610	6.8	6.3	2.42	3.04	3.04	-	-	8.50	3.3 ~ 10.4	2520	630 ~ 3230	11.9	10.9	
	16 + 20 + 25	1.60	2.00	2.50	-	-	6.10	1.9 ~ 8.0	1670	270 ~ 2610	8.0	7.3	2.23	2.79	3.48	-	-	8.50	3.3 ~ 10.4	2520	630 ~ 3230	11.9	10.9	
	16 + 20 + 35	1.60	2.00	3.50	-	-	7.10	1.9 ~ 8.0	2190	270 ~ 2520	10.4	9.5	1.92	2.39	4.19	-	-	8.50	3.3 ~ 10.4	2450	620 ~ 3160	11.6	10.6	
	16 + 20 + 42	1.46	1.82	3.82	-	-	7.10	1.9 ~ 8.1	2190	270 ~ 2570	10.4	9.5	1.74	2.18	4.58	-	-	8.50	3.3 ~ 10.5	2450	620 ~ 3200	11.6	10.6	
	16 + 20 + 50	1.32	1.65	4.13	-	-	7.10	2.0 ~ 8.5	2010	320 ~ 2570	9.5	8.7	1.58	1.98	4.94	-	-	8.50	3.2 ~ 10.7	2310	600 ~ 3140	10.9	10.0	
	16 + 20 + 60	1.18	1.48	4.44	-	-	7.10	2.0 ~ 8.5	2010	320 ~ 2570	9.5	8.7	1.42	1.77	5.31	-	-	8.50	3.2 ~ 10.7	2310	600 ~ 3140	10.9	10.0	
	16 + 25 + 25	1.60	2.50	2.50	-	-	6.60	1.9 ~ 8.0	1920	270 ~ 2610	9.1	8.3	2.06	3.22	3.22	-	-	8.50	3.3 ~ 10.4	2520	630 ~ 3230	11.9	10.9	
	16 + 25 + 35	1.49	2.34	3.27	-	-	7.10	1.9 ~ 8.0	2190	270 ~ 2520	10.4	9.5	1.79	2.80	3.91	-	-	8.50	3.3 ~ 10.4	2450	620 ~ 3160	11.6	10.6	
	16 + 25 + 42	1.37	2.14	3.59	-	-	7.10	1.9 ~ 8.1	2190	270 ~ 2570	10.4	9.5	1.64	2.56	4.30	-	-	8.50	3.3 ~ 10.5	2450	620 ~ 3200	11.6	10.6	
	16 + 25 + 50	1.25	1.95	3.90	-	-	7.10	2.0 ~ 8.5	2010	320 ~ 2570	9.5	8.7	1.49	2.34	4.67	-	-	8.50	3.2 ~ 10.7	2310	600 ~ 3140	10.9	10.0	
	16 + 25 + 60	1.12	1.76	4.22	-	-	7.10	2.0 ~ 8.5	2010	320 ~ 2570	9.5	8.7	1.35	2.10	5.05	-	-	8.50	3.2 ~ 10.7	2310	600 ~ 3140	10.9	10.0	
	16 + 35 + 35	1.32	2.89	2.89	-	-	7.10	1.9 ~ 8.1	2150	290 ~ 2520	10.2	9.3	1.58	3.46	3.46	-	-	8.50	3.3 ~ 10.5	2430	640 ~ 3180	11.5	10.5	
	16 + 35 + 42	1.22	2.67	3.21	-	-	7.10	1.9 ~ 8.2	2150	290 ~ 2570	10.2	9.3	1.46	3.20	3.84	-	-	8.50	3.3 ~ 10.5	2420	640 ~ 3170	11.4	10.5	
	16 + 35 + 50	1.12	2.46	3.52	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2530	9.3	8.5	1.34	2.95	4.21	-	-	8.50	3.2 ~ 10.7	2290	600 ~ 3110	10.8	9.9	
	16 + 35 + 60	1.02	2.24	3.84	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2530	9.3	8.5	1.23	2.68	4.59	-	-	8.50	3.2 ~ 10.7	2290	600 ~ 3110	10.8	9.9	
	16 + 42 + 42	1.14	2.98	2.98	-	-	7.10	1.9 ~ 8.2	2150	290 ~ 2570	10.2	9.3	1.36	3.57	3.57	-	-	8.50	3.3 ~ 10.5	2410	640 ~ 3160	11.4	10.4	
	16 + 42 + 50	1.05	2.76	3.29	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2480	9.3	8.5	1.25	3.31	3.94	-	-	8.50	3.2 ~ 10.6	2280	600 ~ 3060	10.8	9.9	
	20 + 20 + 20	2.00	2.00	2.00	-	-	6.00	1.9 ~ 8.0	1630	270 ~ 2560	7.8	7.1	2.83	2.83	2.83	-	-	8.49	3.3 ~ 10.4	2470	630 ~ 3220	11.7	10.7	
	20 + 20 + 25	2.00	2.00	2.50	-	-	6.50	1.9 ~ 8.0	1880	270 ~ 2560	8.9	8.1	2.62	2.62	3.26	-	-	8.50	3.3 ~ 10.4	2470	630 ~ 3220	11.7	10.7	
	20 + 20 + 35	1.89	1.89	3.32	-	-	7.10	1.9 ~ 8.0	2190	270 ~ 2470	10.4	9.5	2.27	2.27	3.96	-	-	8.50	3.3 ~ 10.4	2450	620 ~ 3150	11.6	10.6	
	20 + 20 + 42	1.73	1.73	3.64	-	-	7.10	1.9 ~ 8.1	2150	290 ~ 2570	10.2	9.3	2.07	2.07	4.36	-	-	8.50	3.3 ~ 10.5	2440	620 ~ 3190	11.5	10.6	
	20 + 20 + 50	1.58	1.58	3.94	-	-	7.10	2.0 ~ 8.5	2010	340 ~ 2530	9.5	8.7	1.89	1.89	4.72	-	-	8.50	3.2 ~ 10.7	2300	600 ~ 3130	10.9	10.0	
	20 + 20 + 60	1.42	1.42	4.26	-	-	7.10	2.0 ~ 8.5	2010	340 ~ 2530	9.5	8.7	1.70	1.70	5.10	-	-	8.50	3.2 ~ 10.7	2300	600 ~ 3130	10.9	10.0	
	20 + 25 + 25	2.00	2.50	2.50	-	-	7.00	1.9 ~ 8.0	2150	270 ~ 2560	10.2	9.3	2.42	3.04	3.04	-	-	8.50	3.3 ~ 10.4	2470	630 ~ 3220	11.7	10.7	
	20 + 25 + 35	1.78	2.22	3.10	-	-	7.10	1.9 ~ 8.0	2190	270 ~ 2470	10.4	9.5	2.12	2.66	3.72	-	-	8.50	3.3 ~ 10.4	2450	620 ~ 3150	11.6	10.6	
	20 + 25 + 42	1.63	2.04	3.43	-	-	7.10	1.9 ~ 8.1	2150	290 ~ 2570	10.2	9.3	1.95	2.44	4.11	-	-	8.50	3.3 ~ 10.5	2440	620 ~ 3190	11.5	10.6	
20 + 25 + 50	1.49	1.87	3.74	-	-	7.10	2.0 ~ 8.5	2010	340 ~ 2530	9.5	8.7	1.79	2.24	4.47	-	-	8.50	3.2 ~ 10.7	2300	600 ~ 3130	10.9	10.0		
20 + 25 + 60	1.35	1.69	4.06	-	-	7.10	2.0 ~ 8.5	2010	340 ~ 2530	9.5	8.7	1.62	2.02	4.86	-	-	8.50	3.2 ~ 10.7	2300	600 ~ 3130	10.9	10.0		
20 + 35 + 35	1.58	2.76	2.76	-	-	7.10	1.9 ~ 8.1	2150	290 ~ 2480	10.2	9.3	1.88	3.31	3.31	-	-	8.50	3.3 ~ 10.5	2420	640 ~ 3170	11.4	10.5		
20 + 35 + 42	1.46	2.56	3.08	-	-	7.10	1.9 ~ 8.2	2100	290 ~ 2570	9.9	9.1	1.75	3.07	3.68	-	-	8.50	3.3 ~ 10.5	2410	640 ~ 3160	11.4	10.4		
20 + 35 + 50	1.35	2.37	3.38	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2480	9.3	8.5	1.62	2.83	4.05	-	-	8.50	3.2 ~ 10.7	2280	600 ~ 3100	10.8	9.9		
20 + 35 + 60	1.23	2.16	3.71	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2480	9.3	8.5	1.48	2.59	4.43	-	-	8.50	3.2 ~ 10.7	2280	600 ~ 3100	10.8	9.9		
20 + 42 + 42	1.36	2.87	2.87	-	-	7.10	1.9 ~ 8.2	2100	290 ~ 2520	9.9	9.1	1.64	3.43	3.43	-	-	8.50	3.3 ~ 10.5	2400	630 ~ 3160	11.3	10.4		
20 + 42 + 50	1.27	2.66	3.17	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2480	9.3	8.5	1.52	3.19	3.79	-	-	8.50	3.2 ~ 10.6	2270	620 ~ 3050	10.7	9.8		
25 + 25 + 25	2.36	2.36	2.36	-	-	7.08	1.9 ~ 8.0	2190	270 ~ 2560	10.4	9.5	2.83	2.83	2.83	-	-	8.49	3.3 ~ 10.4	2470	630 ~ 3220	11.7	10.7		
25 + 25 + 35	2.09	2.09	2.92	-	-	7.10	1.9 ~ 8.0	2190	270 ~ 2470	10.4	9.5	2.50	2.50	3.50	-	-	8.50	3.3 ~ 10.4	2450	620 ~ 3150	11.6	10.6		
25 + 25 + 42	1.93	1.93	3.24	-	-	7.10	1.9 ~ 8.1	2150	290 ~ 2570	10.2	9.3	2.31	2.31	3.88	-	-	8.50	3.3 ~ 10.5	2440	620 ~ 3190	11.5	10.6		
25 + 25 + 50	1.78	1.78	3.54	-	-	7.10	2.0 ~ 8.5	2010	340 ~ 2530	9.5	8.7	2.13	2.13	4.24	-	-	8.50	3.2 ~ 10.7	2300	600 ~ 3130	10.9	10.0		
25 + 25 + 60	1.61	1.61	3.88	-	-	7.10	2.0 ~ 8.5	2010	340 ~ 2530	9.5	8.7	1.93	1.93	4.64	-	-	8.50	3.2 ~ 10.7	2300	600 ~ 3130	10.9	10.0		
25 + 35 + 35	1.86	2.62	2.62	-	-	7.10	1.9 ~ 8.1	2150	290 ~ 2480	10.2	9.3	2.24	3.13	3.13	-	-	8.50	3.3 ~ 10.5	2420	640 ~ 3170	11.4	10.5		
25 + 35 + 42	1.74	2.44	2.92	-	-	7.10	1.9 ~ 8.2	2100	290 ~ 2570	9.9	9.1	2.08	2.92	3.50	-	-	8.50	3.3 ~ 10.5	2410	640 ~ 3160	11.4	10.4		
25 + 35 + 50	1.61	2.26	3.23	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2480	9.3	8.5	1.93	2.70	3.87	-	-	8.50	3.2 ~ 10.7	2280	600 ~ 3100	10.8	9.9		
25 + 42 + 42	1.62	2.74	2.74	-	-	7.10	1.9 ~ 8.2	2100	290 ~ 2520	9.9	9.1	1.94	3.28	3.28	-</									

CU-4Z80WBH-8: Only Wall-Mounted Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
1 Room	16	1.60	-	-	-	-	1.60	1.3 ~ 2.3	420	250 ~ 660	2.2	2.0	2.60	-	-	-	-	2.60	1.2 ~ 3.2	640	290 ~ 1000	3.3	3.0
	20	2.00	-	-	-	-	2.00	1.8 ~ 2.9	520	340 ~ 830	2.7	2.5	3.20	-	-	-	-	3.20	1.2 ~ 4.1	780	290 ~ 1270	4.0	3.7
	25	2.50	-	-	-	-	2.50	1.8 ~ 2.9	650	340 ~ 830	3.4	3.1	3.60	-	-	-	-	3.60	1.2 ~ 4.3	980	290 ~ 1270	5.1	4.7
	35	3.50	-	-	-	-	3.50	1.8 ~ 4.1	960	340 ~ 1380	4.8	4.4	4.50	-	-	-	-	4.50	1.2 ~ 5.8	1270	290 ~ 2140	6.5	5.9
	42	4.20	-	-	-	-	4.20	1.8 ~ 4.5	1390	340 ~ 2010	6.8	6.2	5.60	-	-	-	-	5.60	1.2 ~ 6.8	1760	290 ~ 2970	8.5	7.8
	50	5.00	-	-	-	-	5.00	1.9 ~ 5.4	1630	340 ~ 2150	7.9	7.3	6.80	-	-	-	-	6.80	1.2 ~ 6.9	2350	290 ~ 2840	11.3	10.4
	60	6.00	-	-	-	-	6.00	1.9 ~ 6.2	2050	340 ~ 2350	9.7	8.9	8.50	-	-	-	-	8.50	1.3 ~ 9.0	2440	320 ~ 2590	11.8	10.8
	71	7.10	-	-	-	-	7.10	2.0 ~ 7.2	2550	370 ~ 2790	12.1	11.1	8.70	-	-	-	-	8.70	1.4 ~ 9.2	2590	380 ~ 2760	12.5	11.4
2 Rooms	16 + 16	1.60	1.60	-	-	-	3.20	2.3 ~ 5.8	770	350 ~ 2030	4.1	3.7	2.60	2.60	-	-	-	5.20	2.2 ~ 8.2	1640	430 ~ 2920	8.1	7.5
	16 + 20	1.60	2.00	-	-	-	3.60	2.3 ~ 5.8	910	340 ~ 2030	4.7	4.3	2.58	3.22	-	-	-	5.80	2.2 ~ 8.2	1760	430 ~ 2910	8.6	7.9
	16 + 25	1.60	2.50	-	-	-	4.10	2.3 ~ 5.8	1110	340 ~ 2030	5.7	5.2	2.42	3.78	-	-	-	6.20	2.2 ~ 8.2	1900	430 ~ 2910	9.3	8.6
	16 + 35	1.60	3.50	-	-	-	5.10	2.3 ~ 5.8	1520	340 ~ 1960	7.7	7.0	2.23	4.87	-	-	-	7.10	2.2 ~ 8.6	2070	380 ~ 2990	10.2	9.3
	16 + 42	1.60	4.20	-	-	-	5.80	2.3 ~ 6.7	1860	340 ~ 2520	9.3	8.5	2.26	5.94	-	-	-	8.20	2.2 ~ 9.8	2450	370 ~ 3520	12.0	11.0
	16 + 50	1.60	5.00	-	-	-	6.60	2.3 ~ 7.2	2100	320 ~ 2520	10.5	9.6	2.28	7.12	-	-	-	9.40	2.2 ~ 10.0	2540	330 ~ 3330	12.5	11.4
	16 + 60	1.60	6.00	-	-	-	7.60	2.3 ~ 8.5	2730	320 ~ 3530	13.7	12.5	1.98	7.42	-	-	-	9.40	2.2 ~ 10.0	2540	330 ~ 3330	12.5	11.4
	16 + 71	1.47	6.53	-	-	-	8.00	2.3 ~ 8.5	2880	320 ~ 3380	14.4	13.2	1.73	7.67	-	-	-	9.40	2.2 ~ 10.3	2480	320 ~ 3500	12.2	11.2
	20 + 20	2.00	2.00	-	-	-	4.00	2.3 ~ 5.8	1050	340 ~ 1970	5.4	4.9	3.20	3.20	-	-	-	6.40	2.2 ~ 8.2	1940	390 ~ 2900	9.5	8.7
	20 + 25	2.00	2.50	-	-	-	4.50	2.3 ~ 5.8	1280	340 ~ 1970	6.5	5.9	3.02	3.78	-	-	-	6.80	2.2 ~ 8.2	2000	390 ~ 2900	9.8	9.0
	20 + 35	2.00	3.50	-	-	-	5.50	2.3 ~ 5.8	1690	340 ~ 1900	8.5	7.8	2.80	4.90	-	-	-	7.70	2.2 ~ 8.6	2250	370 ~ 2930	11.1	10.1
	20 + 42	2.00	4.20	-	-	-	6.20	2.3 ~ 7.2	2110	340 ~ 2940	10.6	9.7	2.84	5.96	-	-	-	8.80	2.2 ~ 10.0	2500	370 ~ 3630	12.3	11.3
	20 + 50	2.00	5.00	-	-	-	7.00	2.3 ~ 8.1	2250	320 ~ 3140	11.3	10.3	2.69	6.71	-	-	-	9.40	2.2 ~ 10.0	2530	320 ~ 3310	12.4	11.4
	20 + 60	2.00	6.00	-	-	-	8.00	2.3 ~ 8.5	2950	320 ~ 3530	14.8	13.5	2.35	7.05	-	-	-	9.40	2.2 ~ 10.0	2530	320 ~ 3310	12.4	11.4
	20 + 71	1.76	6.24	-	-	-	8.00	2.3 ~ 8.5	2810	350 ~ 3380	14.1	12.9	2.07	7.33	-	-	-	9.40	2.2 ~ 10.3	2470	320 ~ 3480	12.1	11.1
	25 + 25	2.50	2.50	-	-	-	5.00	2.3 ~ 5.8	1470	340 ~ 1970	7.4	6.8	3.60	3.60	-	-	-	7.20	2.2 ~ 8.6	2130	390 ~ 3010	10.5	9.6
	25 + 35	2.50	3.50	-	-	-	6.00	2.3 ~ 6.7	1980	340 ~ 2520	9.9	9.1	3.37	4.73	-	-	-	8.10	2.2 ~ 9.8	2400	370 ~ 3520	11.8	10.8
	25 + 42	2.50	4.20	-	-	-	6.70	2.3 ~ 7.2	2450	340 ~ 2940	12.3	11.2	3.43	5.77	-	-	-	9.20	2.2 ~ 10.0	2650	370 ~ 3630	13.0	11.9
	25 + 50	2.50	5.00	-	-	-	7.50	2.3 ~ 8.5	2590	320 ~ 3530	13.0	11.9	3.13	6.27	-	-	-	9.40	2.2 ~ 10.0	2530	320 ~ 3310	12.4	11.4
	25 + 60	2.35	5.65	-	-	-	8.00	2.3 ~ 8.5	2950	320 ~ 3530	14.8	13.5	2.76	6.64	-	-	-	9.40	2.2 ~ 10.0	2530	320 ~ 3310	12.4	11.4
	25 + 71	2.08	5.92	-	-	-	8.00	2.3 ~ 8.5	2810	350 ~ 3380	14.1	12.9	2.45	6.95	-	-	-	9.40	2.2 ~ 10.3	2470	320 ~ 3480	12.1	11.1
	35 + 35	3.50	3.50	-	-	-	7.00	2.3 ~ 8.1	2590	330 ~ 3670	13.0	11.9	4.50	4.50	-	-	-	9.00	2.2 ~ 10.0	2530	360 ~ 3550	12.4	11.4
	35 + 42	3.50	4.20	-	-	-	7.70	2.3 ~ 8.5	3080	330 ~ 4160	15.4	14.1	4.27	5.13	-	-	-	9.40	2.2 ~ 10.0	2670	350 ~ 3540	13.1	12.0
	35 + 50	3.29	4.71	-	-	-	8.00	2.3 ~ 8.5	2810	320 ~ 3380	14.1	12.9	3.87	5.53	-	-	-	9.40	2.2 ~ 10.0	2460	320 ~ 3280	12.1	11.1
	35 + 60	2.95	5.05	-	-	-	8.00	2.3 ~ 8.5	2810	320 ~ 3380	14.1	12.9	3.46	5.94	-	-	-	9.40	2.2 ~ 10.3	2460	320 ~ 3400	12.1	11.1
	35 + 71	2.64	5.36	-	-	-	8.00	2.3 ~ 8.6	2740	350 ~ 3380	13.7	12.6	3.10	6.30	-	-	-	9.40	2.2 ~ 10.5	2440	310 ~ 3510	12.0	11.0
	42 + 42	4.00	4.00	-	-	-	8.00	2.3 ~ 8.5	3380	330 ~ 4080	16.9	15.5	4.70	4.70	-	-	-	9.40	2.2 ~ 10.0	2660	350 ~ 3530	13.1	12.0
	42 + 50	3.65	4.35	-	-	-	8.00	2.3 ~ 8.5	2810	320 ~ 3380	14.1	12.9	4.29	5.11	-	-	-	9.40	2.2 ~ 10.3	2440	320 ~ 3390	12.0	11.0
	42 + 60	3.29	4.71	-	-	-	8.00	2.3 ~ 8.6	2810	320 ~ 3460	14.1	12.9	3.87	5.53	-	-	-	9.40	2.2 ~ 10.3	2440	320 ~ 3390	12.0	11.0
	42 + 71	2.97	5.03	-	-	-	8.00	2.3 ~ 8.6	2740	350 ~ 3300	13.7	12.6	3.49	5.91	-	-	-	9.40	2.2 ~ 10.5	2430	310 ~ 3500	11.9	10.9
	50 + 50	4.00	4.00	-	-	-	8.00	2.3 ~ 8.6	2460	340 ~ 2990	12.3	11.3	4.70	4.70	-	-	-	9.40	2.2 ~ 10.3	2280	310 ~ 3170	11.2	10.3
	50 + 60	3.64	4.36	-	-	-	8.00	2.3 ~ 8.6	2460	340 ~ 2990	12.3	11.3	4.27	5.13	-	-	-	9.40	2.2 ~ 10.5	2280	310 ~ 3230	11.2	10.3
	50 + 71	3.31	4.69	-	-	-	8.00	2.3 ~ 8.6	2390	340 ~ 2920	12.0	11.0	3.88	5.52	-	-	-	9.40	2.2 ~ 10.5	2260	310 ~ 3210	11.1	10.2
	60 + 60	4.00	4.00	-	-	-	8.00	2.3 ~ 8.6	2460	340 ~ 2990	12.3	11.3	4.70	4.70	-	-	-	9.40	2.2 ~ 10.5	2280	310 ~ 3230	11.2	10.3
	60 + 71	3.66	4.34	-	-	-	8.00	2.3 ~ 8.6	2390	340 ~ 2920	12.0	11.0	4.31	5.09	-	-	-	9.40	2.2 ~ 10.5	2260	310 ~ 3210	11.1	10.2
	71 + 71	4.00	4.00	-	-	-	8.00	2.3 ~ 8.6	2320	380 ~ 2840	11.6	10.6	4.70	4.70	-	-	-	9.40	2.2 ~ 10.5	2250	320 ~ 3200	11.1	10.1
3 Rooms	16 + 16 + 16	1.60	1.60	1.60	-	-	4.80	2.3 ~ 8.5	1140	350 ~ 3170	5.8	5.3	2.60	2.60	2.60	-	-	7.80	3.0 ~ 10.4	2000	440 ~ 3460	9.8	9.0
	16 + 16 + 20	1.60	1.60	2.00	-	-	5.20	2.3 ~ 8.5	1240	350 ~ 3170	6.3	5.7	2.58	2.58	3.24	-	-	8.40	3.0 ~ 10.4	2230	440 ~ 3380	11.0	10.0
	16 + 16 + 25	1.60	1.60	2.50	-	-	5.70	2.3 ~ 8.5	1450	350 ~ 3170	7.3	6.7	2.47	2.47	3.86	-	-	8.80	3.0 ~ 10.4	2210	440 ~ 3380	10.9	10.0
	16 + 16 + 35	1.60	1.60	3.50	-	-	6.70	2.3 ~ 8.5	1770	340 ~ 3090	8.9	8.1	2.24	2.24	4.92	-	-	9.40	3.0 ~ 10.4	2370	440 ~ 3350	11.6	10.7
	16 + 16 + 42	1.60	1.60	4.20	-	-	7.40	2.3 ~ 8.5	2130	340 ~ 3010	10.7	9.8	2.03	2.03	5.34	-	-	9.40	3.0 ~ 10.4	2360	430 ~ 3330	11.6	10.6
	16 + 16 + 50	1.56	1.56	4.88	-	-	8.00	2.3 ~ 8.6	2160	380 ~ 2790	10.8	9.9	1.83	1.83	5.74	-	-	9.40	3.0 ~ 10.4	2250	460 ~ 3120	11.1	10.1
	16 + 16 + 60	1.39	1.39	5.22	-	-	8.00	2.3 ~ 8.6	2160	380 ~ 2790	10.8	9.9	1.63	1.63	6.14	-	-	9.40	3.0 ~ 10.5	2250	460 ~ 3180	11.1	10.1
	16 + 16 + 71	1.24	1.24																				

CU-4Z80WBH-8: Only Wall-Mounted Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V
3 Rooms	25 + 42 + 60	1.57	2.65	3.78	-	-	8.00	2.3 ~ 9.0	2100	380 ~ 2930	10.5	9.6	1.85	3.11	4.44	-	-	9.40	3.0 ~ 10.6	2200	490 ~ 3170	10.8	9.9
	25 + 42 + 71	1.45	2.43	4.12	-	-	8.00	2.3 ~ 9.0	2040	380 ~ 2860	10.2	9.4	1.70	2.86	4.84	-	-	9.40	3.0 ~ 10.6	2190	490 ~ 3150	10.8	9.9
	25 + 50 + 50	1.60	3.20	3.20	-	-	8.00	2.3 ~ 9.0	1980	430 ~ 2710	9.9	9.1	1.88	3.76	3.76	-	-	9.40	3.0 ~ 10.6	2110	550 ~ 3040	10.4	9.5
	25 + 50 + 60	1.48	2.96	3.56	-	-	8.00	2.3 ~ 9.0	1980	430 ~ 2710	9.9	9.1	1.74	3.48	4.18	-	-	9.40	3.0 ~ 10.6	2110	550 ~ 3040	10.4	9.5
	25 + 50 + 71	1.37	2.74	3.89	-	-	8.00	2.3 ~ 9.0	1980	470 ~ 2710	9.9	9.1	1.61	3.22	4.57	-	-	9.40	3.0 ~ 10.6	2100	580 ~ 3030	10.3	9.5
	25 + 60 + 60	1.38	3.31	3.31	-	-	8.00	2.3 ~ 9.0	1980	430 ~ 2710	9.9	9.1	1.62	3.89	3.89	-	-	9.40	3.0 ~ 10.6	2110	550 ~ 3040	10.4	9.5
	35 + 35 + 35	2.66	2.66	2.66	-	-	7.98	2.3 ~ 8.8	2230	340 ~ 3090	11.2	10.2	3.13	3.13	3.13	-	-	9.39	3.0 ~ 10.5	2300	460 ~ 3250	11.3	10.4
	35 + 35 + 42	2.50	2.50	3.00	-	-	8.00	2.3 ~ 8.8	2230	340 ~ 3090	11.2	10.2	2.94	2.94	3.52	-	-	9.40	3.0 ~ 10.6	2290	460 ~ 3290	11.3	10.3
	35 + 35 + 50	2.33	2.33	3.33	-	-	7.99	2.3 ~ 9.0	2040	380 ~ 2930	10.2	9.4	2.74	2.74	3.92	-	-	9.40	3.0 ~ 10.6	2180	490 ~ 3150	10.7	9.8
	35 + 35 + 60	2.15	2.15	3.70	-	-	8.00	2.3 ~ 9.0	2040	380 ~ 2930	10.2	9.4	2.53	2.53	4.34	-	-	9.40	3.0 ~ 10.6	2180	490 ~ 3150	10.7	9.8
	35 + 35 + 71	1.99	1.99	4.02	-	-	8.00	2.3 ~ 9.0	2040	420 ~ 2860	10.2	9.4	2.33	2.33	4.74	-	-	9.40	3.0 ~ 10.6	2170	500 ~ 3130	10.7	9.8
	35 + 42 + 42	2.36	2.82	2.82	-	-	8.00	2.3 ~ 9.0	2230	340 ~ 3160	11.2	10.2	2.76	3.32	3.32	-	-	9.40	3.0 ~ 10.6	2280	460 ~ 3280	11.2	10.3
	35 + 42 + 50	2.20	2.65	3.15	-	-	8.00	2.3 ~ 9.0	2040	380 ~ 2860	10.2	9.4	2.59	3.11	3.70	-	-	9.40	3.0 ~ 10.6	2170	500 ~ 3140	10.7	9.8
	35 + 42 + 60	2.04	2.45	3.51	-	-	8.00	2.3 ~ 9.0	2040	380 ~ 2860	10.2	9.4	2.40	2.88	4.12	-	-	9.40	3.0 ~ 10.6	2170	500 ~ 3140	10.7	9.8
	35 + 50 + 50	2.08	2.96	2.96	-	-	8.00	2.3 ~ 9.0	1980	470 ~ 2710	9.9	9.1	2.44	3.48	3.48	-	-	9.40	3.0 ~ 10.6	2090	580 ~ 3010	10.3	9.4
	35 + 50 + 60	1.93	2.76	3.31	-	-	8.00	2.3 ~ 9.0	1980	470 ~ 2710	9.9	9.1	2.27	3.24	3.89	-	-	9.40	3.0 ~ 10.6	2090	580 ~ 3010	10.3	9.4
	42 + 42 + 42	2.66	2.66	2.66	-	-	7.98	2.3 ~ 9.0	2230	340 ~ 3160	11.2	10.2	3.13	3.13	3.13	-	-	9.39	3.0 ~ 10.6	2270	460 ~ 3270	11.2	10.2
	42 + 42 + 50	2.51	2.51	2.98	-	-	8.00	2.3 ~ 9.0	2040	380 ~ 2860	10.2	9.4	2.95	2.95	3.50	-	-	9.40	3.0 ~ 10.6	2170	500 ~ 3120	10.7	9.8
	42 + 42 + 60	2.33	2.33	3.33	-	-	7.99	2.3 ~ 9.0	2040	380 ~ 2860	10.2	9.4	2.74	2.74	3.92	-	-	9.40	3.0 ~ 10.6	2170	500 ~ 3120	10.7	9.8
	42 + 50 + 50	2.36	2.82	2.82	-	-	8.00	2.3 ~ 9.0	1980	470 ~ 2710	9.9	9.1	2.78	3.31	3.31	-	-	9.40	3.0 ~ 10.6	2090	590 ~ 3000	10.3	9.4
4 Rooms	16 + 16 + 16 + 16	1.60	1.60	1.60	1.60	-	6.40	2.3 ~ 9.2	1490	420 ~ 2940	7.4	6.8	2.35	2.35	2.35	-	-	9.40	3.0 ~ 11.6	2060	490 ~ 3470	10.3	9.5
	16 + 16 + 16 + 20	1.60	1.60	1.60	2.00	-	6.80	2.3 ~ 9.2	1600	420 ~ 2870	7.9	7.3	2.21	2.21	2.21	2.77	-	9.40	3.0 ~ 11.6	2050	500 ~ 3460	10.3	9.4
	16 + 16 + 16 + 25	1.60	1.60	1.60	2.50	-	7.30	2.3 ~ 9.2	1760	420 ~ 2870	8.6	7.9	2.06	2.06	2.06	3.22	-	9.40	3.0 ~ 11.6	2050	500 ~ 3460	10.3	9.4
	16 + 16 + 16 + 35	1.54	1.54	1.54	3.38	-	8.00	2.3 ~ 9.2	1980	420 ~ 2870	9.7	8.9	1.81	1.81	1.81	3.97	-	9.40	3.0 ~ 11.6	2030	500 ~ 3420	10.2	9.3
	16 + 16 + 16 + 42	1.42	1.42	1.42	3.74	-	8.00	2.3 ~ 9.2	1980	420 ~ 2870	9.7	8.9	1.67	1.67	1.67	4.39	-	9.40	3.0 ~ 11.6	2020	510 ~ 3410	10.1	9.3
	16 + 16 + 16 + 50	1.31	1.31	1.31	4.07	-	8.00	2.3 ~ 9.2	1880	480 ~ 2730	9.2	8.5	1.53	1.53	1.53	4.81	-	9.40	3.0 ~ 11.6	2000	600 ~ 3340	10.0	9.2
	16 + 16 + 16 + 60	1.19	1.19	1.19	4.43	-	8.00	2.3 ~ 9.2	1880	480 ~ 2730	9.2	8.5	1.39	1.39	1.39	5.23	-	9.40	3.0 ~ 11.6	2000	600 ~ 3340	10.0	9.2
	16 + 16 + 16 + 71	1.08	1.08	1.08	4.76	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.26	1.26	1.26	5.62	-	9.40	3.0 ~ 11.6	1990	630 ~ 3320	10.0	9.1
	16 + 16 + 20 + 20	1.60	1.60	2.00	2.00	-	7.20	2.3 ~ 9.2	1710	420 ~ 2870	8.5	7.8	2.09	2.09	2.61	2.61	-	9.40	3.0 ~ 11.6	2040	500 ~ 3440	10.2	9.4
	16 + 16 + 20 + 25	1.60	1.60	2.00	2.50	-	7.70	2.3 ~ 9.2	1870	420 ~ 2870	9.2	8.4	1.95	1.95	2.44	3.06	-	9.40	3.0 ~ 11.6	2040	500 ~ 3440	10.2	9.4
	16 + 16 + 20 + 35	1.47	1.47	1.84	3.22	-	8.00	2.3 ~ 9.2	1930	420 ~ 2870	9.5	8.7	1.73	1.73	2.16	3.78	-	9.40	3.0 ~ 11.6	2020	510 ~ 3410	10.1	9.3
	16 + 16 + 20 + 42	1.36	1.36	1.70	3.58	-	8.00	2.3 ~ 9.2	1930	420 ~ 2870	9.5	8.7	1.60	1.60	2.00	4.20	-	9.40	3.0 ~ 11.6	2020	530 ~ 3400	10.1	9.3
	16 + 16 + 20 + 50	1.25	1.25	1.57	3.93	-	8.00	2.3 ~ 9.2	1880	480 ~ 2660	9.2	8.5	1.47	1.47	1.84	4.62	-	9.40	3.0 ~ 11.6	1990	620 ~ 3330	10.0	9.1
	16 + 16 + 20 + 60	1.14	1.14	1.43	4.29	-	8.00	2.3 ~ 9.2	1880	480 ~ 2660	9.2	8.5	1.34	1.34	1.68	5.04	-	9.40	3.0 ~ 11.6	1990	620 ~ 3330	10.0	9.1
	16 + 16 + 20 + 71	1.04	1.04	1.30	4.62	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.22	1.22	1.53	5.43	-	9.40	3.0 ~ 11.6	1980	630 ~ 3310	9.9	9.1
	16 + 16 + 25 + 25	1.56	1.56	2.44	2.44	-	8.00	2.3 ~ 9.2	1980	420 ~ 2870	9.7	8.9	1.83	1.83	2.87	2.87	-	9.40	3.0 ~ 11.6	2040	500 ~ 3440	10.2	9.4
	16 + 16 + 25 + 35	1.39	1.39	2.17	3.05	-	8.00	2.3 ~ 9.2	1930	420 ~ 2870	9.5	8.7	1.63	1.63	2.55	3.59	-	9.40	3.0 ~ 11.6	2020	510 ~ 3410	10.1	9.3
	16 + 16 + 25 + 42	1.29	1.29	2.02	3.40	-	8.00	2.3 ~ 9.2	1930	420 ~ 2870	9.5	8.7	1.52	1.52	2.37	3.99	-	9.40	3.0 ~ 11.6	2020	530 ~ 3400	10.1	9.3
	16 + 16 + 25 + 50	1.20	1.20	1.87	3.73	-	8.00	2.3 ~ 9.2	1880	480 ~ 2660	9.2	8.5	1.41	1.41	2.20	4.38	-	9.40	3.0 ~ 11.6	1990	620 ~ 3330	10.0	9.1
	16 + 16 + 25 + 60	1.09	1.09	1.71	4.11	-	8.00	2.3 ~ 9.2	1880	480 ~ 2660	9.2	8.5	1.29	1.29	2.01	4.81	-	9.40	3.0 ~ 11.6	1990	620 ~ 3330	10.0	9.1
	16 + 16 + 25 + 71	1.00	1.00	1.56	4.44	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.18	1.18	1.84	5.20	-	9.40	3.0 ~ 11.6	1980	630 ~ 3310	9.9	9.1
	16 + 16 + 35 + 35	1.25	1.25	2.75	2.75	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.47	1.47	3.23	3.23	-	9.40	3.0 ~ 11.6	2010	540 ~ 3380	10.1	9.2
	16 + 16 + 35 + 42	1.17	1.17	2.57	3.09	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.38	1.38	3.02	3.62	-	9.40	3.0 ~ 11.6	2000	540 ~ 3360	10.0	9.2
	16 + 16 + 35 + 50	1.09	1.09	2.39	3.43	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.29	1.29	2.81	4.01	-	9.40	3.0 ~ 11.6	1980	640 ~ 3300	9.9	9.1
	16 + 16 + 35 + 60	1.01	1.01	2.20	3.78	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.18	1.18	2.59	4.45	-	9.40	3.0 ~ 11.6	1980	640 ~ 3300	9.9	9.1
	16 + 16 + 35 + 71	0.93	0.93	2.03	4.11	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.09	1.09	2.38	4.84	-	9.40	3.0 ~ 11.6	1970	650 ~ 3290	9.9	9.0
	16 + 16 + 42 + 42	1.10	1.10	2.90	2.90	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.30	1.30	3.40	3.40	-	9.40	3.0 ~ 11.6	1990	550 ~ 3350	10.0	9.1
	16 + 16 + 42 + 50	1.03	1.03	2.71	3.23	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.21	1.21	3.18	3.80	-	9.40	3.0 ~ 11.6	1970	650 ~ 3290	9.9	9.0
	16 + 16 + 42 + 60	0.96	0.96	2.51	3.57	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.12	1.12	2.95	4.21	-	9.40					

CU-4Z80WBH-8: Only Wall-Mounted Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
4 Rooms	20 + 20 + 50 + 50	1.14	1.14	2.86	2.86	-	8.00	2.3 ~ 9.2	1890	590 ~ 2610	9.3	8.5	1.34	1.34	3.36	3.36	-	9.40	3.0 ~ 11.6	2000	800 ~ 3290	10.0	9.2
	20 + 25 + 25 + 25	1.67	2.11	2.11	2.11	-	8.00	2.3 ~ 9.2	1980	420 ~ 2870	9.7	8.9	1.99	2.47	2.47	2.47	-	9.40	3.0 ~ 11.6	2030	500 ~ 3420	10.2	9.3
	20 + 25 + 25 + 35	1.52	1.90	1.90	2.68	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.79	2.24	2.24	3.13	-	9.40	3.0 ~ 11.6	2010	530 ~ 3380	10.1	9.2
	20 + 25 + 25 + 42	1.43	1.79	1.79	2.99	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.68	2.10	2.10	3.52	-	9.40	3.0 ~ 11.6	2000	540 ~ 3370	10.0	9.2
	20 + 25 + 25 + 50	1.33	1.67	1.67	3.33	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.57	1.96	1.96	3.91	-	9.40	3.0 ~ 11.6	1980	640 ~ 3310	9.9	9.1
	20 + 25 + 25 + 60	1.23	1.54	1.54	3.69	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.45	1.81	1.81	4.33	-	9.40	3.0 ~ 11.6	1980	640 ~ 3310	9.9	9.1
	20 + 25 + 25 + 71	1.13	1.42	1.42	4.03	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.33	1.67	1.67	4.73	-	9.40	3.0 ~ 11.6	1970	640 ~ 3290	9.9	9.0
	20 + 25 + 35 + 35	1.39	1.75	2.43	2.43	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.63	2.05	2.86	2.86	-	9.40	3.0 ~ 11.6	1990	550 ~ 3350	10.0	9.1
	20 + 25 + 35 + 42	1.31	1.64	2.30	2.75	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.54	1.93	2.70	3.23	-	9.40	3.0 ~ 11.6	1990	550 ~ 3340	10.0	9.1
	20 + 25 + 35 + 50	1.23	1.54	2.15	3.08	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.45	1.81	2.53	3.61	-	9.40	3.0 ~ 11.6	1970	670 ~ 3280	9.9	9.0
	20 + 25 + 35 + 60	1.14	1.43	2.00	3.43	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.34	1.68	2.35	4.03	-	9.40	3.0 ~ 11.6	1970	670 ~ 3280	9.9	9.0
	20 + 25 + 42 + 42	1.24	1.56	2.60	2.60	-	8.00	2.3 ~ 9.2	1930	460 ~ 2800	9.5	8.7	1.46	1.82	3.06	3.06	-	9.40	3.0 ~ 11.6	1980	570 ~ 3330	9.9	9.1
	20 + 25 + 42 + 50	1.17	1.46	2.45	2.92	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.37	1.72	2.88	3.43	-	9.40	3.0 ~ 11.6	2000	680 ~ 3270	10.0	9.2
	20 + 25 + 42 + 60	1.09	1.36	2.29	3.26	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.28	1.60	2.69	3.83	-	9.40	3.0 ~ 11.6	2000	680 ~ 3270	10.0	9.2
	20 + 25 + 50 + 50	1.10	1.38	2.76	2.76	-	8.00	2.3 ~ 9.2	1890	590 ~ 2610	9.3	8.5	1.30	1.62	3.24	3.24	-	9.40	3.0 ~ 11.6	2000	800 ~ 3290	10.0	9.2
	20 + 35 + 35 + 35	1.28	2.24	2.24	2.24	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.51	2.63	2.63	2.63	-	9.40	3.0 ~ 11.6	1980	580 ~ 3320	9.9	9.1
	20 + 35 + 35 + 42	1.21	2.12	2.12	2.55	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.42	2.49	2.49	3.00	-	9.40	3.0 ~ 11.6	1970	580 ~ 3370	9.9	9.0
	20 + 35 + 35 + 50	1.14	2.00	2.00	2.86	-	8.00	2.3 ~ 9.2	1880	530 ~ 2660	9.2	8.5	1.34	2.35	2.35	3.36	-	9.40	3.0 ~ 11.6	2000	690 ~ 3310	10.0	9.2
	20 + 35 + 42 + 42	1.15	2.01	2.42	2.42	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.35	2.37	2.84	2.84	-	9.40	3.0 ~ 11.6	1970	590 ~ 3360	9.9	9.0
	20 + 35 + 42 + 50	1.09	1.90	2.29	2.72	-	8.00	2.3 ~ 9.2	1880	530 ~ 2660	9.2	8.5	1.28	2.24	2.69	3.19	-	9.40	3.0 ~ 11.6	1990	700 ~ 3300	10.0	9.1
	20 + 42 + 42 + 42	1.10	2.30	2.30	2.30	-	8.00	2.3 ~ 9.2	1870	470 ~ 2730	9.2	8.4	1.30	2.70	2.70	2.70	-	9.40	3.0 ~ 11.6	2000	590 ~ 3350	10.0	9.2
	25 + 25 + 25 + 25	2.00	2.00	2.00	2.00	-	8.00	2.3 ~ 9.2	1980	420 ~ 2870	9.7	8.9	2.35	2.35	2.35	2.35	-	9.40	3.0 ~ 11.6	2030	500 ~ 3420	10.2	9.3
	25 + 25 + 25 + 35	1.82	1.82	1.82	2.54	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	2.14	2.14	2.14	2.98	-	9.40	3.0 ~ 11.6	2010	530 ~ 3380	10.1	9.2
	25 + 25 + 25 + 42	1.71	1.71	1.71	2.87	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	2.01	2.01	2.01	3.37	-	9.40	3.0 ~ 11.6	2000	540 ~ 3370	10.0	9.2
	25 + 25 + 25 + 50	1.60	1.60	1.60	3.20	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.88	1.88	1.88	3.76	-	9.40	3.0 ~ 11.6	1980	640 ~ 3310	9.9	9.1
	25 + 25 + 25 + 60	1.48	1.48	1.48	3.56	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.74	1.74	1.74	4.18	-	9.40	3.0 ~ 11.6	1980	640 ~ 3310	9.9	9.1
	25 + 25 + 25 + 71	1.37	1.37	1.37	3.89	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.61	1.61	1.61	4.57	-	9.40	3.0 ~ 11.6	1970	640 ~ 3290	9.9	9.0
	25 + 25 + 35 + 35	1.67	1.67	2.33	2.33	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.96	1.96	2.74	2.74	-	9.40	3.0 ~ 11.6	1990	550 ~ 3350	10.0	9.1
	25 + 25 + 35 + 42	1.57	1.57	2.20	2.66	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.85	1.85	2.59	3.11	-	9.40	3.0 ~ 11.6	1990	550 ~ 3340	10.0	9.1
	25 + 25 + 35 + 50	1.48	1.48	2.07	2.97	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.74	1.74	2.44	3.48	-	9.40	3.0 ~ 11.6	1970	670 ~ 3280	9.9	9.0
	25 + 25 + 35 + 60	1.38	1.38	1.93	3.31	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.62	1.62	2.27	3.89	-	9.40	3.0 ~ 11.6	1970	670 ~ 3280	9.9	9.0
	25 + 25 + 42 + 42	1.49	1.49	2.51	2.51	-	8.00	2.3 ~ 9.2	1930	460 ~ 2800	9.5	8.7	1.75	1.75	2.95	2.95	-	9.40	3.0 ~ 11.6	1980	570 ~ 3330	9.9	9.1
	25 + 25 + 42 + 50	1.41	1.41	2.37	2.81	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.65	1.65	2.78	3.32	-	9.40	3.0 ~ 11.6	2000	680 ~ 3270	10.0	9.2
	25 + 35 + 35 + 35	1.55	2.15	2.15	2.15	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.81	2.53	2.53	2.53	-	9.40	3.0 ~ 11.6	1980	580 ~ 3320	9.9	9.1
	25 + 35 + 35 + 42	1.46	2.04	2.04	2.46	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.72	2.40	2.40	2.88	-	9.40	3.0 ~ 11.6	1970	580 ~ 3370	9.9	9.0
	25 + 35 + 35 + 50	1.38	1.93	1.93	2.76	-	8.00	2.3 ~ 9.2	1880	530 ~ 2660	9.2	8.5	1.62	2.27	2.27	3.24	-	9.40	3.0 ~ 11.6	2000	690 ~ 3310	10.0	9.2
	25 + 35 + 42 + 42	1.39	1.95	2.33	2.33	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.63	2.29	2.74	2.74	-	9.40	3.0 ~ 11.6	1970	590 ~ 3360	9.9	9.0
	35 + 35 + 35 + 35	2.00	2.00	2.00	2.00	-	8.00	2.3 ~ 9.2	1870	470 ~ 2730	9.2	8.4	2.35	2.35	2.35	2.35	-	9.40	3.0 ~ 11.6	2000	590 ~ 3350	10.0	9.2
	35 + 35 + 35 + 42	1.90	1.90	1.90	2.30	-	8.00	2.3 ~ 9.2	1870	470 ~ 2730	9.2	8.4	2.24	2.24	2.24	2.68	-	9.40	3.0 ~ 11.6	2000	600 ~ 3340	10.0	9.2

CU-4Z80WBH-8: Free Multi Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
1 Room	16	1.60	-	-	-	-	1.60	1.3 ~ 2.3	450	250 ~ 690	2.4	2.2	2.60	-	-	-	-	2.60	1.2 ~ 3.2	700	290 ~ 1060	3.5	3.2
	20	2.00	-	-	-	-	2.00	1.8 ~ 2.9	550	340 ~ 860	2.8	2.6	3.20	-	-	-	-	3.20	1.2 ~ 4.1	840	290 ~ 1330	4.3	3.9
	25	2.50	-	-	-	-	2.50	1.8 ~ 2.9	680	340 ~ 860	3.5	3.2	3.60	-	-	-	-	3.60	1.2 ~ 4.3	1040	290 ~ 1330	5.4	4.9
	35	3.50	-	-	-	-	3.50	1.8 ~ 4.1	990	340 ~ 1410	5.0	4.6	4.50	-	-	-	-	4.50	1.2 ~ 5.8	1330	290 ~ 2200	6.8	6.2
	42	4.20	-	-	-	-	4.20	1.8 ~ 4.5	1420	340 ~ 2040	6.9	6.3	5.60	-	-	-	-	5.60	1.2 ~ 6.8	1820	290 ~ 3030	8.8	8.0
	50	5.00	-	-	-	-	5.00	1.9 ~ 5.4	1630	340 ~ 2150	7.9	7.3	6.80	-	-	-	-	6.80	1.2 ~ 6.9	2350	290 ~ 2840	11.3	10.4
	60	6.00	-	-	-	-	6.00	1.9 ~ 6.2	2080	340 ~ 2380	9.8	9.0	8.50	-	-	-	-						

CU-4Z80WBH-8: Free Multi Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V
3 Rooms	16 + 42 + 71	0.99	2.60	4.41	-	-	8.00	2.3 ~ 9.0	2130	380 ~ 2950	10.7	9.8	1.17	3.06	5.17	-	-	9.40	3.0 ~ 10.6	2370	490 ~ 3340	11.6	10.7
	16 + 50 + 50	1.10	3.45	3.45	-	-	8.00	2.3 ~ 8.8	2070	430 ~ 2730	10.4	9.5	1.30	4.05	4.05	-	-	9.40	3.0 ~ 10.6	2300	550 ~ 3230	11.3	10.4
	16 + 50 + 60	1.02	3.17	3.81	-	-	8.00	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.19	3.73	4.48	-	-	9.40	3.0 ~ 10.6	2300	550 ~ 3230	11.3	10.4
	16 + 50 + 71	0.93	2.92	4.15	-	-	8.00	2.3 ~ 9.0	2070	470 ~ 2800	10.4	9.5	1.10	3.43	4.87	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
	16 + 60 + 60	0.94	3.53	3.53	-	-	8.00	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.10	4.15	4.15	-	-	9.40	3.0 ~ 10.6	2300	550 ~ 3230	11.3	10.4
	16 + 60 + 71	0.87	3.27	3.86	-	-	8.00	2.3 ~ 9.0	2070	470 ~ 2800	10.4	9.5	1.02	3.84	4.54	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
	20 + 20 + 20	2.00	2.00	2.00	-	-	6.00	2.3 ~ 8.5	1650	340 ~ 3180	8.3	7.6	3.13	3.13	3.13	-	-	9.39	3.0 ~ 10.4	2560	440 ~ 3540	12.6	11.5
	20 + 20 + 25	2.00	2.00	2.50	-	-	6.50	2.3 ~ 8.5	1880	340 ~ 3180	9.4	8.6	2.89	2.89	3.62	-	-	9.40	3.0 ~ 10.4	2560	440 ~ 3540	12.6	11.5
	20 + 20 + 35	2.00	2.00	3.50	-	-	7.50	2.3 ~ 8.5	2210	340 ~ 3100	11.1	10.1	2.51	2.51	4.38	-	-	9.40	3.0 ~ 10.4	2530	430 ~ 3500	12.4	11.4
	20 + 20 + 42	1.95	1.95	4.10	-	-	8.00	2.3 ~ 8.6	2440	340 ~ 3180	12.2	11.2	2.29	2.29	4.82	-	-	9.40	3.0 ~ 10.4	2520	460 ~ 3490	12.4	11.3
	20 + 20 + 50	1.78	1.78	4.44	-	-	8.00	2.3 ~ 8.6	2190	380 ~ 2800	11.0	10.0	2.09	2.09	5.22	-	-	9.40	3.0 ~ 10.5	2410	460 ~ 3330	11.8	10.9
	20 + 20 + 60	1.60	1.60	4.80	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	1.88	1.88	5.64	-	-	9.40	3.0 ~ 10.5	2410	460 ~ 3330	11.8	10.9
	20 + 20 + 71	1.44	1.44	5.12	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2870	11.0	10.0	1.69	1.69	6.02	-	-	9.40	3.0 ~ 10.6	2400	460 ~ 3380	11.8	10.8
	20 + 25 + 25	2.00	2.50	2.50	-	-	7.00	2.3 ~ 8.5	2040	340 ~ 3180	10.2	9.4	2.68	3.36	3.36	-	-	9.40	3.0 ~ 10.4	2560	440 ~ 3540	12.6	11.5
	20 + 25 + 35	2.00	2.50	3.50	-	-	8.00	2.3 ~ 8.6	2440	340 ~ 3180	12.2	11.2	2.35	2.94	4.11	-	-	9.40	3.0 ~ 10.4	2530	430 ~ 3500	12.4	11.4
	20 + 25 + 42	1.84	2.30	3.86	-	-	8.00	2.3 ~ 8.6	2440	340 ~ 3180	12.2	11.2	2.16	2.70	4.54	-	-	9.40	3.0 ~ 10.5	2520	460 ~ 3550	12.4	11.3
	20 + 25 + 50	1.68	2.11	4.21	-	-	8.00	2.3 ~ 8.6	2190	380 ~ 2800	11.0	10.0	1.98	2.47	4.95	-	-	9.40	3.0 ~ 10.5	2410	460 ~ 3330	11.8	10.9
	20 + 25 + 60	1.52	1.90	4.58	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	1.79	2.24	5.37	-	-	9.40	3.0 ~ 10.5	2410	460 ~ 3330	11.8	10.9
	20 + 25 + 71	1.38	1.72	4.90	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2870	11.0	10.0	1.62	2.03	5.75	-	-	9.40	3.0 ~ 10.6	2400	460 ~ 3380	11.8	10.8
	20 + 35 + 35	1.78	3.11	3.11	-	-	8.00	2.3 ~ 8.6	2380	340 ~ 3100	11.9	10.9	2.08	3.66	3.66	-	-	9.40	3.0 ~ 10.5	2500	460 ~ 3460	12.3	11.3
	20 + 35 + 42	1.65	2.89	3.66	-	-	8.00	2.3 ~ 8.6	2380	340 ~ 3100	11.9	10.9	1.94	3.39	4.07	-	-	9.40	3.0 ~ 10.5	2490	460 ~ 3450	12.2	11.2
	20 + 35 + 50	1.52	2.67	3.81	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	1.79	3.13	4.48	-	-	9.40	3.0 ~ 10.5	2390	490 ~ 3300	11.7	10.8
	20 + 35 + 60	1.39	2.43	4.18	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	1.63	2.86	4.91	-	-	9.40	3.0 ~ 10.6	2390	490 ~ 3360	11.7	10.8
	20 + 35 + 71	1.27	2.22	4.51	-	-	8.00	2.3 ~ 9.0	2130	380 ~ 2950	10.7	9.8	1.49	2.61	5.30	-	-	9.40	3.0 ~ 10.6	2370	490 ~ 3340	11.6	10.7
	20 + 42 + 42	1.54	3.23	3.23	-	-	8.00	2.3 ~ 8.8	2380	340 ~ 3180	11.9	10.9	1.80	3.80	3.80	-	-	9.40	3.0 ~ 10.5	2480	460 ~ 3440	12.2	11.2
	20 + 42 + 50	1.43	3.00	3.57	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2870	11.0	10.0	1.68	3.53	4.19	-	-	9.40	3.0 ~ 10.6	2380	490 ~ 3350	11.7	10.7
	20 + 42 + 60	1.31	2.75	3.94	-	-	8.00	2.3 ~ 9.0	2190	380 ~ 3020	11.0	10.0	1.54	3.24	4.62	-	-	9.40	3.0 ~ 10.6	2380	490 ~ 3350	11.7	10.7
	20 + 42 + 71	1.20	2.53	4.27	-	-	8.00	2.3 ~ 9.0	2130	380 ~ 2950	10.7	9.8	1.41	2.97	5.02	-	-	9.40	3.0 ~ 10.6	2370	490 ~ 3330	11.6	10.7
	20 + 50 + 50	1.33	3.33	3.33	-	-	7.99	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.56	3.92	3.92	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
	20 + 50 + 60	1.23	3.08	3.69	-	-	8.00	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.45	3.62	4.33	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
	20 + 50 + 71	1.13	2.84	4.03	-	-	8.00	2.3 ~ 9.0	2070	470 ~ 2800	10.4	9.5	1.33	3.33	4.74	-	-	9.40	3.0 ~ 10.6	2280	580 ~ 3210	11.2	10.3
	20 + 60 + 60	1.14	3.43	3.43	-	-	8.00	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.34	4.03	4.03	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
	25 + 25 + 25	2.50	2.50	2.50	-	-	7.50	2.3 ~ 8.5	2280	340 ~ 3180	11.4	10.5	3.13	3.13	3.13	-	-	9.39	3.0 ~ 10.4	2560	440 ~ 3540	12.6	11.5
	25 + 25 + 35	2.35	2.35	3.30	-	-	8.00	2.3 ~ 8.6	2440	340 ~ 3180	12.2	11.2	2.76	2.76	3.88	-	-	9.40	3.0 ~ 10.4	2530	430 ~ 3500	12.4	11.4
	25 + 25 + 42	2.17	2.17	3.66	-	-	8.00	2.3 ~ 8.6	2440	340 ~ 3180	12.2	11.2	2.55	2.55	4.30	-	-	9.40	3.0 ~ 10.5	2520	460 ~ 3550	12.4	11.3
	25 + 25 + 50	2.00	2.00	4.00	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	2.35	2.35	4.70	-	-	9.40	3.0 ~ 10.5	2410	460 ~ 3330	11.8	10.9
	25 + 25 + 60	1.82	1.82	4.36	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	2.14	2.14	5.12	-	-	9.40	3.0 ~ 10.5	2410	460 ~ 3330	11.8	10.9
	25 + 25 + 71	1.65	1.65	4.70	-	-	8.00	2.3 ~ 9.0	2190	380 ~ 3020	11.0	10.0	1.94	1.94	5.52	-	-	9.40	3.0 ~ 10.6	2400	460 ~ 3380	11.8	10.8
	25 + 35 + 35	2.10	2.95	2.95	-	-	8.00	2.3 ~ 8.6	2380	340 ~ 3100	11.9	10.9	2.48	3.46	3.46	-	-	9.40	3.0 ~ 10.5	2500	460 ~ 3460	12.3	11.3
	25 + 35 + 42	1.96	2.75	3.29	-	-	8.00	2.3 ~ 8.8	2380	340 ~ 3250	11.9	10.9	2.30	3.23	3.87	-	-	9.40	3.0 ~ 10.5	2490	460 ~ 3450	12.2	11.2
	25 + 35 + 50	1.82	2.55	3.63	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	2.14	2.99	4.27	-	-	9.40	3.0 ~ 10.5	2390	490 ~ 3300	11.7	10.8
	25 + 35 + 60	1.67	2.33	4.00	-	-	8.00	2.3 ~ 9.0	2190	380 ~ 3020	11.0	10.0	1.96	2.74	4.70	-	-	9.40	3.0 ~ 10.6	2390	490 ~ 3360	11.7	10.8
	25 + 35 + 71	1.53	2.14	4.33	-	-	8.00	2.3 ~ 9.0	2130	380 ~ 2950	10.7	9.8	1.79	2.51	5.10	-	-	9.40	3.0 ~ 10.6	2370	490 ~ 3340	11.6	10.7
	25 + 42 + 42	1.84	3.08	3.08	-	-	8.00	2.3 ~ 8.8	2380	340 ~ 3180	11.9	10.9	2.16	3.62	3.62	-	-	9.40	3.0 ~ 10.5	2480	460 ~ 3440	12.2	11.2
	25 + 42 + 50	1.71	2.87	3.42	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2870	11.0	10.0	2.01	3.37	4.02	-	-	9.40	3.0 ~ 10.6	2380	490 ~ 3350	11.7	10.7
	25 + 42 + 60	1.57	2.65	3.78	-	-	8.00	2.3 ~ 9.0	2190	380 ~ 3020	11.0	10.0	1.85	3.11	4.44	-	-	9.40	3.0 ~ 10.6	2380	490 ~ 3350	11.7	10.7
	25 + 42 + 71	1.45	2.43	4.12	-	-	8.00	2.3 ~ 9.0	2130	380 ~ 2950	10.7	9.8	1.70	2.86	4.84	-	-	9.40	3.0 ~ 10.6	2370	490 ~ 3330	11.6	10.7
	25 + 50 + 50	1.60	3.20	3.20	-	-	8.00	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.88	3.76	3.76	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
	25 + 50 + 60	1.48	2.96	3.56	-	-	8.00	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.74	3.48	4.18	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
	25 + 50 + 71	1.37	2.74	3.89	-	-	8.00	2.3 ~ 9.0	2070	470 ~ 2800	10.4	9.5	1.61	3.22	4.57	-	-	9.40	3.0 ~ 10.6	2280	580 ~ 3210	11.2	1

CU-4Z80WBH-8: Free Multi Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V
4 Rooms	16 + 20 + 50 + 50	0.94	1.18	2.94	2.94	-	8.00	2.3 ~ 9.2	2010	590 ~ 2730	9.9	9.1	1.10	1.38	3.46	3.46	-	9.40	3.0 ~ 11.6	2250	790 ~ 3540	11.3	10.3
	16 + 20 + 50 + 60	0.88	1.10	2.74	3.28	-	8.00	2.3 ~ 9.2	2010	590 ~ 2730	9.9	9.1	1.03	1.29	3.22	3.86	-	9.40	3.0 ~ 11.6	2250	790 ~ 3540	11.3	10.3
	16 + 25 + 25 + 25	1.40	2.20	2.20	2.20	-	8.00	2.3 ~ 9.2	2100	420 ~ 2990	10.3	9.5	1.66	2.58	2.58	2.58	-	9.40	3.0 ~ 11.6	2280	500 ~ 3670	11.4	10.5
	16 + 25 + 25 + 35	1.27	1.98	1.98	2.27	-	8.00	2.3 ~ 9.2	2050	420 ~ 2920	10.1	9.2	1.49	2.33	2.33	3.25	-	9.40	3.0 ~ 11.6	2260	530 ~ 3640	11.3	10.4
	16 + 25 + 25 + 42	1.19	1.85	1.85	3.11	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.39	2.18	2.18	3.65	-	9.40	3.0 ~ 11.6	2250	530 ~ 3620	11.3	10.3
	16 + 25 + 25 + 50	1.10	1.72	1.72	3.46	-	8.00	2.3 ~ 9.2	2000	480 ~ 2780	9.8	9.0	1.30	2.03	2.03	4.04	-	9.40	3.0 ~ 11.6	2230	630 ~ 3560	11.2	10.2
	16 + 25 + 25 + 60	1.02	1.59	1.59	3.80	-	8.00	2.3 ~ 9.2	2000	480 ~ 2780	9.8	9.0	1.19	1.87	1.87	4.47	-	9.40	3.0 ~ 11.6	2230	630 ~ 3560	11.2	10.2
	16 + 25 + 25 + 71	0.93	1.46	1.46	4.15	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.10	1.72	1.72	4.86	-	9.40	3.0 ~ 11.6	2220	640 ~ 3540	11.1	10.2
	16 + 25 + 35 + 35	1.15	1.81	2.52	2.52	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.35	2.13	2.96	2.96	-	9.40	3.0 ~ 11.6	2240	540 ~ 3600	11.2	10.3
	16 + 25 + 35 + 42	1.08	1.69	2.37	2.86	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.27	1.99	2.79	3.35	-	9.40	3.0 ~ 11.6	2230	550 ~ 3590	11.2	10.2
	16 + 25 + 35 + 50	1.02	1.59	2.22	3.17	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.19	1.87	2.61	3.73	-	9.40	3.0 ~ 11.6	2210	650 ~ 3530	11.1	10.1
	16 + 25 + 35 + 60	0.94	1.47	2.06	3.53	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.10	1.73	2.42	4.15	-	9.40	3.0 ~ 11.6	2210	650 ~ 3530	11.1	10.1
	16 + 25 + 35 + 71	0.87	1.36	1.90	3.87	-	8.00	2.3 ~ 9.2	2000	530 ~ 2780	9.8	9.0	1.02	1.60	2.24	4.54	-	9.40	3.0 ~ 11.6	2210	670 ~ 3520	11.1	10.1
	16 + 25 + 42 + 42	1.02	1.60	2.69	2.69	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.20	1.88	3.16	3.16	-	9.40	3.0 ~ 11.6	2230	550 ~ 3580	11.2	10.2
	16 + 25 + 42 + 50	0.96	1.50	2.53	3.01	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.13	1.77	2.97	3.53	-	9.40	3.0 ~ 11.6	2210	670 ~ 3520	11.1	10.1
	16 + 25 + 42 + 60	0.90	1.40	2.35	3.35	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.05	1.64	2.76	3.95	-	9.40	3.0 ~ 11.6	2210	670 ~ 3520	11.1	10.1
	16 + 25 + 50 + 50	0.90	1.42	2.84	2.84	-	8.00	2.3 ~ 9.2	2010	590 ~ 2730	9.9	9.1	1.07	1.67	3.33	3.33	-	9.40	3.0 ~ 11.6	2250	790 ~ 3540	11.3	10.3
	16 + 35 + 35 + 35	1.07	2.31	2.31	2.31	-	8.00	2.3 ~ 9.2	2050	470 ~ 2920	10.1	9.2	1.24	2.72	2.72	2.72	-	9.40	3.0 ~ 11.6	2220	550 ~ 3570	11.1	10.2
	16 + 35 + 35 + 42	1.00	2.19	2.19	2.62	-	8.00	2.3 ~ 9.2	2050	470 ~ 2850	10.1	9.2	1.18	2.57	2.57	3.08	-	9.40	3.0 ~ 11.6	2220	580 ~ 3560	11.1	10.2
	16 + 35 + 35 + 50	0.94	2.06	2.06	2.94	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.11	2.42	2.42	3.45	-	9.40	3.0 ~ 11.6	2240	680 ~ 3500	11.2	10.3
	16 + 35 + 35 + 60	0.88	1.92	1.92	3.28	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.03	2.25	2.25	3.87	-	9.40	3.0 ~ 11.6	2240	680 ~ 3500	11.2	10.3
	16 + 35 + 42 + 42	0.95	2.07	2.49	2.49	-	8.00	2.3 ~ 9.2	2050	470 ~ 2850	10.1	9.2	1.11	2.45	2.92	2.92	-	9.40	3.0 ~ 11.6	2210	580 ~ 3610	11.1	10.1
	16 + 35 + 42 + 50	0.90	1.96	2.35	2.79	-	8.00	2.3 ~ 9.2	2000	530 ~ 2780	9.8	9.0	1.05	2.30	2.76	3.29	-	9.40	3.0 ~ 11.6	2240	690 ~ 3550	11.2	10.3
	16 + 42 + 42 + 42	0.89	2.37	2.37	2.37	-	8.00	2.3 ~ 9.2	2050	470 ~ 2850	10.1	9.2	1.06	2.78	2.78	2.78	-	9.40	3.0 ~ 11.6	2210	590 ~ 3600	11.1	10.1
	20 + 20 + 20 + 20	2.00	2.00	2.00	2.00	-	8.00	2.3 ~ 9.2	2100	420 ~ 2990	10.3	9.5	2.35	2.35	2.35	2.35	-	9.40	3.0 ~ 11.6	2270	500 ~ 3660	11.4	10.4
	20 + 20 + 20 + 25	1.88	1.88	1.88	2.36	-	8.00	2.3 ~ 9.2	2100	420 ~ 2990	10.3	9.5	2.21	2.21	2.21	2.77	-	9.40	3.0 ~ 11.6	2270	500 ~ 3660	11.4	10.4
	20 + 20 + 20 + 35	1.68	1.68	1.68	2.96	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.98	1.98	1.98	3.46	-	9.40	3.0 ~ 11.6	2250	530 ~ 3620	11.3	10.3
	20 + 20 + 20 + 42	1.57	1.57	1.57	3.29	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.84	1.84	1.84	3.88	-	9.40	3.0 ~ 11.6	2240	540 ~ 3610	11.2	10.3
	20 + 20 + 20 + 50	1.45	1.45	1.45	3.65	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.71	1.71	1.71	4.27	-	9.40	3.0 ~ 11.6	2220	640 ~ 3550	11.1	10.2
	20 + 20 + 20 + 60	1.33	1.33	1.33	4.01	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.57	1.57	1.57	4.69	-	9.40	3.0 ~ 11.6	2220	640 ~ 3550	11.1	10.2
	20 + 20 + 20 + 71	1.22	1.22	1.22	4.34	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.44	1.44	1.44	5.08	-	9.40	3.0 ~ 11.6	2210	640 ~ 3530	11.1	10.1
	20 + 20 + 25 + 25	1.78	1.78	2.22	2.22	-	8.00	2.3 ~ 9.2	2100	420 ~ 2990	10.3	9.5	2.09	2.09	2.61	2.61	-	9.40	3.0 ~ 11.6	2270	500 ~ 3660	11.4	10.4
	20 + 20 + 25 + 35	1.60	1.60	2.00	2.80	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.88	1.88	2.35	3.29	-	9.40	3.0 ~ 11.6	2250	530 ~ 3620	11.3	10.3
	20 + 20 + 25 + 42	1.50	1.50	1.87	3.13	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.76	1.76	2.20	3.68	-	9.40	3.0 ~ 11.6	2240	540 ~ 3610	11.2	10.3
	20 + 20 + 25 + 50	1.39	1.39	1.74	3.48	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.63	1.63	2.04	4.10	-	9.40	3.0 ~ 11.6	2220	640 ~ 3550	11.1	10.2
	20 + 20 + 25 + 60	1.28	1.28	1.60	3.84	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.50	1.50	1.88	4.52	-	9.40	3.0 ~ 11.6	2220	640 ~ 3550	11.1	10.2
	20 + 20 + 25 + 71	1.18	1.18	1.47	4.17	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.38	1.38	1.73	4.91	-	9.40	3.0 ~ 11.6	2210	640 ~ 3530	11.1	10.1
	20 + 20 + 35 + 35	1.45	1.45	2.55	2.55	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.71	1.71	2.99	2.99	-	9.40	3.0 ~ 11.6	2230	550 ~ 3590	11.2	10.2
	20 + 20 + 35 + 42	1.37	1.37	2.39	2.87	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.61	1.61	2.81	3.37	-	9.40	3.0 ~ 11.6	2230	550 ~ 3580	11.2	10.2
	20 + 20 + 35 + 50	1.28	1.28	2.24	3.20	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.50	1.50	2.63	3.77	-	9.40	3.0 ~ 11.6	2210	670 ~ 3520	11.1	10.1
	20 + 20 + 35 + 60	1.19	1.19	2.07	3.55	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.39	1.39	2.44	4.18	-	9.40	3.0 ~ 11.6	2210	670 ~ 3520	11.1	10.1
	20 + 20 + 35 + 71	1.10	1.10	1.92	3.88	-	8.00	2.3 ~ 9.2	2000	530 ~ 2780	9.8	9.0	1.29	1.29	2.25	4.57	-	9.40	3.0 ~ 11.6	2240	680 ~ 3510	11.2	10.3
	20 + 20 + 42 + 42	1.29	1.29	2.71	2.71	-	8.00	2.3 ~ 9.2	2050	460 ~ 2920	10.1	9.2	1.52	1.52	3.18	3.18	-	9.40	3.0 ~ 11.6	2220	570 ~ 3570	11.1	10.2
	20 + 20 + 42 + 50	1.21	1.21	2.55	3.03	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.42	1.42	2.99	3.57	-	9.40	3.0 ~ 11.6	2240	680 ~ 3510	11.2	10.3
	20 + 20 + 42 + 60	1.13	1.13	2.37	3.37	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.32	1.32	2.78	3.98	-	9.40	3.0 ~ 11.6	2240	680 ~ 3510	11.2	10.3
	20 + 20 + 50 + 50	1.14	1.14	2.86	2.86	-	8.00	2.3 ~ 9.2	2010	590 ~ 2730	9.9	9.1	1.34	1.34	3.36	3.36	-	9.40	3.0 ~ 11.6	2240	800 ~ 3530	11.2	10.3
	20 + 25 + 25 + 25	1.67	2.11	2.11	2.11	-	8.00	2.3 ~ 9.2	2100	420 ~ 2990	10.3	9.5	1.99	2.47	2.47	2.47	-	9.40	3.0 ~ 11.6	2270	500 ~ 3660	11.4	10.4
	20 + 25 + 25 + 35	1.52	1.90	1.90	2.68	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.79	2.24									

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)					Input Power (W)		Current (A)				
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
2 Rooms	25 + 71	2.50	7.10	-	-	-	9.60	2.3 ~ 10.1	3570	260 ~ 4220	17.9	16.4	3.13	8.87	-	-	-	12.00	2.0 ~ 13.0	3190	160 ~ 4050	15.7	14.4
	35 + 35	3.50	3.50	-	-	-	7.00	2.3 ~ 8.1	2290	250 ~ 3100	11.5	10.5	4.50	4.50	-	-	-	9.00	2.0 ~ 11.0	2530	200 ~ 3300	12.4	11.4
	35 + 42	3.50	4.20	-	-	-	7.70	2.3 ~ 8.6	2710	250 ~ 3590	13.6	12.4	4.59	5.51	-	-	-	10.10	2.0 ~ 11.0	2880	200 ~ 3240	14.1	13.0
	35 + 50	3.50	5.00	-	-	-	8.50	2.3 ~ 9.1	2850	230 ~ 3200	14.3	13.1	4.65	6.65	-	-	-	11.30	2.0 ~ 13.0	2840	160 ~ 4040	14.0	12.8
	35 + 60	3.50	6.00	-	-	-	9.50	2.3 ~ 10.1	3610	230 ~ 4220	18.1	16.6	4.42	7.58	-	-	-	12.00	2.0 ~ 13.0	3130	160 ~ 4040	15.4	14.1
	35 + 71	3.30	6.70	-	-	-	10.00	2.3 ~ 10.4	3860	260 ~ 4380	19.3	17.7	3.96	8.04	-	-	-	12.00	2.0 ~ 13.8	3120	160 ~ 4390	15.3	14.1
	42 + 42	4.20	4.20	-	-	-	8.40	2.3 ~ 9.1	3380	250 ~ 4000	16.9	15.5	5.60	5.60	-	-	-	11.20	2.0 ~ 13.0	3020	190 ~ 4230	14.8	13.6
	42 + 50	4.20	5.00	-	-	-	9.20	2.3 ~ 10.0	3270	230 ~ 4070	16.4	15.0	5.48	6.52	-	-	-	12.00	2.0 ~ 13.0	3120	160 ~ 3970	15.3	14.1
	42 + 60	4.12	5.88	-	-	-	10.00	2.3 ~ 10.4	4070	230 ~ 4370	20.4	18.7	4.94	7.06	-	-	-	12.00	2.0 ~ 13.8	3120	160 ~ 4390	15.3	14.1
	42 + 71	3.72	6.28	-	-	-	10.00	2.3 ~ 10.4	3790	260 ~ 4380	19.0	17.4	4.46	7.54	-	-	-	12.00	2.0 ~ 13.8	3110	160 ~ 4380	15.3	14.0
	50 + 50	5.00	5.00	-	-	-	10.00	2.3 ~ 10.4	3310	250 ~ 3650	16.6	15.2	6.00	6.00	-	-	-	12.00	2.0 ~ 13.8	2910	170 ~ 4140	14.3	13.1
	50 + 60	4.55	5.45	-	-	-	10.00	2.3 ~ 10.4	3310	250 ~ 3650	16.6	15.2	5.45	6.55	-	-	-	12.00	2.0 ~ 13.8	2910	170 ~ 4140	14.3	13.1
	50 + 71	4.13	5.87	-	-	-	10.00	2.3 ~ 10.4	3170	250 ~ 3520	15.9	14.5	4.96	7.04	-	-	-	12.00	2.0 ~ 13.8	2890	170 ~ 4120	14.2	13.0
	60 + 60	5.00	5.00	-	-	-	10.00	2.3 ~ 10.4	3310	250 ~ 3650	16.6	15.2	6.00	6.00	-	-	-	12.00	2.0 ~ 13.8	2910	170 ~ 4140	14.3	13.1
	60 + 71	4.58	5.42	-	-	-	10.00	2.3 ~ 10.4	3170	250 ~ 3520	15.9	14.5	5.50	6.50	-	-	-	12.00	2.0 ~ 13.8	2890	170 ~ 4120	14.2	13.0
	71 + 71	5.00	5.00	-	-	-	10.00	2.3 ~ 10.4	3040	280 ~ 3380	15.2	13.9	6.00	6.00	-	-	-	12.00	2.0 ~ 13.8	2880	180 ~ 4100	14.1	13.0
3 Rooms	16 + 16 + 16	1.60	1.60	1.60	-	-	4.80	2.3 ~ 8.5	1050	260 ~ 2680	5.4	4.9	2.60	2.60	2.60	-	-	7.80	2.7 ~ 12.3	1920	230 ~ 3640	9.4	8.6
	16 + 16 + 20	1.60	1.60	2.00	-	-	5.20	2.3 ~ 8.5	1160	260 ~ 2680	5.9	5.4	2.58	2.58	3.24	-	-	8.40	2.7 ~ 12.3	2140	230 ~ 3620	10.5	9.6
	16 + 16 + 25	1.60	1.60	2.50	-	-	5.70	2.3 ~ 8.5	1350	260 ~ 2680	6.8	6.3	2.47	2.47	3.86	-	-	8.80	2.7 ~ 12.3	2210	230 ~ 3620	10.9	10.0
	16 + 16 + 35	1.60	1.60	3.50	-	-	6.70	2.3 ~ 8.5	1670	260 ~ 2610	8.4	7.7	2.32	2.32	5.06	-	-	9.70	2.7 ~ 12.3	2520	230 ~ 3540	12.4	11.3
	16 + 16 + 42	1.60	1.60	4.20	-	-	7.40	2.3 ~ 8.5	2010	250 ~ 2550	10.1	9.2	2.34	2.34	6.12	-	-	10.80	2.7 ~ 12.3	2650	230 ~ 3520	13.0	11.9
	16 + 16 + 50	1.60	1.60	5.00	-	-	8.20	2.3 ~ 8.7	2170	280 ~ 2350	10.9	10.0	2.34	2.34	7.32	-	-	12.00	2.7 ~ 12.9	2870	250 ~ 3610	14.1	12.9
	16 + 16 + 60	1.60	1.60	6.00	-	-	9.20	2.3 ~ 10.1	2510	280 ~ 3060	12.6	11.5	2.09	2.09	7.82	-	-	12.00	2.7 ~ 13.6	2870	250 ~ 3970	14.1	12.9
	16 + 16 + 71	1.55	1.55	6.90	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.86	1.86	8.28	-	-	12.00	2.7 ~ 13.6	2860	250 ~ 3890	14.1	12.9
	16 + 20 + 20	1.60	2.00	2.00	-	-	5.60	2.3 ~ 8.5	1300	260 ~ 2610	6.6	6.0	2.58	3.21	3.21	-	-	9.00	2.7 ~ 12.3	2250	230 ~ 3610	11.1	10.1
	16 + 20 + 25	1.60	2.00	2.50	-	-	6.10	2.3 ~ 8.5	1510	260 ~ 2610	7.6	7.0	2.47	3.08	3.85	-	-	9.40	2.7 ~ 12.3	2390	230 ~ 3610	11.7	10.8
	16 + 20 + 35	1.60	2.00	3.50	-	-	7.10	2.3 ~ 8.5	1840	250 ~ 2550	9.2	8.4	2.32	2.90	5.08	-	-	10.30	2.7 ~ 12.3	2550	230 ~ 3520	12.5	11.5
	16 + 20 + 42	1.60	2.00	4.20	-	-	7.80	2.3 ~ 8.5	2120	250 ~ 2550	10.6	9.7	2.34	2.92	6.14	-	-	11.40	2.7 ~ 12.9	2790	230 ~ 3800	13.7	12.6
	16 + 20 + 50	1.60	2.00	5.00	-	-	8.60	2.3 ~ 9.6	2360	280 ~ 2680	11.8	10.8	2.23	2.79	6.98	-	-	12.00	2.7 ~ 13.6	2860	250 ~ 3890	14.1	12.9
	16 + 20 + 60	1.60	2.00	6.00	-	-	9.60	2.3 ~ 10.1	2680	280 ~ 3000	13.4	12.3	2.00	2.50	7.50	-	-	12.00	2.7 ~ 13.6	2860	250 ~ 3890	14.1	12.9
	16 + 20 + 71	1.50	1.87	6.63	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.80	2.24	7.96	-	-	12.00	2.7 ~ 13.8	2850	250 ~ 4000	14.0	12.8
	16 + 25 + 25	1.60	2.50	2.50	-	-	6.60	2.3 ~ 8.5	1720	260 ~ 2610	8.7	8.0	2.38	3.71	3.71	-	-	9.80	2.7 ~ 12.3	2590	230 ~ 3610	12.7	11.7
	16 + 25 + 35	1.60	2.50	3.50	-	-	7.60	2.3 ~ 8.5	2120	250 ~ 2550	10.6	9.7	2.25	3.52	4.93	-	-	10.70	2.7 ~ 12.3	2690	230 ~ 3520	13.2	12.1
	16 + 25 + 42	1.60	2.50	4.20	-	-	8.30	2.3 ~ 8.7	2420	250 ~ 2600	12.1	11.1	2.28	3.55	5.97	-	-	11.80	2.7 ~ 12.9	2930	230 ~ 3800	14.4	13.2
	16 + 25 + 50	1.60	2.50	5.00	-	-	9.10	2.3 ~ 10.1	2450	280 ~ 3000	12.3	11.2	2.11	3.30	6.59	-	-	12.00	2.7 ~ 13.6	2860	250 ~ 3890	14.1	12.9
	16 + 25 + 60	1.58	2.48	5.94	-	-	10.00	2.3 ~ 10.7	2930	280 ~ 3540	14.7	13.4	1.90	2.97	7.13	-	-	12.00	2.7 ~ 13.6	2860	250 ~ 3890	14.1	12.9
	16 + 25 + 71	1.43	2.23	6.34	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.71	2.68	7.61	-	-	12.00	2.7 ~ 13.8	2850	250 ~ 4000	14.0	12.8
	16 + 35 + 35	1.60	3.50	3.50	-	-	8.60	2.3 ~ 9.6	2550	250 ~ 2990	12.8	11.7	2.16	4.72	4.72	-	-	11.60	2.7 ~ 13.6	2820	230 ~ 4140	13.9	12.7
	16 + 35 + 42	1.60	3.50	4.20	-	-	9.30	2.3 ~ 10.1	2830	250 ~ 3390	14.2	13.0	2.06	4.52	5.42	-	-	12.00	2.7 ~ 13.6	2950	240 ~ 4130	14.5	13.3
	16 + 35 + 50	1.58	3.47	4.95	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.90	4.16	5.94	-	-	12.00	2.7 ~ 13.6	2780	250 ~ 3860	13.7	12.5
	16 + 35 + 60	1.44	3.15	5.41	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.73	3.78	6.49	-	-	12.00	2.7 ~ 13.8	2780	250 ~ 3980	13.7	12.5
	16 + 35 + 71	1.31	2.87	5.82	-	-	10.00	2.3 ~ 10.7	2800	280 ~ 3260	14.0	12.8	1.58	3.44	6.98	-	-	12.00	2.7 ~ 13.8	2770	270 ~ 3960	13.6	12.5
	16 + 42 + 42	1.60	4.20	4.20	-	-	10.00	2.3 ~ 10.7	3260	250 ~ 3970	16.3	15.0	1.92	5.04	5.04	-	-	12.00	2.7 ~ 13.6	2940	240 ~ 4050	14.4	13.2
	16 + 42 + 50	1.48	3.89	4.63	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.78	4.67	5.55	-	-	12.00	2.7 ~ 13.8	2770	270 ~ 3970	13.6	12.5
	16 + 42 + 60	1.36	3.56	5.08	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.63	4.27	6.10	-	-	12.00	2.7 ~ 13.8	2770	270 ~ 3970	13.6	12.5
	16 + 42 + 71	1.24	3.26	5.50	-	-	10.00	2.3 ~ 10.7	2800	280 ~ 3260	14.0	12.8	1.49	3.91	6.60	-	-	12.00	2.7 ~ 14.1	2760	270 ~ 4070	13.6	12.4
	16 + 50 + 50	1.38	4.31	4.31	-	-	10.00	2.3 ~ 10.7	2610	320 ~ 3000	13.1	12.0	1.66	5.17	5.17	-	-	12.00	2.7 ~ 13.8	2660	300 ~ 3760	13.1	12.0
	16 + 50 + 60	1.27	3.97	4.76	-	-	10.00	2.3 ~ 10.7	2610	320 ~ 3000	13.1	12.0	1.53	4.76	5.71	-	-	12.00	2.7 ~ 13.8	2660	300 ~ 3760	13.1	12.0
	16 + 50 + 71	1.17	3.65	5.18	-	-	10.00	2.3 ~ 10.7	2550	340 ~ 2930	12.8	11.7	1.40	4.3									

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V
3 Rooms	42 + 42 + 60	2.92	2.92	4.16	-	-	10.00	2.3 ~ 10.7	2740	280 ~ 3260	13.7	12.6	3.50	3.50	5.00	-	-	12.00	2.7 ~ 14.1	2730	280 ~ 4020	13.4	12.3
	42 + 42 + 71	2.71	2.71	4.58	-	-	10.00	2.3 ~ 10.7	2680	310 ~ 3130	13.4	12.3	3.25	3.25	5.50	-	-	12.00	2.7 ~ 14.4	2710	280 ~ 4130	13.3	12.2
	42 + 50 + 50	2.96	3.52	3.52	-	-	10.00	2.3 ~ 10.7	2550	350 ~ 2930	12.8	11.7	3.54	4.23	4.23	-	-	12.00	2.7 ~ 14.1	2670	330 ~ 3870	13.1	12.0
	42 + 50 + 60	2.76	3.29	3.95	-	-	10.00	2.3 ~ 10.7	2550	350 ~ 2930	12.8	11.7	3.32	3.95	4.73	-	-	12.00	2.7 ~ 14.4	2670	330 ~ 3990	13.1	12.0
	42 + 50 + 71	2.58	3.07	4.35	-	-	10.00	2.3 ~ 10.7	2490	350 ~ 2870	12.5	11.4	3.09	3.68	5.23	-	-	12.00	2.7 ~ 14.4	2650	340 ~ 3980	13.0	11.9
	42 + 60 + 60	2.60	3.70	3.70	-	-	10.00	2.3 ~ 10.7	2550	350 ~ 2930	12.8	11.7	3.12	4.44	4.44	-	-	12.00	2.7 ~ 14.4	2670	330 ~ 3990	13.1	12.0
	42 + 60 + 71	2.43	3.47	4.10	-	-	10.00	2.3 ~ 10.7	2490	350 ~ 2870	12.5	11.4	2.92	4.16	4.92	-	-	12.00	2.7 ~ 14.4	2650	340 ~ 3980	13.0	11.9
	50 + 50 + 50	3.33	3.33	3.33	-	-	9.99	2.3 ~ 10.7	2380	390 ~ 2740	11.9	10.9	4.00	4.00	4.00	-	-	12.00	2.7 ~ 14.4	2620	400 ~ 3910	12.9	11.8
	50 + 50 + 60	3.13	3.13	3.74	-	-	10.00	2.3 ~ 10.7	2440	390 ~ 2740	12.2	11.2	3.75	3.75	4.50	-	-	12.00	2.7 ~ 14.4	2620	400 ~ 3910	12.9	11.8
	50 + 50 + 71	2.92	2.92	4.16	-	-	10.00	2.3 ~ 10.7	2380	390 ~ 2750	11.9	10.9	3.51	3.51	4.98	-	-	12.00	2.7 ~ 14.4	2610	410 ~ 3890	12.8	11.8
	50 + 60 + 60	2.94	3.53	3.53	-	-	10.00	2.3 ~ 10.7	2440	390 ~ 2740	12.2	11.2	3.52	4.24	4.24	-	-	12.00	2.7 ~ 14.4	2620	400 ~ 3910	12.9	11.8
50 + 60 + 71	2.77	3.31	3.92	-	-	10.00	2.3 ~ 10.7	2380	390 ~ 2750	11.9	10.9	3.31	3.98	4.71	-	-	12.00	2.7 ~ 14.4	2610	410 ~ 3890	12.8	11.8	
60 + 60 + 60	3.33	3.33	3.33	-	-	9.99	2.3 ~ 10.7	2380	390 ~ 2740	11.9	10.9	4.00	4.00	4.00	-	-	12.00	2.7 ~ 14.4	2620	400 ~ 3910	12.9	11.8	
4 Rooms	16 + 16 + 16 + 16	1.60	1.60	1.60	1.60	-	6.40	2.3 ~ 10.6	1480	310 ~ 3560	7.5	6.9	2.60	2.60	2.60	2.60	-	10.40	3.4 ~ 14.2	2400	340 ~ 4160	11.8	10.8
	16 + 16 + 16 + 20	1.60	1.60	1.60	2.00	-	6.80	2.3 ~ 10.6	1620	310 ~ 3560	8.2	7.5	2.59	2.59	2.59	3.23	-	11.00	3.4 ~ 14.2	2540	340 ~ 4150	12.5	11.4
	16 + 16 + 16 + 25	1.60	1.60	1.60	2.50	-	7.30	2.3 ~ 10.6	1780	310 ~ 3560	8.9	8.2	2.50	2.50	2.50	3.90	-	11.40	3.4 ~ 14.2	2600	340 ~ 4150	12.8	11.7
	16 + 16 + 16 + 35	1.60	1.60	1.60	3.50	-	8.30	2.3 ~ 10.6	2170	310 ~ 3480	10.9	10.0	2.31	2.31	2.31	5.07	-	12.00	3.4 ~ 14.2	2760	340 ~ 4110	13.6	12.4
	16 + 16 + 16 + 42	1.60	1.60	1.60	4.20	-	9.00	2.3 ~ 10.6	2460	310 ~ 3480	12.3	11.3	2.13	2.13	2.13	5.61	-	12.00	3.4 ~ 14.2	2750	340 ~ 4100	13.5	12.4
	16 + 16 + 16 + 50	1.60	1.60	1.60	5.00	-	9.80	2.3 ~ 10.6	2660	350 ~ 3190	13.3	12.2	1.96	1.96	1.96	6.12	-	12.00	3.4 ~ 14.2	2690	390 ~ 3950	13.2	12.1
	16 + 16 + 16 + 60	1.48	1.48	1.48	5.56	-	10.00	2.3 ~ 10.6	2790	350 ~ 3190	14.0	12.8	1.78	1.78	1.78	6.66	-	12.00	3.4 ~ 14.2	2690	390 ~ 3950	13.2	12.1
	16 + 16 + 16 + 71	1.34	1.34	1.34	5.98	-	10.00	2.3 ~ 10.6	2730	380 ~ 3120	13.7	12.5	1.61	1.61	1.61	7.17	-	12.00	3.4 ~ 14.2	2680	400 ~ 3930	13.2	12.1
	16 + 16 + 20 + 20	1.60	1.60	2.00	2.00	-	7.20	2.3 ~ 10.6	1730	310 ~ 3480	8.7	8.0	2.58	2.58	3.22	3.22	-	11.60	3.4 ~ 14.2	2630	340 ~ 4130	12.9	11.8
	16 + 16 + 20 + 25	1.60	1.60	2.00	2.50	-	7.70	2.3 ~ 10.6	1930	310 ~ 3480	9.7	8.9	2.49	2.49	3.12	3.90	-	12.00	3.4 ~ 14.2	2770	340 ~ 4130	13.6	12.5
	16 + 16 + 20 + 35	1.60	1.60	2.00	3.50	-	8.70	2.3 ~ 10.6	2330	310 ~ 3410	11.7	10.7	2.21	2.21	2.76	4.82	-	12.00	3.4 ~ 14.2	2750	340 ~ 4100	13.5	12.4
	16 + 16 + 20 + 42	1.60	1.60	2.00	4.20	-	9.40	2.3 ~ 10.6	2620	310 ~ 3410	13.1	12.0	2.04	2.04	2.56	5.36	-	12.00	3.4 ~ 14.2	2740	340 ~ 4080	13.5	12.3
	16 + 16 + 20 + 50	1.57	1.57	1.96	4.90	-	10.00	2.3 ~ 10.6	2790	350 ~ 3190	14.0	12.8	1.88	1.88	2.36	5.88	-	12.00	3.4 ~ 14.2	2680	400 ~ 3930	13.2	12.1
	16 + 16 + 20 + 60	1.43	1.43	1.79	5.35	-	10.00	2.3 ~ 10.6	2790	350 ~ 3190	14.0	12.8	1.71	1.71	2.15	6.43	-	12.00	3.4 ~ 14.2	2680	400 ~ 3930	13.2	12.1
	16 + 16 + 20 + 71	1.30	1.30	1.63	5.77	-	10.00	2.3 ~ 10.8	2730	380 ~ 3260	13.7	12.5	1.56	1.56	1.95	6.93	-	12.00	3.4 ~ 14.2	2670	400 ~ 3920	13.1	12.0
	16 + 16 + 25 + 25	1.60	1.60	2.50	2.50	-	8.20	2.3 ~ 10.6	2110	310 ~ 3480	10.6	9.7	2.34	2.34	3.66	3.66	-	12.00	3.4 ~ 14.2	2770	340 ~ 4130	13.6	12.5
	16 + 16 + 25 + 35	1.60	1.60	2.50	3.50	-	9.20	2.3 ~ 10.6	2560	310 ~ 3410	12.8	11.7	2.09	2.09	3.26	4.56	-	12.00	3.4 ~ 14.2	2750	340 ~ 4100	13.5	12.4
	16 + 16 + 25 + 42	1.60	1.60	2.50	4.20	-	9.90	2.3 ~ 10.6	2920	310 ~ 3410	14.6	13.4	1.94	1.94	3.03	5.09	-	12.00	3.4 ~ 14.2	2740	340 ~ 4080	13.5	12.3
	16 + 16 + 25 + 50	1.50	1.50	2.34	4.66	-	10.00	2.3 ~ 10.6	2790	350 ~ 3190	14.0	12.8	1.79	1.79	2.81	5.61	-	12.00	3.4 ~ 14.2	2680	400 ~ 3930	13.2	12.1
	16 + 16 + 25 + 60	1.37	1.37	2.14	5.12	-	10.00	2.3 ~ 10.6	2790	350 ~ 3190	14.0	12.8	1.64	1.64	2.57	6.15	-	12.00	3.4 ~ 14.2	2680	400 ~ 3930	13.2	12.1
	16 + 16 + 25 + 71	1.25	1.25	1.95	5.55	-	10.00	2.3 ~ 10.8	2730	380 ~ 3260	13.7	12.5	1.50	1.50	2.34	6.66	-	12.00	3.4 ~ 14.4	2670	400 ~ 3980	13.1	12.0
	16 + 16 + 35 + 35	1.57	1.57	3.43	3.43	-	10.00	2.3 ~ 10.6	2920	320 ~ 3410	14.6	13.4	1.88	1.88	4.12	4.12	-	12.00	3.4 ~ 14.2	2720	360 ~ 4060	13.4	12.2
	16 + 16 + 35 + 42	1.47	1.47	3.21	3.85	-	10.00	2.3 ~ 10.6	2920	320 ~ 3330	14.6	13.4	1.76	1.76	3.86	4.62	-	12.00	3.4 ~ 14.2	2710	360 ~ 3980	13.3	12.2
	16 + 16 + 35 + 50	1.37	1.37	2.99	4.27	-	10.00	2.3 ~ 10.6	2730	380 ~ 3120	13.7	12.5	1.64	1.64	3.59	5.13	-	12.00	3.4 ~ 14.2	2660	420 ~ 3900	13.1	12.0
	16 + 16 + 35 + 60	1.26	1.26	2.76	4.72	-	10.00	2.3 ~ 10.8	2730	380 ~ 3260	13.7	12.5	1.51	1.51	3.31	5.67	-	12.00	3.4 ~ 14.2	2660	420 ~ 3900	13.1	12.0
	16 + 16 + 35 + 71	1.16	1.16	2.54	5.14	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.39	1.39	3.05	6.17	-	12.00	3.4 ~ 14.4	2650	420 ~ 3940	13.0	11.9
	16 + 16 + 42 + 42	1.38	1.38	3.62	3.62	-	10.00	2.3 ~ 10.6	2920	320 ~ 3330	14.6	13.4	1.66	1.66	4.34	4.34	-	12.00	3.4 ~ 14.2	2700	370 ~ 3970	13.3	12.2
	16 + 16 + 42 + 50	1.29	1.29	3.39	4.03	-	10.00	2.3 ~ 10.8	2730	380 ~ 3260	13.7	12.5	1.55	1.55	4.06	4.84	-	12.00	3.4 ~ 14.2	2650	420 ~ 3890	13.0	11.9
	16 + 16 + 42 + 60	1.19	1.19	3.14	4.48	-	10.00	2.3 ~ 10.8	2730	380 ~ 3260	13.7	12.5	1.43	1.43	3.77	5.37	-	12.00	3.4 ~ 14.4	2650	420 ~ 3950	13.0	11.9
	16 + 16 + 42 + 71	1.10	1.10	2.90	4.90	-	10.00	2.3 ~ 11.0	2730	390 ~ 3340	13.7	12.5	1.32	1.32	3.48	5.88	-	12.00	3.4 ~ 14.4	2640	430 ~ 3930	13.0	11.9
	16 + 16 + 50 + 50	1.21	1.21	3.79	3.79	-	10.00	2.3 ~ 10.8	2610	430 ~ 3060	13.1	12.0	1.45	1.45	4.55	4.55	-	12.00	3.4 ~ 14.4	2610	490 ~ 3870	12.8	11.8
	16 + 16 + 50 + 60	1.13	1.13	3.52	4.22	-	10.00	2.3 ~ 11.0	2610	430 ~ 3200	13.1	12.0	1.35	1.35	4.23	5.07	-	12.00	3.4 ~ 14.4	2610	490 ~ 3870	12.8	11.8
	16 + 16 + 50 + 71	1.05	1.05	3.27	4.63	-	10.00	2.3 ~ 11.0	2610	460 ~													

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min - max	Rated	min - max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min - max	Rated	min - max	220V	240V
4 Rooms	16 + 42 + 50 + 71	0.89	2.35	2.79	3.97	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.07	2.82	3.35	4.76	-	12.00	3.4 ~ 14.4	2620	540 ~ 3870	12.9	11.8
	16 + 42 + 60 + 60	0.90	2.36	3.37	3.37	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.08	2.84	4.04	4.04	-	12.00	3.4 ~ 14.4	2630	530 ~ 3880	12.9	11.8
	16 + 50 + 50 + 50	0.97	3.01	3.01	3.01	-	10.00	2.3 ~ 11.2	2570	520 ~ 3220	12.9	11.8	1.17	3.61	3.61	3.61	-	12.00	3.4 ~ 14.4	2660	630 ~ 3880	13.1	12.0
	16 + 50 + 50 + 60	0.91	2.84	2.84	3.41	-	10.00	2.3 ~ 11.2	2570	520 ~ 3220	12.9	11.8	1.09	3.41	3.41	4.09	-	12.00	3.4 ~ 14.4	2660	630 ~ 3880	13.1	12.0
	20 + 20 + 20 + 20	2.00	2.00	2.00	2.00	-	8.00	2.3 ~ 10.6	2050	310 ~ 3480	10.3	9.4	3.00	3.00	3.00	3.00	-	12.00	3.4 ~ 14.2	2750	340 ~ 4110	13.5	12.4
	20 + 20 + 20 + 25	2.00	2.00	2.00	2.50	-	8.50	2.3 ~ 10.6	2230	310 ~ 3480	11.2	10.2	2.82	2.82	2.82	3.54	-	12.00	3.4 ~ 14.2	2750	340 ~ 4110	13.5	12.4
	20 + 20 + 20 + 35	2.00	2.00	2.00	3.50	-	9.50	2.3 ~ 10.6	2690	320 ~ 3410	13.5	12.3	2.53	2.53	2.53	4.41	-	12.00	3.4 ~ 14.2	2730	350 ~ 4070	13.4	12.3
	20 + 20 + 20 + 42	1.96	1.96	1.96	4.12	-	10.00	2.3 ~ 10.6	2920	320 ~ 3410	14.6	13.4	2.35	2.35	2.35	4.95	-	12.00	3.4 ~ 14.2	2720	360 ~ 4050	13.4	12.2
	20 + 20 + 20 + 50	1.82	1.82	1.82	4.54	-	10.00	2.3 ~ 10.6	2730	380 ~ 3120	13.7	12.5	2.18	2.18	2.18	5.46	-	12.00	3.4 ~ 14.2	2660	420 ~ 3910	13.1	12.0
	20 + 20 + 20 + 60	1.67	1.67	1.67	4.99	-	10.00	2.3 ~ 10.6	2730	380 ~ 3120	13.7	12.5	2.00	2.00	2.00	6.00	-	12.00	3.4 ~ 14.2	2660	420 ~ 3910	13.1	12.0
	20 + 20 + 20 + 71	1.53	1.53	1.53	5.41	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.83	1.83	1.83	6.51	-	12.00	3.4 ~ 14.4	2650	420 ~ 3950	13.0	11.9
	20 + 20 + 25 + 25	2.00	2.00	2.50	2.50	-	9.00	2.3 ~ 10.6	2460	310 ~ 3480	12.3	11.3	2.67	2.67	3.33	3.33	-	12.00	3.4 ~ 14.2	2750	340 ~ 4110	13.5	12.4
	20 + 20 + 25 + 35	2.00	2.00	2.50	3.50	-	10.00	2.3 ~ 10.6	2920	320 ~ 3410	14.6	13.4	2.40	2.40	3.00	4.20	-	12.00	3.4 ~ 14.2	2730	350 ~ 4070	13.4	12.3
	20 + 20 + 25 + 42	1.87	1.87	2.34	3.92	-	10.00	2.3 ~ 10.6	2920	320 ~ 3410	14.6	13.4	2.24	2.24	2.81	4.71	-	12.00	3.4 ~ 14.2	2720	360 ~ 4050	13.4	12.2
	20 + 20 + 25 + 50	1.74	1.74	2.17	4.35	-	10.00	2.3 ~ 10.6	2730	380 ~ 3120	13.7	12.5	2.09	2.09	2.61	5.21	-	12.00	3.4 ~ 14.2	2660	420 ~ 3910	13.1	12.0
	20 + 20 + 25 + 60	1.60	1.60	2.00	4.80	-	10.00	2.3 ~ 10.8	2730	380 ~ 3260	13.7	12.5	1.92	1.92	2.40	5.76	-	12.00	3.4 ~ 14.2	2660	420 ~ 3910	13.1	12.0
	20 + 20 + 25 + 71	1.47	1.47	1.84	5.22	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.76	1.76	2.22	6.26	-	12.00	3.4 ~ 14.4	2650	420 ~ 3950	13.0	11.9
	20 + 20 + 35 + 35	1.82	1.82	3.18	3.18	-	10.00	2.3 ~ 10.6	2860	320 ~ 3330	14.3	13.1	2.18	2.18	3.82	3.82	-	12.00	3.4 ~ 14.2	2700	370 ~ 3970	13.3	12.2
	20 + 20 + 35 + 42	1.71	1.71	2.99	3.59	-	10.00	2.3 ~ 10.6	2860	320 ~ 3330	14.3	13.1	2.05	2.05	3.59	4.31	-	12.00	3.4 ~ 14.2	2690	370 ~ 3960	13.2	12.1
	20 + 20 + 35 + 50	1.60	1.60	2.80	4.00	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.92	1.92	3.36	4.80	-	12.00	3.4 ~ 14.2	2640	420 ~ 3880	13.0	11.9
	20 + 20 + 35 + 60	1.48	1.48	2.60	4.44	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.78	1.78	3.11	5.33	-	12.00	3.4 ~ 14.4	2640	420 ~ 3930	13.0	11.9
	20 + 20 + 35 + 71	1.37	1.37	2.40	4.86	-	10.00	2.3 ~ 11.0	2660	390 ~ 3270	13.3	12.2	1.64	1.64	2.88	5.84	-	12.00	3.4 ~ 14.4	2630	430 ~ 3920	12.9	11.8
	20 + 20 + 42 + 42	1.61	1.61	3.39	3.39	-	10.00	2.3 ~ 10.8	2860	340 ~ 3480	14.3	13.1	1.94	1.94	4.06	4.06	-	12.00	3.4 ~ 14.2	2680	370 ~ 3950	13.2	12.1
	20 + 20 + 42 + 50	1.52	1.52	3.18	3.78	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.82	1.82	3.82	4.54	-	12.00	3.4 ~ 14.4	2630	430 ~ 3920	12.9	11.8
	20 + 20 + 42 + 60	1.41	1.41	2.96	4.22	-	10.00	2.3 ~ 11.0	2730	390 ~ 3340	13.7	12.5	1.69	1.69	3.55	5.07	-	12.00	3.4 ~ 14.4	2630	430 ~ 3920	12.9	11.8
	20 + 20 + 42 + 71	1.31	1.31	2.75	4.63	-	10.00	2.3 ~ 11.0	2660	390 ~ 3270	13.3	12.2	1.57	1.57	3.29	5.57	-	12.00	3.4 ~ 14.4	2620	440 ~ 3960	12.9	11.8
	20 + 20 + 50 + 50	1.43	1.43	3.57	3.57	-	10.00	2.3 ~ 10.8	2610	440 ~ 3060	13.1	12.0	1.71	1.71	4.29	4.29	-	12.00	3.4 ~ 14.4	2640	510 ~ 3910	13.0	11.9
	20 + 20 + 50 + 60	1.33	1.33	3.34	4.00	-	10.00	2.3 ~ 11.0	2610	440 ~ 3200	13.1	12.0	1.60	1.60	4.00	4.80	-	12.00	3.4 ~ 14.4	2640	510 ~ 3910	13.0	11.9
	20 + 20 + 50 + 71	1.24	1.24	3.11	4.41	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.49	1.49	3.73	5.29	-	12.00	3.4 ~ 14.4	2630	520 ~ 3890	12.9	11.8
	20 + 20 + 60 + 60	1.25	1.25	3.75	3.75	-	10.00	2.3 ~ 11.2	2610	440 ~ 3270	13.1	12.0	1.50	1.50	4.50	4.50	-	12.00	3.4 ~ 14.4	2640	510 ~ 3910	13.0	11.9
	20 + 20 + 60 + 71	1.17	1.17	3.51	4.15	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.40	1.40	4.22	4.98	-	12.00	3.4 ~ 14.4	2630	520 ~ 3890	12.9	11.8
	20 + 20 + 71 + 71	1.10	1.10	3.90	3.90	-	10.00	2.3 ~ 11.2	2620	480 ~ 3210	13.1	12.0	1.32	1.32	4.68	4.68	-	12.00	3.4 ~ 14.4	2630	530 ~ 3880	12.9	11.8
	20 + 25 + 25 + 25	2.00	2.50	2.50	2.50	-	9.50	2.3 ~ 10.6	2690	310 ~ 3480	13.5	12.3	2.52	3.16	3.16	3.16	-	12.00	3.4 ~ 14.2	2750	340 ~ 4110	13.5	12.4
	20 + 25 + 25 + 35	1.91	2.38	2.38	3.33	-	10.00	2.3 ~ 10.6	2920	320 ~ 3410	14.6	13.4	2.29	2.86	2.86	3.99	-	12.00	3.4 ~ 14.2	2730	350 ~ 4070	13.4	12.3
	20 + 25 + 25 + 42	1.79	2.23	2.23	3.75	-	10.00	2.3 ~ 10.6	2920	320 ~ 3410	14.6	13.4	2.14	2.68	2.68	4.50	-	12.00	3.4 ~ 14.2	2720	360 ~ 4050	13.4	12.2
	20 + 25 + 25 + 50	1.67	2.08	2.08	4.17	-	10.00	2.3 ~ 10.6	2730	380 ~ 3120	13.7	12.5	2.00	2.50	2.50	5.00	-	12.00	3.4 ~ 14.2	2660	420 ~ 3910	13.1	12.0
	20 + 25 + 25 + 60	1.54	1.92	1.92	4.62	-	10.00	2.3 ~ 10.8	2730	380 ~ 3260	13.7	12.5	1.85	2.31	2.31	5.53	-	12.00	3.4 ~ 14.4	2660	420 ~ 3970	13.1	12.0
	20 + 25 + 25 + 71	1.42	1.77	1.77	5.04	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.70	2.13	2.13	6.04	-	12.00	3.4 ~ 14.4	2650	420 ~ 3950	13.0	11.9
	20 + 25 + 35 + 35	1.75	2.17	3.04	3.04	-	10.00	2.3 ~ 10.6	2860	320 ~ 3330	14.3	13.1	2.09	2.61	3.65	3.65	-	12.00	3.4 ~ 14.2	2700	370 ~ 3970	13.3	12.2
	20 + 25 + 35 + 42	1.64	2.05	2.87	3.44	-	10.00	2.3 ~ 10.8	2860	320 ~ 3480	14.3	13.1	1.97	2.46	3.44	4.13	-	12.00	3.4 ~ 14.2	2690	370 ~ 3960	13.2	12.1
	20 + 25 + 35 + 50	1.54	1.92	2.69	3.85	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.85	2.31	3.23	4.61	-	12.00	3.4 ~ 14.4	2640	420 ~ 3930	13.0	11.9
	20 + 25 + 35 + 60	1.43	1.79	2.50	4.28	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.72	2.14	3.00	5.14	-	12.00	3.4 ~ 14.4	2640	420 ~ 3930	13.0	11.9
	20 + 25 + 35 + 71	1.32	1.66	2.32	4.70	-	10.00	2.3 ~ 11.0	2660	390 ~ 3270	13.3	12.2	1.59	1.99	2.78	5.64	-	12.00	3.4 ~ 14.4	2630	430 ~ 3920	12.9	11.8
	20 + 25 + 42 + 42	1.55	1.93	3.26	3.26	-	10.00	2.3 ~ 10.8	2860	340 ~ 3480	14.3	13.1	1.86	2.32	3.91	3.91	-	12.00	3.4 ~ 14.4	2680	370 ~ 4070	13.2	12.1
	20 + 25 + 42 + 50	1.46	1.82	3.07	3.65	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.75	2.19	3.68	4.38							

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min - max	Rated	min - max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min - max	Rated	min - max	220V	240V
4 Rooms	35 + 35 + 35 + 60	2.12	2.12	2.12	3.64	-	10.00	2.3 ~ 11.2	2660	390 ~ 3410	13.3	12.2	2.55	2.55	2.55	4.35	-	12.00	3.4 ~ 14.4	2650	460 ~ 3930	13.0	11.9
	35 + 35 + 35 + 71	1.99	1.99	1.99	4.03	-	10.00	2.3 ~ 11.2	2670	430 ~ 3340	13.4	12.2	2.39	2.39	2.39	4.83	-	12.00	3.4 ~ 14.4	2640	470 ~ 3910	13.0	11.9
	35 + 35 + 42 + 42	2.27	2.27	2.73	2.73	-	10.00	2.3 ~ 11.0	2790	350 ~ 3480	14.0	12.8	2.73	2.73	3.27	3.27	-	12.00	3.4 ~ 14.4	2680	400 ~ 4000	13.2	12.1
	35 + 35 + 42 + 50	2.16	2.16	2.59	3.09	-	10.00	2.3 ~ 11.2	2670	420 ~ 3410	13.4	12.2	2.59	2.59	3.12	3.70	-	12.00	3.4 ~ 14.4	2640	470 ~ 3920	13.0	11.9
	35 + 35 + 42 + 60	2.03	2.03	2.45	3.49	-	10.00	2.3 ~ 11.2	2670	420 ~ 3410	13.4	12.2	2.44	2.44	2.93	4.19	-	12.00	3.4 ~ 14.4	2640	470 ~ 3920	13.0	11.9
	35 + 35 + 42 + 71	1.91	1.91	2.30	3.88	-	10.00	2.3 ~ 11.2	2670	430 ~ 3340	13.4	12.2	2.30	2.30	2.75	4.65	-	12.00	3.4 ~ 14.4	2630	480 ~ 3900	12.9	11.8
	35 + 35 + 50 + 50	2.06	2.06	2.94	2.94	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	2.47	2.47	3.53	3.53	-	12.00	3.4 ~ 14.4	2650	550 ~ 3850	13.0	11.9
	35 + 35 + 50 + 60	1.94	1.94	2.79	3.33	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	2.33	2.33	3.33	4.01	-	12.00	3.4 ~ 14.4	2650	550 ~ 3850	13.0	11.9
	35 + 42 + 42 + 42	2.17	2.61	2.61	2.61	-	10.00	2.3 ~ 11.2	2790	350 ~ 3640	14.0	12.8	2.61	3.13	3.13	3.13	-	12.00	3.4 ~ 14.4	2670	400 ~ 3980	13.1	12.0
	35 + 42 + 42 + 50	2.07	2.49	2.49	2.95	-	10.00	2.3 ~ 11.2	2670	420 ~ 3420	13.4	12.2	2.49	2.98	2.98	3.55	-	12.00	3.4 ~ 14.4	2630	480 ~ 3900	12.9	11.8
	35 + 42 + 42 + 60	1.96	2.35	2.35	3.34	-	10.00	2.3 ~ 11.2	2670	420 ~ 3420	13.4	12.2	2.35	2.82	2.82	4.01	-	12.00	3.4 ~ 14.4	2630	480 ~ 3900	12.9	11.8
	35 + 42 + 50 + 50	1.99	2.37	2.82	2.82	-	10.00	2.3 ~ 11.2	2620	470 ~ 3280	13.1	12.0	2.37	2.85	3.39	3.39	-	12.00	3.4 ~ 14.4	2650	560 ~ 3840	13.0	11.9
	42 + 42 + 42 + 42	2.50	2.50	2.50	2.50	-	10.00	2.3 ~ 11.2	2790	350 ~ 3560	14.0	12.8	3.00	3.00	3.00	3.00	-	12.00	3.4 ~ 14.4	2660	400 ~ 3970	13.1	12.0
	42 + 42 + 42 + 50	2.39	2.39	2.39	2.83	-	10.00	2.3 ~ 11.2	2670	420 ~ 3340	13.4	12.2	2.86	2.86	2.86	3.42	-	12.00	3.4 ~ 14.4	2620	480 ~ 3890	12.9	11.8
5 Rooms	16 + 16 + 16 + 16 + 16	1.60	1.60	1.60	1.60	1.60	8.00	2.3 ~ 11.5	1840	390 ~ 3660	9.0	8.4	2.40	2.40	2.40	2.40	2.40	12.00	3.4 ~ 14.5	2750	540 ~ 4020	13.0	12.0
	16 + 16 + 16 + 16 + 20	1.60	1.60	1.60	1.60	2.00	8.40	2.3 ~ 11.5	1950	390 ~ 3660	9.6	8.9	2.29	2.29	2.29	2.29	2.84	12.00	3.4 ~ 14.5	2740	560 ~ 4010	13.0	12.0
	16 + 16 + 16 + 16 + 25	1.60	1.60	1.60	1.60	2.50	8.90	2.3 ~ 11.5	2120	390 ~ 3660	10.4	9.6	2.16	2.16	2.16	2.16	3.36	12.00	3.4 ~ 14.5	2740	560 ~ 4010	13.0	12.0
	16 + 16 + 16 + 16 + 35	1.60	1.60	1.60	1.60	3.50	9.90	2.3 ~ 11.5	2540	420 ~ 3590	12.5	11.5	1.94	1.94	1.94	1.94	4.24	12.00	3.4 ~ 14.5	2770	570 ~ 3970	13.1	12.1
	16 + 16 + 16 + 16 + 42	1.51	1.51	1.51	1.51	3.96	10.00	2.3 ~ 11.5	2600	430 ~ 3590	12.8	11.8	1.81	1.81	1.81	1.81	4.76	12.00	3.4 ~ 14.5	2760	580 ~ 4020	13.1	12.1
	16 + 16 + 16 + 16 + 50	1.40	1.40	1.40	1.40	4.40	10.00	2.3 ~ 11.5	2550	480 ~ 3450	12.5	11.6	1.68	1.68	1.68	1.68	5.28	12.00	3.4 ~ 14.5	2780	680 ~ 3950	13.1	12.2
	16 + 16 + 16 + 16 + 60	1.29	1.29	1.29	1.29	4.84	10.00	2.3 ~ 11.5	2550	480 ~ 3450	12.5	11.6	1.55	1.55	1.55	1.55	5.80	12.00	3.4 ~ 14.5	2780	680 ~ 3950	13.1	12.2
	16 + 16 + 16 + 16 + 71	1.19	1.19	1.19	1.19	5.24	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.42	1.42	1.42	1.42	6.32	12.00	3.4 ~ 14.5	2770	700 ~ 3940	13.1	12.1
	16 + 16 + 16 + 20 + 20	1.60	1.60	1.60	2.00	2.00	8.80	2.3 ~ 11.5	2120	420 ~ 3580	10.4	9.6	2.18	2.18	2.18	2.73	2.73	12.00	3.4 ~ 14.5	2740	560 ~ 3990	13.0	12.0
	16 + 16 + 16 + 20 + 25	1.60	1.60	1.60	2.00	2.50	9.30	2.3 ~ 11.5	2290	420 ~ 3580	11.3	10.4	2.06	2.06	2.06	2.59	3.23	12.00	3.4 ~ 14.5	2740	560 ~ 3990	13.0	12.0
	16 + 16 + 16 + 20 + 35	1.55	1.55	1.55	1.95	3.40	10.00	2.3 ~ 11.5	2600	430 ~ 3590	12.8	11.8	1.86	1.86	1.86	2.34	4.08	12.00	3.4 ~ 14.5	2760	580 ~ 4020	13.1	12.1
	16 + 16 + 16 + 20 + 42	1.45	1.45	1.45	1.83	3.82	10.00	2.3 ~ 11.5	2600	430 ~ 3590	12.8	11.8	1.75	1.75	1.75	2.18	4.57	12.00	3.4 ~ 14.5	2750	600 ~ 4010	13.0	12.0
	16 + 16 + 16 + 20 + 50	1.36	1.36	1.36	1.69	4.23	10.00	2.3 ~ 11.5	2560	510 ~ 3450	12.6	11.6	1.63	1.63	1.63	2.03	5.08	12.00	3.4 ~ 14.5	2770	700 ~ 3940	13.1	12.1
	16 + 16 + 16 + 20 + 60	1.25	1.25	1.25	1.56	4.69	10.00	2.3 ~ 11.5	2560	510 ~ 3450	12.6	11.6	1.50	1.50	1.50	1.88	5.62	12.00	3.4 ~ 14.5	2770	700 ~ 3940	13.1	12.1
	16 + 16 + 16 + 20 + 71	1.15	1.15	1.15	1.44	5.11	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.38	1.38	1.38	1.73	6.13	12.00	3.4 ~ 14.5	2760	710 ~ 3930	13.1	12.1
	16 + 16 + 16 + 25 + 25	1.60	1.60	1.60	2.50	2.50	9.80	2.3 ~ 11.5	2540	420 ~ 3580	12.5	11.5	1.96	1.96	1.96	3.06	3.06	12.00	3.4 ~ 14.5	2740	560 ~ 3990	13.0	12.0
	16 + 16 + 16 + 25 + 35	1.48	1.48	1.48	2.32	3.24	10.00	2.3 ~ 11.5	2600	430 ~ 3590	12.8	11.8	1.78	1.78	1.78	2.78	3.88	12.00	3.4 ~ 14.5	2760	580 ~ 4020	13.1	12.1
	16 + 16 + 16 + 25 + 42	1.39	1.39	1.39	2.18	3.65	10.00	2.3 ~ 11.5	2600	430 ~ 3590	12.8	11.8	1.67	1.67	1.67	2.61	4.38	12.00	3.4 ~ 14.5	2750	600 ~ 4010	13.0	12.0
	16 + 16 + 16 + 25 + 50	1.30	1.30	1.30	2.03	4.07	10.00	2.3 ~ 11.5	2560	510 ~ 3450	12.6	11.6	1.56	1.56	1.56	2.44	4.88	12.00	3.4 ~ 14.5	2770	700 ~ 3940	13.1	12.1
	16 + 16 + 16 + 25 + 60	1.20	1.20	1.20	1.89	4.51	10.00	2.3 ~ 11.5	2560	510 ~ 3450	12.6	11.6	1.44	1.44	1.44	2.27	5.41	12.00	3.4 ~ 14.5	2770	700 ~ 3940	13.1	12.1
	16 + 16 + 16 + 25 + 71	1.11	1.11	1.11	1.74	4.93	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.33	1.33	1.33	2.09	5.92	12.00	3.4 ~ 14.5	2760	710 ~ 3930	13.1	12.1
	16 + 16 + 16 + 35 + 35	1.36	1.36	1.36	2.96	2.96	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	1.62	1.62	1.62	3.57	3.57	12.00	3.4 ~ 14.5	2740	600 ~ 3990	13.0	12.0
	16 + 16 + 16 + 35 + 42	1.28	1.28	1.28	2.80	3.36	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	1.54	1.54	1.54	3.36	4.02	12.00	3.4 ~ 14.5	2740	610 ~ 3980	13.0	12.0
	16 + 16 + 16 + 35 + 50	1.20	1.20	1.20	2.64	3.76	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.44	1.44	1.44	3.17	4.51	12.00	3.4 ~ 14.5	2760	720 ~ 3970	13.1	12.1
	16 + 16 + 16 + 35 + 60	1.12	1.12	1.12	2.45	4.19	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.34	1.34	1.34	2.95	5.03	12.00	3.4 ~ 14.5	2760	720 ~ 3970	13.1	12.1
	16 + 16 + 16 + 35 + 71	1.04	1.04	1.04	2.27	4.61	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.25	1.25	1.25	2.73	5.52	12.00	3.4 ~ 14.5	2790	740 ~ 3960	13.2	12.2
	16 + 16 + 16 + 42 + 42	1.22	1.22	1.22	3.17	3.17	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	1.46	1.46	1.46	3.81	3.81	12.00	3.4 ~ 14.5	2730	630 ~ 3970	12.9	11.9
	16 + 16 + 16 + 42 + 50	1.14	1.14	1.14	3.01	3.57	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.37	1.37	1.37	3.60	4.29	12.00	3.4 ~ 14.5	2750	740 ~ 3960	13.0	12.0
	16 + 16 + 16 + 42 + 60	1.07	1.07	1.07	2.80	3.99	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.28	1.28	1.28	3.36	4.80	12.00	3.4 ~ 14.5	2750	740 ~ 3960	13.0	12.0
	16 + 16 + 16 + 42 + 71	0.99																					

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V
5 Rooms	16 + 20 + 20 + 25 + 25	1.50	1.89	1.89	2.36	2.36	10.00	2.3 ~ 11.5	2600	420 ~ 3590	12.8	11.8	1.82	2.26	2.26	2.83	2.83	12.00	3.4 ~ 14.5	2770	570 ~ 4030	13.1	12.1
	16 + 20 + 20 + 25 + 35	1.38	1.72	1.72	2.16	3.02	10.00	2.3 ~ 11.5	2600	430 ~ 3510	12.8	11.8	1.66	2.07	2.07	2.59	3.61	12.00	3.4 ~ 14.5	2750	600 ~ 4000	13.0	12.0
	16 + 20 + 20 + 25 + 42	1.30	1.63	1.63	2.03	3.41	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	1.56	1.95	1.95	2.44	4.10	12.00	3.4 ~ 14.5	2740	610 ~ 3990	13.0	12.0
	16 + 20 + 20 + 25 + 50	1.22	1.53	1.53	1.91	3.81	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.47	1.83	1.83	2.29	4.58	12.00	3.4 ~ 14.5	2760	720 ~ 3920	13.1	12.1
	16 + 20 + 20 + 25 + 60	1.13	1.42	1.42	1.77	4.26	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.36	1.70	1.70	2.13	5.11	12.00	3.4 ~ 14.5	2760	720 ~ 3920	13.1	12.1
	16 + 20 + 20 + 25 + 71	1.05	1.32	1.32	1.64	4.67	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.26	1.58	1.58	1.97	5.61	12.00	3.4 ~ 14.5	2750	730 ~ 3970	13.0	12.0
	16 + 20 + 20 + 35 + 35	1.26	1.59	1.59	2.78	2.78	10.00	2.3 ~ 11.5	2540	440 ~ 3510	12.5	11.5	1.52	1.90	1.90	3.34	3.34	12.00	3.4 ~ 14.5	2730	630 ~ 3970	12.9	11.9
	16 + 20 + 20 + 35 + 42	1.21	1.50	1.50	2.63	3.16	10.00	2.3 ~ 11.5	2540	440 ~ 3520	12.5	11.5	1.45	1.80	1.80	3.16	3.79	12.00	3.4 ~ 14.5	2770	640 ~ 3960	13.1	12.1
	16 + 20 + 20 + 35 + 50	1.13	1.42	1.42	2.48	3.55	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.36	1.70	1.70	2.98	4.26	12.00	3.4 ~ 14.5	2790	750 ~ 3950	13.2	12.2
	16 + 20 + 20 + 35 + 60	1.07	1.32	1.32	2.32	3.97	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.27	1.59	1.59	2.78	4.77	12.00	3.4 ~ 14.5	2790	750 ~ 3950	13.2	12.2
	16 + 20 + 20 + 35 + 71	1.00	1.23	1.23	2.16	4.38	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.19	1.48	1.48	2.59	5.26	12.00	3.4 ~ 14.5	2780	760 ~ 3940	13.1	12.2
	16 + 20 + 20 + 42 + 42	1.14	1.43	1.43	3.00	3.00	10.00	2.3 ~ 11.5	2550	460 ~ 3520	12.5	11.6	1.38	1.71	1.71	3.60	3.60	12.00	3.4 ~ 14.5	2760	640 ~ 3950	13.1	12.1
	16 + 20 + 20 + 42 + 50	1.08	1.35	1.35	2.84	3.38	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.30	1.62	1.62	3.41	4.05	12.00	3.4 ~ 14.5	2790	760 ~ 3950	13.2	12.2
	16 + 20 + 20 + 42 + 60	1.01	1.27	1.27	2.66	3.79	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.22	1.52	1.52	3.19	4.55	12.00	3.4 ~ 14.5	2790	760 ~ 3950	13.2	12.2
	16 + 20 + 20 + 42 + 71	0.95	1.18	1.18	2.49	4.20	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.14	1.42	1.42	2.98	5.04	12.00	3.4 ~ 14.5	2780	780 ~ 3930	13.1	12.2
	16 + 20 + 20 + 50 + 50	1.02	1.28	1.28	3.21	3.21	10.00	2.3 ~ 11.5	2530	610 ~ 3330	12.4	11.5	1.22	1.54	1.54	3.85	3.85	12.00	3.4 ~ 14.5	2870	890 ~ 3960	13.6	12.6
	16 + 20 + 20 + 50 + 60	0.96	1.21	1.21	3.01	3.61	10.00	2.3 ~ 11.5	2530	610 ~ 3330	12.4	11.5	1.16	1.45	1.45	3.61	4.33	12.00	3.4 ~ 14.5	2870	890 ~ 3960	13.6	12.6
	16 + 20 + 20 + 50 + 71	0.90	1.13	1.13	2.82	4.02	10.00	2.3 ~ 11.5	2530	650 ~ 3340	12.4	11.5	1.08	1.36	1.36	3.39	4.81	12.00	3.4 ~ 14.5	2860	900 ~ 4000	13.5	12.5
	16 + 20 + 20 + 60 + 60	0.90	1.14	1.14	3.41	3.41	10.00	2.3 ~ 11.5	2530	610 ~ 3330	12.4	11.5	1.10	1.36	1.36	4.09	4.09	12.00	3.4 ~ 14.5	2870	890 ~ 3960	13.6	12.6
	16 + 20 + 25 + 25 + 25	1.45	1.80	2.25	2.25	2.25	10.00	2.3 ~ 11.5	2600	420 ~ 3590	12.8	11.8	1.74	2.16	2.70	2.70	2.70	12.00	3.4 ~ 14.5	2770	570 ~ 4030	13.1	12.1
	16 + 20 + 25 + 25 + 35	1.32	1.65	2.07	2.07	2.89	10.00	2.3 ~ 11.5	2600	430 ~ 3510	12.8	11.8	1.59	1.98	2.48	2.48	3.47	12.00	3.4 ~ 14.5	2750	600 ~ 4000	13.0	12.0
	16 + 20 + 25 + 25 + 42	1.26	1.56	1.95	1.95	3.28	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	1.50	1.88	2.34	2.34	3.94	12.00	3.4 ~ 14.5	2740	610 ~ 3990	13.0	12.0
	16 + 20 + 25 + 25 + 50	1.18	1.47	1.84	1.84	3.67	10.00																

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V
5 Rooms	20 + 20 + 25 + 25 + 60	1.33	1.33	1.67	1.67	4.00	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.60	1.60	2.00	2.00	4.80	12.00	3.4 ~ 14.5	2760	720 ~ 3970	13.1	12.1
	20 + 20 + 25 + 25 + 71	1.24	1.24	1.55	1.55	4.42	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.49	1.49	1.86	1.86	5.30	12.00	3.4 ~ 14.5	2790	750 ~ 3960	13.2	12.2
	20 + 20 + 25 + 35 + 35	1.48	1.48	1.86	2.59	2.59	10.00	2.3 ~ 11.5	2550	460 ~ 3520	12.5	11.6	1.78	1.78	2.22	3.11	3.11	12.00	3.4 ~ 14.5	2770	640 ~ 3960	13.1	12.1
	20 + 20 + 25 + 35 + 42	1.41	1.41	1.76	2.46	2.96	10.00	2.3 ~ 11.5	2550	460 ~ 3520	12.5	11.6	1.69	1.69	2.11	2.96	3.55	12.00	3.4 ~ 14.5	2760	640 ~ 3950	13.1	12.1
	20 + 20 + 25 + 35 + 50	1.33	1.33	1.68	2.33	3.33	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.60	1.60	2.00	2.80	4.00	12.00	3.4 ~ 14.5	2790	760 ~ 3950	13.2	12.2
	20 + 20 + 25 + 35 + 60	1.25	1.25	1.56	2.19	3.75	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.50	1.50	1.88	2.63	4.49	12.00	3.4 ~ 14.5	2790	760 ~ 3950	13.2	12.2
	20 + 20 + 25 + 35 + 71	1.17	1.17	1.46	2.05	4.15	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.40	1.40	1.76	2.46	4.98	12.00	3.4 ~ 14.5	2780	780 ~ 3930	13.1	12.2
	20 + 20 + 25 + 42 + 42	1.34	1.34	1.68	2.82	2.82	10.00	2.3 ~ 11.5	2550	470 ~ 3520	12.5	11.6	1.61	1.61	2.02	3.38	3.38	12.00	3.4 ~ 14.5	2760	650 ~ 3930	13.1	12.1
	20 + 20 + 25 + 42 + 50	1.27	1.27	1.60	2.68	3.18	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.53	1.53	1.91	3.21	3.82	12.00	3.4 ~ 14.5	2780	760 ~ 3940	13.1	12.2
	20 + 20 + 25 + 42 + 60	1.20	1.20	1.50	2.51	3.59	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.44	1.44	1.80	3.02	4.30	12.00	3.4 ~ 14.5	2780	760 ~ 3940	13.1	12.2
	20 + 20 + 25 + 42 + 71	1.12	1.12	1.41	2.36	3.99	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.35	1.35	1.69	2.83	4.78	12.00	3.4 ~ 14.5	2780	780 ~ 3980	13.1	12.2
	20 + 20 + 25 + 50 + 50	1.21	1.21	1.52	3.03	3.03	10.00	2.3 ~ 11.5	2530	610 ~ 3330	12.4	11.5	1.45	1.45	1.82	3.64	3.64	12.00	3.4 ~ 14.5	2870	900 ~ 4010	13.6	12.6
	20 + 20 + 25 + 50 + 60	1.14	1.14	1.43	2.86	3.43	10.00	2.3 ~ 11.5	2530	610 ~ 3330	12.4	11.5	1.37	1.37	1.72	3.43	4.11	12.00	3.4 ~ 14.5	2870	900 ~ 4010	13.6	12.6
	20 + 20 + 35 + 35 + 35	1.37	1.37	2.42	2.42	2.42	10.00	2.3 ~ 11.5	2550	470 ~ 3440	12.5	11.6	1.65	1.65	2.90	2.90	2.90	12.00	3.4 ~ 14.5	2750	650 ~ 3980	13.0	12.0
	20 + 20 + 35 + 35 + 42	1.32	1.32	2.30	2.30	2.76	10.00	2.3 ~ 11.5	2550	470 ~ 3440	12.5	11.6	1.58	1.58	2.76	2.76	3.32	12.00	3.4 ~ 14.5	2740	670 ~ 3970	13.0	12.0
	20 + 20 + 35 + 35 + 50	1.25	1.25	2.19	2.19	3.12	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.50	1.50	2.63	2.63	3.74	12.00	3.4 ~ 14.5	2820	790 ~ 3980	13.3	12.3
	20 + 20 + 35 + 35 + 60	1.18	1.18	2.06	2.06	3.52	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.41	1.41	2.47	2.47	4.24	12.00	3.4 ~ 14.5	2820	790 ~ 3980	13.3	12.3
	20 + 20 + 35 + 35 + 71	1.11	1.11	1.93	1.93	3.92	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.33	1.33	2.32	2.32	4.70	12.00	3.4 ~ 14.5	2810	800 ~ 3960	13.3	12.3
	20 + 20 + 35 + 42 + 42	1.26	1.26	2.20	2.64	2.64	10.00	2.3 ~ 11.5	2550	470 ~ 3450	12.5	11.6	1.51	1.51	2.64	3.17	3.17	12.00	3.4 ~ 14.5	2740	680 ~ 3960	13.0	12.0
	20 + 20 + 35 + 42 + 50	1.20	1.20	2.10	2.51	2.99	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.44	1.44	2.51	3.02	3.59	12.00	3.4 ~ 14.5	2810	800 ~ 3970	13.3	12.3
	20 + 20 + 35 + 42 + 60	1.13	1.13	1.98	2.37	3.39	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.36	1.36	2.37	2.85	4.06	12.00	3.4 ~ 14.5	2810	800 ~ 3970	13.3	12.3
	20 + 20 + 35 + 50 + 50	1.14	1.14	2.00	2.86	2.86	10.00	2.3 ~ 11.5	2540	650 ~ 3340	12.5	11.5	1.37	1.37	2.40	3.43	3.43	12.00	3.4 ~ 14.5	2900	940 ~ 3990	13.7	12.7
	20 + 20 + 42 + 42 + 42	1.19	1.19	2.54	2.54	2.54</																	

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V
2 Rooms	25 + 50	2.50	5.00	-	-	-	7.50	2.3 ~ 8.6	2350	240 ~ 3110	11.8	10.8	3.47	6.93	-	-	-	10.40	2.0 ~ 11.0	2880	160 ~ 3180	14.1	13.0
	25 + 60	2.50	6.00	-	-	-	8.50	2.3 ~ 9.1	3040	240 ~ 3390	15.2	13.9	3.53	8.47	-	-	-	12.00	2.0 ~ 13.0	3330	160 ~ 4180	16.4	15.0
	25 + 71	2.50	7.10	-	-	-	9.60	2.3 ~ 10.1	3630	260 ~ 4280	18.2	16.7	3.13	8.87	-	-	-	12.00	2.0 ~ 13.0	3310	160 ~ 4170	16.3	14.9
	35 + 35	3.50	3.50	-	-	-	7.00	2.3 ~ 8.1	2350	250 ~ 3160	11.8	10.8	4.50	4.50	-	-	-	9.00	2.0 ~ 11.0	2650	200 ~ 3420	13.0	11.9
	35 + 42	3.50	4.20	-	-	-	7.70	2.3 ~ 8.6	2770	250 ~ 3650	13.9	12.7	4.59	5.51	-	-	-	10.10	2.0 ~ 11.0	3000	200 ~ 3360	14.7	13.5
	35 + 50	3.50	5.00	-	-	-	8.50	2.3 ~ 9.1	2910	230 ~ 3260	14.6	13.3	4.65	6.65	-	-	-	11.30	2.0 ~ 13.0	2960	160 ~ 4160	14.5	13.3
	35 + 60	3.50	6.00	-	-	-	9.50	2.3 ~ 10.1	3670	230 ~ 4280	18.4	16.8	4.42	7.58	-	-	-	12.00	2.0 ~ 13.0	3250	160 ~ 4160	16.0	14.6
	35 + 71	3.30	6.70	-	-	-	10.00	2.3 ~ 10.4	3920	260 ~ 4440	19.6	18.0	3.96	8.04	-	-	-	12.00	2.0 ~ 13.8	3240	160 ~ 4510	15.9	14.6
	42 + 42	4.20	4.20	-	-	-	8.40	2.3 ~ 9.1	3440	250 ~ 4060	17.2	15.8	5.60	5.60	-	-	-	11.20	2.0 ~ 13.0	3140	190 ~ 4350	15.4	14.1
	42 + 50	4.20	5.00	-	-	-	9.20	2.3 ~ 10.0	3330	230 ~ 4130	16.7	15.3	5.48	6.52	-	-	-	12.00	2.0 ~ 13.0	3240	160 ~ 4090	15.9	14.6
	42 + 60	4.12	5.88	-	-	-	10.00	2.3 ~ 10.4	4130	230 ~ 4430	20.7	18.9	4.94	7.06	-	-	-	12.00	2.0 ~ 13.8	3240	160 ~ 4510	15.9	14.6
	42 + 71	3.72	6.28	-	-	-	10.00	2.3 ~ 10.4	3850	260 ~ 4440	19.3	17.7	4.46	7.54	-	-	-	12.00	2.0 ~ 13.8	3230	160 ~ 4500	15.9	14.5
	50 + 50	5.00	5.00	-	-	-	10.00	2.3 ~ 10.4	3370	250 ~ 3710	16.9	15.5	6.00	6.00	-	-	-	12.00	2.0 ~ 13.8	3030	170 ~ 4260	14.9	13.6
	50 + 60	4.55	5.45	-	-	-	10.00	2.3 ~ 10.4	3370	250 ~ 3710	16.9	15.5	5.45	6.55	-	-	-	12.00	2.0 ~ 13.8	3030	170 ~ 4260	14.9	13.6
	50 + 71	4.13	5.87	-	-	-	10.00	2.3 ~ 10.4	3230	250 ~ 3580	16.2	14.8	4.96	7.04	-	-	-	12.00	2.0 ~ 13.8	3010	170 ~ 4240	14.8	13.6
	60 + 60	5.00	5.00	-	-	-	10.00	2.3 ~ 10.4	3370	250 ~ 3710	16.9	15.5	6.00	6.00	-	-	-	12.00	2.0 ~ 13.8	3030	170 ~ 4260	14.9	13.6
	60 + 71	4.58	5.42	-	-	-	10.00	2.3 ~ 10.4	3230	250 ~ 3580	16.2	14.8	5.50	6.50	-	-	-	12.00	2.0 ~ 13.8	3010	170 ~ 4240	14.8	13.6
	71 + 71	5.00	5.00	-	-	-	10.00	2.3 ~ 10.4	3100	280 ~ 3440	15.5	14.2	6.00	6.00	-	-	-	12.00	2.0 ~ 13.8	3000	180 ~ 4220	14.7	13.5
3 Rooms	16 + 16 + 16	1.60	1.60	1.60	-	-	4.80	2.3 ~ 8.5	1140	260 ~ 2770	5.8	5.3	2.60	2.60	2.60	-	-	7.80	2.7 ~ 12.3	2100	230 ~ 3820	10.3	9.5
	16 + 16 + 20	1.60	1.60	2.00	-	-	5.20	2.3 ~ 8.5	1250	260 ~ 2770	6.3	5.8	2.58	2.58	3.24	-	-	8.40	2.7 ~ 12.3	2320	230 ~ 3800	11.4	10.4
	16 + 16 + 25	1.60	1.60	2.50	-	-	5.70	2.3 ~ 8.5	1440	260 ~ 2770	7.3	6.7	2.47	2.47	3.86	-	-	8.80	2.7 ~ 12.3	2390	230 ~ 3800	11.7	10.8
	16 + 16 + 35	1.60	1.60	3.50	-	-	6.70	2.3 ~ 8.5	1760	260 ~ 2700	8.8	8.1	2.32	2.32	5.06	-	-	9.70	2.7 ~ 12.3	2700	230 ~ 3720	13.3	12.2
	16 + 16 + 42	1.60	1.60	4.20	-	-	7.40	2.3 ~ 8.5	2100	250 ~ 2640	10.5	9.6	2.34	2.34	6.12	-	-	10.80	2.7 ~ 12.3	2830	230 ~ 3700	13.9	12.7
	16 + 16 + 50	1.60	1.60	5.00	-	-	8.20	2.3 ~ 8.7	2260	280 ~ 2440	11.3	10.4	2.34	2.34	7.32	-	-	12.00	2.7 ~ 12.9	3050	250 ~ 3790	15.0	13.7
	16 + 16 + 60	1.60	1.60	6.00	-	-	9.20	2.3 ~ 10.1	2600	280 ~ 3150	13.0	11.9	2.09	2.09	7.82	-	-	12.00	2.7 ~ 13.6	3050	250 ~ 4150	15.0	13.7
	16 + 16 + 71	1.55	1.55	6.90	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3490	14.8	13.6	1.86	1.86	8.28	-	-	12.00	2.7 ~ 13.6	3040	250 ~ 4070	14.9	13.7
	16 + 20 + 20	1.60	2.00	2.00	-	-	5.60	2.3 ~ 8.5	1390	260 ~ 2700	7.0	6.4	2.58	3.21	3.21	-	-	9.00	2.7 ~ 12.3	2430	230 ~ 3790	11.9	10.9

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V
3 Rooms	42 + 42 + 42	3.33	3.33	3.33	-	-	9.99	2.3 ~ 10.7	3220	250 ~ 3840	16.1	14.8	4.00	4.00	4.00	-	-	12.00	2.7 ~ 13.8	3070	250 ~ 4230	15.1	13.8
	42 + 42 + 50	3.13	3.13	3.74	-	-	10.00	2.3 ~ 10.7	2830	280 ~ 3350	14.2	13.0	3.76	3.76	4.48	-	-	12.00	2.7 ~ 14.1	2910	280 ~ 4200	14.3	13.1
	42 + 42 + 60	2.92	2.92	4.16	-	-	10.00	2.3 ~ 10.7	2830	280 ~ 3350	14.2	13.0	3.50	3.50	5.00	-	-	12.00	2.7 ~ 14.1	2910	280 ~ 4200	14.3	13.1
	42 + 42 + 71	2.71	2.71	4.58	-	-	10.00	2.3 ~ 10.7	2770	310 ~ 3220	13.9	12.7	3.25	3.25	5.50	-	-	12.00	2.7 ~ 14.4	2890	280 ~ 4310	14.2	13.0
	42 + 50 + 50	2.96	3.52	3.52	-	-	10.00	2.3 ~ 10.7	2640	350 ~ 3020	13.2	12.1	3.54	4.23	4.23	-	-	12.00	2.7 ~ 14.1	2850	330 ~ 4050	14.0	12.8
	42 + 50 + 60	2.76	3.29	3.95	-	-	10.00	2.3 ~ 10.7	2640	350 ~ 3020	13.2	12.1	3.32	3.95	4.73	-	-	12.00	2.7 ~ 14.4	2850	330 ~ 4170	14.0	12.8
	42 + 50 + 71	2.58	3.07	4.35	-	-	10.00	2.3 ~ 10.7	2580	350 ~ 2960	12.9	11.8	3.09	3.68	5.23	-	-	12.00	2.7 ~ 14.4	2830	340 ~ 4160	13.9	12.7
	42 + 60 + 60	2.60	3.70	3.70	-	-	10.00	2.3 ~ 10.7	2640	350 ~ 3020	13.2	12.1	3.12	4.44	4.44	-	-	12.00	2.7 ~ 14.4	2850	330 ~ 4170	14.0	12.8
	42 + 60 + 71	2.43	3.47	4.10	-	-	10.00	2.3 ~ 10.7	2580	350 ~ 2960	12.9	11.8	2.92	4.16	4.92	-	-	12.00	2.7 ~ 14.4	2830	340 ~ 4160	13.9	12.7
	50 + 50 + 50	3.33	3.33	3.33	-	-	9.99	2.3 ~ 10.7	2470	390 ~ 2830	12.4	11.3	4.00	4.00	4.00	-	-	12.00	2.7 ~ 14.4	2800	400 ~ 4090	13.8	12.6
	50 + 50 + 60	3.13	3.13	3.74	-	-	10.00	2.3 ~ 10.7	2530	390 ~ 2830	12.7	11.6	3.75	3.75	4.50	-	-	12.00	2.7 ~ 14.4	2800	400 ~ 4090	13.8	12.6
	50 + 50 + 71	2.92	2.92	4.16	-	-	10.00	2.3 ~ 10.7	2470	390 ~ 2840	12.4	11.3	3.51	3.51	4.98	-	-	12.00	2.7 ~ 14.4	2790	410 ~ 4070	13.7	12.6
	50 + 60 + 60	2.94	3.53	3.53	-	-	10.00	2.3 ~ 10.7	2530	390 ~ 2830	12.7	11.6	3.52	4.24	4.24	-	-	12.00	2.7 ~ 14.4	2800	400 ~ 4090	13.8	12.6
	50 + 60 + 71	2.77	3.31	3.92	-	-	10.00	2.3 ~ 10.7	2470	390 ~ 2840	12.4	11.3	3.31	3.98	4.71	-	-	12.00	2.7 ~ 14.4	2790	410 ~ 4070	13.7	12.6
	60 + 60 + 60	3.33	3.33	3.33	-	-	9.99	2.3 ~ 10.7	2470	390 ~ 2830	12.4	11.3	4.00	4.00	4.00	-	-	12.00	2.7 ~ 14.4	2800	400 ~ 4090	13.8	12.6
4 Rooms	16 + 16 + 16 + 16	1.60	1.60	1.60	1.60	-	6.40	2.3 ~ 10.6	1600	310 ~ 3680	8.1	7.4	2.60	2.60	2.60	2.60	-	10.40	3.4 ~ 14.2	2640	340 ~ 4400	13.0	11.9
	16 + 16 + 16 + 20	1.60	1.60	1.60	2.00	-	6.80	2.3 ~ 10.6	1740	310 ~ 3680	8.8	8.1	2.59	2.59	2.59	3.23	-	11.00	3.4 ~ 14.2	2780	340 ~ 4390	13.7	12.5
	16 + 16 + 16 + 25	1.60	1.60	1.60	2.50	-	7.30	2.3 ~ 10.6	1900	310 ~ 3680	9.5	8.7	2.50	2.50	2.50	3.90	-	11.40	3.4 ~ 14.2	2840	340 ~ 4390	14.0	12.8
	16 + 16 + 16 + 35	1.60	1.60	1.60	3.50	-	8.30	2.3 ~ 10.6	2290	310 ~ 3600	11.5	10.5	2.31	2.31	2.31	5.07	-	12.00	3.4 ~ 14.2	3000	340 ~ 4350	14.7	13.5
	16 + 16 + 16 + 42	1.60	1.60	1.60	4.20	-	9.00	2.3 ~ 10.6	2580	310 ~ 3600	12.9	11.8	2.13	2.13	2.13	5.61	-	12.00	3.4 ~ 14.2	2990	340 ~ 4340	14.7	13.5
	16 + 16 + 16 + 50	1.60	1.60	1.60	5.00	-	9.80	2.3 ~ 10.6	2780	350 ~ 3310	13.9	12.8	1.96	1.96	1.96	6.12	-	12.00	3.4 ~ 14.2	2930	390 ~ 4190	14.4	13.2
	16 + 16 + 16 + 60	1.48	1.48	1.48	5.56	-	10.00	2.3 ~ 10.6	2910	350 ~ 3310	14.6	13.3	1.78	1.78	1.78	6.66	-	12.00	3.4 ~ 14.2	2930	390 ~ 4190	14.4	13.2
	16 + 16 + 16 + 71	1.34	1.34	1.34	5.98	-	10.00	2.3 ~ 10.6	2850	380 ~ 3240	14.3	13.1	1.61	1.61	1.61	7.17	-	12.00	3.4 ~ 14.2	2920	400 ~ 4170	14.3	13.1
	16 + 16 + 20 + 20	1.60	1.60	2.00	2.00	-	7.20	2.3 ~ 10.6	1850	310 ~ 3600	9.3	8.5	2.58	2.58	3.22	3.22	-	11.60	3.4 ~ 14.2	2870	340 ~ 4370	14.1	12.9
	16 + 16 + 20 + 25	1.60	1.																				

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
4 Rooms	16 + 42 + 50 + 50	1.02	2.66	3.16	3.16	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.22	3.18	3.80	3.80	-	12.00	3.4 ~ 14.4	2870	530 ~ 4120	14.1	12.9
	16 + 42 + 50 + 60	0.95	2.50	2.98	3.57	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.14	3.00	3.57	4.29	-	12.00	3.4 ~ 14.4	2870	530 ~ 4120	14.1	12.9
	16 + 42 + 50 + 71	0.89	2.35	2.79	3.97	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.07	2.82	3.35	4.76	-	12.00	3.4 ~ 14.4	2860	540 ~ 4110	14.1	12.9
	16 + 42 + 60 + 60	0.90	2.36	3.37	3.37	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.08	2.84	4.04	4.04	-	12.00	3.4 ~ 14.4	2870	530 ~ 4120	14.1	12.9
	16 + 50 + 50 + 50	0.97	3.01	3.01	3.01	-	10.00	2.3 ~ 11.2	2690	520 ~ 3340	13.5	12.3	1.17	3.61	3.61	3.61	-	12.00	3.4 ~ 14.4	2900	630 ~ 4120	14.2	13.1
	16 + 50 + 50 + 60	0.91	2.84	2.84	3.41	-	10.00	2.3 ~ 11.2	2690	520 ~ 3340	13.5	12.3	1.09	3.41	3.41	4.09	-	12.00	3.4 ~ 14.4	2900	630 ~ 4120	14.2	13.1
	20 + 20 + 20 + 20	2.00	2.00	2.00	2.00	-	8.00	2.3 ~ 10.6	2170	310 ~ 3600	10.9	10.0	3.00	3.00	3.00	3.00	-	12.00	3.4 ~ 14.2	2990	340 ~ 4350	14.7	13.5
	20 + 20 + 20 + 25	2.00	2.00	2.00	2.50	-	8.50	2.3 ~ 10.6	2350	310 ~ 3600	11.8	10.8	2.82	2.82	2.82	3.54	-	12.00	3.4 ~ 14.2	2990	340 ~ 4350	14.7	13.5
	20 + 20 + 20 + 35	2.00	2.00	2.00	3.50	-	9.50	2.3 ~ 10.6	2810	320 ~ 3530	14.1	12.9	2.53	2.53	2.53	4.41	-	12.00	3.4 ~ 14.2	2970	350 ~ 4310	14.6	13.4
	20 + 20 + 20 + 42	1.96	1.96	1.96	4.12	-	10.00	2.3 ~ 10.6	3040	320 ~ 3530	15.2	13.9	2.35	2.35	2.35	4.95	-	12.00	3.4 ~ 14.2	2960	360 ~ 4290	14.5	13.3
	20 + 20 + 20 + 50	1.82	1.82	1.82	4.54	-	10.00	2.3 ~ 10.6	2850	380 ~ 3240	14.3	13.1	2.18	2.18	2.18	5.46	-	12.00	3.4 ~ 14.2	2900	420 ~ 4150	14.2	13.1
	20 + 20 + 20 + 60	1.67	1.67	1.67	4.99	-	10.00	2.3 ~ 10.6	2850	380 ~ 3240	14.3	13.1	2.00	2.00	2.00	6.00	-	12.00	3.4 ~ 14.2	2900	420 ~ 4150	14.2	13.1
	20 + 20 + 20 + 71	1.53	1.53	1.53	5.41	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.83	1.83	1.83	6.51	-	12.00	3.4 ~ 14.4	2890	420 ~ 4190	14.2	13.0
	20 + 20 + 25 + 25	2.00	2.00	2.50	2.50	-	9.00	2.3 ~ 10.6	2580	310 ~ 3600	12.9	11.8	2.67	2.67	3.33	3.33	-	12.00	3.4 ~ 14.2	2990	340 ~ 4350	14.7	13.5
	20 + 20 + 25 + 35	2.00	2.00	2.50	3.50	-	10.00	2.3 ~ 10.6	3040	320 ~ 3530	15.2	13.9	2.40	2.40	3.00	4.20	-	12.00	3.4 ~ 14.2	2970	350 ~ 4310	14.6	13.4
	20 + 20 + 25 + 42	1.87	1.87	2.34	3.92	-	10.00	2.3 ~ 10.6	3040	320 ~ 3530	15.2	13.9	2.24	2.24	2.81	4.71	-	12.00	3.4 ~ 14.2	2960	360 ~ 4290	14.5	13.3
	20 + 20 + 25 + 50	1.74	1.74	2.17	4.35	-	10.00	2.3 ~ 10.6	2850	380 ~ 3240	14.3	13.1	2.09	2.09	2.61	5.21	-	12.00	3.4 ~ 14.2	2900	420 ~ 4150	14.2	13.1
	20 + 20 + 25 + 60	1.60	1.60	2.00	4.80	-	10.00	2.3 ~ 10.8	2850	380 ~ 3380	14.3	13.1	1.92	1.92	2.40	5.76	-	12.00	3.4 ~ 14.2	2900	420 ~ 4150	14.2	13.1
	20 + 20 + 25 + 71	1.47	1.47	1.84	5.22	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.76	1.76	2.22	6.26	-	12.00	3.4 ~ 14.4	2890	420 ~ 4190	14.2	13.0
	20 + 20 + 35 + 35	1.82	1.82	3.18	3.18	-	10.00	2.3 ~ 10.6	2980	320 ~ 3450	14.9	13.7	2.18	2.18	3.82	3.82	-	12.00	3.4 ~ 14.2	2940	370 ~ 4210	14.4	13.2
	20 + 20 + 35 + 42	1.71	1.71	2.99	3.59	-	10.00	2.3 ~ 10.6	2980	320 ~ 3450	14.9	13.7	2.05	2.05	3.59	4.31	-	12.00	3.4 ~ 14.2	2930	370 ~ 4200	14.4	13.2
	20 + 20 + 35 + 50	1.60	1.60	2.80	4.00	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.92	1.92	3.36	4.80	-	12.00	3.4 ~ 14.2	2880	420 ~ 4120	14.1	13.0
	20 + 20 + 35 + 60	1.48	1.48	2.60	4.44	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.78	1.78	3.11	5.33	-	12.00	3.4 ~ 14.4	2880	420 ~ 4170	14.1	13.0
	20 + 20 + 35 + 71	1.37	1.37	2.40	4.86	-	10.00	2.3 ~ 11.0	2780	390 ~ 3390	13.9	12.8	1.64	1.64	2.88	5.84	-	12.00	3.4 ~ 14.4	2870	430 ~ 4160	14.1	12.9
	20 + 20 + 42 + 42	1.61	1.61	3.39	3.39	-	10.00	2.3 ~ 10.8	2980	340 ~ 3600	14.9	13.7	1.94	1.94	4.06	4.06	-	12.00	3.4 ~ 14.2	2920	370 ~ 4190	14.3	13.1
	20 + 20 + 42 + 50	1.52	1.52	3.18	3.78	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.82	1.82	3.82	4.54	-	12.00	3.4 ~ 14.4	2870	430 ~ 4160	14.1	12.9
	20 + 20 + 42 + 60	1.41	1.41	2.96	4.22	-	10.00	2.3 ~ 11.0	2850	390 ~ 3460	14.3	13.1	1.69	1.69	3.55	5.07	-	12.00	3.4 ~ 14.4	2870	430 ~ 4160	14.1	12.9
	20 + 20 + 42 + 71	1.31	1.31	2.75	4.63	-	10.00	2.3 ~ 11.0	2780	390 ~ 3390	13.9	12.8	1.57	1.57	3.29	5.57	-	12.00	3.4 ~ 14.4	2860	440 ~ 4200	14.1	12.9
	20 + 20 + 50 + 50	1.43	1.43	3.57	3.57	-	10.00	2.3 ~ 10.8	2730	440 ~ 3180	13.7	12.5	1.71	1.71	4.29	4.29	-	12.00	3.4 ~ 14.4	2880	510 ~ 4150	14.1	13.0
	20 + 20 + 50 + 60	1.33	1.33	3.34	4.00	-	10.00	2.3 ~ 11.0	2730	440 ~ 3320	13.7	12.5	1.60	1.60	4.00	4.80	-	12.00	3.4 ~ 14.4	2880	510 ~ 4150	14.1	13.0
	20 + 20 + 50 + 71	1.24	1.24	3.11	4.41	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5											

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V
4 Rooms	35 + 35 + 35 + 42	2.38	2.38	2.38	2.86	-	10.00	2.3 ~ 11.0	2910	350 ~ 3600	14.6	13.3	2.86	2.86	2.86	3.42	-	12.00	3.4 ~ 14.4	2930	390 ~ 4250	14.4	13.2
	35 + 35 + 35 + 50	2.26	2.26	2.26	3.22	-	10.00	2.3 ~ 11.0	2780	390 ~ 3390	13.9	12.8	2.71	2.71	2.71	3.87	-	12.00	3.4 ~ 14.4	2890	460 ~ 4170	14.2	13.0
	35 + 35 + 35 + 60	2.12	2.12	2.12	3.64	-	10.00	2.3 ~ 11.2	2780	390 ~ 3530	13.9	12.8	2.55	2.55	2.55	4.35	-	12.00	3.4 ~ 14.4	2890	460 ~ 4170	14.2	13.0
	35 + 35 + 35 + 71	1.99	1.99	1.99	4.03	-	10.00	2.3 ~ 11.2	2790	430 ~ 3460	14.0	12.8	2.39	2.39	2.39	4.83	-	12.00	3.4 ~ 14.4	2880	470 ~ 4150	14.1	13.0
	35 + 35 + 42 + 42	2.27	2.27	2.73	2.73	-	10.00	2.3 ~ 11.0	2910	350 ~ 3600	14.6	13.3	2.73	2.73	3.27	3.27	-	12.00	3.4 ~ 14.4	2920	400 ~ 4240	14.3	13.1
	35 + 35 + 42 + 50	2.16	2.16	2.59	3.09	-	10.00	2.3 ~ 11.2	2790	420 ~ 3530	14.0	12.8	2.59	2.59	3.12	3.70	-	12.00	3.4 ~ 14.4	2880	470 ~ 4160	14.1	13.0
	35 + 35 + 42 + 60	2.03	2.03	2.45	3.49	-	10.00	2.3 ~ 11.2	2790	420 ~ 3530	14.0	12.8	2.44	2.44	2.93	4.19	-	12.00	3.4 ~ 14.4	2880	470 ~ 4160	14.1	13.0
	35 + 35 + 42 + 71	1.91	1.91	2.30	3.88	-	10.00	2.3 ~ 11.2	2790	430 ~ 3460	14.0	12.8	2.30	2.30	2.75	4.65	-	12.00	3.4 ~ 14.4	2870	480 ~ 4140	14.1	12.9
	35 + 35 + 50 + 50	2.06	2.06	2.94	2.94	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	2.47	2.47	3.53	3.53	-	12.00	3.4 ~ 14.4	2890	550 ~ 4090	14.2	13.0
	35 + 35 + 50 + 60	1.94	1.94	2.79	3.33	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	2.33	2.33	3.33	4.01	-	12.00	3.4 ~ 14.4	2890	550 ~ 4090	14.2	13.0
	35 + 42 + 42 + 42	2.17	2.61	2.61	2.61	-	10.00	2.3 ~ 11.2	2910	350 ~ 3760	14.6	13.3	2.61	3.13	3.13	3.13	-	12.00	3.4 ~ 14.4	2910	400 ~ 4220	14.3	13.1
	35 + 42 + 42 + 50	2.07	2.49	2.49	2.95	-	10.00	2.3 ~ 11.2	2790	420 ~ 3540	14.0	12.8	2.49	2.98	2.98	3.55	-	12.00	3.4 ~ 14.4	2870	480 ~ 4140	14.1	12.9
	35 + 42 + 42 + 60	1.96	2.35	2.35	3.34	-	10.00	2.3 ~ 11.2	2790	420 ~ 3540	14.0	12.8	2.35	2.82	2.82	4.01	-	12.00	3.4 ~ 14.4	2870	480 ~ 4140	14.1	12.9
	35 + 42 + 50 + 50	1.99	2.37	2.82	2.82	-	10.00	2.3 ~ 11.2	2740	470 ~ 3400	13.7	12.6	2.37	2.85	3.39	3.39	-	12.00	3.4 ~ 14.4	2890	560 ~ 4080	14.2	13.0
	42 + 42 + 42 + 42	2.50	2.50	2.50	2.50	-	10.00	2.3 ~ 11.2	2910	350 ~ 3680	14.6	13.3	3.00	3.00	3.00	3.00	-	12.00	3.4 ~ 14.4	2900	400 ~ 4210	14.2	13.1
	42 + 42 + 42 + 50	2.39	2.39	2.39	2.83	-	10.00	2.3 ~ 11.2	2790	420 ~ 3460	14.0	12.8	2.86	2.86	2.86	3.42	-	12.00	3.4 ~ 14.4	2860	480 ~ 4130	14.1	12.9
5 Rooms	16 + 16 + 16 + 16 + 16	1.60	1.60	1.60	1.60	1.60	8.00	2.3 ~ 11.5	1990	390 ~ 3810	9.8	9.0	2.40	2.40	2.40	2.40	2.40	12.00	3.4 ~ 14.5	3050	540 ~ 4320	14.4	13.4
	16 + 16 + 16 + 16 + 20	1.60	1.60	1.60	1.60	2.00	8.40	2.3 ~ 11.5	2100	390 ~ 3810	10.3	9.5	2.29	2.29	2.29	2.29	2.84	12.00	3.4 ~ 14.5	3040	560 ~ 4310	14.4	13.3
	16 + 16 + 16 + 16 + 25	1.60	1.60	1.60	1.60	2.50	8.90	2.3 ~ 11.5	2270	390 ~ 3810	11.2	10.3	2.16	2.16	2.16	2.16	3.36	12.00	3.4 ~ 14.5	3040	560 ~ 4310	14.4	13.3
	16 + 16 + 16 + 16 + 35	1.60	1.60	1.60	1.60	3.50	9.90	2.3 ~ 11.5	2690	420 ~ 3740	13.2	12.2	1.94	1.94	1.94	1.94	4.24	12.00	3.4 ~ 14.5	3070	570 ~ 4270	14.5	13.4
	16 + 16 + 16 + 16 + 42	1.51	1.51	1.51	1.51	3.96	10.00	2.3 ~ 11.5	2750	430 ~ 3740	13.5	12.5	1.81	1.81	1.81	1.81	4.76	12.00	3.4 ~ 14.5	3060	580 ~ 4320	14.5	13.4
	16 + 16 + 16 + 16 + 50	1.40	1.40	1.40	1.40	4.40	10.00	2.3 ~ 11.5	2700	480 ~ 3600	13.3	12.3	1.68	1.68	1.68	1.68	5.28	12.00	3.4 ~ 14.5	3080	680 ~ 4250	14.6	13.5
	16 + 16 + 16 + 16 + 60	1.29	1.29	1.29	1.29	4.84	10.00	2.3 ~ 11.5	2700	480 ~ 3600	13.3	12.3	1.55	1.55	1.55	1.55	5.80	12.00	3.4 ~ 14.5	3080	680 ~ 4250	14.6	13.5
	16 + 16 + 16 + 16 + 71	1.19	1.19	1.19	1.19	5.24	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.42	1.42	1.42	1.42	6.32	12.00	3.4 ~ 14.5	3070	700 ~ 4240	14.5	13.4
	16 + 16 + 16 + 20 + 20	1.60	1.60	1.60	2.00	2.00	8.80</																

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V
5 Rooms	16 + 20 + 20 + 20 + 60	1.18	1.47	1.47	1.47	4.41	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.42	1.76	1.76	1.76	5.30	12.00	3.4 ~ 14.5	3060	720 ~ 4220	14.5	13.4
	16 + 20 + 20 + 20 + 71	1.09	1.36	1.36	1.36	4.83	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.31	1.63	1.63	1.63	5.80	12.00	3.4 ~ 14.5	3050	730 ~ 4270	14.4	13.4
	16 + 20 + 20 + 25 + 25	1.50	1.89	1.89	2.36	2.36	10.00	2.3 ~ 11.5	2750	420 ~ 3740	13.5	12.5	1.82	2.26	2.26	2.83	2.83	12.00	3.4 ~ 14.5	3070	570 ~ 4330	14.5	13.4
	16 + 20 + 20 + 25 + 35	1.38	1.72	1.72	2.16	3.02	10.00	2.3 ~ 11.5	2750	430 ~ 3660	13.5	12.5	1.66	2.07	2.07	2.59	3.61	12.00	3.4 ~ 14.5	3050	600 ~ 4300	14.4	13.4
	16 + 20 + 20 + 25 + 42	1.30	1.63	1.63	2.03	3.41	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	1.56	1.95	1.95	2.44	4.10	12.00	3.4 ~ 14.5	3040	610 ~ 4290	14.4	13.3
	16 + 20 + 20 + 25 + 50	1.22	1.53	1.53	1.91	3.81	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.47	1.83	1.83	2.29	4.58	12.00	3.4 ~ 14.5	3060	720 ~ 4220	14.5	13.4
	16 + 20 + 20 + 25 + 60	1.13	1.42	1.42	1.77	4.26	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.36	1.70	1.70	2.13	5.11	12.00	3.4 ~ 14.5	3060	720 ~ 4220	14.5	13.4
	16 + 20 + 20 + 25 + 71	1.05	1.32	1.32	1.64	4.67	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.26	1.58	1.58	1.97	5.61	12.00	3.4 ~ 14.5	3050	730 ~ 4270	14.4	13.4
	16 + 20 + 20 + 35 + 35	1.26	1.59	1.59	2.78	2.78	10.00	2.3 ~ 11.5	2690	440 ~ 3660	13.2	12.2	1.52	1.90	1.90	3.34	3.34	12.00	3.4 ~ 14.5	3030	630 ~ 4270	14.3	13.3
	16 + 20 + 20 + 35 + 42	1.21	1.50	1.50	2.63	3.16	10.00	2.3 ~ 11.5	2690	440 ~ 3670	13.2	12.2	1.45	1.80	1.80	3.16	3.79	12.00	3.4 ~ 14.5	3070	640 ~ 4260	14.5	13.4
	16 + 20 + 20 + 35 + 50	1.13	1.42	1.42	2.48	3.55	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.36	1.70	1.70	2.98	4.26	12.00	3.4 ~ 14.5	3090	750 ~ 4250	14.6	13.5
	16 + 20 + 20 + 35 + 60	1.07	1.32	1.32	2.32	3.97	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.27	1.59	1.59	2.78	4.77	12.00	3.4 ~ 14.5	3090	750 ~ 4250	14.6	13.5
	16 + 20 + 20 + 35 + 71	1.00	1.23	1.23	2.16	4.38	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.19	1.48	1.48	2.59	5.26	12.00	3.4 ~ 14.5	3080	760 ~ 4240	14.6	13.5
	16 + 20 + 20 + 42 + 42	1.14	1.43	1.43	3.00	3.00	10.00	2.3 ~ 11.5	2700	460 ~ 3670	13.3	12.3	1.38	1.71	1.71	3.60	3.60	12.00	3.4 ~ 14.5	3060	640 ~ 4250	14.5	13.4
	16 + 20 + 20 + 42 + 50	1.08	1.35	1.35	2.84	3.38	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.30	1.62	1.62	3.41	4.05	12.00	3.4 ~ 14.5	3090	760 ~ 4250	14.6	13.5
	16 + 20 + 20 + 42 + 60	1.01	1.27	1.27	2.66	3.79	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.22	1.52	1.52	3.19	4.55	12.00	3.4 ~ 14.5	3090	760 ~ 4250	14.6	13.5
	16 + 20 + 20 + 42 + 71	0.95	1.18	1.18	2.49	4.20	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.14	1.42	1.42	2.98	5.04	12.00	3.4 ~ 14.5	3080	780 ~ 4230	14.6	13.5
	16 + 20 + 20 + 50 + 50	1.02	1.28	1.28	3.21	3.21	10.00	2.3 ~ 11.5	2680	610 ~ 3480	13.2	12.2	1.22	1.54	1.54	3.85	3.85	12.00	3.4 ~ 14.5	3170	890 ~ 4260	15.0	13.9
	16 + 20 + 20 + 50 + 60	0.96	1.21	1.21	3.01	3.61	10.00	2.3 ~ 11.5	2680	610 ~ 3480	13.2	12.2	1.16	1.45	1.45	3.61	4.33	12.00	3.4 ~ 14.5	3170	890 ~ 4260	15.0	13.9
	16 + 20 + 20 + 50 + 71	0.90	1.13	1.13	2.82	4.02	10.00	2.3 ~ 11.5	2680	650 ~ 3490	13.2	12.2	1.08	1.36	1.36	3.39	4.81	12.00	3.4 ~ 14.5	3160	900 ~ 4300	14.9	13.8
	16 + 20 + 20 + 60 + 60	0.90	1.14	1.14	3.41	3.41	10.00	2.3 ~ 11.5	2680	610 ~ 3480	13.2	12.2	1.10	1.36	1.36	4.09	4.09	12.00	3.4 ~ 14.5	3170	890 ~ 4260	15.0	13.9
	16 + 20 + 25 + 25 + 25	1.45	1.80	2.25	2.25	2.25	10.00	2.3 ~ 11.5	2750	420 ~ 3740	13.5	12.5	1.74	2.16	2.70	2.70	2.70	12.00	3.4 ~ 14.5	3070	570 ~ 4330	14.5	13.4
	16 + 20 + 25 + 25 + 35	1.32	1.65	2.07	2.07	2.89	10.00	2.3 ~ 11.5	2750	430 ~ 3660	13.5	12.5	1.59	1.98	2.48	2.48	3.47	12.00	3.4 ~ 14.5	3050	600 ~ 4300	14.4	13.4
	16 + 20 + 25 + 25 + 42	1.26	1.56	1.95	1.95	3.28	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	1.50	1.88	2.34	2.34	3.94	12.00					

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min – max	Rated	min – max	220V	240V
5 Rooms	20 + 20 + 25 + 25 + 42	1.52	1.52	1.89	1.89	3.18	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	1.82	1.82	2.27	2.27	3.82	12.00	3.4 ~ 14.5	3030	610 ~ 4280	14.3	13.3
	20 + 20 + 25 + 25 + 50	1.43	1.43	1.79	1.79	3.56	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.71	1.71	2.14	2.14	4.30	12.00	3.4 ~ 14.5	3060	720 ~ 4270	14.5	13.4
	20 + 20 + 25 + 25 + 60	1.33	1.33	1.67	1.67	4.00	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.60	1.60	2.00	2.00	4.80	12.00	3.4 ~ 14.5	3060	720 ~ 4270	14.5	13.4
	20 + 20 + 25 + 25 + 71	1.24	1.24	1.55	1.55	4.42	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.49	1.49	1.86	1.86	5.30	12.00	3.4 ~ 14.5	3090	750 ~ 4260	14.6	13.5
	20 + 20 + 25 + 35 + 35	1.48	1.48	1.86	2.59	2.59	10.00	2.3 ~ 11.5	2700	460 ~ 3670	13.3	12.3	1.78	1.78	2.22	3.11	3.11	12.00	3.4 ~ 14.5	3070	640 ~ 4260	14.5	13.4
	20 + 20 + 25 + 35 + 42	1.41	1.41	1.76	2.46	2.96	10.00	2.3 ~ 11.5	2700	460 ~ 3670	13.3	12.3	1.69	1.69	2.11	2.96	3.55	12.00	3.4 ~ 14.5	3060	640 ~ 4250	14.5	13.4
	20 + 20 + 25 + 35 + 50	1.33	1.33	1.68	2.33	3.33	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.60	1.60	2.00	2.80	4.00	12.00	3.4 ~ 14.5	3090	760 ~ 4250	14.6	13.5
	20 + 20 + 25 + 35 + 60	1.25	1.25	1.56	2.19	3.75	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.50	1.50	1.88	2.63	4.49	12.00	3.4 ~ 14.5	3090	760 ~ 4250	14.6	13.5
	20 + 20 + 25 + 35 + 71	1.17	1.17	1.46	2.05	4.15	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.40	1.40	1.76	2.46	4.98	12.00	3.4 ~ 14.5	3080	780 ~ 4230	14.6	13.5
	20 + 20 + 25 + 42 + 42	1.34	1.34	1.68	2.82	2.82	10.00	2.3 ~ 11.5	2700	470 ~ 3670	13.3	12.3	1.61	1.61	2.02	3.38	3.38	12.00	3.4 ~ 14.5	3060	650 ~ 4230	14.5	13.4
	20 + 20 + 25 + 42 + 50	1.27	1.27	1.60	2.68	3.18	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.53	1.53	1.91	3.21	3.82	12.00	3.4 ~ 14.5	3080	760 ~ 4240	14.6	13.5
	20 + 20 + 25 + 42 + 60	1.20	1.20	1.50	2.51	3.59	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.44	1.44	1.80	3.02	4.30	12.00	3.4 ~ 14.5	3080	760 ~ 4240	14.6	13.5
	20 + 20 + 25 + 42 + 71	1.12	1.12	1.41	2.36	3.99	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.35	1.35	1.69	2.83	4.78	12.00	3.4 ~ 14.5	3080	780 ~ 4280	14.6	13.5
	20 + 20 + 25 + 50 + 50	1.21	1.21	1.52	3.03	3.03	10.00	2.3 ~ 11.5	2680	610 ~ 3480	13.2	12.2	1.45	1.45	1.82	3.64	3.64	12.00	3.4 ~ 14.5	3170	900 ~ 4310	15.0	13.9
	20 + 20 + 25 + 50 + 60	1.14	1.14	1.43	2.86	3.43	10.00	2.3 ~ 11.5	2680	610 ~ 3480	13.2	12.2	1.37	1.37	1.72	3.43	4.11	12.00	3.4 ~ 14.5	3170	900 ~ 4310	15.0	13.9
	20 + 20 + 35 + 35 + 35	1.37	1.37	2.42	2.42	2.42	10.00	2.3 ~ 11.5	2700	470 ~ 3590	13.3	12.3	1.65	1.65	2.90	2.90	2.90	12.00	3.4 ~ 14.5	3050	650 ~ 4280	14.4	13.4
	20 + 20 + 35 + 35 + 42	1.32	1.32	2.30	2.30	2.76	10.00	2.3 ~ 11.5	2700	470 ~ 3590	13.3	12.3	1.58	1.58	2.76	2.76	3.32	12.00	3.4 ~ 14.5	3040	670 ~ 4270	14.4	13.3
	20 + 20 + 35 + 35 + 50	1.25	1.25	2.19	2.19	3.12	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.50	1.50	2.63	2.63	3.74	12.00	3.4 ~ 14.5	3120	790 ~ 4280	14.8	13.7
	20 + 20 + 35 + 35 + 60	1.18	1.18	2.06	2.06	3.52	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.41	1.41	2.47	2.47	4.24	12.00	3.4 ~ 14.5	3120	790 ~ 4280	14.8	13.7
	20 + 20 + 35 + 35 + 71	1.11	1.11	1.93	1.93	3.92	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.33	1.33	2.32	2.32	4.70	12.00	3.4 ~ 14.5	3110	800 ~ 4260	14.7	13.6
	20 + 20 + 35 + 42 + 42	1.26	1.26	2.20	2.64	2.64	10.00	2.3 ~ 11.5	2700	470 ~ 3600	13.3	12.3	1.51	1.51	2.64	3.17	3.17	12.00	3.4 ~ 14.5	3040	680 ~ 4260	14.4	13.3
	20 + 20 + 35 + 42 + 50	1.20	1.20	2.10	2.51	2.99	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.44	1.44	2.51	3.02	3.59	12.00	3.4 ~ 14.5	3110	800 ~ 4270	14.7	13.6
	20 + 20 + 35 + 42 + 60	1.13	1.13	1.98	2.37	3.39	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.36	1.36	2.37	2.85	4.06	12.00	3.4 ~ 14.5	3110	800 ~ 4270	14.7	13.6
	20 + 20 + 35 + 50 + 50	1.14	1.14	2.00	2.86	2.86	10.00	2.3 ~ 11.5	2690	650 ~ 3490	13.2	12.2	1.37	1.37									