

Panasonic

MULTI-SPLIT AIR CONDITIONERS 2020/2021



ANTI-BACTERIAL FILTER

INVERTER










QUALITY AIR FOR LIFE

A Better Life, A Better World

Multi-Split Air Conditioning System

Panasonic's multi-split air conditioning systems are designed to provide more spaces saving installation for outdoor units. A neater alternative to preserve the exterior appearance of buildings such as condominiums, single and multi-storey residences.



	Type	Features	1.6kW	2.0kW
R32 COOLING & HEATING	Wall-Mounted	  ANTI-BACTERIAL FILTER	 CS-MRZ16WKH-8	 CS-MRZ20WKH-8
	Slim Ducted			
	4-way Mini Cassette			
R410A COOLING ONLY	Type	Features		
	Wall-Mounted	  ANTI-BACTERIAL FILTER		
	Slim Ducted			

INDEX

Features Highlight

- Air Purification **04**
- Air Efficiency **05**
- Airflow **06 - 07**
- Air Connectivity **08**
- Durability **09**
- Installation & Servicing **10 - 11**











Products Information

- Advantages of Multi-Split Air Conditioning System **12**
- R32 Cooling & Heating Multi-Split Air Conditioning System **13 - 17**
- R410A Cooling Only Multi-Split Air Conditioning System **18 - 22**
- Features Explanation & Features Comparison **23 - 25**
- Project Reference **26 - 27**
- Multi-Split Capacity Table **28 - 74**
- Indoor Dimension **75 - 79**

Capacity

2.5kW	3.5kW	4.2kW	5.0kW	6.0kW	7.1kW
 CS-MRZ25WKH-8	 CS-MRZ35WKH-8	 CS-MRZ42WKH-8	 CS-MRZ50WKH-8	 CS-MRZ60WKH-8	 CS-MRZ71WKH-8
 CS-MZ25WD3H8A	 CS-MZ35WD3H8A		 CS-MZ50WD3H8A	 CS-MZ60WD3H8A	
 CS-MZ25WB4H8A	 CS-MZ35WB4H8A		 CS-MZ50WB4H8A	 CS-MZ60WB4H8A	

Capacity

2.8kW	3.2kW	4.0kW	5.0kW	6.0kW	7.0kW
 CS-MPS9SKH	 CS-MPS12SKH	 CS-MPS15SKH	 CS-MPS18SKH	 CS-MPS24SKH	 CS-MPS28SKH
 CS-MS9SD3H	 CS-MS12SD3H		 CS-MS18SD3H	 CS-MS24SD3H	

ANTI-BACTERIAL FILTER

Clean Air

The Anti-bacterial filter combines anti-bacterial, anti-virus, anti-allergen and anti-mould protection in one to provide clean air for your loved ones.





Effectiveness	Target Substance and Substance Name	Mechanism
<p>DEACTIVATES UP TO 99% of filter-captured Bacteria*¹</p>	<p>Anti-bacterial</p> <p>*¹ Bacteria deactivation was certified by Boken Quality Evaluation Institute. Test Report No : 10042459-1 and 10042459-2 Bacteria : Staphylococcus aureus NBRC 12732 : Escherichia coli NBRC 3972</p>	<p>Artificial Enzyme</p> <p>Bacteria is caught by the filter. Artificial Enzyme will attach to surface of bacteria. Cell-wall is covered by Artificial Enzyme. Bacteria becomes inactive by preventing its growth.</p> <p>Remark: The above are not actual images of target substance structure. Image drawn is for illustration purpose.</p>
<p>DEACTIVATES UP TO 99% of filter-captured Viruses*²</p>	<p>Anti-virus</p> <p>*² Virus deactivation was certified by Osaka Prefectural Institute of Public Health. Test Report No : 313360397 Virus : Influenza (H3N2) A/Hong Kong</p>	<p>Disinfectant</p> <p>The virus is caught by the filter. Disinfectant will attach to surface protein of virus. Spikes are covered by Disinfectant. Virus becomes inactive through 'tanning effect' making them harmless.</p> <p>Remark: The above are not actual images of target substance structure. Image drawn is for illustration purpose.</p>
<p>DEACTIVATES UP TO 99% of filter-captured Allergen*³</p>	<p>Anti-allergen</p> <p>*³ Allergen deactivation was certified by Shinshu University. Allergen : Cider Pollen Allergen Cry j1</p>	<p>Artificial Enzyme</p> <p>The allergen is caught by the filter. Artificial Enzyme will 'denature' the filter-captured allergen. Allergen loses original properties or characteristic. 'Denatured' allergen will no longer keep its original property as allergen; therefore, it is harmless.</p> <p>When allergen is denatured, the strand of amino acid is "teased" apart hence changing the shape. In this way, allergen will lose its original properties or characteristic as allergen, thus making them harmless.</p> <p>Remark: The above are not actual images of target substance structure. Image drawn is for illustration purpose.</p>
<p>INHIBITS Mould*⁴ Growth</p>	<p>Anti-mould</p> <p>*⁴ Certified by Boken Quality Evaluation Institute. Test Report No : 000366-3 Mould : Aspergillus niger ATCC 6275</p>	<p>The mould will be caught by the filter. Fungicide will attach to surface protein of mould. 'Fungicide inhibits mould from growing by preventing the cell-wall composition.'</p>

*Applicable to CS-MR216/20/25/35/42/50/60/71WKH-8 and CS-MPS9/12/15/18/24/28SKH



Energy Saving and Precise Temperature Control

Panasonic's INVERTER reduces power consumption by varying the speed of the compressor according to the temperature changes with the aim of minimising the temperature fluctuations so you can enjoy consistent cooling comfort.

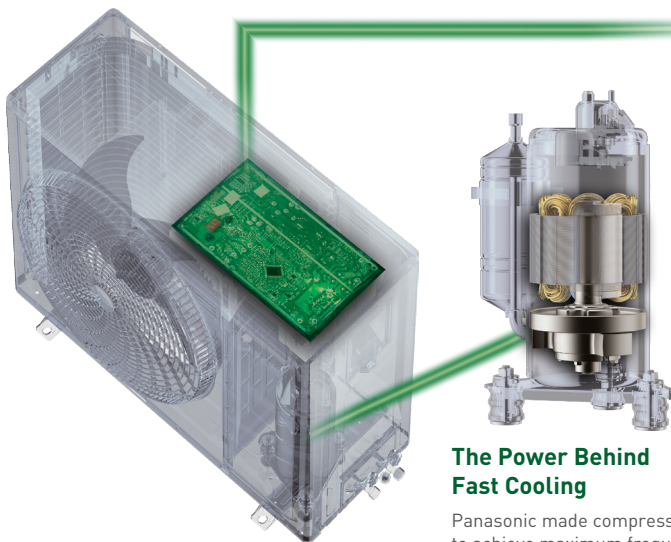


The "BRAIN" of the Inverter - The Micro Computer

Determines the most suitable operation mode as time passes and automatically adjusts power output for maximum comfort.



PAM (Pulse Amplitude Modulation)

Increases compressor voltage rapidly to provide powerful cooling to reach the set temperature fast at start up.



PWM (Pulse Width Modulated Wave)

Stabilises the compressor rotation speed when maintaining the set temperature.

The Power Behind Fast Cooling

Panasonic made compressor able to achieve maximum frequency in the shortest time at start-up, giving you powerful cooling the moment the air conditioner is switched on.



An Environmentally-friendly Refrigerant



HIGHER COOLING CAPACITY

R32 has higher cooling capacity thereby increases heat transfer efficiency.

REDUCE ENERGY COSTS

It consumes less energy, helping you to save on electricity costs.

ECO FRIENDLY

R32 has zero impact on the ozone layer, therefore it's environment friendly.


Refrigerant Properties of R32, R410A, and R22

	R32	R410A	R-22
Composition	Single Component	2 Components	Single Component
Chemical Formula	CH ₂ F ₂	CH ₂ F ₂ / CHF ₂ CF ₃	CHCLF ₂
Boiling Point (°C)	-51.7	-51.5	-40.8
Ozone Depletion Potential (ODP)	0	0	0.055
Global Warming Potential (GWP)	675	2090	1810
Pressure	1.6 x	1.6 x	1x
Refrigerant Oil	Synthetic Oil (FW50S)	Synthetic Oil (FV50S)	Mineral Oil
Toxicity	None	None	None
Flammability	A2L Mildly flammable	A1 Non-flammable	A1 Non-flammable


*Applicable to R32 COOLING & HEATING MULTI-SPLIT AIR CONDITIONING SYSTEM only.

Comfort Cooling with Faster, Further Airflow

Panasonic's air solutions offer ideal airflow to keep your family comfortable.

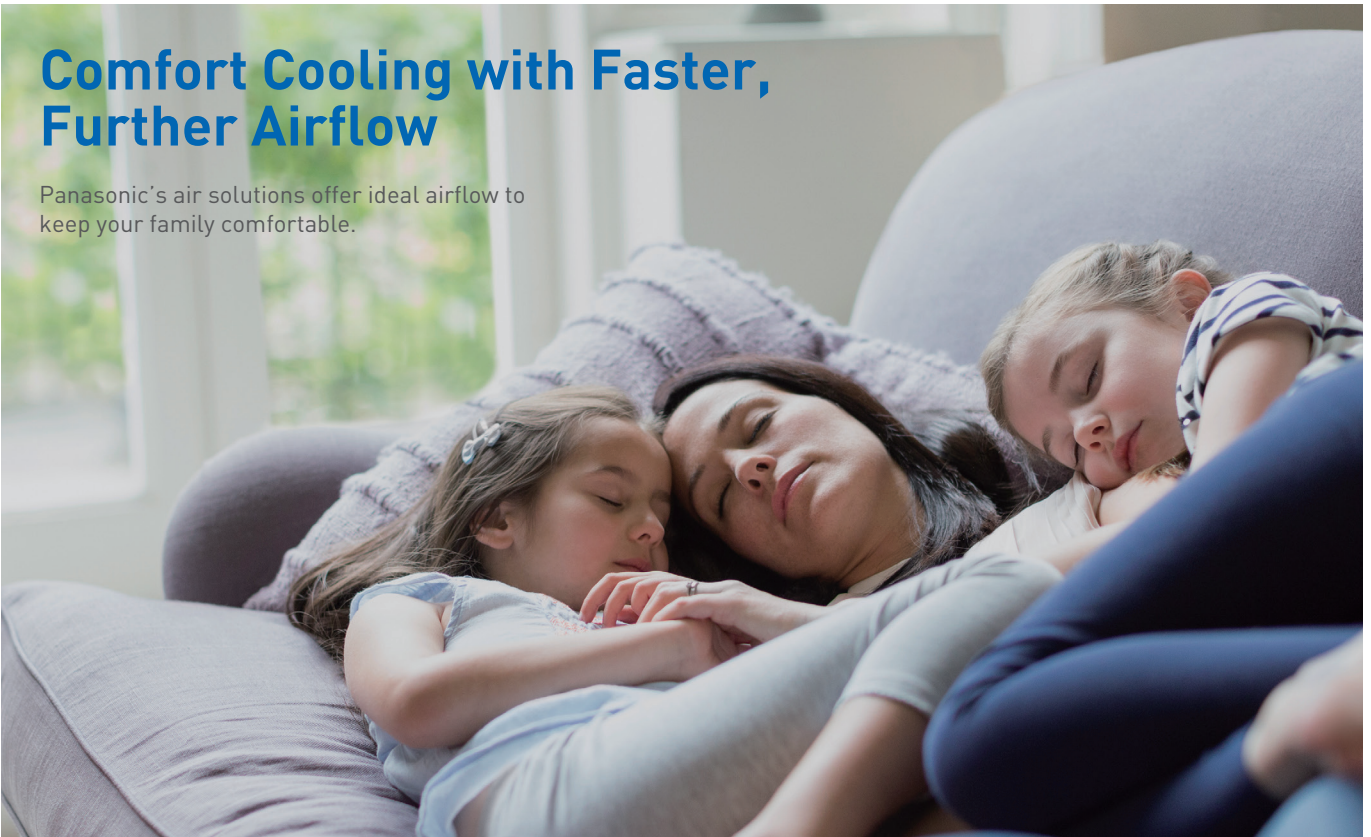


Types of Air Conditioners

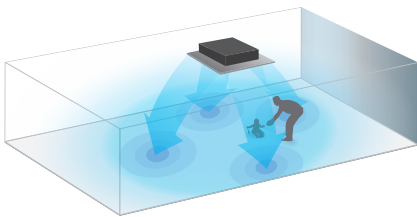


4-way Mini Cassette

Four-way airflow distributes cool air evenly

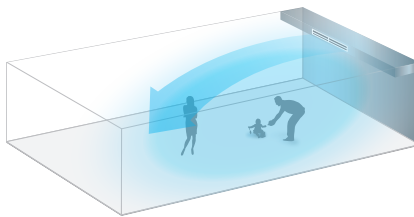

Slim Ducted


Directs cool air towards ceiling

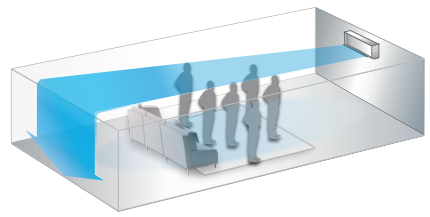

Wall-mounted

Cool air spread across the room for further air throw distance

4-way Mini Cassette

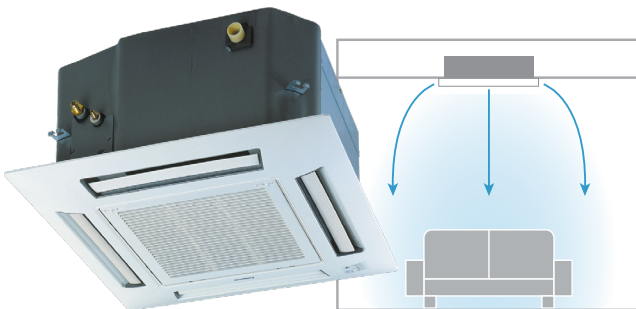


4-Way Directional Flap Creates Comfortable Wide- distance Airflow Distribution

Air from the center is sent farther and air blown out from the four sides flaps spreads throughout the room to provide all round cooling comfort.



Slim Ducted

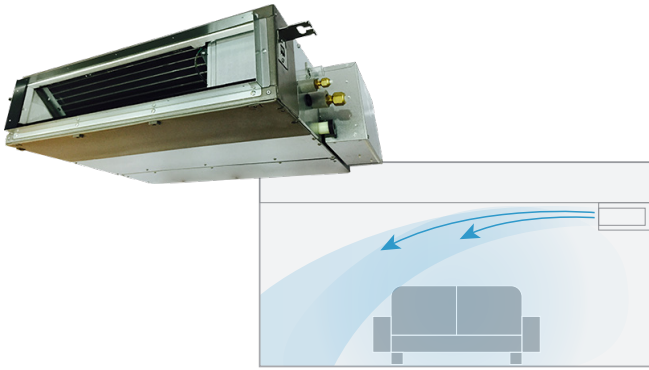

Cool Airflow Direct to the Ceiling

Slim ducted directs cool air towards the ceiling over a wide-angle range. Cool air gently making natural, refreshing comfort.



Wall Mounted



MRZ Series



MPS Series



Fast Cooling & Shower Cooling

As soon as the air conditioner is turned on, powerful direct airflows cool you immediately, perfect when you return home after a hot day.

The flap can be adjust upward to spread cool air evenly across the room to avoid direct cooling.



Fast Cooling^{*1}

The flap directs airflow downward to cool you rapidly



Shower Cooling^{*1}


The flap directs airflow upwards over a wider area then showers down gently and evenly across the room.

^{*1}Flap design may vary depends on models.

Enjoy Faster Cooling with Just a Push of a Button

POWERFUL Mode will run indoor fan at super high speed, so you get to enjoy powerful cooling.

POWERFUL Mode^{*2}



Press **POWERFUL/ECO** once to switch ON POWERFUL Mode

POWERFUL Cooling at Startup

POWERFUL Mode cools your room faster the moment you switch on your air conditioner.



^{*2} Applicable to CS-MRZ16/20/25/35/42/50/60/71WKH-8 only.

AIR CONNECTIVITY


Convenient Centralised Solutions

The **Panasonic Comfort Cloud Application** enables you to conveniently manage and monitor multiple air conditioning units for homes from just 1 mobile device.



SMART Control

Control Multiple AC Units in 1 Location

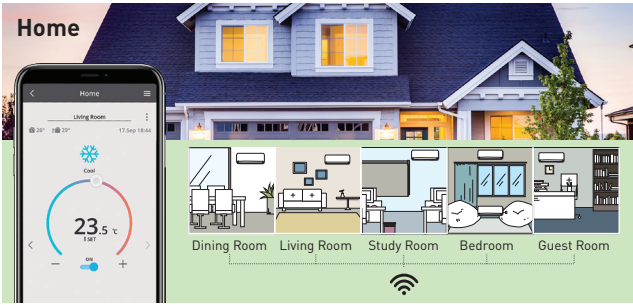

Control Multiple Units in Multiple Locations



SMART Comfort

Remotely Access All AC Features



Pre-cool Spaces




SMART Efficiency

Analyse Energy Usage Patterns




Compare Usage History for Better Budget Planning

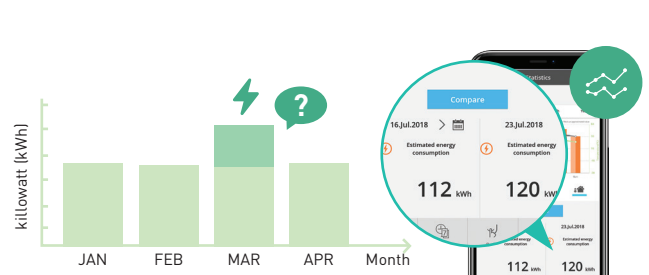

SMART Assist

Effortless Troubleshooting

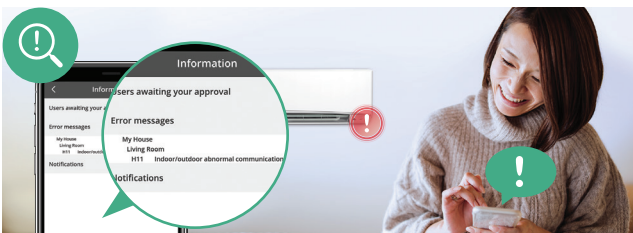

Assign Other Users While You Are Away



Compatible Device and Browsers

- iOS 9.0 or above
- Android™ 5.0 Lollipop or Later



Please note: This is not a definitive list of all compatible devices, other similar devices which use supported Operating Systems should also work either via dedicated Apps. Please note that user experience may vary slightly depending on hardware and software combination.

* Wireless LAN Remote Control for Internet Connection required optional network adaptor.
 * Indoor temperature display and some function are not available through the App for all models.

Highly Durable Outdoor Unit for Corrosion Resistance

Panasonic's outdoor unit provides high level durability for an extended time under a wide range of conditions to achieve excellent performance.

Wide Operating Temperature Range*
 Cooling : **-10°C ~ +46°C**
 Heating : **-15°C ~ +24°C**



Blue Fin Condenser




- Improves durability
- Protects condenser against corrosion from air, water and other corrosive
- Anti-rust



Copper Tube Condenser

COPPER TUBE CONDENSER

- Better heat transfer
- Higher cooling capacity
- Easy to clean and maintain




Corrosion Resistant Outdoor Coating

- Outdoor unit layered with multiple type of protection coatings
- Withstand salty air and rain exposure
- Resist corrosion



Water Resistant PCB

- Contact sections on Printed Circuit Board (PCB) are resin-potted
- Prevent adverse effects by unlikely contact with droplets of water



* Applicable to R32 COOLING & HEATING MULTI-SPLIT AIR CONDITIONING SYSTEM only.

Flexible Installation Design

Panasonic's offers wide range of indoor and outdoor units to match your interior and exterior.



Compact design fit perfectly anywhere

The wall-mounted designed to be compact in size allow it easily fitted within any interior either above the door, close to ceiling or close to wall.



Slim and compact, this unit require less ceiling space

With 200mm height of slim ducted unit, it allows installation in very narrow ceiling space.



Flat Horizontal design, provide neat fit in the ceiling


The flat horizontal design of 4-way mini cassette allows it to protrude only 30mm from the ceiling to blend naturally into a variety of interior.




Built-in Drain Pump

Using a high-lift built-in drain pump, drain piping can be elevated up to 702mm (slim ducted) or 750mm (mini cassette) from the base of the unit.

Slim Ducted

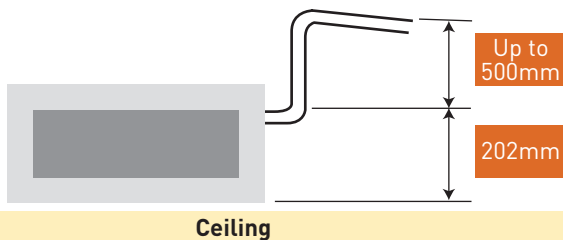


4-way Mini Cassette

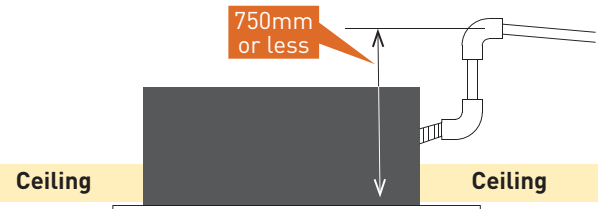

Long Piping Length Up to 80 meters

Flexible arrangement and installation of indoor and outdoor units based on the room condition, location and installation convenience of the site.

1 Maximum height up to 15 meters for indoor and outdoor unit.

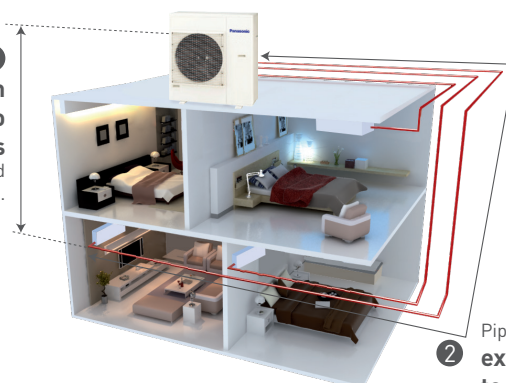

2 Piping can be extended up to 80 meters*1.

*1 Applicable to CU-5Z100WBH-8 only.

Easy Breezy Installation & Servicing

Panasonic air conditioners are designed to be compact in size, minimalist with matt finishing, enabling them to be easily fitted and seamlessly harmonize with any interior. Its uniquely designed structure enhances durability and yet conveniently eases installation and maintenance routines. The Good Design Award 2020 has recognised its achievement of balancing product design and function for the benefit of the global community*2.



Easy Removal

User-friendly slider locks



Easy to lock & unlock the front grille.

One-piece front grille




Makes installation & servicing easier when dismantling or assembling.

Simple steps for circuit board (PCB) removal



Remove control board cover.

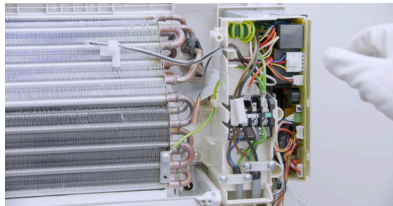

Disconnect all the connectors.



Pull out main PCB, Screw-free design makes it easy to remove PCB.


Easy Access

Built-in support holders



Built-in support holder makes it easy to securely hold the indoor unit against the wall.

Piping storage



180mm bigger piping space improves work efficiency during installation and servicing.

Easy access to drain hose & piping



More open working spaces provides easy view and unobstructed access to setup drain hose and piping.

Easy wire insertion and connection



Single wire insert tunnel with wider opening provides front visibility and easy wire insertion and connection.

Neat Installation

Stronger installation plate



Stronger & more solid installation plate which provides more stability to better support indoor units.

Screw holders for uneven surfaces



Ensures indoor units fit well on the wall without any gaps.

*2 Applicable to CS-MRZ16/20/25/35/42/50WKH-8 only.

Why Panasonic Multi-Split Air Conditioning System



Compact and Lightweight Design to Fit Every Building Type

The multi-split system offers greater installation versatility and space-saving choices for condominium with limited free space.



Offer Wide Ranges in Multi-split System

Full flexibility of multi-split range from 1.6kW to 7.1kW for 5 indoor units with one outdoor unit.


Space-Saving

Space-saving Installation with Less Outdoor Units Required

As 1 outdoor unit is able to connect up to 5 indoor units, this provide flexible customisation according to the layout of your house.

Single-Split

1 Outdoor Unit Connect to 1 Indoor Unit

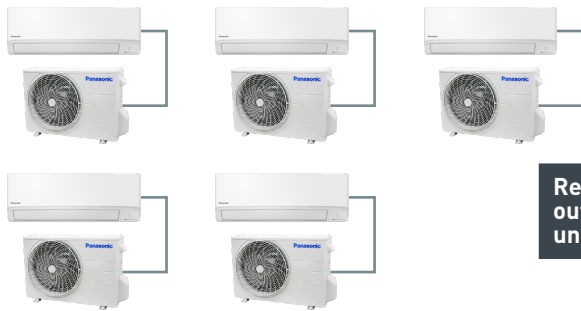

Reduce outdoor units

Multi Split


1 Outdoor Unit Connect Up to 5 Indoor Units



Independent Operation Control


Outdoor Unit Connects to Each Indoor Unit Independently

Able to adjust the operation settings for each indoor unit separately. If one indoor unit is malfunctions, other indoor units can continue to operate by provide cooling comfort to the rooms.

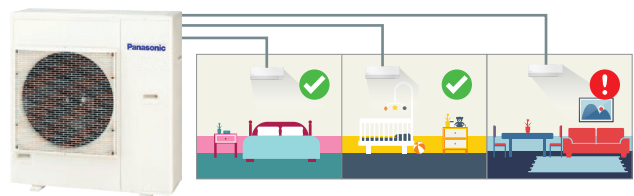


R32 COOLING & HEATING MULTI-SPLIT AIR CONDITIONING SYSTEM

Wall-mounted

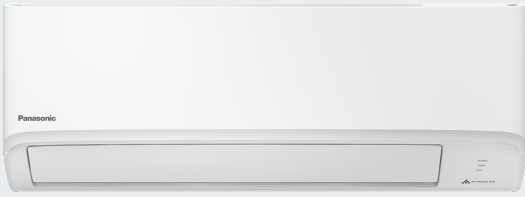

CS-MRZ16WKH-8 (1.6kW) / CS-MRZ20WKH-8 (2.0kW) /
CS-MRZ25WKH-8 (2.5kW) / CS-MRZ35WKH-8 (3.5kW) /
CS-MRZ42WKH-8 (4.2kW) / CS-MRZ50WKH-8 (5.0kW)*1

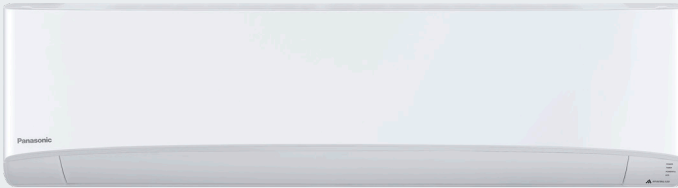

CS-MRZ60WKH-8 (6.0kW)*2 / CS-MRZ71WKH-8 (7.1kW)*2 *3



Wireless Remote Controller Included



CZ-RD514C Wired Remote Controller [Optional]



ANTI-BACTERIAL FILTER

Features

SLEEP			ECO+AI
CS-MRZ16WKH-8 CS-MRZ20WKH-8 CS-MRZ25WKH-8 CS-MRZ35WKH-8 CS-MRZ42WKH-8 CS-MRZ50WKH-8	CS-MRZ16WKH-8 CS-MRZ20WKH-8 CS-MRZ25WKH-8 CS-MRZ35WKH-8 CS-MRZ42WKH-8 CS-MRZ50WKH-8	CS-MRZ16WKH-8 CS-MRZ20WKH-8 CS-MRZ25WKH-8 CS-MRZ35WKH-8 CS-MRZ42WKH-8 CS-MRZ50WKH-8	CS-MRZ16WKH-8 CS-MRZ20WKH-8 CS-MRZ25WKH-8 CS-MRZ35WKH-8 CS-MRZ42WKH-8 CS-MRZ50WKH-8
CS-MRZ60WKH-8 CS-MRZ71WKH-8			
	(Random)		(Optional)
			(Optional)

Slim Ducted



CS-MZ25WD3H8A (2.5kW) / CS-MZ35WD3H8A (3.5kW) /
CS-MZ50WD3H8A (5.0kW)*1 / CS-MZ60WD3H8A (6.0kW)*2



Wired Remote Controller Included

CZ-RL511D
Optional wireless kit


Wireless Remote Controller Receiver



Features

			(Random)
			(Optional)

4-way Mini Cassette

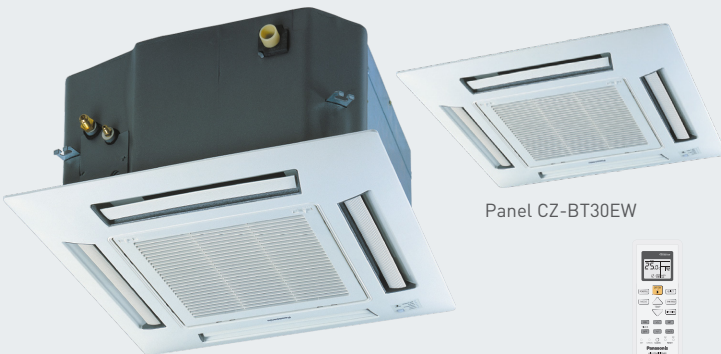

Panel CZ-BT30EW

CS-MZ25WB4H8A (2.5kW) / CS-MZ35WB4H8A (3.5kW) /
CS-MZ50WB4H8A (5.0kW)*1 / CS-MZ60WB4H8A (6.0kW)*2



Wireless Remote Controller Included



CZ-RD52CP Wired Remote Controller [Optional]



Features

			(Optional)
			(Random)

*1 CZ-MA1P is to be used to reduce the connection size on the indoor unit from 1/2" to 3/8".
*2 CZ-MA2P is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2".
*3 CZ-MA3P is to be used to reduce the connection size on the indoor unit from 5/8" to 1/2".

Connection of Outdoor and Indoor Units

	Models	Indoor Units: Possible Combination Patterns (Must be within capacity range)	Maximum Connectable Indoor Unit kW	Indoor unit combination			
				Capacity (kW class)	Wall-Mounted	Slim Ducted	Mini Cassette
Up to 2 rooms	CU-2Z52WBH-8  5.2kW PORT A: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 *Either unit PORT B: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 *Either unit Dimensions (H x W x D) : 619 x 824 (+70) x 299 mm / Weight : 39 kg *At least two indoor units must be connected.	7.7kW	1.6	•			
			2.0	•			
			2.5	•	•	•	
			3.5	•	•	•	
			4.2	•			
			5.0	•	•	•	
Up to 3 rooms	CU-3Z54WBH-8  5.4kW PORT A: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 *Either unit PORT B: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 *Either unit PORT C: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 *Either unit Dimensions (H x W x D) : 795 x 875 (+95) x 320 mm / Weight : 71 kg *At least two indoor units must be connected.	9.5kW	1.6	•			
			2.0	•			
			2.5	•	•	•	
			3.5	•	•	•	
			4.2	•			
			5.0	•	•	•	
Up to 4 rooms	CU-4Z71WBH-8  7.1kW PORT A: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 *Either unit PORT B: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 *Either unit PORT C: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 *Either unit PORT D: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 *Either unit Dimensions (H x W x D) : 795 x 875 (+95) x 320 mm / Weight : 72 kg *At least two indoor units must be connected.	11.5kW	1.6	•			
			2.0	•			
			2.5	•	•	•	
			3.5	•	•	•	
			4.2	•			
			5.0	•	•	•	

Outdoor



Up to 2 rooms
CU-2Z52WBH-8



Up to 3 rooms
CU-3Z54WBH-8



Up to 4 rooms
CU-4Z71WBH-8



Connection of Outdoor and Indoor Units

Models	Indoor Units: Possible Combination Patterns (Must be within capacity range)	Maximum Connectable Indoor Unit kW	Indoor unit combination			
			Capacity (kW class)	Wall-Mounted	Slim Ducted	Mini Cassette
Up to 4 rooms  8.0kW	CU-4Z80WBH-8 PORT A: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 or 7.1 *Either unit PORT B: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 or 7.1 *Either unit PORT C: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 or 7.1 *Either unit PORT D: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 or 7.1 *Either unit Dimensions (H x W x D) : 999 x 940 x 340 mm / Weight : 80 kg *At least two indoor units must be connected.	14.7kW	1.6	•		
			2.0	•		
			2.5	•	•	•
			3.5	•	•	•
			4.2	•		
			5.0	•	•	•
			6.0	•	•	•
			7.1	•		
Up to 5 rooms  10.0kW	CU-5Z100WBH-8 PORT A: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 or 7.1 *Either unit PORT B: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 or 7.1 *Either unit PORT C: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 or 7.1 *Either unit PORT D: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 or 7.1 *Either unit PORT E: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 or 7.1 *Either unit Dimensions (H x W x D) : 999 x 940 x 340 mm / Weight : 81 kg *At least two indoor units must be connected.	18.3kW	1.6	•		
			2.0	•		
			2.5	•	•	•
			3.5	•	•	•
			4.2	•		
			5.0	•	•	•
			6.0	•	•	•
			7.1	•		

Accessories		
 CZ-MA1P <small>*1 CZ-MA1P is to be used to reduce the connection size on the indoor unit from 1/2" to 3/8".</small>	 CZ-MA2P <small>*2 CZ-MA2P is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2".</small>	 CZ-MA3P <small>*3 CZ-MA3P is to be used to reduce the connection size on the indoor unit from 5/8" to 1/2".</small>

Outdoor



Up to 4 rooms
CU-4Z80WBH-8



Up to 5 rooms
CU-5Z100WBH-8



Indoor Units

Cooling
Heating

Model			WALL-MOUNTED							
			CS-MRZ16WKH-8	CS-MRZ20WKH-8	CS-MRZ25WKH-8	CS-MRZ35WKH-8	CS-MRZ42WKH-8	CS-MRZ50WKH-8	CS-MRZ60WKH-8	CS-MRZ71WKH-8
Capacity	Cooling	kW	1.6	2.0	2.5	3.5	4.2	5.0	6.0	7.1
		Heating	2.6	3.2	3.6	4.5	5.0	5.3	8.5	8.7
	Cooling	Btu/h	5,460	6,820	8,530	11,900	14,300	17,100	20,500	24,200
		Heating	8,870	10,900	12,300	15,300	17,100	18,100	29,000	29,700
Power Source			Single Phase, 220V - 240V, 50Hz							
Sound Pressure Level (H/L)	Cooling	dB(A)	41 / 27	42 / 27	42 / 27	46 / 28	46 / 33	46 / 36	48 / 38	51 / 39
	Heating		41 / 29	42 / 29	42 / 29	46 / 31	46 / 35	46 / 35	48 / 38	51 / 39
Air Circulation (H)	Cooling	m³/min (cfm)	11.0 (390)	11.3 (400)	11.0 (390)	11.6 (410)	11.6 (410)	12.8 (455)	21.2 (750)	23.1 (815)
	Heating		11.6 (410)	11.9 (420)	12.0 (425)	12.1 (430)	12.1 (430)	13.5 (475)	21.2 (750)	23.7 (835)
Dimension	Height	mm	290	290	290	290	290	290	302	302
	Width	mm	779	779	779	779	779	779	1,102	1,102
	Depth	mm	209	209	209	209	209	209	244	244
Net Weight		kg	8	8	8	8	8	8	13	13
Refrigerant Pipe Diameter	Liquid Side	mm	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35
	Gas Side	mm	Ø 9.52	Ø 9.52	Ø 9.52	Ø 9.52	Ø 9.52 ¹	Ø 9.52 ¹	Ø 12.70 ²	Ø 12.70 ^{2,3}
Power Supply			Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor

Model			SLIM DUCTED				4-WAY MINI CASSETTE			
			CS-MZ25WD3H8A	CS-MZ35WD3H8A	CS-MZ50WD3H8A	CS-MZ60WD3H8A	CS-MZ25WB4H8A	CS-MZ35WB4H8A	CS-MZ50WB4H8A	CS-MZ60WB4H8A
Capacity	Cooling	kW	2.5	3.5	5.0	6.0	2.5	3.5	5.0	6.0
		Heating	3.6	4.5	5.3	8.5	3.6	4.5	5.3	8.5
	Cooling	Btu/h	8,530	11,900	17,100	20,500	8,530	11,900	17,100	20,500
		Heating	12,300	15,300	18,100	29,000	12,300	15,300	18,100	29,000
Power Source			Single Phase, 220V - 240V, 50Hz							
Sound Pressure Level (H/L)	Cooling	dB(A)	35 / 29	35 / 28	41 / 31	43 / 32	36 / 27	36 / 28	40 / 30	45 / 34
	Heating		36 / 29	37 / 29	41 / 32	43 / 34	37 / 30	39 / 30	41 / 31	47 / 34
Air Circulation (H)	Cooling	m³/min (cfm)	10.5 (370)	11.2 (395)	15.3 (540)	15.7 (555)	10.5 (370)	10.5 (370)	11.5 (405)	14.2 (500)
	Heating		10.8 (380)	11.2 (395)	15.3 (540)	15.7 (555)	10.8 (380)	11.7 (415)	11.8 (415)	15.2 (535)
Dimension	Height	mm	200	200	200	200	260	260	260	260
	Width	mm	750	750	750	750	575	575	575	575
	Depth	mm	640	640	640	640	575	575	575	575
Net Weight		kg	19	19	19	19	18	18	18	18
Refrigerant Pipe Diameter	Liquid Side	mm	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35
	Gas Side	mm	Ø 9.52	Ø 9.52	Ø 9.52 ¹	Ø 12.70 ²	Ø 9.52	Ø 9.52	Ø 9.52 ¹	Ø 12.70 ²
Power Supply			Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor

¹ CZ-MA1P is to be used to reduce the connection size on the indoor unit from 1/2" to 3/8".
² CZ-MA2P is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2".
³ CZ-MA3P is to be used to reduce the connection size on the indoor unit from 5/8" to 1/2".

Outdoor Units

Cooling
Heating


Model			CU-2Z52WBH-8	CU-3Z54WBH-8	CU-4Z71WBH-8	CU-4Z80WBH-8	CU-5Z100WBH-8
Cooling Operation Capacity	(min - max)	kW	5.20 (1.50 - 6.00)	5.40 (1.80 - 7.30)	7.10 (1.90 - 8.80)	8.00 (2.30 - 9.20)	10.00 (2.30 - 11.50)
	(min - max)	Btu/h	17,700 (5,120 - 20,500)	18,400 (6,140 - 24,900)	24,200 (6,480 - 30,000)	27,300 (7,840 - 31,400)	34,100 (7,840 - 39,200)
Power Source			Single Phase 220 - 240V, 50Hz				
Maximum Connectable Capacity		kW	7.7	9.5	11.5	14.7	18.3
Maximum Connectable Indoors		Units	2	3	4	4	5
Electrical Data	Running Current	A	6.4 - 5.9	5.4 - 5.1	7.9 - 7.4	9.7 - 8.9	12.8 - 11.8
	Power Input (min - max)	W	1,350 (250 - 1,620)	1,120 (360 - 2,180)	1,660 (340 - 2,470)	1,980 (420 - 2,870)	2,600 (430 - 3,590)
EER	(min - max)	W/W	3.85 (6.00 - 3.70)	4.82 (5.00 - 3.35)	4.28 (5.59 - 3.56)	4.04 (5.48 - 3.21)	3.85 (5.35 - 3.20)
	(min - max)	Btu/hW	13.14 (20.47 - 12.62)	16.45 (17.06 - 11.43)	14.60 (19.07 - 12.15)	13.78 (18.70 - 10.95)	13.14 (18.25 - 10.92)
Noise [H]	Sound Pressure Level	dB(A)	51	48	49	51	53
Heating Operation Capacity	(min - max)	kW	6.10 (1.10-7.20)	7.00 (1.60-9.00)	8.50 (3.00-10.70)	9.40 (3.00-11.60)	12.00 (3.40-14.50)
	(min - max)	Btu/h	20,800(3,750-24,600)	23,900(5,460-30,700)	29,000(10,200-36,500)	32,100(10,200-39,600)	40,900(11,600-49,400)
Electrical Data	Running Current	A	6.7 - 6.2	7.3 - 6.8	9.2 - 8.6	10.2 - 9.3	13.1 - 12.1
	Power Input (min - max)	W	1,430 (210 - 1,900)	1,540 (320 - 2,630)	1,950 (500 - 2,720)	2,030 (500 - 3,420)	2,760 (580 - 4,020)
COP	(min - max)	W/W	4.27 (5.24 - 3.79)	4.55 (5.00 - 3.42)	4.36 (6.00 - 3.93)	4.63 (6.00 - 3.39)	4.35 (5.86 - 3.61)
	(min - max)	Btu/hW	14.57 (17.88 - 12.93)	15.52 (17.06 - 11.67)	14.88 (20.47 - 13.41)	15.80 (20.47 - 11.57)	14.87 (19.99 - 12.32)
Noise [H]	Sound Pressure Level	dB(A)	53	49	51	52	56
Maximum Current		A	11.5	15.2	15.6	19.0	21.3
Starting Current		A	6.7	7.3	9.2	10.2	13.1
Compressor Output		W	900	1300	1300	1700	1700
Dimensions	Height	mm	619	795	795	999	999
	Width	mm	824 (+70)	875 (+95)	875 (+95)	940	940
	Depth	mm	299	320	320	340	340
Net Weight		kg	39	71	72	80	81
Refrigerant Pipe Diameter	Liquid Side	mm	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35
	Gas Side	mm	ø 9.52	ø 9.52	ø 9.52	ø 9.52	ø 9.52
Pipe Extension **	Chargeless Pipe Length	m	20	30	30	45	45
	Maximum Pipe length	1 Room (m)	20	25	25	25	25
		Total (m)	30	50	60	70	80
	Maximum Elevation Length	m	10	15	15	15	15
	Additional Refrigerant Gas	g/m	15	20	20	20	20
Operating Range	Cooling	Degree [°C]	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46
	Heating	Degree [°C]	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24

** When pipes are not extended from the standard pipe length, the required amount of refrigerant is already in the unit.

Cooling Only Multi-Split Air Conditioning System



Wall-mounted

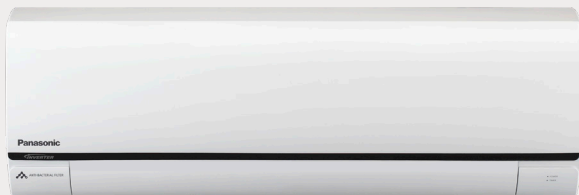

CS-MPS9SKH (2.8kW) / CS-MPS12SKH (3.2kW) / CS-MPS15SKH (4.0kW)



Wireless Remote Controller Included





CZ-RD514C Wired Remote Controller (Optional)

INVERTER

ANTI-BACTERIAL FILTER

Features

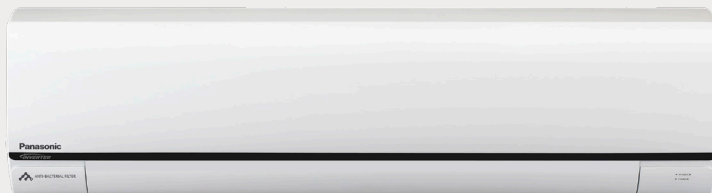

CS-MPS18SKH (5.0kW) / CS-MPS24SKH (6.0kW)** / CS-MPS28SKH (7.0kW)**

Slim Ducted




CS-MS9SD3H (2.8kW) / CS-MS12SD3H (3.2kW) / CS-MS18SD3H (5.0kW) / CS-MS24SD3H (6.0kW)**



Wireless Remote Controller Included

INVERTER

Features



*1 CZ-MA2P is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2".

Connection of Outdoor and Indoor Units

	Models	Indoor Units: Possible Combination Patterns (Must be within capacity range)	Maximum Connectable Indoor Unit kW	Indoor unit combination		
				Capacity (kW class)	Wall-Mounted	Slim Ducted
Up to 2 rooms	CU-2S18SKH	 <p>5.0kW</p> <p>PORT A: 2.8 or 3.2 *Either unit</p> <p>PORT B: 2.8 or 3.2 *Either unit</p> <p>Dimensions (H x W x D) : 619 x 824 (+70) x 299 mm / Weight : 37 kg *At least two indoor units must be connected.</p>	6.4kW	2.8	•	•
				3.2	•	•
Up to 3 rooms	CU-3S27SBH	 <p>7.5kW</p> <p>PORT A: 2.8 or 3.2 or 4.0 or 5.0 *Either unit</p> <p>PORT B: 2.8 or 3.2 or 4.0 or 5.0 *Either unit</p> <p>PORT C: 2.8 or 3.2 or 4.0 or 5.0 *Either unit</p> <p>Dimensions (H x W x D) : 695 x 875 (+95) x 320 mm / Weight : 57 kg *At least two indoor units must be connected.</p>	13.2kW	2.8	•	•
				3.2	•	•
				4.0	•	
				5.0	•	•
Up to 3 rooms	CU-3S28SBH	 <p>7.5kW</p> <p>PORT A: 2.8 or 3.2 or 4.0 or 5.0 or 6.0 *Either unit</p> <p>PORT B: 2.8 or 3.2 or 4.0 or 5.0 or 6.0 *Either unit</p> <p>PORT C: 2.8 or 3.2 or 4.0 or 5.0 or 6.0 *Either unit</p> <p>Dimensions (H x W x D) : 795 x 875 (+95) x 320 mm / Weight : 68 kg *At least two indoor units must be connected.</p>	13.2kW	2.8	•	•
				3.2	•	•
				4.0	•	
				5.0	•	•
				6.0	•	•

Outdoor



Up to 2 rooms
CU-2S18SKH



Up to 3 rooms
CU-3S27SBH



Up to 3 rooms
CU-3S28SBH



Connection of Outdoor and Indoor Units

	Models	Indoor Units: Possible Combination Patterns (Must be within capacity range)	Maximum Connectable Indoor Unit kW	Indoor unit combination		
				Capacity (kW class)	Wall-Mounted	Slim Ducted
Up to 4 rooms	CU-4S27SBH	<p>7.5kW</p> <p>PORT A: 2.8 or 3.2 or 4.0 or 5.0 *Either unit</p> <p>PORT B: 2.8 or 3.2 or 4.0 or 5.0 *Either unit</p> <p>PORT C: 2.8 or 3.2 or 4.0 or 5.0 *Either unit</p> <p>PORT D: 2.8 or 3.2 or 4.0 or 5.0 *Either unit</p> <p>Dimensions (H x W x D) : 695 x 875 (+95) x 320 mm / Weight : 57 kg *At least two indoor units must be connected.</p>	13.4kW	2.8	•	•
				3.2	•	•
				4.0	•	
				5.0	•	•
Up to 4 rooms	CU-4S34SBH	<p>10.0kW</p> <p>PORT A: 2.8 or 3.2 or 4.0 or 5.0 or 6.0 or 7.0 *Either unit</p> <p>PORT B: 2.8 or 3.2 or 4.0 or 5.0 or 6.0 or 7.0 *Either unit</p> <p>PORT C: 2.8 or 3.2 or 4.0 or 5.0 or 6.0 or 7.0 *Either unit</p> <p>PORT D: 2.8 or 3.2 or 4.0 or 5.0 or 6.0 or 7.0 *Either unit</p> <p>Dimensions (H x W x D) : 999 x 940 x 340 mm / Weight : 76 kg *At least two indoor units must be connected.</p>	17.4kW	2.8	•	•
				3.2	•	•
				4.0	•	
				5.0	•	•
				6.0	•	•
				7.0	•	

Accessories



CZ-MA2P

* CZ-MA2P is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2".

Outdoor



Up to 4 rooms
CU-4S27SBH



Up to 4 rooms
CU-4S34SBH



Indoor Units

Model			WALL-MOUNTED					
			CS-MPS9SKH	CS-MPS12SKH	CS-MPS15SKH	CS-MPS18SKH	CS-MPS24SKH	CS-MPS28SKH
Cooling Capacity	kW		2.80	3.20	4.00	5.00	6.00	7.00
	Btu/h		9,550	10,900	13,600	17,100	20,500	23,900
Power Source			Single Phase, 220V - 240V, 50Hz					
Sound Pressure Level (H/L)	dB(A)		40 / 29	44 / 32	45 / 32	47 / 38	48 / 39	48 / 39
Air Circulation (H)	m ³ /min.		10.1	10.9	11.2	18.1	18.5	19.0
	cfm		355	385	395	640	655	670
Dimensions	Height	mm	290	290	290	290	290	290
	Width	mm	870	870	870	1,070	1,070	1,070
	Depth	mm	214	214	214	240	240	240
Net Weight	kg		9	9	9	12	12	12
Refrigerant Pipe Diameter	Liquid Side	mm	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35
	Gas Side	mm	ø 9.52	ø 9.52	ø 9.52	ø 9.52	ø 12.70 ^{*1}	ø 12.70 ^{*1}
Power Supply			Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor

Model			SLIM DUCTED			
			CS-MS9SD3H	CS-MS12SD3H	CS-MS18SD3H	CS-MS24SD3H
Cooling Capacity	kW		2.80	3.20	5.00	6.00
	Btu/h		9,550	10,900	17,100	20,500
Power Source			Single Phase, 220V - 240V, 50Hz			
Sound Pressure Level (H/L)	dB(A)		35 / 28	35 / 28	41 / 30	41 / 30
Air Circulation (H)	m ³ /min.		13.2	13.2	15.5	15.5
	cfm		465	465	545	545
Dimensions	Height	mm	200	200	200	200
	Width	mm	750	750	750	750
	Depth	mm	640	640	640	640
Net Weight	kg		19	19	19	19
Refrigerant Pipe Diameter	Liquid Side	mm	ø 6.35	ø 6.35	ø 6.35	ø 6.35
	Gas Side	mm	ø 9.52	ø 9.52	ø 9.52	ø 12.70 ^{*1}
Power Supply			Outdoor	Outdoor	Outdoor	Outdoor

*1 CZ-MA2P is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2".

Outdoor Units

Model			CU-2S18SKH	CU-3S27SBH	CU-3S28SBH	CU-4S27SBH	CU-4S34SBH	
Cooling Capacity	(min - max)	kW	5.00 [1.50 - 6.00]	7.50 [2.80 - 8.00]	7.50 [2.80 - 9.00]	7.50 [2.80 - 8.00]	10.0 [2.90 - 11.00]	
	(min - max)	Btu/h	17,100 [5,120 - 20,500]	25,600 [9,550 - 27,300]	25,600 [9,550 - 30,700]	25,600 [9,550 - 27,300]	34,100 [9,890 - 37,500]	
Power Source			Single Phase, 220V - 240V, 50Hz					
Maximum Connectable Capacity		kW	6.4	13.2	13.2	13.4	17.4	
Maximum Connectable Indoor		Units	2	3	3	4	4	
Electrical Data	Running Current	A	6.8 - 6.2	10.2 - 9.4	10.1 - 9.2	10.2 - 9.4	13.5 - 12.4	
	Power Input (min - max)	W	1,430 [250-1,780]	2,060 [520-2,650]	2,060 [520-2,830]	2,060 [520-2,530]	2,800 [560-3,460]	
EER		W/W	3.50	3.64	3.64	3.64	3.57	
		Btu/hW	11.96	12.43	12.43	12.43	12.18	
Noise (H)	Sound Pressure Level	dB(A)	50	49	49	49	52	
Maximum Current		A	12.0	15.2	15.2	15.2	21.3	
Starting Current		A	6.8	10.2	10.1	10.2	13.5	
Compressor Output		W	900	1,300	1,300	1,300	1,700	
Dimensions	Height	mm	619	695	795	695	999	
	Width	mm	824 (+70)	875 (+95)	875 (+95)	875 (+95)	940	
	Depth	mm	299	320	320	320	340	
Net Weight		kg	37	57	68	57	76	
Refrigerant Pipe Diameter	Liquid Side	mm	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	
	Gas Side	mm	ø 9.52	ø 9.52	ø 9.52	ø 9.52	ø 9.52	
Pipe Extension**	Chargeless Pipe Length		m	20	30	30	35	45
	Maximum Pipe Length	1 Room (m)		20	25	25	25	25
		Total (m)		30	60	60	60	70
	Maximum Elevation Length		m	10	15	15	15	15
	Additional Refrigerant Gas*		g/m	15	20	20	20	20
Operating Range		Degree [°C]	+16°C ~ +43°C	+16°C ~ +43°C	+16°C ~ +43°C	+16°C ~ +43°C	+16°C ~ +43°C	

** When pipes are not extended from the standard pipe length, the required amount of refrigerant is already in the unit.

Features Explanation

COMFORT

SLEEP MODE

Delays off timer with temperature control for better sleep.



SOFT DRY OPERATION MODE

Starts with cooling to dehumidify, then provides continuous breeze at a low frequency to keep a room dry without much change to the temperature.



AUTOMATIC OPERATION MODE (COOLING)



INVERTER CONTROL

Varies the rotation speed of the compressor for higher energy savings.



PERSONAL AIRFLOW CREATION

Vertical and horizontal airflow patterns can be combined as desired to achieve optimum comfort, with operation possible by remote even from a distance.



HOT START CONTROL

On the start of the heating cycle and after the defrost cycle, the indoor fan will start up once the indoor heat exchanger is warm.



QUIET MODE

Enjoy the comfort of running your air conditioner at night and still have a relaxing sleep.



AIRFLOW DIRECTION CONTROL (UP & DOWN)

Vertical airflow patterns can be controlled with operation by remote, even from a distance.



AUTO CHANGEOVER (INVERTER)

In Auto Mode the unit will select if heating or cooling is required.



POWERFUL MODE

Pressing the Powerful button cools or heats the room quickly. It provides fast comfort, with full power and a strong airflow. This is perfect for use immediately after coming home, or when unexpected guests arrive.



MANUAL HORIZONTAL AIRFLOW DIRECTION CONTROL



ECO MODE WITH A.I. / ECO MODE

More energy saving compared to the normal mode by automatically adjusting the set temperature by up to 2°C. It's ideal when you want to maintain room temperature for gentle cooling and heating.



CLEANER AIR

ANTI-BACTERIAL FILTER

The Anti-Bacterial Filter combines three effects in one: anti-allergen, anti-virus and anti-bacteria protection to provide clean air.



ODOUR-REMOVING FUNCTION

With this function, there's no unpleasant odor when the unit starts up. That's because the fan remains off momentarily, while the source of the odour inside the air conditioner is suppressed.



ONE-TOUCH AIR FILTER



REMOVABLE, WASHABLE PANEL

Gives you easy access to the filter as well making the unit easy to clean.



CONVENIENCE

24-HOUR DUAL ON & OFF REAL SETTING TIMER

This feature enables you to preset two different sets of start/stop operation timer (hour and minute) within a 24-hour time frame.



WIRED REMOTE CONTROL

For use in commercial applications, or where users don't want a remote control.



BOTTOM AIR INTAKE



24-HOUR ON & OFF REAL SETTING TIMER

The exact operating time (hour and minute) of the air conditioner can be set in advance. From here on, the unit will operate in accordance to these preset hours every day until the system is reset.



BUILT-IN DRAIN PUMP



LCD WIRELESS REMOTE CONTROL

Easy control of the unit from anywhere in the room.



RELIABILITY

RANDOM AUTO RESTART

When multiple units are connected and there is a power outage, they will turn on at different times in order to not spike the power supply.



TOP-PANEL MAINTENANCE ACCESS

Easy access for maintenance.



BLUE FIN CONDENSER

Extra protection from the elements with a longer lasting coil.



SELF-DIAGNOSTIC FUNCTION

Should a malfunction occur, the unit diagnoses the problem and shows the corresponding alphanumeric code. This allows for quicker servicing.



R32 COOLING & HEATING

MODEL	WALL-MOUNTED		SLIM DUCTED	
	CS-MRZ16WKH-8 CS-MRZ20WKH-8 CS-MRZ25WKH-8	CS-MRZ35WKH-8 CS-MRZ42WKH-8 CS-MRZ50WKH-8	CS-MRZ60WKH-8 CS-MRZ71WKH-8	CS-MZ25WD3H8A CS-MZ35WD3H8A CS-MZ50WD3H8A CS-MZ60WD3H8A
COMFORT				
SLEEP	SLEEP MODE	•		
INVERTER CONTROL		•	•	•
QUIET MODE		•	•	•
POWERFUL MODE		•	•	•
SOFT DRY OPERATION MODE		•	•	•
PERSONAL AIRFLOW CREATION			•	
AIRFLOW DIRECTION CONTROL (UP & DOWN)		•		
MANUAL HORIZONTAL AIRFLOW DIRECTION CONTROL		•		
AUTOMATIC OPERATION MODE (COOLING)				
HOT START CONTROL		•	•	•
AUTO CHANGEOVER (INVERTER)		•	•	•
ECO MODE WITH A.I.		•		
ECO MODE			•	
CLEANER AIR				
ANTI-BACTERIAL FILTER		•	•	
ODOUR-REMOVING FUNCTION		•	•	•
REMOVABLE, WASHABLE PANEL		•	•	
ONE-TOUCH AIR FILTER				•
CONVENIENCE				
24-HOUR DUAL ON & OFF REAL SETTING TIMER		•	•	
24-HOUR ON & OFF REAL SETTING TIMER				
LCD WIRELESS REMOTE CONTROL		•	•	
WIRED REMOTE CONTROL		• (Optional)	• (Optional)	•
BOTTOM AIR INTAKE				•
BUILT-IN DRAIN PUMP				•
RELIABILITY				
RANDOM AUTO RESTART		•	•	•
BLUE FIN CONDENSER		•	•	•
TOP-PANEL MAINTENANCE ACCESS		•	•	•
SELF-DIAGNOSTIC FUNCTION		•	•	•

CU-2Z52WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION										
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V
1 Room	16	1.60	-	-	-	1.60	1.1 ~ 2.3	430	220 ~ 620	2.20	2.00	2.60	-	-	-	-	2.60	0.7 ~ 3.8	730	170 ~ 1150	3.60	3.30
	20	2.00	-	-	-	2.00	1.1 ~ 2.9	540	220 ~ 790	2.70	2.50	3.20	-	-	-	-	3.20	0.7 ~ 4.8	890	170 ~ 1450	4.30	4.00
	25	2.50	-	-	-	2.50	1.1 ~ 3.5	690	220 ~ 1020	3.40	3.10	3.60	-	-	-	-	3.60	0.7 ~ 5.5	1070	170 ~ 1740	5.20	4.80
	35	3.50	-	-	-	3.50	1.1 ~ 4.0	1030	220 ~ 1240	5.10	4.60	4.50	-	-	-	-	4.50	0.7 ~ 6.2	1290	170 ~ 1850	6.30	5.70
	42	4.20	-	-	-	4.20	1.1 ~ 4.5	1380	220 ~ 1520	6.80	6.20	5.00	-	-	-	-	5.00	1.1 ~ 6.4	1590	210 ~ 2220	7.70	7.10
	50	5.00	-	-	-	5.00	1.2 ~ 5.1	1710	230 ~ 1810	8.30	7.60	5.30	-	-	-	-	5.30	1.1 ~ 6.8	1680	210 ~ 2330	8.10	7.50
2 Rooms	16 + 16	1.60	1.60	-	-	3.20	1.5 ~ 4.0	680	250 ~ 990	3.30	3.00	2.60	2.60	-	-	-	5.20	1.1 ~ 7.0	1210	210 ~ 1910	5.70	5.20
	16 + 20	1.60	2.00	-	-	3.60	1.5 ~ 4.5	780	250 ~ 1150	3.80	3.50	2.40	3.00	-	-	-	5.40	1.1 ~ 7.0	1260	210 ~ 1890	5.90	5.40
	16 + 25	1.60	2.50	-	-	4.10	1.5 ~ 5.2	900	250 ~ 1370	4.40	4.00	2.20	3.40	-	-	-	5.60	1.1 ~ 7.0	1310	210 ~ 1890	6.20	5.70
	16 + 35	1.65	3.55	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	1.90	4.20	-	-	-	6.10	1.1 ~ 7.0	1430	210 ~ 1890	6.70	6.20
	16 + 42	1.45	3.75	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	1.70	4.40	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20
	16 + 50	1.25	3.95	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	1.50	4.60	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20
	20 + 20	2.00	2.00	-	-	4.00	1.5 ~ 5.0	890	250 ~ 1310	4.30	4.00	2.80	2.80	-	-	-	5.60	1.1 ~ 7.0	1310	210 ~ 1870	6.20	5.70
	20 + 25	2.00	2.50	-	-	4.50	1.5 ~ 5.2	1030	250 ~ 1370	4.90	4.50	2.60	3.20	-	-	-	5.80	1.1 ~ 7.0	1360	210 ~ 1870	6.40	5.90
	20 + 35	1.90	3.30	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	2.20	3.90	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20
	20 + 42	1.70	3.50	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	1.95	4.15	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20
	20 + 50	1.50	3.70	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	1.75	4.35	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20
	25 + 25	2.60	2.60	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	3.05	3.05	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20
	25 + 35	2.15	3.05	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	2.55	3.55	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20
	25 + 42	1.95	3.25	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	2.30	3.80	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20
	25 + 50	1.75	3.45	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	2.05	4.05	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20
	35 + 35	2.60	2.60	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	3.05	3.05	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20
35 + 42	2.35	2.85	-	-	5.20	1.5 ~ 6.0	1350	250 ~ 1620	6.40	5.90	2.75	3.35	-	-	-	6.10	1.1 ~ 7.2	1430	210 ~ 1900	6.70	6.20	

CU-2Z52WBH-8: Free Multi Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION										
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V
1 Room	16	1.60	-	-	-	1.60	1.1 ~ 2.3	460	220 ~ 650	2.30	2.10	2.60	-	-	-	-	2.60	0.7 ~ 3.8	760	170 ~ 1180	3.70	3.40
	20	2.00	-	-	-	2.00	1.1 ~ 2.9	570	220 ~ 820	2.80	2.60	3.20	-	-	-	-	3.20	0.7 ~ 4.8	920	170 ~ 1480	4.50	4.10
	25	2.50	-	-	-	2.50	1.1 ~ 3.5	720	220 ~ 1050	3.60	3.30	3.60	-	-	-	-	3.60	0.7 ~ 5.5	1100	170 ~ 1770	5.30	4.90
	35	3.50	-	-	-	3.50	1.1 ~ 4.0	1060	220 ~ 1270	5.20	4.80	4.50	-	-	-	-	4.50	0.7 ~ 6.2	1320	170 ~ 1880	6.40	5.90
	42	4.20	-	-	-	4.20	1.1 ~ 4.5	1410	220 ~ 1550	6.90	6.40	5.00	-	-	-	-	5.00	1.1 ~ 6.4	1620	210 ~ 2250	7.90	7.20
	50	5.00	-	-	-	5.00	1.2 ~ 5.1	1740	230 ~ 1840	8.40	7.70	5.30	-	-	-	-	5.30	1.1 ~ 6.8	1710	210 ~ 2360	8.30	7.60
2 Rooms	16 + 16	1.60	1.60	-	-	3.20	1.5 ~ 4.0	740	250 ~ 1050	3.60	3.30	2.60	2.60	-	-	-	5.20	1.1 ~ 7.0	1270	210 ~ 1970	6.00	5.50
	16 + 20	1.60	2.00	-	-	3.60	1.5 ~ 4.5	840	250 ~ 1210	4.10	3.70	2.40	3.00	-	-	-	5.40	1.1 ~ 7.0	1320	210 ~ 1950	6.20	5.70
	16 + 25	1.60	2.50	-	-	4.10	1.5 ~ 5.2	960	250 ~ 1430	4.70	4.30	2.20	3.40	-	-	-	5.60	1.1 ~ 7.0	1370	210 ~ 1950	6.40	5.90
	16 + 35	1.65	3.55	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	1.90	4.20	-	-	-	6.10	1.1 ~ 7.0	1490	210 ~ 1950	7.00	6.40
	16 + 42	1.45	3.75	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	1.70	4.40	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40
	16 + 50	1.25	3.95	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	1.50	4.60	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40
	20 + 20	2.00	2.00	-	-	4.00	1.5 ~ 5.0	950	250 ~ 1370	4.60	4.20	2.80	2.80	-	-	-	5.60	1.1 ~ 7.0	1370	210 ~ 1930	6.40	5.90
	20 + 25	2.00	2.50	-	-	4.50	1.5 ~ 5.2	810	250 ~ 1430	3.90	3.50	2.60	3.20	-	-	-	5.80	1.1 ~ 7.0	1420	210 ~ 1930	6.70	6.10
	20 + 35	1.90	3.30	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	2.20	3.90	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40
	20 + 42	1.70	3.50	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	1.95	4.15	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40
	20 + 50	1.50	3.70	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	1.75	4.35	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40
	25 + 25	2.60	2.60	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	3.05	3.05	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40
	25 + 35	2.15	3.05	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	2.55	3.55	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40
	25 + 42	1.95	3.25	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	2.30	3.80	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40
	25 + 50	1.75	3.45	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	2.05	4.05	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40
	35 + 35	2.60	2.60	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	3.05	3.05	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40
35 + 42	2.35	2.85	-	-	5.20	1.5 ~ 6.0	1410	250 ~ 1680	6.70	6.10	2.75	3.35	-	-	-	6.10	1.1 ~ 7.2	1490	210 ~ 1960	7.00	6.40	

• Specification based on JIS C 9612 standard.
 • A minimum of 2 indoor units must be connected.

CU-3Z54WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION										
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V
1 Room	16	1.60	-	-	-	1.60	1.3 ~ 2.3	420	250 ~ 660	2.2	2.0	2.60	-	-	-	-	2.60	1.2 ~ 3.2	640	290 ~ 1000	3.3	3.0
	20	2.00	-	-	-	2.00	1.8 ~ 2.9	520	340 ~ 830	2.7	2.5	3.20	-	-	-	-	3.20	1.2 ~ 4.1	780	290 ~ 1270	4.0	3.7
	25	2.50	-	-	-	2.50	1.8 ~ 2.9	650	340 ~ 830	3.2	2.9	3.60	-	-	-	-	3.60	1.2 ~ 4.3	980	290 ~ 1270	4.9	4.5
	35	3.50	-	-	-	3.50	1.8 ~ 3.8	960	340 ~ 1380	4.5	4.2	4.50	-	-	-	-	4.50	1.2 ~ 5.8	1270	290 ~ 2140	6.3	5.8
	42	4.20	-	-	-	4.20	1.8 ~ 4.3	1390	340 ~ 2010	6.5	6.0	5.60	-	-	-	-	5.60	1.2 ~ 6.8	1760	290 ~ 2970	8.2	7.5
	50	5.00	-	-	-	5.00	1.9 ~ 5.4	1630	340 ~ 2150	7.9	7.3	6.80	-	-	-	-	6.80	1.2 ~ 6.9	2350	290 ~ 2840	11.3	10.4
2 Rooms	16 + 16	1.60	1.60	-	-	3.20	1.8 ~ 6.2	630	330 ~ 2130	3.2	3.0	2.60	2.60	-	-	-	5.20	1.4 ~ 7.0	1340	340 ~ 2070	6.4	5.9
	16 + 20	1.60	2.00	-	-	3.60	1.8 ~ 6.2	770	330 ~ 2090	3.8	3.5	2.58	3.22	-	-	-	5.80	1.4 ~ 7.0	1520	330 ~ 2030	7.3	6.7
	16 + 25	1.60	2.50	-	-	4.10	1.8 ~ 6.2	920	330 ~ 2090	4.5	4.1	2.42	3.78	-	-	-	6.20	1.4 ~ 7.0	1650	330 ~ 2030	7.9	7.2
	16 + 35	1.60	3.50	-	-	5.10	1.8 ~ 6.3	1350	330 ~ 2100	6.4	5.9	2.20	4.80	-	-	-	7.00	1.4 ~ 7.3	1900	290 ~ 2130	9.0	8.2
	16 + 42	1.49	3.91	-	-	5.40	1.9 ~ 6.4	1500	350 ~ 2140	7.2	6.6	1.93	5.07	-	-	-	7.00	1.4 ~ 7.3	1890	310 ~ 2120	8.9	8.2
	16 + 50	1.31	4.09	-	-	5.40	1.9 ~ 6.8	1320	340 ~ 2080	6.3	5.8	1.70	5.30	-	-	-	7.00	1.4 ~ 8.0	1710	270 ~ 2230	8.2	7.5
	20 + 20	2.00	2.00	-	-	4.00	1.8 ~ 6.2	890	330 ~ 2050	4.4	4.0	3.20	3.20	-	-	-	6.40	1.4 ~ 7.0	1710	320 ~ 2030	8.2	7.5
	20 + 25	2.00	2.50	-	-	4.50	1.8 ~ 6.2	1080	330 ~ 2050	5.2	4.8	3.02	3.78	-	-	-	6.80	1.4 ~ 7.0	1840	290 ~ 2030	8.7	8.0
	20 + 35	1.96	3.44	-	-	5.40	1.8 ~ 6.3	1470	330 ~ 2060	7.0	6.4	2.55	4.45	-	-	-	7.00	1.4 ~ 7.3	1890	280 ~ 2120	8.9	8.2
	20 + 42	1.74	3.66	-	-	5.40	1.9 ~ 6.4	1470	350 ~ 2100	7.0	6.4	2.26	4.74	-	-	-	7.00	1.4 ~ 7.3	1850	300 ~ 2080	8.7	8.0
	20 + 50	1.54	3.86	-	-	5.40	1.9 ~ 6.8	1280	340 ~ 2080	6.1	5.6	2.00	5.00	-	-	-	7.00	1.4 ~ 8.0	1700	270 ~ 2230	8.1	7.4
	25 + 25	2.50	2.50	-	-	5.00	1.8 ~ 6.2	1320	330 ~ 2050	6.3	5.8	3.50	3.50	-	-	-	7.00	1.4 ~ 7.2	1900	290 ~ 2100	9.0	8.2
	25 + 35	2.25	3.15	-	-	5.40	1.9 ~ 6.3	1470	350 ~ 2060	7.0	6.4	2.92	4.08	-	-	-	7.00	1.4 ~ 7.3	1890	280 ~ 2120	8.9	8.2
	25 + 42	2.01	3.39	-	-	5.40	1.9 ~ 6.4	1470	350 ~ 2100	7.0	6.4	2.61	4.39	-	-	-	7.00	1.4 ~ 7.3	1850	280 ~ 2080	8.7	8.0
	25 + 50	1.80	3.60	-	-	5.40	1.9 ~ 6.8	1280	340 ~ 2080	6.1	5.6	2.33	4.67	-	-	-	7.00	1.4 ~ 8.0	1700	240 ~ 2230	8.1	7.4
	35 + 35	2.70	2.70	-	-	5.40	1.9 ~ 6.4	1430	350 ~ 2060	6.8	6.3	3.50	3.50	-	-	-	7.00	1.4 ~ 7.5	1840	270 ~ 2140	8.7	8.0
35 + 42	2.45	2.95	-	-	5.40	1.9 ~ 6.5	1430	350 ~ 2110	6.8	6.3	3.18	3.82	-	-	-	7.00	1.4 ~ 7.5	1830	260 ~ 2140	8.7	7.9	
35 + 50	2.22	3.18	-	-	5.40	1.9 ~ 6.9	1280	360 ~ 2080	6.1	5.6	2.88	4.12	-	-	-	7.00	1.4 ~ 8.0	1680	240 ~ 2160	8.0	7.4	
42 + 42	2.70	2.70	-	-	5.40	1.9 ~ 6.5	1430	350 ~ 2110	6.8	6.3	3.50	3.50	-	-	-	7.00	1.4 ~ 7.6	1790	260 ~ 2170	8.5	7.8	
42 + 50	2.47	2.93	-	-	5.40	1.9 ~ 6.9	1280	360 ~ 2080	6.1	5.6	3.20	3.80	-	-	-	7.00	1.4 ~ 8.0	1680	240 ~ 2160	8.0	7.4	
3 Rooms	16 + 16 + 16	1.60	1.60	1.60	-	4.80	1.8 ~ 7.2	930	360 ~ 2140	4.5	4.2	2.33	2.33	2.33	-	-	6.99	1.5 ~ 8.1	1550	290 ~ 2270	7.3	6.9
	16 + 16 + 20	1.66	1.66	2.08	-	5.40	1.8 ~ 7.3	1120	360 ~ 2180	5.4	5.1	2.15	2.15	2.70	-	-	7.00	1.6 ~ 9.0	1540	320 ~ 2630	7.3	6.8
	16 + 16 + 25	1.52	1.52	2.36	-	5.40	1.9 ~ 7.2	1120	390 ~ 2090	5.4	5.1	1.96	1.96	3.08	-	-	7.00	1.6 ~ 9.0	1540	320 ~ 2630	7.3	6.8
	16 + 16 + 35	1.29	1.29	2.82	-	5.40	1.9 ~ 7.2	1120	390 ~ 2050	5.4	5.1	1.67	1.67	3.66	-	-	7.00	1.6 ~ 9.0	1520	340 ~ 2610	7.2	6.7
	16 + 16 + 42	1.17	1.17	3.06	-	5.40	1.8 ~ 7.3	1120	390 ~ 2090	5.4	5.1	1.51	1.51	3.98	-	-	7.00	1.6 ~ 9.0	1510	310 ~ 2560	7.1	6.7
	16 + 16 + 50	1.05	1.05	3.30	-	5.40	1.8 ~ 7.3	1050	420 ~ 1920	5.1	4.7	1.37	1.37	4.26	-	-	7.00	1.6 ~ 9.0	1410	330 ~ 2410	6.7	6.2
	16 + 20 + 20	1.54	1.93	1.93	-	5.40	1.9 ~ 7.2	1120	390 ~ 2090	5.4	5.1	2.00	2.50	2.50	-	-	7.00	1.6 ~ 9.0	1530	310 ~ 2620	7.2	6.8
	16 + 20 + 25	1.42	1.77	2.21	-	5.40	1.9 ~ 7.2	1120	390 ~ 2090	5.4	5.1	1.84	2.30	2.86	-	-	7.00	1.6 ~ 9.0	1530	310 ~ 2620	7.2	6.8
	16 + 20 + 35	1.22	1.52	2.66	-	5.40	1.9 ~ 7.2	1120	390 ~ 2010	5.4	5.1	1.58	1.97	3.45	-	-	7.00	1.6 ~ 9.0	1510	340 ~ 2560	7.1	6.7
	16 + 20 + 42	1.11	1.38	2.91	-	5.40	1.8 ~ 7.3	1120	390 ~ 2090	5.4	5.1	1.44	1.79	3.77	-	-	7.00	1.6 ~ 9.0	1510	310 ~ 2550	7.1	6.7
	16 + 20 + 50	1.00	1.26	3.14	-	5.40	1.8 ~ 7.3	1050	420 ~ 1880	5.1	4.7	1.30	1.63	4.07	-	-	7.00	1.6 ~ 9.0	1410	340 ~ 2400	6.7	6.2
	16 + 25 + 25	1.30	2.05	2.05	-	5.40	1.9 ~ 7.2	1120	390 ~ 2090	5.4	5.1	1.70	2.65	2.65	-	-	7.00	1.6 ~ 9.0	1530	310 ~ 2620	7.2	6.8
	16 + 25 + 35	1.14	1.78	2.48	-	5.40	1.8 ~ 7.3	1120	390 ~ 2090	5.4	5.1	1.47	2.30	3.23	-	-	7.00	1.6 ~ 9.0	1510	340 ~ 2560	7.1	6.7
	16 + 25 + 42	1.04	1.63	2.73	-	5.40	1.8 ~ 7.3	1120	390 ~ 2090	5.4	5.1	1.35	2.11	3.54	-	-	7.00	1.6 ~ 9.0	1510	310 ~ 2550	7.1	6.7
	16 + 25 + 50	0.95	1.48	2.97	-	5.40	1.8 ~ 7.3	1050	420 ~ 1880	5.1	4.7	1.23	1.92	3.85	-	-	7.00	1.6 ~ 9.0	1410	340 ~ 2400	6.7	6.2
	16 + 35 + 35	1.00	2.20	2.20	-	5.40	1.8 ~ 7.3	1090	390 ~ 2050	5.3	4.9	1.30	2.85	2.85	-	-	7.00	1.6 ~ 9.0	1500	320 ~ 2530	7.1	6.6
	16 + 35 + 42	0.93	2.03	2.44	-	5.40	1.8 ~ 7.3	1090	390 ~ 2050	5.3	4.9	1.20	2.63	3.17	-	-	7.00	1.6 ~ 9.0	1490	320 ~ 2520	7.0	6.6
	20 + 20 + 20	1.80	1.80	1.80	-	5.40	1.9 ~ 7.2	1120	390 ~ 2050	5.4	5.1	2.33	2.33	2.33	-	-	6.99	1.6 ~ 9.0	1530	310 ~ 2610	7.2	6.8
	20 + 20 + 25	1.66	1.66	2.08	-	5.40	1.9 ~ 7.2	1120	390 ~ 2050	5.4	5.1	2.15	2.15	2.70	-	-	7.00	1.6 ~ 9.0	1530	310 ~ 2610	7.2	6.8
	20 + 20 + 35	1.44	1.44	2.52	-	5.40	1.9 ~ 7.2	1120	390 ~ 2010	5.4	5.1	1.87	1.87	3.26	-	-	7.00	1.6 ~ 9.0	1510	340 ~ 2550	7.1	6.7
	20 + 20 + 42	1.32	1.32	2.76	-	5.40	1.8 ~ 7.3	1090	390 ~ 2050	5.3	4.9	1.71	1.71	3.58	-	-	7.00	1.6 ~ 9.0	1500	320 ~ 2540	7.1	6.6
	20 + 20 + 50	1.20	1.20	3.00	-	5.40	1.8 ~ 7.3	1050	420 ~ 1880	5.1	4.7	1.56	1.56	3.88	-	-	7.00	1.6 ~ 9.0	1400	340 ~ 2390	6.6	6.2
	20 + 25 + 25	1.54	1.93	1.93	-	5.40	1.9 ~ 7.2	1120	390 ~ 2050	5.4	5.1	2.00	2.50	2.50	-	-	7.00	1.6 ~ 9.0	1530	310 ~ 2610	7.2	6.8
	20 + 25 + 35	1.35	1.69	2.36	-	5.40	1.9 ~ 7.2	1120	390 ~ 2010	5.4	5.1	1.75	2.19	3.06	-	-	7.00	1.6 ~ 9.0	1510	340 ~ 2550	7.1	6.7
	20 + 25 + 42	1.24	1.55	2.61	-	5.40	1.8 ~ 7.3	1090	390 ~ 2050	5.3	4.9	1.61	2.01	3.38	-	-	7.00	1.6 ~ 9.0	1500	320 ~ 2540	7.1	6.6
20 + 25 + 50	1.14	1.42	2.84	-	5.40	1.8 ~ 7.3	1050	420 ~ 1880	5.1	4.7	1.47	1.84	3.69	-	-	7.00	1.6 ~ 9.0	1400	340 ~ 2390	6.6	6.2	
25 + 35 + 35	1.20	2.10																				

CU-3Z54WBH-8: Free Multi Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION										
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V
1 Room	16	1.60	-	-	-	1.60	1.3 ~ 2.3	450	250 ~ 690	2.4	2.2	2.60	-	-	-	-	2.60	1.2 ~ 3.2	700	290 ~ 1060	3.5	3.2
	20	2.00	-	-	-	2.00	1.8 ~ 2.9	550	340 ~ 860	2.8	2.6	3.20	-	-	-	-	3.20	1.2 ~ 4.1	840	290 ~ 1330	4.3	3.9
	25	2.50	-	-	-	2.50	1.8 ~ 2.9	680	340 ~ 860	3.4	3.1	3.60	-	-	-	-	3.60	1.2 ~ 4.3	1040	290 ~ 1330	5.2	4.7
	35	3.50	-	-	-	3.50	1.8 ~ 3.8	990	340 ~ 1410	4.7	4.3	4.50	-	-	-	-	4.50	1.2 ~ 5.8	1330	290 ~ 2200	6.6	6.1
	42	4.20	-	-	-	4.20	1.8 ~ 4.3	1420	340 ~ 2040	6.7	6.1	5.60	-	-	-	-	5.60	1.2 ~ 6.8	1820	290 ~ 3030	8.4	7.7
	50	5.00	-	-	-	5.00	1.9 ~ 5.4	1630	340 ~ 2150	7.9	7.3	6.80	-	-	-	-	6.80	1.2 ~ 6.9	2350	290 ~ 2840	11.3	10.4
2 Rooms	16 + 16	1.60	1.60	-	-	3.20	1.8 ~ 6.2	690	330 ~ 2190	3.5	3.2	2.60	2.60	-	-	-	5.20	1.4 ~ 7.0	1460	340 ~ 2190	7.0	6.4
	16 + 20	1.60	2.00	-	-	3.60	1.8 ~ 6.2	830	330 ~ 2150	4.1	3.7	2.58	3.22	-	-	-	5.80	1.4 ~ 7.0	1640	330 ~ 2150	7.8	7.2
	16 + 25	1.60	2.50	-	-	4.10	1.8 ~ 6.2	980	330 ~ 2150	4.8	4.4	2.42	3.78	-	-	-	6.20	1.4 ~ 7.0	1770	330 ~ 2150	8.4	7.7
	16 + 35	1.60	3.50	-	-	5.10	1.8 ~ 6.3	1410	330 ~ 2160	6.7	6.2	2.20	4.80	-	-	-	7.00	1.4 ~ 7.3	2020	290 ~ 2250	9.6	8.8
	16 + 42	1.49	3.91	-	-	5.40	1.9 ~ 6.4	1560	350 ~ 2200	7.5	6.8	1.93	5.07	-	-	-	7.00	1.4 ~ 7.3	2010	310 ~ 2240	9.5	8.7
	16 + 50	1.31	4.09	-	-	5.40	1.9 ~ 6.8	1380	340 ~ 2140	6.6	6.0	1.70	5.30	-	-	-	7.00	1.4 ~ 8.0	1830	270 ~ 2350	8.7	7.9
	20 + 20	2.00	2.00	-	-	4.00	1.8 ~ 6.2	950	330 ~ 2110	4.6	4.2	3.20	3.20	-	-	-	6.40	1.4 ~ 7.0	1830	320 ~ 2150	8.7	7.9
	20 + 25	2.00	2.50	-	-	4.50	1.8 ~ 6.2	1140	330 ~ 2110	5.5	5.0	3.02	3.78	-	-	-	6.80	1.4 ~ 7.0	1960	290 ~ 2150	9.3	8.5
	20 + 35	1.96	3.44	-	-	5.40	1.8 ~ 6.3	1530	330 ~ 2120	7.3	6.7	2.55	4.45	-	-	-	7.00	1.4 ~ 7.3	2010	280 ~ 2240	9.5	8.7
	20 + 42	1.74	3.66	-	-	5.40	1.9 ~ 6.4	1530	350 ~ 2160	7.3	6.7	2.26	4.74	-	-	-	7.00	1.4 ~ 7.3	1970	300 ~ 2200	9.3	8.5
	20 + 50	1.54	3.86	-	-	5.40	1.9 ~ 6.8	1340	340 ~ 2140	6.4	5.9	2.00	5.00	-	-	-	7.00	1.4 ~ 8.0	1820	270 ~ 2350	8.6	7.9
	25 + 25	2.50	2.50	-	-	5.00	1.8 ~ 6.2	1380	330 ~ 2110	6.6	6.0	3.50	3.50	-	-	-	7.00	1.4 ~ 7.2	2020	290 ~ 2220	9.6	8.8
	25 + 35	2.25	3.15	-	-	5.40	1.9 ~ 6.3	1530	350 ~ 2120	7.3	6.7	2.92	4.08	-	-	-	7.00	1.4 ~ 7.3	2010	280 ~ 2240	9.5	8.7
	25 + 42	2.01	3.39	-	-	5.40	1.9 ~ 6.4	1530	350 ~ 2160	7.3	6.7	2.61	4.39	-	-	-	7.00	1.4 ~ 7.3	1970	280 ~ 2200	9.3	8.5
	25 + 50	1.80	3.60	-	-	5.40	1.9 ~ 6.8	1340	340 ~ 2140	6.4	5.9	2.33	4.67	-	-	-	7.00	1.4 ~ 8.0	1820	240 ~ 2350	8.6	7.9
	35 + 35	2.70	2.70	-	-	5.40	1.9 ~ 6.4	1490	350 ~ 2120	7.1	6.5	3.50	3.50	-	-	-	7.00	1.4 ~ 7.5	1960	270 ~ 2260	9.3	8.5
35 + 42	2.45	2.95	-	-	5.40	1.9 ~ 6.5	1490	350 ~ 2170	7.1	6.5	3.18	3.82	-	-	-	7.00	1.4 ~ 7.5	1950	260 ~ 2260	9.2	8.5	
35 + 50	2.22	3.18	-	-	5.40	1.9 ~ 6.9	1340	360 ~ 2140	6.4	5.9	2.88	4.12	-	-	-	7.00	1.4 ~ 8.0	1800	240 ~ 2280	8.5	7.8	
42 + 42	2.70	2.70	-	-	5.40	1.9 ~ 6.5	1490	350 ~ 2170	7.1	6.5	3.50	3.50	-	-	-	7.00	1.4 ~ 7.6	1910	260 ~ 2290	9.0	8.3	
42 + 50	2.47	2.93	-	-	5.40	1.9 ~ 6.9	1340	360 ~ 2140	6.4	5.9	3.20	3.80	-	-	-	7.00	1.4 ~ 8.0	1800	240 ~ 2280	8.5	7.8	
3 Rooms	16 + 16 + 16	1.60	1.60	1.60	-	4.80	1.8 ~ 7.2	1020	360 ~ 2230	5.0	4.6	2.33	2.33	2.33	-	-	6.99	1.5 ~ 8.1	1730	290 ~ 2450	8.2	7.6
	16 + 16 + 20	1.66	1.66	2.08	-	5.40	1.8 ~ 7.3	1210	360 ~ 2270	5.8	5.5	2.15	2.15	2.70	-	-	7.00	1.6 ~ 9.0	1720	320 ~ 2810	8.1	7.6
	16 + 16 + 25	1.52	1.52	2.36	-	5.40	1.9 ~ 7.2	1210	390 ~ 2180	5.8	5.5	1.96	1.96	3.08	-	-	7.00	1.6 ~ 9.0	1720	320 ~ 2810	8.1	7.6
	16 + 16 + 35	1.29	1.29	2.82	-	5.40	1.9 ~ 7.2	1210	390 ~ 2140	5.8	5.5	1.67	1.67	3.66	-	-	7.00	1.6 ~ 9.0	1700	340 ~ 2790	8.0	7.5
	16 + 16 + 42	1.17	1.17	3.06	-	5.40	1.8 ~ 7.3	1210	390 ~ 2180	5.8	5.5	1.51	1.51	3.98	-	-	7.00	1.6 ~ 9.0	1690	310 ~ 2740	8.0	7.5
	16 + 16 + 50	1.05	1.05	3.30	-	5.40	1.8 ~ 7.3	1140	420 ~ 2010	5.5	5.1	1.37	1.37	4.26	-	-	7.00	1.6 ~ 9.0	1590	330 ~ 2590	7.5	7.0
	16 + 20 + 20	1.54	1.93	1.93	-	5.40	1.9 ~ 7.2	1210	390 ~ 2180	5.8	5.5	2.00	2.50	2.50	-	-	7.00	1.6 ~ 9.0	1710	310 ~ 2800	8.1	7.6
	16 + 20 + 25	1.42	1.77	2.21	-	5.40	1.9 ~ 7.2	1210	390 ~ 2180	5.8	5.5	1.84	2.30	2.86	-	-	7.00	1.6 ~ 9.0	1710	310 ~ 2800	8.1	7.6
	16 + 20 + 35	1.22	1.52	2.66	-	5.40	1.9 ~ 7.2	1210	390 ~ 2100	5.8	5.5	1.58	1.97	3.45	-	-	7.00	1.6 ~ 9.0	1690	340 ~ 2740	8.0	7.5
	16 + 20 + 42	1.11	1.38	2.91	-	5.40	1.8 ~ 7.3	1210	390 ~ 2180	5.8	5.5	1.44	1.79	3.77	-	-	7.00	1.6 ~ 9.0	1690	310 ~ 2730	8.0	7.5
	16 + 20 + 50	1.00	1.26	3.14	-	5.40	1.8 ~ 7.3	1140	420 ~ 1970	5.5	5.1	1.30	1.63	4.07	-	-	7.00	1.6 ~ 9.0	1590	340 ~ 2580	7.5	7.0
	16 + 25 + 25	1.30	2.05	2.05	-	5.40	1.9 ~ 7.2	1210	390 ~ 2180	5.8	5.5	1.70	2.65	2.65	-	-	7.00	1.6 ~ 9.0	1710	310 ~ 2800	8.1	7.6
	16 + 25 + 35	1.14	1.78	2.48	-	5.40	1.8 ~ 7.3	1210	390 ~ 2180	5.8	5.5	1.47	2.30	3.23	-	-	7.00	1.6 ~ 9.0	1690	340 ~ 2740	8.0	7.5
	16 + 25 + 42	1.04	1.63	2.73	-	5.40	1.8 ~ 7.3	1210	390 ~ 2180	5.8	5.5	1.35	2.11	3.54	-	-	7.00	1.6 ~ 9.0	1690	310 ~ 2730	8.0	7.5
	16 + 25 + 50	0.95	1.48	2.97	-	5.40	1.8 ~ 7.3	1140	420 ~ 1970	5.5	5.1	1.23	1.92	3.85	-	-	7.00	1.6 ~ 9.0	1590	340 ~ 2580	7.5	7.0
	16 + 35 + 35	1.00	2.20	2.20	-	5.40	1.8 ~ 7.3	1180	390 ~ 2140	5.7	5.3	1.30	2.85	2.85	-	-	7.00	1.6 ~ 9.0	1680	320 ~ 2710	7.9	7.4
	16 + 35 + 42	0.93	2.03	2.44	-	5.40	1.8 ~ 7.3	1180	390 ~ 2140	5.7	5.3	1.20	2.63	3.17	-	-	7.00	1.6 ~ 9.0	1670	320 ~ 2700	7.9	7.4
	20 + 20 + 20	1.80	1.80	1.80	-	5.40	1.9 ~ 7.2	1210	390 ~ 2140	5.8	5.5	2.33	2.33	2.33	-	-	6.99	1.6 ~ 9.0	1710	310 ~ 2790	8.1	7.6
	20 + 20 + 25	1.66	1.66	2.08	-	5.40	1.9 ~ 7.2	1210	390 ~ 2140	5.8	5.5	2.15	2.15	2.70	-	-	7.00	1.6 ~ 9.0	1710	310 ~ 2790	8.1	7.6
	20 + 20 + 35	1.44	1.44	2.52	-	5.40	1.9 ~ 7.2	1210	390 ~ 2100	5.8	5.5	1.87	1.87	3.26	-	-	7.00	1.6 ~ 9.0	1690	340 ~ 2730	8.0	7.5
	20 + 20 + 42	1.32	1.32	2.76	-	5.40	1.8 ~ 7.3	1180	390 ~ 2140	5.7	5.3	1.71	1.71	3.58	-	-	7.00	1.6 ~ 9.0	1680	320 ~ 2720	7.9	7.4
	20 + 20 + 50	1.20	1.20	3.00	-	5.40	1.8 ~ 7.3	1140	420 ~ 1970	5.5	5.1	1.56	1.56	3.88	-	-	7.00	1.6 ~ 9.0	1580	340 ~ 2570	7.5	7.0
	20 + 25 + 25	1.54	1.93	1.93	-	5.40	1.9 ~ 7.2	1210	390 ~ 2140	5.8	5.5	2.00	2.50	2.50	-	-	7.00	1.6 ~ 9.0	1710	310 ~ 2790	8.1	7.6
	20 + 25 + 35	1.35	1.69	2.36	-	5.40	1.9 ~ 7.2	1210	390 ~ 2100	5.8	5.5	1.75	2.19	3.06	-	-	7.00	1.6 ~ 9.0	1690	340 ~ 2730	8.0	7.5
20 + 25 + 42	1.24	1.55	2.61	-	5.40	1.8 ~ 7.3	1180	390 ~ 2140	5.7	5.3	1.61	2.01	3.38	-	-	7.00	1.6 ~ 9.0	1680	320 ~ 2720	7.9	7.4	
20 + 25 + 50	1.14	1.42	2.84	-	5.40	1.8 ~ 7.3	1140	420 ~ 1970	5.5	5.1	1.47	1.84	3.69	-	-	7.00	1.6 ~ 9.0	1580	340 ~ 2570	7.5	7.0	
25 + 35 + 35	1.20	2.10	2.10	-	5.40	1.8 ~ 7.3	1180	390 ~ 210														

CU-4Z71WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION										
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V
1 Room	16	1.60	-	-	-	1.60	1.3 ~ 2.3	420	250 ~ 660	2.2	2.0	2.60	-	-	-	-	2.60	1.2 ~ 3.2	640	290 ~ 1000	3.3	3.0
	20	2.00	-	-	-	2.00	1.8 ~ 2.9	520	340 ~ 830	2.7	2.5	3.20	-	-	-	-	3.20	1.2 ~ 4.1	780	290 ~ 1270	4.0	3.7
	25	2.50	-	-	-	2.50	1.8 ~ 2.9	650	340 ~ 830	3.4	3.1	3.60	-	-	-	-	3.60	1.2 ~ 4.3	980	290 ~ 1270	5.1	4.7
	35	3.50	-	-	-	3.50	1.8 ~ 3.8	960	340 ~ 1380	4.8	4.4	4.50	-	-	-	-	4.50	1.2 ~ 5.8	1270	290 ~ 2140	6.5	5.9
	42	4.20	-	-	-	4.20	1.8 ~ 4.3	1390	340 ~ 2010	6.8	6.2	5.60	-	-	-	-	5.60	1.2 ~ 6.8	1760	290 ~ 2970	8.5	7.8
	50	5.00	-	-	-	5.00	1.9 ~ 5.4	1630	340 ~ 2150	7.9	7.3	6.80	-	-	-	-	6.80	1.2 ~ 6.9	2350	290 ~ 2840	11.3	10.4
	60	6.00	-	-	-	6.00	1.9 ~ 6.2	2050	340 ~ 2350	9.7	8.9	8.50	-	-	-	-	8.50	1.3 ~ 9.0	2440	320 ~ 2590	11.8	10.8
2 Rooms	16 + 16	1.60	1.60	-	-	3.20	1.9 ~ 6.4	600	270 ~ 2160	3.1	2.9	2.60	2.60	-	-	-	5.20	2.7 ~ 9.8	1380	660 ~ 3090	6.6	6.0
	16 + 20	1.60	2.00	-	-	3.60	1.9 ~ 6.4	730	270 ~ 2120	3.7	3.4	2.58	3.22	-	-	-	5.80	2.7 ~ 9.8	1560	650 ~ 3100	7.5	6.8
	16 + 25	1.60	2.50	-	-	4.10	1.9 ~ 6.4	870	270 ~ 2120	4.3	3.9	2.42	3.78	-	-	-	6.20	2.7 ~ 9.8	1690	650 ~ 3100	8.1	7.4
	16 + 35	1.60	3.50	-	-	5.10	1.9 ~ 6.9	1290	270 ~ 2520	6.2	5.6	2.23	4.87	-	-	-	7.10	2.7 ~ 9.9	1980	630 ~ 3100	9.4	8.6
	16 + 42	1.60	4.20	-	-	5.80	1.9 ~ 6.9	1650	270 ~ 2480	7.9	7.2	2.26	5.94	-	-	-	8.20	2.7 ~ 9.9	2410	630 ~ 3100	11.4	10.4
	16 + 50	1.60	5.00	-	-	6.60	2.0 ~ 7.5	1860	280 ~ 2560	8.8	8.1	2.06	6.44	-	-	-	8.50	2.8 ~ 10.2	2340	560 ~ 3070	11.1	10.1
	16 + 60	1.49	5.61	-	-	7.10	2.0 ~ 7.5	2260	280 ~ 2560	10.7	9.8	1.79	6.71	-	-	-	8.50	2.8 ~ 10.2	2340	560 ~ 3070	11.1	10.1
	20 + 20	2.00	2.00	-	-	4.00	1.9 ~ 6.4	840	270 ~ 2080	4.1	3.8	3.20	3.20	-	-	-	6.40	2.7 ~ 9.8	1750	640 ~ 3100	8.3	7.6
	20 + 25	2.00	2.50	-	-	4.50	1.9 ~ 6.4	1020	270 ~ 2080	5.0	4.6	3.02	3.78	-	-	-	6.80	2.7 ~ 9.8	1880	640 ~ 3100	8.9	8.1
	20 + 35	2.00	3.50	-	-	5.50	1.9 ~ 6.9	1470	270 ~ 2480	7.0	6.4	2.80	4.90	-	-	-	7.70	2.7 ~ 9.9	2190	630 ~ 3100	10.4	9.5
	20 + 42	2.00	4.20	-	-	6.20	1.9 ~ 6.9	1890	270 ~ 2440	8.9	8.2	2.74	5.76	-	-	-	8.50	2.7 ~ 9.9	2520	620 ~ 3110	11.9	10.9
	20 + 50	2.00	5.00	-	-	7.00	2.0 ~ 7.5	2120	280 ~ 2520	10.0	9.2	2.43	6.07	-	-	-	8.50	2.8 ~ 10.2	2340	560 ~ 3070	11.1	10.1
	20 + 60	1.78	5.32	-	-	7.10	2.0 ~ 7.5	2210	280 ~ 2520	10.5	9.6	2.12	6.38	-	-	-	8.50	2.8 ~ 10.2	2340	560 ~ 3070	11.1	10.1
	25 + 25	2.50	2.50	-	-	5.00	1.9 ~ 6.8	1250	270 ~ 2470	6.0	5.5	3.60	3.60	-	-	-	7.20	2.7 ~ 9.8	2020	640 ~ 3100	9.6	8.8
	25 + 35	2.50	3.50	-	-	6.00	1.9 ~ 6.9	1770	270 ~ 2480	8.4	7.7	3.37	4.73	-	-	-	8.10	2.7 ~ 9.9	2330	630 ~ 3100	11.0	10.1
	25 + 42	2.50	4.20	-	-	6.70	1.9 ~ 6.9	2320	270 ~ 2440	11.0	10.1	3.17	5.33	-	-	-	8.50	2.7 ~ 9.9	2520	620 ~ 3110	11.9	10.9
	25 + 50	2.37	4.73	-	-	7.10	1.9 ~ 7.5	2210	260 ~ 2520	10.5	9.6	2.83	5.67	-	-	-	8.50	2.8 ~ 10.2	2340	560 ~ 3070	11.1	10.1
	25 + 60	2.09	5.01	-	-	7.10	1.9 ~ 7.5	2210	260 ~ 2520	10.5	9.6	2.50	6.00	-	-	-	8.50	2.8 ~ 10.2	2340	560 ~ 3070	11.1	10.1
	35 + 35	3.50	3.50	-	-	7.00	1.9 ~ 7.1	2510	270 ~ 2580	11.9	10.9	4.25	4.25	-	-	-	8.50	2.8 ~ 10.0	2470	640 ~ 3100	11.7	10.7
	35 + 42	3.23	3.87	-	-	7.10	1.9 ~ 7.2	2610	270 ~ 2630	12.3	11.3	3.86	4.64	-	-	-	8.50	2.8 ~ 10.0	2470	600 ~ 3100	11.7	10.7
	35 + 50	2.92	4.18	-	-	7.10	2.0 ~ 7.6	2130	280 ~ 2520	10.1	9.2	3.50	5.00	-	-	-	8.50	2.8 ~ 10.3	2280	540 ~ 3050	10.8	9.9
35 + 60	2.62	4.48	-	-	7.10	2.0 ~ 7.6	2130	280 ~ 2520	10.1	9.2	3.13	5.37	-	-	-	8.50	2.8 ~ 10.3	2280	540 ~ 3050	10.8	9.9	
42 + 42	3.55	3.55	-	-	7.10	1.9 ~ 7.2	2560	260 ~ 2630	12.1	11.1	4.25	4.25	-	-	-	8.50	2.8 ~ 10.0	2460	600 ~ 3060	11.6	10.7	
42 + 50	3.24	3.86	-	-	7.10	2.0 ~ 7.6	2130	280 ~ 2480	10.1	9.2	3.88	4.62	-	-	-	8.50	2.8 ~ 10.3	2270	540 ~ 3040	10.7	9.8	
42 + 60	2.92	4.18	-	-	7.10	2.0 ~ 7.6	2130	280 ~ 2480	10.1	9.2	3.50	5.00	-	-	-	8.50	2.8 ~ 10.3	2270	540 ~ 3040	10.7	9.8	
50 + 50	3.55	3.55	-	-	7.10	2.1 ~ 8.1	1870	320 ~ 2540	8.8	8.1	4.25	4.25	-	-	-	8.50	2.8 ~ 10.5	2130	510 ~ 2950	10.1	9.2	
50 + 60	3.23	3.87	-	-	7.10	2.1 ~ 8.1	1870	320 ~ 2540	8.8	8.1	3.86	4.64	-	-	-	8.50	2.8 ~ 10.5	2130	510 ~ 2950	10.1	9.2	
3 Rooms	16 + 16 + 16	1.60	1.60	1.60	-	4.80	1.9 ~ 8.0	1050	270 ~ 2560	5.1	4.6	2.60	2.60	2.60	-	-	7.80	3.3 ~ 10.4	2080	640 ~ 3070	9.8	9.0
	16 + 16 + 20	1.60	1.60	2.00	-	5.20	1.9 ~ 8.0	1190	270 ~ 2520	5.7	5.3	2.58	2.58	3.24	-	-	8.40	3.3 ~ 10.4	2310	640 ~ 3060	10.9	10.0
	16 + 16 + 25	1.60	1.60	2.50	-	5.70	1.9 ~ 8.0	1420	270 ~ 2520	6.8	6.2	2.39	2.39	3.72	-	-	8.50	3.3 ~ 10.4	2350	640 ~ 3060	11.1	10.2
	16 + 16 + 35	1.60	1.60	3.50	-	6.70	1.9 ~ 8.0	1880	270 ~ 2430	8.9	8.1	2.03	2.03	4.44	-	-	8.50	3.3 ~ 10.4	2280	630 ~ 3040	10.8	9.9
	16 + 16 + 42	1.54	1.54	4.02	-	7.10	1.9 ~ 8.1	2100	270 ~ 2520	9.9	9.1	1.84	1.84	4.82	-	-	8.50	3.3 ~ 10.5	2270	620 ~ 3070	10.7	9.8
	16 + 16 + 50	1.39	1.39	4.32	-	7.10	2.0 ~ 8.5	1920	320 ~ 2480	9.1	8.3	1.66	1.66	5.18	-	-	8.50	3.2 ~ 10.7	2140	600 ~ 2970	10.1	9.3
	16 + 16 + 60	1.23	1.23	4.64	-	7.10	2.0 ~ 8.5	1920	320 ~ 2480	9.1	8.3	1.48	1.48	5.54	-	-	8.50	3.2 ~ 10.7	2140	600 ~ 2970	10.1	9.3
	16 + 20 + 20	1.60	2.00	2.00	-	5.60	1.9 ~ 8.0	1340	270 ~ 2520	6.4	5.9	2.42	3.04	3.04	-	-	8.50	3.3 ~ 10.4	2340	630 ~ 3050	11.1	10.1
	16 + 20 + 25	1.60	2.00	2.50	-	6.10	1.9 ~ 8.0	1580	270 ~ 2520	7.5	6.9	2.23	2.79	3.48	-	-	8.50	3.3 ~ 10.4	2340	630 ~ 3050	11.1	10.1
	16 + 20 + 35	1.60	2.00	3.50	-	7.10	1.9 ~ 8.0	2100	270 ~ 2430	9.9	9.1	1.92	2.39	4.19	-	-	8.50	3.3 ~ 10.4	2270	620 ~ 2980	10.7	9.8
	16 + 20 + 42	1.46	1.82	3.82	-	7.10	1.9 ~ 8.1	2100	270 ~ 2480	9.9	9.1	1.74	2.18	4.58	-	-	8.50	3.3 ~ 10.5	2270	620 ~ 3020	10.7	9.8
	16 + 20 + 50	1.32	1.65	4.13	-	7.10	2.0 ~ 8.5	1920	320 ~ 2480	9.1	8.3	1.58	1.98	4.94	-	-	8.50	3.2 ~ 10.7	2130	600 ~ 2960	10.1	9.2
	16 + 20 + 60	1.18	1.48	4.44	-	7.10	2.0 ~ 8.5	1920	320 ~ 2480	9.1	8.3	1.42	1.77	5.31	-	-	8.50	3.2 ~ 10.7	2130	600 ~ 2960	10.1	9.2
	16 + 25 + 25	1.60	2.50	2.50	-	6.60	1.9 ~ 8.0	1830	270 ~ 2520	8.7	7.9	2.06	3.22	3.22	-	-	8.50	3.3 ~ 10.4	2340	630 ~ 3050	11.1	10.1
	16 + 25 + 35	1.49	2.34	3.27	-	7.10	1.9 ~ 8.0	2100	270 ~ 2430	9.9	9.1	1.79	2.80	3.91	-	-	8.50	3.3 ~ 10.4	2270	620 ~ 2980	10.7	9.8
	16 + 25 + 42	1.37	2.14	3.59	-	7.10	1.9 ~ 8.1	2100	270 ~ 2480	9.9	9.1	1.64	2.56	4.30	-	-	8.50	3.3 ~ 10.5	2270	620 ~ 3020	10.7	9.8
	16 + 25 + 50	1.25	1.95	3.90	-	7.10	2.0 ~ 8.5	1920	320 ~ 2480	9.1	8.3	1.49	2.34	4.67	-	-	8.50	3.2 ~ 10.7	2130	600 ~ 2960	10.1	9.2
	16 + 25 + 60	1.12	1.76	4.22	-	7.10	2.0 ~ 8.5	1920	320 ~ 2480	9.1	8.3	1.35	2.10	5.05	-	-	8.50	3.2 ~ 10.7	2130	600 ~ 2960	10.1	9.2
	16 + 35 + 35	1.32	2.89																			

CU-4Z71WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION												
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)					
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	
3 Rooms	20 + 20 + 20	2.00	2.00	2.00	-	-	6.00	1.9 ~ 8.0	1540	270 ~ 2470	7.4	6.7	2.83	2.83	2.83	-	-	8.49	3.3 ~ 10.4	2290	630 ~ 3040	10.8	9.9	
	20 + 20 + 25	2.00	2.00	2.50	-	-	6.50	1.9 ~ 8.0	1790	270 ~ 2470	8.5	7.8	2.62	2.62	3.26	-	-	8.50	3.3 ~ 10.4	2290	630 ~ 3040	10.8	9.9	
	20 + 20 + 35	1.89	1.89	3.32	-	-	7.10	1.9 ~ 8.0	2100	270 ~ 2380	9.9	9.1	2.27	2.27	3.96	-	-	8.50	3.3 ~ 10.4	2270	620 ~ 2970	10.7	9.8	
	20 + 20 + 42	1.73	1.73	3.64	-	-	7.10	1.9 ~ 8.1	2060	290 ~ 2480	9.7	8.9	2.07	2.07	4.36	-	-	8.50	3.3 ~ 10.5	2260	620 ~ 3010	10.7	9.8	
	20 + 20 + 50	1.58	1.58	3.94	-	-	7.10	2.0 ~ 8.5	1920	340 ~ 2440	9.1	8.3	1.89	1.89	4.72	-	-	8.50	3.2 ~ 10.7	2120	600 ~ 2950	10.0	9.2	
	20 + 20 + 60	1.42	1.42	4.26	-	-	7.10	2.0 ~ 8.5	1920	340 ~ 2440	9.1	8.3	1.70	1.70	5.10	-	-	8.50	3.2 ~ 10.7	2120	600 ~ 2950	10.0	9.2	
	20 + 25 + 25	2.00	2.50	2.50	-	-	7.00	1.9 ~ 8.0	2060	270 ~ 2470	9.7	8.9	2.42	3.04	3.04	-	-	8.50	3.3 ~ 10.4	2290	630 ~ 3040	10.8	9.9	
	20 + 25 + 35	1.78	2.22	3.10	-	-	7.10	1.9 ~ 8.0	2100	270 ~ 2380	9.9	9.1	2.12	2.66	3.72	-	-	8.50	3.3 ~ 10.4	2270	620 ~ 2970	10.7	9.8	
	20 + 25 + 42	1.63	2.04	3.43	-	-	7.10	1.9 ~ 8.1	2060	290 ~ 2480	9.7	8.9	1.95	2.44	4.11	-	-	8.50	3.3 ~ 10.5	2260	620 ~ 3010	10.7	9.8	
	20 + 25 + 50	1.49	1.87	3.74	-	-	7.10	2.0 ~ 8.5	1920	340 ~ 2440	9.1	8.3	1.79	2.24	4.47	-	-	8.50	3.2 ~ 10.7	2120	600 ~ 2950	10.0	9.2	
	20 + 25 + 60	1.35	1.69	4.06	-	-	7.10	2.0 ~ 8.5	1920	340 ~ 2440	9.1	8.3	1.62	2.02	4.86	-	-	8.50	3.2 ~ 10.7	2120	600 ~ 2950	10.0	9.2	
	20 + 35 + 35	1.58	2.76	2.76	-	-	7.10	1.9 ~ 8.1	2060	290 ~ 2390	9.7	8.9	1.88	3.31	3.31	-	-	8.50	3.3 ~ 10.5	2240	640 ~ 2990	10.6	9.7	
	20 + 35 + 42	1.46	2.56	3.08	-	-	7.10	1.9 ~ 8.2	2010	290 ~ 2480	9.5	8.7	1.75	3.07	3.68	-	-	8.50	3.3 ~ 10.5	2230	640 ~ 2980	10.5	9.7	
	20 + 35 + 50	1.35	2.37	3.38	-	-	7.10	2.0 ~ 8.5	1870	340 ~ 2390	8.8	8.1	1.62	2.83	4.05	-	-	8.50	3.2 ~ 10.7	2100	600 ~ 2920	9.9	9.1	
	20 + 35 + 60	1.23	2.16	3.71	-	-	7.10	2.0 ~ 8.5	1870	340 ~ 2390	8.8	8.1	1.48	2.59	4.43	-	-	8.50	3.2 ~ 10.7	2100	600 ~ 2920	9.9	9.1	
	20 + 42 + 42	1.36	2.87	2.87	-	-	7.10	1.9 ~ 8.2	2010	290 ~ 2430	9.5	8.7	1.64	3.43	3.43	-	-	8.50	3.3 ~ 10.5	2220	630 ~ 2980	10.5	9.6	
	20 + 42 + 50	1.27	2.66	3.17	-	-	7.10	2.0 ~ 8.5	1870	340 ~ 2390	8.8	8.1	1.52	3.19	3.79	-	-	8.50	3.2 ~ 10.6	2090	620 ~ 2870	9.9	9.1	
	25 + 25 + 25	2.36	2.36	2.36	-	-	7.08	1.9 ~ 8.0	2100	270 ~ 2470	9.9	9.1	2.83	2.83	2.83	-	-	8.49	3.3 ~ 10.4	2290	630 ~ 3040	10.8	9.9	
	25 + 25 + 35	2.09	2.09	2.92	-	-	7.10	1.9 ~ 8.0	2100	270 ~ 2380	9.9	9.1	2.50	2.50	3.50	-	-	8.50	3.3 ~ 10.4	2270	620 ~ 2970	10.7	9.8	
	25 + 25 + 42	1.93	1.93	3.24	-	-	7.10	1.9 ~ 8.1	2060	290 ~ 2480	9.7	8.9	2.31	2.31	3.88	-	-	8.50	3.3 ~ 10.5	2260	620 ~ 3010	10.7	9.8	
	25 + 25 + 50	1.78	1.78	3.54	-	-	7.10	2.0 ~ 8.5	1920	340 ~ 2440	9.1	8.3	2.13	2.13	4.24	-	-	8.50	3.2 ~ 10.7	2120	600 ~ 2950	10.0	9.2	
	25 + 25 + 60	1.61	1.61	3.88	-	-	7.10	2.0 ~ 8.5	1920	340 ~ 2440	9.1	8.3	1.93	1.93	4.64	-	-	8.50	3.2 ~ 10.7	2120	600 ~ 2950	10.0	9.2	
	25 + 35 + 35	1.86	2.62	2.62	-	-	7.10	1.9 ~ 8.1	2060	290 ~ 2390	9.7	8.9	2.24	3.13	3.13	-	-	8.50	3.3 ~ 10.5	2240	640 ~ 2990	10.6	9.7	
	25 + 35 + 42	1.74	2.44	2.92	-	-	7.10	1.9 ~ 8.2	2010	290 ~ 2480	9.5	8.7	2.08	2.92	3.50	-	-	8.50	3.3 ~ 10.5	2230	640 ~ 2980	10.5	9.7	
	25 + 35 + 50	1.61	2.26	3.23	-	-	7.10	2.0 ~ 8.5	1870	340 ~ 2390	8.8	8.1	1.93	2.70	3.87	-	-	8.50	3.2 ~ 10.7	2100	600 ~ 2920	9.9	9.1	
	25 + 42 + 42	1.62	2.74	2.74	-	-	7.10	1.9 ~ 8.2	2010	290 ~ 2430	9.5	8.7	1.94	3.28	3.28	-	-	8.50	3.3 ~ 10.5	2220	630 ~ 2980	10.5	9.6	
	35 + 35 + 35	2.36	2.36	2.36	-	-	7.08	1.9 ~ 8.2	2010	290 ~ 2390	9.5	8.7	2.83	2.83	2.83	-	-	8.49	3.3 ~ 10.5	2180	630 ~ 2970	10.3	9.5	
	35 + 35 + 42	2.22	2.22	2.66	-	-	7.10	1.9 ~ 8.2	2010	290 ~ 2390	9.5	8.7	2.66	2.66	3.18	-	-	8.50	3.3 ~ 10.5	2170	630 ~ 2920	10.3	9.4	
	4 Rooms	16 + 16 + 16 + 16	1.60	1.60	1.60	-	-	6.40	1.9 ~ 8.7	1390	340 ~ 2370	6.6	6.2	2.12	2.12	2.12	-	-	8.48	3.0 ~ 10.7	1960	500 ~ 2770	9.3	8.7
		16 + 16 + 16 + 20	1.67	1.67	1.67	2.09	-	7.10	1.9 ~ 8.8	1660	340 ~ 2470	7.9	7.4	2.00	2.00	2.00	2.50	-	8.50	3.0 ~ 10.7	1950	500 ~ 2720	9.2	8.6
16 + 16 + 16 + 25		1.56	1.56	1.56	2.42	-	7.10	1.9 ~ 8.8	1660	340 ~ 2470	7.9	7.4	1.86	1.86	1.86	2.92	-	8.50	3.0 ~ 10.7	1950	500 ~ 2720	9.2	8.6	
16 + 16 + 16 + 35		1.37	1.37	1.37	2.99	-	7.10	1.9 ~ 8.8	1660	340 ~ 2380	7.9	7.4	1.64	1.64	1.64	3.58	-	8.50	3.0 ~ 10.7	1930	500 ~ 2700	9.1	8.5	
16 + 16 + 16 + 42		1.26	1.26	1.26	3.32	-	7.10	1.9 ~ 8.8	1660	340 ~ 2380	7.9	7.4	1.51	1.51	1.51	3.97	-	8.50	3.0 ~ 10.7	1930	500 ~ 2690	9.1	8.5	
16 + 16 + 16 + 50		1.16	1.16	1.16	3.62	-	7.10	1.9 ~ 8.8	1580	400 ~ 2240	7.5	7.1	1.39	1.39	1.39	4.33	-	8.50	3.0 ~ 10.7	1890	560 ~ 2590	8.9	8.4	
16 + 16 + 16 + 60		1.05	1.05	1.05	3.95	-	7.10	1.9 ~ 8.8	1580	400 ~ 2240	7.5	7.1	1.26	1.26	1.26	4.72	-	8.50	3.0 ~ 10.7	1890	560 ~ 2590	8.9	8.4	
16 + 16 + 20 + 20		1.58	1.58	1.97	1.97	-	7.10	1.9 ~ 8.8	1660	340 ~ 2420	7.9	7.4	1.89	1.89	2.36	2.36	-	8.50	3.1 ~ 10.7	1950	520 ~ 2710	9.2	8.6	
16 + 16 + 20 + 25		1.48	1.48	1.84	2.30	-	7.10	1.9 ~ 8.8	1660	340 ~ 2420	7.9	7.4	1.77	1.77	2.20	2.76	-	8.50	3.1 ~ 10.7	1950	520 ~ 2710	9.2	8.6	
16 + 16 + 20 + 35		1.31	1.31	1.63	2.85	-	7.10	1.9 ~ 8.8	1660	340 ~ 2380	7.9	7.4	1.56	1.56	1.95	3.43	-	8.50	3.0 ~ 10.7	1930	500 ~ 2690	9.1	8.5	
16 + 16 + 20 + 42		1.21	1.21	1.51	3.17	-	7.10	1.9 ~ 8.8	1620	370 ~ 2380	7.7	7.2	1.45	1.45	1.80	3.80	-	8.50	3.0 ~ 10.7	1920	520 ~ 2680	9.1	8.5	
16 + 16 + 20 + 50		1.11	1.11	1.39	3.49	-	7.10	1.9 ~ 8.8	1580	400 ~ 2200	7.5	7.1	1.33	1.33	1.67	4.17	-	8.50	3.0 ~ 10.7	1880	570 ~ 2580	8.9	8.3	
16 + 16 + 20 + 60		1.01	1.01	1.27	3.81	-	7.10	1.9 ~ 8.8	1580	400 ~ 2200	7.5	7.1	1.21	1.21	1.52	4.56	-	8.50	3.0 ~ 10.7	1880	570 ~ 2580	8.9	8.3	
16 + 16 + 25 + 25		1.39	1.39	2.16	2.16	-	7.10	1.9 ~ 8.8	1660	340 ~ 2420	7.9	7.4	1.66	1.66	2.59	2.59	-	8.50	3.1 ~ 10.7	1950	520 ~ 2710	9.2	8.6	
16 + 16 + 25 + 35		1.23	1.23	1.93	2.71	-	7.10	1.9 ~ 8.8	1660	340 ~ 2380	7.9	7.4	1.48	1.48	2.31	3.23	-	8.50	3.0 ~ 10.7	1930	500 ~ 2690	9.1	8.5	
16 + 16 + 25 + 42		1.15	1.15	1.79	3.01	-	7.10	1.9 ~ 8.8	1620	370 ~ 2380	7.7	7.2	1.37	1.37	2.15	3.61	-	8.50	3.0 ~ 10.7	1920	520 ~ 2680	9.1	8.5	
16 + 16 + 25 + 50		1.06	1.06	1.66	3.32	-	7.10	1.9 ~ 8.8	1580	400 ~ 2200	7.5	7.1	1.27	1.27	1.99	3.97	-	8.50	3.0 ~ 10.7	1880	570 ~ 2580	8.9	8.3	
16 + 16 + 35 + 35		1.11	1.11	2.44	2.44	-	7.10	1.9 ~ 8.8	1620	370 ~ 2330	7.7	7.2	1.33	1.33	2.92	2.92	-	8.50	3.0 ~ 10.7	1910	530 ~ 2660	9.0	8.4	
16 + 16 + 35 + 42		1.04	1.04	2.28	2.74	-	7.10	1.9 ~ 8.8	1620	370 ~ 2330	7.7	7.2	1.25	1.25	2.72	3.28	-	8.50	3.0 ~ 10.7	1900	530 ~ 2650	9.0	8.4	
16 + 20 + 20 + 20		1.49	1.87	1.87	1.87	-	7.10	1.9 ~ 8.8	1660	340 ~ 2420	7.9	7.4	1.78	2.24	2.24	2.24	-	8.50	3.1 ~ 10.7	1940	520 ~ 2700	9.2	8.6	
16 + 20 + 20 + 25		1.40	1.75	1.75	2.20	-	7.10	1.9 ~ 8.8	1660	340 ~ 2420	7.9	7.4	1.68	2.10	2.10	2.62	-	8.50	3.1 ~ 10.7	1940	520 ~ 2700	9.2	8.6	
16 + 20 + 20 + 35		1.25	1.56	1.56	2.73	-	7.10	1.9 ~ 8.8	1620	370 ~ 2380	7.7	7.2	1.49	1.87	1.87	3.27	-	8.50	3.0 ~ 10.7	1920	520 ~ 2680	9.1	8.5	
16 + 20 + 20 + 42		1.16	1.45	1.45	3.04	-	7.10	1.9 ~ 8.8	1620	370 ~ 2380	7.7	7.2	1.39	1.73	1.73	3.65	-	8.50	3.0 ~ 10.7	1910	520 ~ 2670	9.0	8.4	
16 + 20 + 20 + 50		1.07	1.34	1.34	3.35	-	7.10	1.9 ~ 8.8	1580	420 ~ 2200	7.5	7.1	1.28	1.60	1.60	4.02	-	8.50	3.0 ~ 10.7	1880	590 ~ 2570	8.9	8.3	
16 + 20 + 25 + 25		1.33	1.65	2.06	2.06	-	7.10	1.9 ~ 8.8	1660	340 ~ 2420	7.9	7.4	1.58	1.98	2.47	2.47	-	8.50	3.1 ~ 10.7	1940	520 ~ 2700	9.2	8.6	
16 + 20 + 25 + 35		1.18	1.48	1.85	2.59	-	7.10	1.9 ~ 8.8	1620	370 ~ 2380	7.7</													

CU-4Z71WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)					Input Power (W)		Current (A)				
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
4 Rooms	16 + 25 + 35 + 35	1.02	1.60	2.24	2.24	-	7.10	1.9 ~ 8.8	1620	370 ~ 2330	7.7	7.2	1.23	1.91	2.68	2.68	-	8.50	3.0 ~ 10.7	1900	530 ~ 2650	9.0	8.4
	20 + 20 + 20 + 20	1.77	1.77	1.77	1.77	-	7.08	1.9 ~ 8.8	1620	340 ~ 2380	7.7	7.2	2.12	2.12	2.12	2.12	-	8.48	3.1 ~ 10.7	1930	520 ~ 2690	9.1	8.5
	20 + 20 + 20 + 25	1.67	1.67	1.67	2.09	-	7.10	1.9 ~ 8.8	1660	340 ~ 2380	7.9	7.4	2.00	2.00	2.00	2.50	-	8.50	3.1 ~ 10.7	1930	520 ~ 2690	9.1	8.5
	20 + 20 + 20 + 35	1.49	1.49	1.49	2.63	-	7.10	1.9 ~ 8.8	1620	370 ~ 2330	7.7	7.2	1.79	1.79	1.79	3.13	-	8.50	3.0 ~ 10.7	1910	520 ~ 2670	9.0	8.4
	20 + 20 + 20 + 42	1.39	1.39	1.39	2.93	-	7.10	1.9 ~ 8.8	1620	370 ~ 2330	7.7	7.2	1.67	1.67	1.67	3.49	-	8.50	3.0 ~ 10.7	1910	530 ~ 2660	9.0	8.4
	20 + 20 + 20 + 50	1.29	1.29	1.29	3.23	-	7.10	1.9 ~ 8.8	1580	420 ~ 2200	7.5	7.1	1.55	1.55	1.55	3.85	-	8.50	3.0 ~ 10.7	1870	590 ~ 2570	8.8	8.3
	20 + 20 + 25 + 25	1.58	1.58	1.97	1.97	-	7.10	1.9 ~ 8.8	1660	340 ~ 2380	7.9	7.4	1.89	1.89	2.36	2.36	-	8.50	3.1 ~ 10.7	1930	520 ~ 2690	9.1	8.5
	20 + 20 + 25 + 35	1.42	1.42	1.78	2.48	-	7.10	1.9 ~ 8.8	1620	370 ~ 2330	7.7	7.2	1.70	1.70	2.12	2.98	-	8.50	3.0 ~ 10.7	1910	520 ~ 2670	9.0	8.4
	20 + 20 + 25 + 42	1.33	1.33	1.66	2.78	-	7.10	1.9 ~ 8.8	1620	370 ~ 2330	7.7	7.2	1.59	1.59	1.98	3.34	-	8.50	3.0 ~ 10.7	1910	530 ~ 2660	9.0	8.4
	20 + 20 + 25 + 50	1.23	1.23	1.54	3.10	-	7.10	1.9 ~ 8.8	1580	420 ~ 2200	7.5	7.1	1.48	1.48	1.84	3.70	-	8.50	3.0 ~ 10.7	1870	590 ~ 2570	8.8	8.3
	20 + 20 + 35 + 35	1.29	1.29	2.26	2.26	-	7.10	1.9 ~ 8.8	1620	370 ~ 2330	7.7	7.2	1.55	1.55	2.70	2.70	-	8.50	3.0 ~ 10.7	1900	530 ~ 2650	9.0	8.4
	20 + 25 + 25 + 25	1.49	1.87	1.87	1.87	-	7.10	1.9 ~ 8.8	1660	340 ~ 2380	7.9	7.4	1.78	2.24	2.24	2.24	-	8.50	3.1 ~ 10.7	1930	520 ~ 2690	9.1	8.5
	20 + 25 + 25 + 35	1.35	1.69	1.69	2.37	-	7.10	1.9 ~ 8.8	1620	370 ~ 2330	7.7	7.2	1.62	2.02	2.02	2.84	-	8.50	3.0 ~ 10.7	1910	520 ~ 2670	9.0	8.4
	20 + 25 + 25 + 42	1.27	1.58	1.58	2.67	-	7.10	1.9 ~ 8.8	1620	370 ~ 2330	7.7	7.2	1.51	1.90	1.90	3.19	-	8.50	3.0 ~ 10.7	1910	530 ~ 2660	9.0	8.4
	20 + 25 + 35 + 35	1.24	1.54	2.16	2.16	-	7.10	1.9 ~ 8.8	1620	370 ~ 2330	7.7	7.2	1.47	1.85	2.59	2.59	-	8.50	3.0 ~ 10.7	1900	530 ~ 2650	9.0	8.4
	25 + 25 + 25 + 25	1.77	1.77	1.77	1.77	-	7.08	1.9 ~ 8.8	1620	340 ~ 2380	7.7	7.2	2.12	2.12	2.12	2.12	-	8.48	3.1 ~ 10.7	1930	520 ~ 2690	9.1	8.5
25 + 25 + 25 + 35	1.61	1.61	1.61	2.27	-	7.10	1.9 ~ 8.8	1620	370 ~ 2330	7.7	7.2	1.93	1.93	1.93	2.71	-	8.50	3.0 ~ 10.7	1910	520 ~ 2670	9.0	8.4	

CU-4Z71WBH-8: Free Multi Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION										
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)					Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V
1 Room	16	1.60	-	-	-	1.60	1.3 ~ 2.3	450	250 ~ 690	2.4	2.2	2.60	-	-	-	-	2.60	1.2 ~ 3.2	700	290 ~ 1060	3.5	3.2
	20	2.00	-	-	-	2.00	1.8 ~ 2.9	550	340 ~ 860	2.8	2.6	3.20	-	-	-	-	3.20	1.2 ~ 4.1	840	290 ~ 1330	4.3	3.9
	25	2.50	-	-	-	2.50	1.8 ~ 2.9	680	340 ~ 860	3.5	3.2	3.60	-	-	-	-	3.60	1.2 ~ 4.3	1040	290 ~ 1330	5.4	4.9
	35	3.50	-	-	-	3.50	1.8 ~ 3.8	990	340 ~ 1410	4.9	4.5	4.50	-	-	-	-	4.50	1.2 ~ 5.8	1330	290 ~ 2200	6.8	6.2
	42	4.20	-	-	-	4.20	1.8 ~ 4.3	1420	340 ~ 2040	6.9	6.3	5.60	-	-	-	-	5.60	1.2 ~ 6.8	1820	290 ~ 3030	8.8	8.0
	50	5.00	-	-	-	5.00	1.9 ~ 5.4	1630	340 ~ 2150	7.9	7.3	6.80	-	-	-	-	6.80	1.2 ~ 6.9	2350	290 ~ 2840	11.3	10.4
	60	6.00	-	-	-	6.00	1.9 ~ 6.2	2080	340 ~ 2380	9.8	9.0	8.50	-	-	-	-	8.50	1.3 ~ 9.0	2500	320 ~ 2650	12.1	11.0
2 Rooms	16 + 16	1.60	1.60	-	-	3.20	1.9 ~ 6.4	660	270 ~ 2220	3.4	3.1	2.60	2.60	-	-	-	5.20	2.7 ~ 9.8	1500	660 ~ 3210	7.2	6.6
	16 + 20	1.60	2.00	-	-	3.60	1.9 ~ 6.4	790	270 ~ 2180	3.9	3.6	2.58	3.22	-	-	-	5.80	2.7 ~ 9.8	1680	650 ~ 3220	8.0	7.4
	16 + 25	1.60	2.50	-	-	4.10	1.9 ~ 6.4	930	270 ~ 2180	4.5	4.2	2.42	3.78	-	-	-	6.20	2.7 ~ 9.8	1810	650 ~ 3220	8.6	7.8
	16 + 35	1.60	3.50	-	-	5.10	1.9 ~ 6.9	1350	270 ~ 2580	6.4	5.9	2.23	4.87	-	-	-	7.10	2.7 ~ 9.9	2100	630 ~ 3220	9.9	9.1
	16 + 42	1.60	4.20	-	-	5.80	1.9 ~ 6.9	1710	270 ~ 2540	8.2	7.5	2.26	5.94	-	-	-	8.20	2.7 ~ 9.9	2530	630 ~ 3220	12.0	11.0
	16 + 50	1.60	5.00	-	-	6.60	2.0 ~ 7.5	1920	280 ~ 2620	9.1	8.3	2.06	6.44	-	-	-	8.50	2.8 ~ 10.2	2460	630 ~ 3190	11.6	10.7
	16 + 60	1.49	5.61	-	-	7.10	2.0 ~ 7.5	2320	280 ~ 2620	11.0	10.1	1.79	6.71	-	-	-	8.50	2.8 ~ 10.2	2460	560 ~ 3190	11.6	10.7
	20 + 20	2.00	2.00	-	-	4.00	1.9 ~ 6.4	900	270 ~ 2140	4.4	4.1	3.20	3.20	-	-	-	6.40	2.7 ~ 9.8	1870	640 ~ 3220	8.8	8.1
	20 + 25	2.00	2.50	-	-	4.50	1.9 ~ 6.4	1080	270 ~ 2140	5.2	4.8	3.02	3.78	-	-	-	6.80	2.7 ~ 9.8	2000	640 ~ 3220	9.5	8.7
	20 + 35	2.00	3.50	-	-	5.50	1.9 ~ 6.9	1530	270 ~ 2540	7.3	6.7	2.80	4.90	-	-	-	7.70	2.7 ~ 9.9	2310	630 ~ 3220	10.9	10.0
	20 + 42	2.00	4.20	-	-	6.20	1.9 ~ 6.9	1950	270 ~ 2500	9.2	8.5	2.74	5.76	-	-	-	8.50	2.7 ~ 9.9	2640	620 ~ 3230	12.5	11.4
	20 + 50	2.00	5.00	-	-	7.00	2.0 ~ 7.5	2180	280 ~ 2580	10.3	9.5	2.43	6.07	-	-	-	8.50	2.8 ~ 10.2	2460	560 ~ 3190	11.6	10.7
	20 + 60	1.78	5.32	-	-	7.10	2.0 ~ 7.5	2270	280 ~ 2580	10.7	9.8	2.12	6.38	-	-	-	8.50	2.8 ~ 10.2	2460	560 ~ 3190	11.6	10.7
	25 + 25	2.50	2.50	-	-	5.00	1.9 ~ 6.8	1310	270 ~ 2530	6.3	5.7	3.60	3.60	-	-	-	7.20	2.7 ~ 9.8	2140	640 ~ 3220	10.1	9.3
	25 + 35	2.50	3.50	-	-	6.00	1.9 ~ 6.9	1830	270 ~ 2540	8.7	7.9	3.37	4.73	-	-	-	8.10	2.7 ~ 9.9	2450	630 ~ 3220	11.6	10.6
	25 + 42	2.50	4.20	-	-	6.70	1.9 ~ 6.9	2380	270 ~ 2500	11.3	10.3	3.17	5.33	-	-	-	8.50	2.7 ~ 9.9	2640	620 ~ 3230	12.5	11.4
	25 + 50	2.37	4.73	-	-	7.10	1.9 ~ 7.5	2270	260 ~ 2580	10.7	9.8	2.83	5.67	-	-	-	8.50	2.8 ~ 10.2	2460	620 ~ 3190	11.6	10.7
	25 + 60	2.09	5.01	-	-	7.10	1.9 ~ 7.5	2270	260 ~ 2580	10.7	9.8	2.50	6.00	-	-	-	8.50	2.8 ~ 10.2	2460	560 ~ 3190	11.6	10.7
	35 + 35	3.50	3.50	-	-	7.00	1.9 ~ 7.1	2570	270 ~ 2640	12.2	11.1	4.25	4.25	-	-	-	8.50	2.8 ~ 10.0	2590	640 ~ 3220	12.2	11.2
	35 + 42	3.23	3.87	-	-	7.10	1.9 ~ 7.2	2670	270 ~ 2690	12.6	11.6	3.86	4.64	-	-	-	8.50	2.8 ~ 10.0	2590	600 ~ 3220	12.2	11.2
	35 + 50	2.92	4.18	-	-	7.10	2.0 ~ 7.6	2190	280 ~ 2580	10.4	9.5	3.50	5.00	-	-	-	8.50	2.8 ~ 10.3	2400	540 ~ 3170	11.3	10.4
	35 + 60	2.62	4.48	-	-	7.10	2.0 ~ 7.6	2190	280 ~ 2580	10.4	9.5	3.13	5.37	-	-	-	8.50	2.8 ~ 10.3	2400	540 ~ 3170	11.3	10.4
	42 + 42	3.55	3.55	-	-	7.10	1.9 ~ 7.2	2620	260 ~ 2690	12.4	11.4	4.25	4.25	-	-	-	8.50	2.8 ~ 10.0	2580	600 ~ 3180	12.2	11.2
42 + 50	3.24	3.86	-	-	7.10	2.0 ~ 7.6	2190	280 ~ 2540	10.4	9.5	3.88	4.62	-	-	-	8.50	2.8 ~ 10.3	2390	540 ~ 3160	11.3	10.4	
42 + 60	2.92	4.18	-	-	7.10	2.0 ~ 7.6	2190	280 ~ 2540	10.4	9.5	3.50	5.00	-	-	-	8.50	2.8 ~ 10.3	2390	540 ~ 3160	11.3	10.4	
50 + 50	3.55	3.55	-	-	7.10	2.1 ~ 8.1	1930	320 ~ 2600	9.1	8.4	4.25	4.25	-	-	-	8.50	2.8 ~ 10.5	2250	510 ~ 3070	10.6	9.8	
50 + 60	3.23	3.87	-	-	7.10	2.1 ~ 8.1	1930	320 ~ 2600	9.1	8.4	3.86	4.64	-	-	-	8.50	2.8 ~ 10.5	2250	510 ~ 3070	10.6	9.8	

• Specification based on JIS C 9612 standard.
 • A minimum of 2 indoor units must be connected.

CU-4Z71WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION										
	Cooling Capacity (kW)						Input Power (W)		Current (A)			Heating Capacity (kW)						Input Power (W)		Current (A)		
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
16 + 16 + 16	1.60	1.60	1.60	-	-	4.80	1.9 ~ 8.0	1140	270 ~ 2650	5.5	5.0	2.60	2.60	2.60	-	-	7.80	3.3 ~ 10.4	2260	640 ~ 3250	10.7	9.8
16 + 16 + 20	1.60	1.60	2.00	-	-	5.20	1.9 ~ 8.0	1280	270 ~ 2610	6.1	5.6	2.58	2.58	3.24	-	-	8.40	3.3 ~ 10.4	2490	640 ~ 3240	11.8	10.8
16 + 16 + 25	1.60	1.60	2.50	-	-	5.70	1.9 ~ 8.0	1510	270 ~ 2610	7.2	6.6	2.39	2.39	3.72	-	-	8.50	3.3 ~ 10.4	2530	640 ~ 3240	12.0	11.0
16 + 16 + 35	1.60	1.60	3.50	-	-	6.70	1.9 ~ 8.0	1970	270 ~ 2520	9.3	8.5	2.03	2.03	4.44	-	-	8.50	3.3 ~ 10.4	2460	630 ~ 3220	11.6	10.7
16 + 16 + 42	1.54	1.54	4.02	-	-	7.10	1.9 ~ 8.1	2190	270 ~ 2610	10.4	9.5	1.84	1.84	4.82	-	-	8.50	3.3 ~ 10.5	2450	620 ~ 3250	11.6	10.6
16 + 16 + 50	1.39	1.39	4.32	-	-	7.10	2.0 ~ 8.5	2010	320 ~ 2570	9.5	8.7	1.66	1.66	5.18	-	-	8.50	3.2 ~ 10.7	2320	600 ~ 3150	11.0	10.1
16 + 16 + 60	1.23	1.23	4.64	-	-	7.10	2.0 ~ 8.5	2010	320 ~ 2570	9.5	8.7	1.48	1.48	5.54	-	-	8.50	3.2 ~ 10.7	2320	600 ~ 3150	11.0	10.1
16 + 20 + 20	1.60	2.00	2.00	-	-	5.60	1.9 ~ 8.0	1430	270 ~ 2610	6.8	6.3	2.42	3.04	3.04	-	-	8.50	3.3 ~ 10.4	2520	630 ~ 3230	11.9	10.9
16 + 20 + 25	1.60	2.00	2.50	-	-	6.10	1.9 ~ 8.0	1670	270 ~ 2610	8.0	7.3	2.23	2.79	3.48	-	-	8.50	3.3 ~ 10.4	2520	630 ~ 3230	11.9	10.9
16 + 20 + 35	1.60	2.00	3.50	-	-	7.10	1.9 ~ 8.0	2190	270 ~ 2520	10.4	9.5	1.92	2.39	4.19	-	-	8.50	3.3 ~ 10.4	2450	620 ~ 3160	11.6	10.6
16 + 20 + 42	1.46	1.82	3.82	-	-	7.10	1.9 ~ 8.1	2190	270 ~ 2570	10.4	9.5	1.74	2.18	4.58	-	-	8.50	3.3 ~ 10.5	2450	620 ~ 3200	11.6	10.6
16 + 20 + 50	1.32	1.65	4.13	-	-	7.10	2.0 ~ 8.5	2010	320 ~ 2570	9.5	8.7	1.58	1.98	4.94	-	-	8.50	3.2 ~ 10.7	2310	600 ~ 3140	10.9	10.0
16 + 20 + 60	1.18	1.48	4.44	-	-	7.10	2.0 ~ 8.5	2010	320 ~ 2570	9.5	8.7	1.42	1.77	5.31	-	-	8.50	3.2 ~ 10.7	2310	600 ~ 3140	10.9	10.0
16 + 25 + 25	1.60	2.50	2.50	-	-	6.60	1.9 ~ 8.0	1920	270 ~ 2610	9.1	8.3	2.06	3.22	3.22	-	-	8.50	3.3 ~ 10.4	2520	630 ~ 3230	11.9	10.9
16 + 25 + 35	1.49	2.34	3.27	-	-	7.10	1.9 ~ 8.0	2190	270 ~ 2520	10.4	9.5	1.79	2.80	3.91	-	-	8.50	3.3 ~ 10.4	2450	620 ~ 3160	11.6	10.6
16 + 25 + 42	1.37	2.14	3.59	-	-	7.10	1.9 ~ 8.1	2190	270 ~ 2570	10.4	9.5	1.64	2.56	4.30	-	-	8.50	3.3 ~ 10.5	2450	620 ~ 3200	11.6	10.6
16 + 25 + 50	1.25	1.95	3.90	-	-	7.10	2.0 ~ 8.5	2010	320 ~ 2570	9.5	8.7	1.49	2.34	4.67	-	-	8.50	3.2 ~ 10.7	2310	600 ~ 3140	10.9	10.0
16 + 25 + 60	1.12	1.76	4.22	-	-	7.10	2.0 ~ 8.5	2010	320 ~ 2570	9.5	8.7	1.35	2.10	5.05	-	-	8.50	3.2 ~ 10.7	2310	600 ~ 3140	10.9	10.0
16 + 35 + 35	1.32	2.89	2.89	-	-	7.10	1.9 ~ 8.1	2150	290 ~ 2520	10.2	9.3	1.58	3.46	3.46	-	-	8.50	3.3 ~ 10.5	2430	640 ~ 3180	11.5	10.5
16 + 35 + 42	1.22	2.67	3.21	-	-	7.10	1.9 ~ 8.2	2150	290 ~ 2570	10.2	9.3	1.46	3.20	3.84	-	-	8.50	3.3 ~ 10.5	2420	640 ~ 3170	11.4	10.5
16 + 35 + 50	1.12	2.46	3.52	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2530	9.3	8.5	1.34	2.95	4.21	-	-	8.50	3.2 ~ 10.7	2290	600 ~ 3110	10.8	9.9
16 + 35 + 60	1.02	2.24	3.84	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2530	9.3	8.5	1.23	2.68	4.59	-	-	8.50	3.2 ~ 10.7	2290	600 ~ 3110	10.8	9.9
16 + 42 + 42	1.14	2.98	2.98	-	-	7.10	1.9 ~ 8.2	2150	290 ~ 2570	10.2	9.3	1.36	3.57	3.57	-	-	8.50	3.3 ~ 10.5	2410	640 ~ 3160	11.4	10.4
16 + 42 + 50	1.05	2.76	3.29	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2480	9.3	8.5	1.25	3.31	3.94	-	-	8.50	3.2 ~ 10.6	2280	600 ~ 3060	10.8	9.9
20 + 20 + 20	2.00	2.00	2.00	-	-	6.00	1.9 ~ 8.0	1630	270 ~ 2560	7.8	7.1	2.83	2.83	2.83	-	-	8.49	3.3 ~ 10.4	2470	630 ~ 3220	11.7	10.7
20 + 20 + 25	2.00	2.00	2.50	-	-	6.50	1.9 ~ 8.0	1880	270 ~ 2560	8.9	8.1	2.62	2.62	3.26	-	-	8.50	3.3 ~ 10.4	2470	630 ~ 3220	11.7	10.7
20 + 20 + 35	1.89	1.89	3.32	-	-	7.10	1.9 ~ 8.0	2190	270 ~ 2470	10.4	9.5	2.27	2.27	3.96	-	-	8.50	3.3 ~ 10.4	2450	620 ~ 3150	11.6	10.6
20 + 20 + 42	1.73	1.73	3.64	-	-	7.10	1.9 ~ 8.1	2150	290 ~ 2570	10.2	9.3	2.07	2.07	4.36	-	-	8.50	3.3 ~ 10.5	2440	620 ~ 3190	11.5	10.6
20 + 20 + 50	1.58	1.58	3.94	-	-	7.10	2.0 ~ 8.5	2010	340 ~ 2530	9.5	8.7	1.89	1.89	4.72	-	-	8.50	3.2 ~ 10.7	2300	600 ~ 3130	10.9	10.0
20 + 20 + 60	1.42	1.42	4.26	-	-	7.10	2.0 ~ 8.5	2010	340 ~ 2530	9.5	8.7	1.70	1.70	5.10	-	-	8.50	3.2 ~ 10.7	2300	600 ~ 3130	10.9	10.0
20 + 25 + 25	2.00	2.50	2.50	-	-	7.00	1.9 ~ 8.0	2150	270 ~ 2560	10.2	9.3	2.42	3.04	3.04	-	-	8.50	3.3 ~ 10.4	2470	630 ~ 3220	11.7	10.7
20 + 25 + 35	1.78	2.22	3.10	-	-	7.10	1.9 ~ 8.0	2190	270 ~ 2470	10.4	9.5	2.12	2.66	3.72	-	-	8.50	3.3 ~ 10.4	2450	620 ~ 3150	11.6	10.6
20 + 25 + 42	1.63	2.04	3.43	-	-	7.10	1.9 ~ 8.1	2150	290 ~ 2570	10.2	9.3	1.95	2.44	4.11	-	-	8.50	3.3 ~ 10.5	2440	620 ~ 3190	11.5	10.6
20 + 25 + 50	1.49	1.87	3.74	-	-	7.10	2.0 ~ 8.5	2010	340 ~ 2530	9.5	8.7	1.79	2.24	4.47	-	-	8.50	3.2 ~ 10.7	2300	600 ~ 3130	10.9	10.0
20 + 25 + 60	1.35	1.69	4.06	-	-	7.10	2.0 ~ 8.5	2010	340 ~ 2530	9.5	8.7	1.62	2.02	4.86	-	-	8.50	3.2 ~ 10.7	2300	600 ~ 3130	10.9	10.0
20 + 35 + 35	1.58	2.76	2.76	-	-	7.10	1.9 ~ 8.1	2150	290 ~ 2480	10.2	9.3	1.88	3.31	3.31	-	-	8.50	3.3 ~ 10.5	2420	640 ~ 3170	11.4	10.5
20 + 35 + 42	1.46	2.56	3.08	-	-	7.10	1.9 ~ 8.2	2100	290 ~ 2570	9.9	9.1	1.75	3.07	3.68	-	-	8.50	3.3 ~ 10.5	2410	640 ~ 3160	11.4	10.4
20 + 35 + 50	1.35	2.37	3.38	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2480	9.3	8.5	1.62	2.83	4.05	-	-	8.50	3.2 ~ 10.7	2280	600 ~ 3100	10.8	9.9
20 + 35 + 60	1.23	2.16	3.71	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2480	9.3	8.5	1.48	2.59	4.43	-	-	8.50	3.2 ~ 10.7	2280	600 ~ 3100	10.8	9.9
20 + 42 + 42	1.36	2.87	2.87	-	-	7.10	1.9 ~ 8.2	2100	290 ~ 2520	9.9	9.1	1.64	3.43	3.43	-	-	8.50	3.3 ~ 10.5	2400	630 ~ 3160	11.3	10.4
20 + 42 + 50	1.27	2.66	3.17	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2480	9.3	8.5	1.52	3.19	3.79	-	-	8.50	3.2 ~ 10.6	2270	620 ~ 3050	10.7	9.8
25 + 25 + 25	2.36	2.36	2.36	-	-	7.08	1.9 ~ 8.0	2190	270 ~ 2560	10.4	9.5	2.83	2.83	2.83	-	-	8.49	3.3 ~ 10.4	2470	630 ~ 3220	11.7	10.7
25 + 25 + 35	2.09	2.09	2.92	-	-	7.10	1.9 ~ 8.0	2190	270 ~ 2470	10.4	9.5	2.50	2.50	3.50	-	-	8.50	3.3 ~ 10.4	2450	620 ~ 3150	11.6	10.6
25 + 25 + 42	1.93	1.93	3.24	-	-	7.10	1.9 ~ 8.1	2150	290 ~ 2570	10.2	9.3	2.31	2.31	3.88	-	-	8.50	3.3 ~ 10.5	2440	620 ~ 3190	11.5	10.6
25 + 25 + 50	1.78	1.78	3.54	-	-	7.10	2.0 ~ 8.5	2010	340 ~ 2530	9.5	8.7	2.13	2.13	4.24	-	-	8.50	3.2 ~ 10.7	2300	600 ~ 3130	10.9	10.0
25 + 25 + 60	1.61	1.61	3.88	-	-	7.10	2.0 ~ 8.5	2010	340 ~ 2530	9.5	8.7	1.93	1.93	4.64	-	-	8.50	3.2 ~ 10.7	2300	600 ~ 3130	10.9	10.0
25 + 35 + 35	1.86	2.62	2.62	-	-	7.10	1.9 ~ 8.1	2150	290 ~ 2480	10.2	9.3	2.24	3.13	3.13	-	-	8.50	3.3 ~ 10.5	2420	640 ~ 3170	11.4	10.5
25 + 35 + 42	1.74	2.44	2.92	-	-	7.10	1.9 ~ 8.2	2100	290 ~ 2570	9.9	9.1	2.08	2.92	3.50	-	-	8.50	3.3 ~ 10.5	2410	640 ~ 3160	11.4	10.4
25 + 35 + 50	1.61	2.26	3.23	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2480	9.3	8.5	1.93	2.70	3.87	-	-	8.50	3.2 ~ 10.7	2280	600 ~ 3100	10.8	9.9
25 + 42 + 42	1.62	2.74	2.74	-	-	7.10	1.9 ~ 8.2	2100	290 ~ 2520	9.9	9.1	1.94	3.28	3.28	-	-	8.50	3.3 ~ 10.5	2400	630 ~ 3160	11.3	10.4
35 + 35 + 35	2.36	2.36	2.36	-	-	7.08	1.9 ~ 8.2	2100	290 ~ 2480	9.9	9.1	2.83	2.83	2.83	-	-	8.49	3.3 ~ 10.5	2360	630 ~ 3150	11.2	10.2
35 + 35 + 42	2.22	2.22	2.66	-	-	7.10	1.9 ~ 8.2	2100	290 ~ 2480	9.9	9.1	2.66	2.66	3.18	-	-	8.50	3.3 ~ 10.5	2350	630 ~ 3100	11.1	10.2

* Specification based on JIS C 9612 standard.
 * A minimum of 2 indoor units must be connected.

CU-4Z71WBH-8: Free Multi Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)				
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
4 Rooms	16 + 16 + 16 + 16	1.60	1.60	1.60	1.60	-	6.40	1.9 ~ 8.7	1510	340 ~ 2490	7.2	6.7	2.12	2.12	2.12	2.12	-	8.48	3.0 ~ 10.7	2200	500 ~ 3010	10.4	9.7
	16 + 16 + 16 + 20	1.67	1.67	1.67	2.09	-	7.10	1.9 ~ 8.8	1780	340 ~ 2590	8.4	7.9	2.00	2.00	2.00	2.50	-	8.50	3.0 ~ 10.7	2190	500 ~ 2960	10.4	9.7
	16 + 16 + 16 + 25	1.56	1.56	1.56	2.42	-	7.10	1.9 ~ 8.8	1780	340 ~ 2590	8.4	7.9	1.86	1.86	1.86	2.92	-	8.50	3.0 ~ 10.7	2190	500 ~ 2960	10.4	9.7
	16 + 16 + 16 + 35	1.37	1.37	1.37	2.99	-	7.10	1.9 ~ 8.8	1780	340 ~ 2500	8.4	7.9	1.64	1.64	1.64	3.58	-	8.50	3.0 ~ 10.7	2170	500 ~ 2940	10.3	9.6
	16 + 16 + 16 + 42	1.26	1.26	1.26	3.32	-	7.10	1.9 ~ 8.8	1780	340 ~ 2500	8.4	7.9	1.51	1.51	1.51	3.97	-	8.50	3.0 ~ 10.7	2170	500 ~ 2930	10.3	9.6
	16 + 16 + 16 + 50	1.16	1.16	1.16	3.62	-	7.10	1.9 ~ 8.8	1700	400 ~ 2360	8.1	7.6	1.39	1.39	1.39	4.33	-	8.50	3.0 ~ 10.7	2130	560 ~ 2830	10.1	9.4
	16 + 16 + 16 + 60	1.05	1.05	1.05	3.95	-	7.10	1.9 ~ 8.8	1700	400 ~ 2360	8.1	7.6	1.26	1.26	1.26	4.72	-	8.50	3.0 ~ 10.7	2130	560 ~ 2830	10.1	9.4
	16 + 16 + 20 + 20	1.58	1.58	1.97	1.97	-	7.10	1.9 ~ 8.8	1780	340 ~ 2540	8.4	7.9	1.89	1.89	2.36	2.36	-	8.50	3.1 ~ 10.7	2190	520 ~ 2950	10.4	9.7
	16 + 16 + 20 + 25	1.48	1.48	1.84	2.30	-	7.10	1.9 ~ 8.8	1780	340 ~ 2540	8.4	7.9	1.77	1.77	2.20	2.76	-	8.50	3.1 ~ 10.7	2190	520 ~ 2950	10.4	9.7
	16 + 16 + 20 + 35	1.31	1.31	1.63	2.85	-	7.10	1.9 ~ 8.8	1780	340 ~ 2500	8.4	7.9	1.56	1.56	1.95	3.43	-	8.50	3.0 ~ 10.7	2170	500 ~ 2930	10.3	9.6
	16 + 16 + 20 + 42	1.21	1.21	1.51	3.17	-	7.10	1.9 ~ 8.8	1740	370 ~ 2500	8.3	7.8	1.45	1.45	1.80	3.80	-	8.50	3.0 ~ 10.7	2160	520 ~ 2920	10.2	9.5
	16 + 16 + 20 + 50	1.11	1.11	1.39	3.49	-	7.10	1.9 ~ 8.8	1700	400 ~ 2320	8.1	7.6	1.33	1.33	1.67	4.17	-	8.50	3.0 ~ 10.7	2120	570 ~ 2820	10.0	9.4
	16 + 16 + 20 + 60	1.01	1.01	1.27	3.81	-	7.10	1.9 ~ 8.8	1700	400 ~ 2320	8.1	7.6	1.21	1.21	1.52	4.56	-	8.50	3.0 ~ 10.7	2120	570 ~ 2820	10.0	9.4
	16 + 16 + 25 + 25	1.39	1.39	2.16	2.16	-	7.10	1.9 ~ 8.8	1780	340 ~ 2540	8.4	7.9	1.66	1.66	2.59	2.59	-	8.50	3.1 ~ 10.7	2190	520 ~ 2950	10.4	9.7
	16 + 16 + 25 + 35	1.23	1.23	1.93	2.71	-	7.10	1.9 ~ 8.8	1780	340 ~ 2500	8.4	7.9	1.48	1.48	2.31	3.23	-	8.50	3.0 ~ 10.7	2170	500 ~ 2930	10.3	9.6
	16 + 16 + 25 + 42	1.15	1.15	1.79	3.01	-	7.10	1.9 ~ 8.8	1740	370 ~ 2500	8.3	7.8	1.37	1.37	2.15	3.61	-	8.50	3.0 ~ 10.7	2160	520 ~ 2920	10.2	9.5
	16 + 16 + 25 + 50	1.06	1.06	1.66	3.32	-	7.10	1.9 ~ 8.8	1700	400 ~ 2320	8.1	7.6	1.27	1.27	1.99	3.97	-	8.50	3.0 ~ 10.7	2120	570 ~ 2820	10.0	9.4
	16 + 16 + 35 + 35	1.11	1.11	2.44	2.44	-	7.10	1.9 ~ 8.8	1740	370 ~ 2450	8.3	7.8	1.33	1.33	2.92	2.92	-	8.50	3.0 ~ 10.7	2150	530 ~ 2900	10.2	9.5
	16 + 16 + 35 + 42	1.04	1.04	2.28	2.74	-	7.10	1.9 ~ 8.8	1740	370 ~ 2450	8.3	7.8	1.25	1.25	2.72	3.28	-	8.50	3.0 ~ 10.7	2140	530 ~ 2890	10.1	9.5
	16 + 20 + 20 + 20	1.49	1.87	1.87	1.87	-	7.10	1.9 ~ 8.8	1780	340 ~ 2540	8.4	7.9	1.78	2.24	2.24	2.24	-	8.50	3.1 ~ 10.7	2180	520 ~ 2940	10.3	9.6
	16 + 20 + 20 + 25	1.40	1.75	1.75	2.20	-	7.10	1.9 ~ 8.8	1780	340 ~ 2540	8.4	7.9	1.68	2.10	2.10	2.62	-	8.50	3.1 ~ 10.7	2180	520 ~ 2940	10.3	9.6
	16 + 20 + 20 + 35	1.25	1.56	1.56	2.73	-	7.10	1.9 ~ 8.8	1740	370 ~ 2500	8.3	7.8	1.49	1.87	1.87	3.27	-	8.50	3.0 ~ 10.7	2160	520 ~ 2920	10.2	9.5
	16 + 20 + 20 + 42	1.16	1.45	1.45	3.04	-	7.10	1.9 ~ 8.8	1740	370 ~ 2500	8.3	7.8	1.39	1.73	1.73	3.65	-	8.50	3.0 ~ 10.7	2150	520 ~ 2910	10.2	9.5
	16 + 20 + 20 + 50	1.07	1.34	1.34	3.35	-	7.10	1.9 ~ 8.8	1700	420 ~ 2320	8.1	7.6	1.28	1.60	1.60	4.02	-	8.50	3.0 ~ 10.7	2120	590 ~ 2810	10.0	9.4
	16 + 20 + 25 + 25	1.33	1.65	2.06	2.06	-	7.10	1.9 ~ 8.8	1780	340 ~ 2540	8.4	7.9	1.58	1.98	2.47	2.47	-	8.50	3.1 ~ 10.7	2180	520 ~ 2940	10.3	9.6
	16 + 20 + 25 + 35	1.18	1.48	1.85	2.59	-	7.10	1.9 ~ 8.8	1740	370 ~ 2500	8.3	7.8	1.42	1.77	2.21	3.10	-	8.50	3.0 ~ 10.7	2160	520 ~ 2920	10.2	9.5
	16 + 20 + 25 + 42	1.10	1.38	1.72	2.90	-	7.10	1.9 ~ 8.8	1740	370 ~ 2500	8.3	7.8	1.32	1.65	2.06	3.47	-	8.50	3.0 ~ 10.7	2150	520 ~ 2910	10.2	9.5
	16 + 20 + 25 + 50	1.02	1.28	1.60	3.20	-	7.10	1.9 ~ 8.8	1700	420 ~ 2320	8.1	7.6	1.23	1.53	1.91	3.83	-	8.50	3.0 ~ 10.7	2120	590 ~ 2810	10.0	9.4
	16 + 20 + 35 + 35	1.07	1.34	2.34	2.35	-	7.10	1.9 ~ 8.8	1740	370 ~ 2450	8.3	7.8	1.28	1.60	2.81	2.81	-	8.50	3.0 ~ 10.7	2140	530 ~ 2890	10.1	9.5
	16 + 20 + 35 + 42	1.01	1.26	2.20	2.63	-	7.10	1.9 ~ 8.8	1740	370 ~ 2450	8.3	7.8	1.20	1.50	2.63	3.17	-	8.50	3.0 ~ 10.7	2140	530 ~ 2890	10.1	9.5
	16 + 25 + 25 + 25	1.25	1.95	1.95	1.95	-	7.10	1.9 ~ 8.8	1780	340 ~ 2540	8.4	7.9	1.48	2.34	2.34	2.34	-	8.50	3.1 ~ 10.7	2180	520 ~ 2940	10.3	9.6
	16 + 25 + 25 + 35	1.12	1.76	1.76	2.46	-	7.10	1.9 ~ 8.8	1740	370 ~ 2500	8.3	7.8	1.35	2.10	2.10	2.95	-	8.50	3.0 ~ 10.7	2160	520 ~ 2920	10.2	9.5
	16 + 25 + 25 + 42	1.05	1.64	1.64	2.77	-	7.10	1.9 ~ 8.8	1740	370 ~ 2500	8.3	7.8	1.25	1.97	1.97	3.31	-	8.50	3.0 ~ 10.7	2150	520 ~ 2910	10.2	9.5
	16 + 25 + 35 + 35	1.02	1.60	2.24	2.24	-	7.10	1.9 ~ 8.8	1740	370 ~ 2450	8.3	7.8	1.23	1.91	2.68	2.68	-	8.50	3.0 ~ 10.7	2140	530 ~ 2890	10.1	9.5
	20 + 20 + 20 + 20	1.77	1.77	1.77	1.77	-	7.08	1.9 ~ 8.8	1740	340 ~ 2500	8.3	7.8	2.12	2.12	2.12	2.12	-	8.48	3.1 ~ 10.7	2170	520 ~ 2930	10.3	9.6
	20 + 20 + 20 + 25	1.67	1.67	1.67	2.09	-	7.10	1.9 ~ 8.8	1780	340 ~ 2500	8.4	7.9	2.00	2.00	2.00	2.50	-	8.50	3.1 ~ 10.7	2170	520 ~ 2930	10.3	9.6
	20 + 20 + 20 + 35	1.49	1.49	1.49	2.63	-	7.10	1.9 ~ 8.8	1740	370 ~ 2450	8.3	7.8	1.79	1.79	1.79	3.13	-	8.50	3.0 ~ 10.7	2150	520 ~ 2910	10.2	9.5
	20 + 20 + 20 + 42	1.39	1.39	1.39	2.93	-	7.10	1.9 ~ 8.8	1740	370 ~ 2450	8.3	7.8	1.67	1.67	1.67	3.49	-	8.50	3.0 ~ 10.7	2150	530 ~ 2900	10.2	9.5
	20 + 20 + 20 + 50	1.29	1.29	1.29	3.23	-	7.10	1.9 ~ 8.8	1700	420 ~ 2320	8.1	7.6	1.55	1.55	1.55	3.85	-	8.50	3.0 ~ 10.7	2110	590 ~ 2810	10.0	9.3
	20 + 20 + 25 + 25	1.58	1.58	1.97	1.97	-	7.10	1.9 ~ 8.8	1780	340 ~ 2500	8.4	7.9	1.89	1.89	2.36	2.36	-	8.50	3.1 ~ 10.7	2170	520 ~ 2930	10.3	9.6
20 + 20 + 25 + 35	1.42	1.42	1.78	2.48	-	7.10	1.9 ~ 8.8	1740	370 ~ 2450	8.3	7.8	1.70	1.70	2.12	2.98	-	8.50	3.0 ~ 10.7	2150	520 ~ 2910	10.2	9.5	
20 + 20 + 25 + 42	1.33	1.33	1.66	2.78	-	7.10	1.9 ~ 8.8	1740	370 ~ 2450	8.3	7.8	1.59	1.59	1.98	3.34	-	8.50	3.0 ~ 10.7	2150	530 ~ 2900	10.2	9.5	
20 + 20 + 25 + 50	1.23	1.23	1.54	3.10	-	7.10	1.9 ~ 8.8	1700	420 ~ 2320	8.1	7.6	1.48	1.48	1.84	3.70	-	8.50	3.0 ~ 10.7	2110	590 ~ 2810	10.0	9.3	
20 + 20 + 35 + 35	1.29	1.29	2.26	2.26	-	7.10	1.9 ~ 8.8	1740	370 ~ 2450	8.3	7.8	1.55	1.55	2.70	2.70	-	8.50	3.0 ~ 10.7	2140	530 ~ 2890	10.1	9.5	
20 + 25 + 25 + 25	1.49	1.87	1.87	1.87	-	7.10	1.9 ~ 8.8	1780	340 ~ 2500	8.4	7.9	1.78	2.24	2.24	2.24	-	8.50	3.1 ~ 10.7	2170	520 ~ 2930	10.3	9.6	
20 + 25 + 25 + 35	1.35	1.69	1.69	2.37	-	7.10	1.9 ~ 8.8	1740	370 ~ 2450	8.3	7.8	1.62	2.02	2.02	2.84	-	8.50	3.0 ~ 10.7	2150	520 ~ 2910	10.2	9.5	
20 + 25 + 25 + 42	1.27	1.58	1.58	2.67	-	7.10	1.9 ~ 8.8	1740	370 ~ 2450	8.3	7.8	1.51	1.90	1.90	3.19	-	8.50	3.0 ~ 10.7	2150	530 ~ 2900	10.2	9.5	
20 + 25 + 35 + 35	1.24	1.54	2.16	2.16	-	7.10	1.9 ~ 8.8	1740	370 ~ 2450	8.3	7.8	1.47	1.85	2.59	2.59	-	8.50	3.0 ~ 10.7	2140	530 ~ 2890	10.1	9.5	
25 + 25 + 25 + 25	1.77	1.77	1.77	1.77	-	7.08	1.9 ~ 8.8	1740	340 ~ 2500	8.3	7.8	2.12	2.12	2.12	2.12	-	8.48	3.1 ~ 10.7	2170	520 ~ 2930	10.3	9.6	
25 + 25 + 25 + 35	1.61	1.61	1.61	2.27	-	7.10	1.9 ~ 8.8	1740	370 ~ 2450	8.3	7.8	1.93	1.93	1.93	2.71	-	8.50	3.0 ~ 10.7	2150	520 ~ 2910	10.2	9.5	

• Specification based on JIS C 9612 standard.
 • A minimum of 2 indoor units must be connected.

CU-4Z80WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION										
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V
1 Room	16	1.60	-	-	-	1.60	1.3 ~ 2.3	420	250 ~ 660	2.2	2.0	2.60	-	-	-	-	2.60	1.2 ~ 3.2	640	290 ~ 1000	3.3	3.0
	20	2.00	-	-	-	2.00	1.8 ~ 2.9	520	340 ~ 830	2.7	2.5	3.20	-	-	-	-	3.20	1.2 ~ 4.1	780	290 ~ 1270	4.0	3.7
	25	2.50	-	-	-	2.50	1.8 ~ 2.9	650	340 ~ 830	3.4	3.1	3.60	-	-	-	-	3.60	1.2 ~ 4.3	980	290 ~ 1270	5.1	4.7
	35	3.50	-	-	-	3.50	1.8 ~ 4.1	960	340 ~ 1380	4.8	4.4	4.50	-	-	-	-	4.50	1.2 ~ 5.8	1270	290 ~ 2140	6.5	5.9
	42	4.20	-	-	-	4.20	1.8 ~ 4.5	1390	340 ~ 2010	6.8	6.2	5.60	-	-	-	-	5.60	1.2 ~ 6.8	1760	290 ~ 2970	8.5	7.8
	50	5.00	-	-	-	5.00	1.9 ~ 5.4	1630	340 ~ 2150	7.9	7.3	6.80	-	-	-	-	6.80	1.2 ~ 6.9	2350	290 ~ 2840	11.3	10.4
	60	6.00	-	-	-	6.00	1.9 ~ 6.2	2050	340 ~ 2350	9.7	8.9	8.50	-	-	-	-	8.50	1.3 ~ 9.0	2440	320 ~ 2590	11.8	10.8
71	7.10	-	-	-	7.10	2.0 ~ 7.2	2550	370 ~ 2790	12.1	11.1	8.70	-	-	-	-	8.70	1.4 ~ 9.2	2590	380 ~ 2760	12.5	11.4	
2 Rooms	16 + 16	1.60	1.60	-	-	3.20	2.3 ~ 5.8	770	350 ~ 2030	4.1	3.7	2.60	2.60	-	-	-	5.20	2.2 ~ 8.2	1640	430 ~ 2920	8.1	7.5
	16 + 20	1.60	2.00	-	-	3.60	2.3 ~ 5.8	910	340 ~ 2030	4.7	4.3	2.58	3.22	-	-	-	5.80	2.2 ~ 8.2	1760	430 ~ 2910	8.6	7.9
	16 + 25	1.60	2.50	-	-	4.10	2.3 ~ 5.8	1110	340 ~ 2030	5.7	5.2	2.42	3.78	-	-	-	6.20	2.2 ~ 8.2	1900	430 ~ 2910	9.3	8.6
	16 + 35	1.60	3.50	-	-	5.10	2.3 ~ 5.8	1520	340 ~ 1960	7.7	7.0	2.23	4.87	-	-	-	7.10	2.2 ~ 8.6	2070	380 ~ 2990	10.2	9.3
	16 + 42	1.60	4.20	-	-	5.80	2.3 ~ 6.7	1860	340 ~ 2520	9.3	8.5	2.26	5.94	-	-	-	8.20	2.2 ~ 9.8	2450	370 ~ 3520	12.0	11.0
	16 + 50	1.60	5.00	-	-	6.60	2.3 ~ 7.2	2100	320 ~ 2520	10.5	9.6	2.28	7.12	-	-	-	9.40	2.2 ~ 10.0	2540	330 ~ 3330	12.5	11.4
	16 + 60	1.60	6.00	-	-	7.60	2.3 ~ 8.5	2730	320 ~ 3530	13.7	12.5	1.98	7.42	-	-	-	9.40	2.2 ~ 10.0	2540	330 ~ 3330	12.5	11.4
	16 + 71	1.47	6.53	-	-	8.00	2.3 ~ 8.5	2880	320 ~ 3380	14.4	13.2	1.73	7.67	-	-	-	9.40	2.2 ~ 10.3	2480	320 ~ 3500	12.2	11.2
	20 + 20	2.00	2.00	-	-	4.00	2.3 ~ 5.8	1050	340 ~ 1970	5.4	4.9	3.20	3.20	-	-	-	6.40	2.2 ~ 8.2	1940	390 ~ 2900	9.5	8.7
	20 + 25	2.00	2.50	-	-	4.50	2.3 ~ 5.8	1280	340 ~ 1970	6.5	5.9	3.02	3.78	-	-	-	6.80	2.2 ~ 8.2	2000	390 ~ 2900	9.8	9.0
	20 + 35	2.00	3.50	-	-	5.50	2.3 ~ 5.8	1690	340 ~ 1900	8.5	7.8	2.80	4.90	-	-	-	7.70	2.2 ~ 8.6	2250	370 ~ 2930	11.1	10.1
	20 + 42	2.00	4.20	-	-	6.20	2.3 ~ 7.2	2110	340 ~ 2940	10.6	9.7	2.84	5.96	-	-	-	8.80	2.2 ~ 10.0	2500	370 ~ 3630	12.3	11.3
	20 + 50	2.00	5.00	-	-	7.00	2.3 ~ 8.1	2250	320 ~ 3140	11.3	10.3	2.69	6.71	-	-	-	9.40	2.2 ~ 10.0	2530	320 ~ 3310	12.4	11.4
	20 + 60	2.00	6.00	-	-	8.00	2.3 ~ 8.5	2950	320 ~ 3530	14.8	13.5	2.35	7.05	-	-	-	9.40	2.2 ~ 10.0	2530	320 ~ 3310	12.4	11.4
	20 + 71	1.76	6.24	-	-	8.00	2.3 ~ 8.5	2810	350 ~ 3380	14.1	12.9	2.07	7.33	-	-	-	9.40	2.2 ~ 10.3	2470	320 ~ 3480	12.1	11.1
	25 + 25	2.50	2.50	-	-	5.00	2.3 ~ 5.8	1470	340 ~ 1970	7.4	6.8	3.60	3.60	-	-	-	7.20	2.2 ~ 8.6	2130	390 ~ 3010	10.5	9.6
	25 + 35	2.50	3.50	-	-	6.00	2.3 ~ 6.7	1980	340 ~ 2520	9.9	9.1	3.37	4.73	-	-	-	8.10	2.2 ~ 9.8	2400	370 ~ 3520	11.8	10.8
	25 + 42	2.50	4.20	-	-	6.70	2.3 ~ 7.2	2450	340 ~ 2940	12.3	11.2	3.43	5.77	-	-	-	9.20	2.2 ~ 10.0	2650	370 ~ 3630	13.0	11.9
	25 + 50	2.50	5.00	-	-	7.50	2.3 ~ 8.5	2590	320 ~ 3530	13.0	11.9	3.13	6.27	-	-	-	9.40	2.2 ~ 10.0	2530	320 ~ 3310	12.4	11.4
	25 + 60	2.35	5.65	-	-	8.00	2.3 ~ 8.5	2950	320 ~ 3530	14.8	13.5	2.76	6.64	-	-	-	9.40	2.2 ~ 10.0	2530	320 ~ 3310	12.4	11.4
	25 + 71	2.08	5.92	-	-	8.00	2.3 ~ 8.5	2810	350 ~ 3380	14.1	12.9	2.45	6.95	-	-	-	9.40	2.2 ~ 10.3	2470	320 ~ 3480	12.1	11.1
	35 + 35	3.50	3.50	-	-	7.00	2.3 ~ 8.1	2590	330 ~ 3670	13.0	11.9	4.50	4.50	-	-	-	9.00	2.2 ~ 10.0	2530	360 ~ 3550	12.4	11.4
	35 + 42	3.50	4.20	-	-	7.70	2.3 ~ 8.5	3080	330 ~ 4160	15.4	14.1	4.27	5.13	-	-	-	9.40	2.2 ~ 10.0	2670	350 ~ 3540	13.1	12.0
	35 + 50	3.29	4.71	-	-	8.00	2.3 ~ 8.5	2810	320 ~ 3380	14.1	12.9	3.87	5.53	-	-	-	9.40	2.2 ~ 10.0	2460	320 ~ 3280	12.1	11.1
	35 + 60	2.95	5.05	-	-	8.00	2.3 ~ 8.5	2810	320 ~ 3380	14.1	12.9	3.46	5.94	-	-	-	9.40	2.2 ~ 10.3	2460	320 ~ 3400	12.1	11.1
	35 + 71	2.64	5.36	-	-	8.00	2.3 ~ 8.6	2740	350 ~ 3380	13.7	12.6	3.10	6.30	-	-	-	9.40	2.2 ~ 10.5	2440	310 ~ 3510	12.0	11.0
	42 + 42	4.00	4.00	-	-	8.00	2.3 ~ 8.5	3380	330 ~ 4080	16.9	15.5	4.70	4.70	-	-	-	9.40	2.2 ~ 10.0	2660	350 ~ 3530	13.1	12.0
42 + 50	3.65	4.35	-	-	8.00	2.3 ~ 8.5	2810	320 ~ 3380	14.1	12.9	4.29	5.11	-	-	-	9.40	2.2 ~ 10.3	2440	320 ~ 3390	12.0	11.0	
42 + 60	3.29	4.71	-	-	8.00	2.3 ~ 8.6	2810	320 ~ 3460	14.1	12.9	3.87	5.53	-	-	-	9.40	2.2 ~ 10.3	2440	320 ~ 3390	12.0	11.0	
42 + 71	2.97	5.03	-	-	8.00	2.3 ~ 8.6	2740	350 ~ 3300	13.7	12.6	3.49	5.91	-	-	-	9.40	2.2 ~ 10.5	2430	310 ~ 3500	11.9	10.9	
50 + 50	4.00	4.00	-	-	8.00	2.3 ~ 8.6	2460	340 ~ 2990	12.3	11.3	4.70	4.70	-	-	-	9.40	2.2 ~ 10.3	2280	310 ~ 3170	11.2	10.3	
50 + 60	3.64	4.36	-	-	8.00	2.3 ~ 8.6	2460	340 ~ 2990	12.3	11.3	4.27	5.13	-	-	-	9.40	2.2 ~ 10.5	2280	310 ~ 3230	11.2	10.3	
50 + 71	3.31	4.69	-	-	8.00	2.3 ~ 8.6	2390	340 ~ 2920	12.0	11.0	3.88	5.52	-	-	-	9.40	2.2 ~ 10.5	2260	310 ~ 3210	11.1	10.2	
60 + 60	4.00	4.00	-	-	8.00	2.3 ~ 8.6	2460	340 ~ 2990	12.3	11.3	4.70	4.70	-	-	-	9.40	2.2 ~ 10.5	2280	310 ~ 3230	11.2	10.3	
60 + 71	3.66	4.34	-	-	8.00	2.3 ~ 8.6	2390	340 ~ 2920	12.0	11.0	4.31	5.09	-	-	-	9.40	2.2 ~ 10.5	2260	310 ~ 3210	11.1	10.2	
71 + 71	4.00	4.00	-	-	8.00	2.3 ~ 8.6	2320	380 ~ 2840	11.6	10.6	4.70	4.70	-	-	-	9.40	2.2 ~ 10.5	2250	320 ~ 3200	11.1	10.1	
3 Rooms	16 + 16 + 16	1.60	1.60	1.60	-	4.80	2.3 ~ 8.5	1140	350 ~ 3170	5.8	5.3	2.60	2.60	2.60	-	-	7.80	3.0 ~ 10.4	2000	440 ~ 3460	9.8	9.0
	16 + 16 + 20	1.60	1.60	2.00	-	5.20	2.3 ~ 8.5	1240	350 ~ 3170	6.3	5.7	2.58	2.58	3.24	-	-	8.40	3.0 ~ 10.4	2230	440 ~ 3380	11.0	10.0
	16 + 16 + 25	1.60	1.60	2.50	-	5.70	2.3 ~ 8.5	1450	350 ~ 3170	7.3	6.7	2.47	2.47	3.86	-	-	8.80	3.0 ~ 10.4	2210	440 ~ 3380	10.9	10.0
	16 + 16 + 35	1.60	1.60	3.50	-	6.70	2.3 ~ 8.5	1770	340 ~ 3090	8.9	8.1	2.24	2.24	4.92	-	-	9.40	3.0 ~ 10.4	2370	440 ~ 3350	11.6	10.7
	16 + 16 + 42	1.60	1.60	4.20	-	7.40	2.3 ~ 8.5	2130	340 ~ 3010	10.7	9.8	2.03	2.03	5.34	-	-	9.40	3.0 ~ 10.4	2360	430 ~ 3330	11.6	10.6
	16 + 16 + 50	1.56	1.56	4.88	-	8.00	2.3 ~ 8.6	2160	380 ~ 2790	10.8	9.9	1.83	1.83	5.74	-	-	9.40	3.0 ~ 10.4	2250	460 ~ 3120	11.1	10.1
	16 + 16 + 60	1.39	1.39	5.22	-	8.00	2.3 ~ 8.6	2160	380 ~ 2790	10.8	9.9	1.63	1.63	6.14	-	-	9.40	3.0 ~ 10.5	2250	460 ~ 3180	11.1	10.1
	16 + 16 + 71	1.24	1.24	5.52	-	8.00	2.3 ~ 8.8	2100	380 ~ 2860	10.5	9.6	1.46	1.46	6.48	-	-	9.40	3.0 ~ 10.5	2240	460 ~ 3160	11.0	10.1
	16 + 20 + 20	1.60	2.00	2.00	-	5.60	2.3 ~ 8.5	1400	350 ~ 3090	7.1	6.5	2.58	3.21	3.21	-	-	9					

CU-4Z80WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
3 Rooms	16 + 25 + 25	1.60	2.50	2.50	-	-	6.60	2.3 ~ 8.5	1850	350 ~ 3090	9.3	8.5	2.28	3.56	3.56	-	-	9.40	3.0 ~ 10.4	2390	440 ~ 3370	11.7	10.8
	16 + 25 + 35	1.60	2.50	3.50	-	-	7.60	2.3 ~ 8.5	2250	340 ~ 3010	11.3	10.3	1.98	3.09	4.33	-	-	9.40	3.0 ~ 10.4	2360	430 ~ 3330	11.6	10.6
	16 + 25 + 42	1.54	2.41	4.05	-	-	8.00	2.3 ~ 8.6	2350	340 ~ 3090	11.8	10.8	1.81	2.83	4.76	-	-	9.40	3.0 ~ 10.4	2350	430 ~ 3320	11.5	10.6
	16 + 25 + 50	1.41	2.20	4.39	-	-	8.00	2.3 ~ 8.6	2160	380 ~ 2790	10.8	9.9	1.65	2.58	5.17	-	-	9.40	3.0 ~ 10.5	2240	460 ~ 3170	11.0	10.1
	16 + 25 + 60	1.27	1.98	4.75	-	-	8.00	2.3 ~ 8.8	2160	380 ~ 2860	10.8	9.9	1.49	2.33	5.58	-	-	9.40	3.0 ~ 10.5	2240	460 ~ 3170	11.0	10.1
	16 + 25 + 71	1.14	1.79	5.07	-	-	8.00	2.3 ~ 8.8	2100	380 ~ 2860	10.5	9.6	1.34	2.10	5.96	-	-	9.40	3.0 ~ 10.6	2230	460 ~ 3210	11.0	10.0
	16 + 35 + 35	1.48	3.26	3.26	-	-	8.00	2.3 ~ 8.6	2290	340 ~ 3010	11.5	10.5	1.74	3.83	3.83	-	-	9.40	3.0 ~ 10.5	2330	460 ~ 3360	11.4	10.5
	16 + 35 + 42	1.38	3.01	3.61	-	-	8.00	2.3 ~ 8.6	2290	340 ~ 3010	11.5	10.5	1.62	3.54	4.24	-	-	9.40	3.0 ~ 10.5	2320	460 ~ 3280	11.4	10.4
	16 + 35 + 50	1.27	2.77	3.96	-	-	8.00	2.3 ~ 8.8	2100	380 ~ 2860	10.5	9.6	1.49	3.26	4.65	-	-	9.40	3.0 ~ 10.5	2210	490 ~ 3130	10.9	10.0
	16 + 35 + 60	1.15	2.52	4.33	-	-	8.00	2.3 ~ 8.8	2100	380 ~ 2860	10.5	9.6	1.35	2.96	5.09	-	-	9.40	3.0 ~ 10.6	2210	490 ~ 3190	10.9	10.0
	16 + 35 + 71	1.05	2.30	4.65	-	-	8.00	2.3 ~ 9.0	2100	380 ~ 2930	10.5	9.6	1.23	2.70	5.47	-	-	9.40	3.0 ~ 10.6	2200	490 ~ 3180	10.8	9.9
	16 + 42 + 42	1.28	3.36	3.36	-	-	8.00	2.3 ~ 8.8	2290	340 ~ 3160	11.5	10.5	1.50	3.95	3.95	-	-	9.40	3.0 ~ 10.5	2310	460 ~ 3270	11.3	10.4
	16 + 42 + 50	1.19	3.11	3.70	-	-	8.00	2.3 ~ 8.8	2100	380 ~ 2860	10.5	9.6	1.39	3.66	4.35	-	-	9.40	3.0 ~ 10.5	2210	490 ~ 3120	10.9	10.0
	16 + 42 + 60	1.08	2.85	4.07	-	-	8.00	2.3 ~ 9.0	2100	380 ~ 2930	10.5	9.6	1.27	3.35	4.78	-	-	9.40	3.0 ~ 10.6	2210	490 ~ 3180	10.9	10.0
	16 + 42 + 71	0.99	2.60	4.41	-	-	8.00	2.3 ~ 9.0	2040	380 ~ 2860	10.2	9.4	1.17	3.06	5.17	-	-	9.40	3.0 ~ 10.6	2190	490 ~ 3160	10.8	9.9
	16 + 50 + 50	1.10	3.45	3.45	-	-	8.00	2.3 ~ 8.8	1980	430 ~ 2640	9.9	9.1	1.30	4.05	4.05	-	-	9.40	3.0 ~ 10.6	2120	550 ~ 3050	10.4	9.5
	16 + 50 + 60	1.02	3.17	3.81	-	-	8.00	2.3 ~ 9.0	1980	430 ~ 2710	9.9	9.1	1.19	3.73	4.48	-	-	9.40	3.0 ~ 10.6	2120	550 ~ 3050	10.4	9.5
	16 + 50 + 71	0.93	2.92	4.15	-	-	8.00	2.3 ~ 9.0	1980	470 ~ 2710	9.9	9.1	1.10	3.43	4.87	-	-	9.40	3.0 ~ 10.6	2110	550 ~ 3040	10.4	9.5
	16 + 60 + 60	0.94	3.53	3.53	-	-	8.00	2.3 ~ 9.0	1980	430 ~ 2710	9.9	9.1	1.10	4.15	4.15	-	-	9.40	3.0 ~ 10.6	2120	550 ~ 3050	10.4	9.5
	16 + 60 + 71	0.87	3.27	3.86	-	-	8.00	2.3 ~ 9.0	1980	470 ~ 2710	9.9	9.1	1.02	3.84	4.54	-	-	9.40	3.0 ~ 10.6	2110	550 ~ 3040	10.4	9.5
	20 + 20 + 20	2.00	2.00	2.00	-	-	6.00	2.3 ~ 8.5	1560	340 ~ 3090	7.9	7.2	3.13	3.13	3.13	-	-	9.39	3.0 ~ 10.4	2380	440 ~ 3360	11.7	10.7
	20 + 20 + 25	2.00	2.00	2.50	-	-	6.50	2.3 ~ 8.5	1790	340 ~ 3090	9.0	8.2	2.89	2.89	3.62	-	-	9.40	3.0 ~ 10.4	2380	440 ~ 3360	11.7	10.7
	20 + 20 + 35	2.00	2.00	3.50	-	-	7.50	2.3 ~ 8.5	2120	340 ~ 3010	10.6	9.7	2.51	2.51	4.38	-	-	9.40	3.0 ~ 10.4	2350	430 ~ 3320	11.5	10.6
	20 + 20 + 42	1.95	1.95	4.10	-	-	8.00	2.3 ~ 8.6	2350	340 ~ 3090	11.8	10.8	2.29	2.29	4.82	-	-	9.40	3.0 ~ 10.4	2340	460 ~ 3310	11.5	10.5
	20 + 20 + 50	1.78	1.78	4.44	-	-	8.00	2.3 ~ 8.6	2100	380 ~ 2710	10.5	9.6	2.09	2.09	5.22	-	-	9.40	3.0 ~ 10.5	2230	460 ~ 3150	11.0	10.0
	20 + 20 + 60	1.60	1.60	4.80	-	-	8.00	2.3 ~ 8.8	2100	380 ~ 2860	10.5	9.6	1.88	1.88	5.64	-	-	9.40	3.0 ~ 10.5	2230	460 ~ 3150	11.0	10.0
	20 + 20 + 71	1.44	1.44	5.12	-	-	8.00	2.3 ~ 8.8	2100	380 ~ 2780	10.5	9.6	1.69	1.69	6.02	-	-	9.40	3.0 ~ 10.6	2220	460 ~ 3200	10.9	10.0
	20 + 25 + 25	2.00	2.50	2.50	-	-	7.00	2.3 ~ 8.5	1950	340 ~ 3090	9.8	8.9	2.68	3.36	3.36	-	-	9.40	3.0 ~ 10.4	2380	440 ~ 3360	11.7	10.7
	20 + 25 + 35	2.00	2.50	3.50	-	-	8.00	2.3 ~ 8.6	2350	340 ~ 3090	11.8	10.8	2.35	2.94	4.11	-	-	9.40	3.0 ~ 10.4	2350	430 ~ 3320	11.5	10.6
	20 + 25 + 42	1.84	2.30	3.86	-	-	8.00	2.3 ~ 8.6	2350	340 ~ 3090	11.8	10.8	2.16	2.70	4.54	-	-	9.40	3.0 ~ 10.5	2340	460 ~ 3370	11.5	10.5
	20 + 25 + 50	1.68	2.11	4.21	-	-	8.00	2.3 ~ 8.6	2100	380 ~ 2710	10.5	9.6	1.98	2.47	4.95	-	-	9.40	3.0 ~ 10.5	2230	460 ~ 3150	11.0	10.0
	20 + 25 + 60	1.52	1.90	4.58	-	-	8.00	2.3 ~ 8.8	2100	380 ~ 2860	10.5	9.6	1.79	2.24	5.37	-	-	9.40	3.0 ~ 10.5	2230	460 ~ 3150	11.0	10.0
	20 + 25 + 71	1.38	1.72	4.90	-	-	8.00	2.3 ~ 8.8	2100	380 ~ 2780	10.5	9.6	1.62	2.03	5.75	-	-	9.40	3.0 ~ 10.6	2220	460 ~ 3200	10.9	10.0
	20 + 35 + 35	1.78	3.11	3.11	-	-	8.00	2.3 ~ 8.6	2290	340 ~ 3010	11.5	10.5	2.08	3.66	3.66	-	-	9.40	3.0 ~ 10.5	2320	460 ~ 3280	11.4	10.4
	20 + 35 + 42	1.65	2.89	3.46	-	-	8.00	2.3 ~ 8.6	2290	340 ~ 3010	11.5	10.5	1.94	3.39	4.07	-	-	9.40	3.0 ~ 10.5	2310	460 ~ 3270	11.3	10.4
	20 + 35 + 50	1.52	2.67	3.81	-	-	8.00	2.3 ~ 8.8	2100	380 ~ 2860	10.5	9.6	1.79	3.13	4.48	-	-	9.40	3.0 ~ 10.5	2210	490 ~ 3120	10.9	10.0
	20 + 35 + 60	1.39	2.43	4.18	-	-	8.00	2.3 ~ 8.8	2100	380 ~ 2860	10.5	9.6	1.63	2.86	4.91	-	-	9.40	3.0 ~ 10.6	2210	490 ~ 3180	10.9	10.0
	20 + 35 + 71	1.27	2.22	4.51	-	-	8.00	2.3 ~ 9.0	2040	380 ~ 2860	10.2	9.4	1.49	2.61	5.30	-	-	9.40	3.0 ~ 10.6	2190	490 ~ 3160	10.8	9.9
	20 + 42 + 42	1.54	3.23	3.23	-	-	8.00	2.3 ~ 8.8	2290	340 ~ 3090	11.5	10.5	1.80	3.80	3.80	-	-	9.40	3.0 ~ 10.5	2300	460 ~ 3260	11.3	10.4
	20 + 42 + 50	1.43	3.00	3.57	-	-	8.00	2.3 ~ 8.8	2100	380 ~ 2780	10.5	9.6	1.68	3.53	4.19	-	-	9.40	3.0 ~ 10.6	2200	490 ~ 3170	10.8	9.9
20 + 42 + 60	1.31	2.75	3.94	-	-	8.00	2.3 ~ 9.0	2100	380 ~ 2930	10.5	9.6	1.54	3.24	4.62	-	-	9.40	3.0 ~ 10.6	2200	490 ~ 3170	10.8	9.9	
20 + 42 + 71	1.20	2.53	4.27	-	-	8.00	2.3 ~ 9.0	2040	380 ~ 2860	10.2	9.4	1.41	2.97	5.02	-	-	9.40	3.0 ~ 10.6	2190	490 ~ 3150	10.8	9.9	
20 + 50 + 50	1.33	3.33	3.33	-	-	7.99	2.3 ~ 9.0	1980	430 ~ 2710	9.9	9.1	1.56	3.92	3.92	-	-	9.40	3.0 ~ 10.6	2110	550 ~ 3040	10.4	9.5	
20 + 50 + 60	1.23	3.08	3.69	-	-	8.00	2.3 ~ 9.0	1980	430 ~ 2710	9.9	9.1	1.45	3.62	4.33	-	-	9.40	3.0 ~ 10.6	2110	550 ~ 3040	10.4	9.5	
20 + 50 + 71	1.13	2.84	4.03	-	-	8.00	2.3 ~ 9.0	1980	470 ~ 2710	9.9	9.1	1.33	3.33	4.74	-	-	9.40	3.0 ~ 10.6	2100	580 ~ 3030	10.3	9.5	
20 + 60 + 60	1.14	3.43	3.43	-	-	8.00	2.3 ~ 9.0	1980	430 ~ 2710	9.9	9.1	1.34	4.03	4.03	-	-	9.40	3.0 ~ 10.6	2110	550 ~ 3040	10.4	9.5	
25 + 25 + 25	2.50	2.50	2.50	-	-	7.50	2.3 ~ 8.5	2190	340 ~ 3090	11.0	10.0	3.13	3.13	3.13	-	-	9.39	3.0 ~ 10.4	2380	440 ~ 3360	11.7	10.7	
25 + 25 + 35	2.35	2.35	3.30	-	-	8.00	2.3 ~ 8.6	2350	340 ~ 3090	11.8	10.8	2.76	2.76	3.88	-	-	9.40	3.0 ~ 10.4	2350	430 ~ 3320	11.5	10.6	
25 + 25 + 42	2.17	2.17	3.66	-	-	8.00	2.3 ~ 8.6	2350	340 ~ 3090	11.8	10.8	2.55	2.55	4.30	-	-	9.40	3.0 ~ 10.5	2340	460 ~ 3370	11.5	10.5	
25 + 25 + 50	2.00	2.00	4.00	-	-	8.00	2.3 ~ 8.8	2100	380 ~ 2860	10.5	9.6	2.35	2.35	4.70	-	-	9.40	3.0 ~ 10.5	2230	460 ~ 3150	11.0	10.0	
25 + 25 + 60	1.82	1.82	4.36	-	-	8.00	2.3 ~ 8.8	2100	380 ~ 2860	10.5	9.6	2.14	2.14	5.12	-	-	9.40	3.0 ~ 10.5	2230	460 ~ 3150	11.0	10.0	
25 + 25 + 71	1.65	1.65	4.70	-	-	8.00	2.3 ~ 9.0	2100	380 ~ 2930	10.5	9.6	1.94	1.94	5.52	-	-	9.40	3.0 ~ 10.6	2220	460 ~ 3200	10.9	10.0	
25 + 35 + 35	2.10	2.95	2.95	-	-	8.00	2.3 ~ 8.6	2290	340 ~ 3010	11.5	10.5	2.48	3.46	3.46	-	-	9.40	3.0 ~ 10.5	2320	460 ~ 3280	11.4	10.4	
25 + 35 + 42	1.96	2.75	3.29	-	-	8.00	2.3 ~ 8.8	2290	340 ~ 3160	11.5	10.5	2.30	3.23	3.87	-	-	9.40	3.0 ~ 10.5	2310	460 ~ 3270	11.3	10.4	
25 + 35 +																							

CU-4Z80WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)				
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
3 Rooms	25 + 42 + 60	1.57	2.65	3.78	-	-	8.00	2.3 ~ 9.0	2100	380 ~ 2930	10.5	9.6	1.85	3.11	4.44	-	-	9.40	3.0 ~ 10.6	2200	490 ~ 3170	10.8	9.9
	25 + 42 + 71	1.45	2.43	4.12	-	-	8.00	2.3 ~ 9.0	2040	380 ~ 2860	10.2	9.4	1.70	2.86	4.84	-	-	9.40	3.0 ~ 10.6	2190	490 ~ 3150	10.8	9.9
	25 + 50 + 50	1.60	3.20	3.20	-	-	8.00	2.3 ~ 9.0	1980	430 ~ 2710	9.9	9.1	1.88	3.76	3.76	-	-	9.40	3.0 ~ 10.6	2110	550 ~ 3040	10.4	9.5
	25 + 50 + 60	1.48	2.96	3.56	-	-	8.00	2.3 ~ 9.0	1980	430 ~ 2710	9.9	9.1	1.74	3.48	4.18	-	-	9.40	3.0 ~ 10.6	2110	550 ~ 3040	10.4	9.5
	25 + 50 + 71	1.37	2.74	3.89	-	-	8.00	2.3 ~ 9.0	1980	470 ~ 2710	9.9	9.1	1.61	3.22	4.57	-	-	9.40	3.0 ~ 10.6	2100	580 ~ 3030	10.3	9.5
	25 + 60 + 60	1.38	3.31	3.31	-	-	8.00	2.3 ~ 9.0	1980	430 ~ 2710	9.9	9.1	1.62	3.89	3.89	-	-	9.40	3.0 ~ 10.6	2110	550 ~ 3040	10.4	9.5
	35 + 35 + 35	2.66	2.66	2.66	-	-	7.98	2.3 ~ 8.8	2230	340 ~ 3090	11.2	10.2	3.13	3.13	3.13	-	-	9.39	3.0 ~ 10.5	2300	460 ~ 3250	11.3	10.4
	35 + 35 + 42	2.50	2.50	3.00	-	-	8.00	2.3 ~ 8.8	2230	340 ~ 3090	11.2	10.2	2.94	2.94	3.52	-	-	9.40	3.0 ~ 10.6	2290	460 ~ 3290	11.3	10.3
	35 + 35 + 50	2.33	2.33	3.33	-	-	7.99	2.3 ~ 9.0	2040	380 ~ 2930	10.2	9.4	2.74	2.74	3.92	-	-	9.40	3.0 ~ 10.6	2180	490 ~ 3150	10.7	9.8
	35 + 35 + 60	2.15	2.15	3.70	-	-	8.00	2.3 ~ 9.0	2040	380 ~ 2930	10.2	9.4	2.53	2.53	4.34	-	-	9.40	3.0 ~ 10.6	2180	490 ~ 3150	10.7	9.8
	35 + 35 + 71	1.99	1.99	4.02	-	-	8.00	2.3 ~ 9.0	2040	420 ~ 2860	10.2	9.4	2.33	2.33	4.74	-	-	9.40	3.0 ~ 10.6	2170	500 ~ 3130	10.7	9.8
	35 + 42 + 42	2.36	2.82	2.82	-	-	8.00	2.3 ~ 9.0	2230	340 ~ 3160	11.2	10.2	2.76	3.32	3.32	-	-	9.40	3.0 ~ 10.6	2280	460 ~ 3280	11.2	10.3
	35 + 42 + 50	2.20	2.65	3.15	-	-	8.00	2.3 ~ 9.0	2040	380 ~ 2860	10.2	9.4	2.59	3.11	3.70	-	-	9.40	3.0 ~ 10.6	2170	500 ~ 3140	10.7	9.8
	35 + 42 + 60	2.04	2.45	3.51	-	-	8.00	2.3 ~ 9.0	2040	380 ~ 2860	10.2	9.4	2.40	2.88	4.12	-	-	9.40	3.0 ~ 10.6	2170	500 ~ 3140	10.7	9.8
	35 + 50 + 50	2.08	2.96	2.96	-	-	8.00	2.3 ~ 9.0	1980	470 ~ 2710	9.9	9.1	2.44	3.48	3.48	-	-	9.40	3.0 ~ 10.6	2090	580 ~ 3010	10.3	9.4
	35 + 50 + 60	1.93	2.76	3.31	-	-	8.00	2.3 ~ 9.0	1980	470 ~ 2710	9.9	9.1	2.27	3.24	3.89	-	-	9.40	3.0 ~ 10.6	2090	580 ~ 3010	10.3	9.4
	42 + 42 + 42	2.66	2.66	2.66	-	-	7.98	2.3 ~ 9.0	2230	340 ~ 3160	11.2	10.2	3.13	3.13	3.13	-	-	9.39	3.0 ~ 10.6	2270	460 ~ 3270	11.2	10.2
	42 + 42 + 50	2.51	2.51	2.98	-	-	8.00	2.3 ~ 9.0	2040	380 ~ 2860	10.2	9.4	2.95	2.95	3.50	-	-	9.40	3.0 ~ 10.6	2170	500 ~ 3120	10.7	9.8
	42 + 42 + 60	2.33	2.33	3.33	-	-	7.99	2.3 ~ 9.0	2040	380 ~ 2860	10.2	9.4	2.74	2.74	3.92	-	-	9.40	3.0 ~ 10.6	2170	500 ~ 3120	10.7	9.8
	42 + 50 + 50	2.36	2.82	2.82	-	-	8.00	2.3 ~ 9.0	1980	470 ~ 2710	9.9	9.1	2.78	3.31	3.31	-	-	9.40	3.0 ~ 10.6	2090	590 ~ 3000	10.3	9.4
4 Rooms	16 + 16 + 16 + 16	1.60	1.60	1.60	1.60	-	6.40	2.3 ~ 9.2	1490	420 ~ 2940	7.4	6.8	2.35	2.35	2.35	-	-	9.40	3.0 ~ 11.6	2060	490 ~ 3470	10.3	9.5
	16 + 16 + 16 + 20	1.60	1.60	1.60	2.00	-	6.80	2.3 ~ 9.2	1600	420 ~ 2870	7.9	7.3	2.21	2.21	2.21	2.77	-	9.40	3.0 ~ 11.6	2050	500 ~ 3460	10.3	9.4
	16 + 16 + 16 + 25	1.60	1.60	1.60	2.50	-	7.30	2.3 ~ 9.2	1760	420 ~ 2870	8.6	7.9	2.06	2.06	2.06	3.22	-	9.40	3.0 ~ 11.6	2050	500 ~ 3460	10.3	9.4
	16 + 16 + 16 + 35	1.54	1.54	1.54	3.38	-	8.00	2.3 ~ 9.2	1980	420 ~ 2870	9.7	8.9	1.81	1.81	1.81	3.97	-	9.40	3.0 ~ 11.6	2030	500 ~ 3420	10.2	9.3
	16 + 16 + 16 + 42	1.42	1.42	1.42	3.74	-	8.00	2.3 ~ 9.2	1980	420 ~ 2870	9.7	8.9	1.67	1.67	1.67	4.39	-	9.40	3.0 ~ 11.6	2020	510 ~ 3410	10.1	9.3
	16 + 16 + 16 + 50	1.31	1.31	1.31	4.07	-	8.00	2.3 ~ 9.2	1880	480 ~ 2730	9.2	8.5	1.53	1.53	1.53	4.81	-	9.40	3.0 ~ 11.6	2000	600 ~ 3340	10.0	9.2
	16 + 16 + 16 + 60	1.19	1.19	1.19	4.43	-	8.00	2.3 ~ 9.2	1880	480 ~ 2730	9.2	8.5	1.39	1.39	1.39	5.23	-	9.40	3.0 ~ 11.6	2000	600 ~ 3340	10.0	9.2
	16 + 16 + 16 + 71	1.08	1.08	1.08	4.76	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.26	1.26	1.26	5.62	-	9.40	3.0 ~ 11.6	1990	630 ~ 3320	10.0	9.1
	16 + 16 + 20 + 20	1.60	1.60	2.00	2.00	-	7.20	2.3 ~ 9.2	1710	420 ~ 2870	8.5	7.8	2.09	2.09	2.61	2.61	-	9.40	3.0 ~ 11.6	2040	500 ~ 3440	10.2	9.4
	16 + 16 + 20 + 25	1.60	1.60	2.00	2.50	-	7.70	2.3 ~ 9.2	1870	420 ~ 2870	9.2	8.4	1.95	1.95	2.44	3.06	-	9.40	3.0 ~ 11.6	2040	500 ~ 3440	10.2	9.4
	16 + 16 + 20 + 35	1.47	1.47	1.84	3.22	-	8.00	2.3 ~ 9.2	1930	420 ~ 2870	9.5	8.7	1.73	1.73	2.16	3.78	-	9.40	3.0 ~ 11.6	2020	510 ~ 3410	10.1	9.3
	16 + 16 + 20 + 42	1.36	1.36	1.70	3.58	-	8.00	2.3 ~ 9.2	1930	420 ~ 2870	9.5	8.7	1.60	1.60	2.00	4.20	-	9.40	3.0 ~ 11.6	2020	530 ~ 3400	10.1	9.3
	16 + 16 + 20 + 50	1.25	1.25	1.57	3.93	-	8.00	2.3 ~ 9.2	1880	480 ~ 2660	9.2	8.5	1.47	1.47	1.84	4.62	-	9.40	3.0 ~ 11.6	1990	620 ~ 3330	10.0	9.1
	16 + 16 + 20 + 60	1.14	1.14	1.43	4.29	-	8.00	2.3 ~ 9.2	1880	480 ~ 2660	9.2	8.5	1.34	1.34	1.68	5.04	-	9.40	3.0 ~ 11.6	1990	620 ~ 3330	10.0	9.1
	16 + 16 + 20 + 71	1.04	1.04	1.30	4.62	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.22	1.22	1.53	5.43	-	9.40	3.0 ~ 11.6	1980	630 ~ 3310	9.9	9.1
	16 + 16 + 25 + 25	1.56	1.56	2.44	2.44	-	8.00	2.3 ~ 9.2	1980	420 ~ 2870	9.7	8.9	1.83	1.83	2.87	2.87	-	9.40	3.0 ~ 11.6	2040	500 ~ 3440	10.2	9.4
	16 + 16 + 25 + 35	1.39	1.39	2.17	3.05	-	8.00	2.3 ~ 9.2	1930	420 ~ 2870	9.5	8.7	1.63	1.63	2.55	3.59	-	9.40	3.0 ~ 11.6	2020	510 ~ 3410	10.1	9.3
	16 + 16 + 25 + 42	1.29	1.29	2.02	3.40	-	8.00	2.3 ~ 9.2	1930	420 ~ 2870	9.5	8.7	1.52	1.52	2.37	3.99	-	9.40	3.0 ~ 11.6	2020	530 ~ 3400	10.1	9.3
	16 + 16 + 25 + 50	1.20	1.20	1.87	3.73	-	8.00	2.3 ~ 9.2	1880	480 ~ 2660	9.2	8.5	1.41	1.41	2.20	4.38	-	9.40	3.0 ~ 11.6	1990	620 ~ 3330	10.0	9.1
	16 + 16 + 25 + 60	1.09	1.09	1.71	4.11	-	8.00	2.3 ~ 9.2	1880	480 ~ 2660	9.2	8.5	1.29	1.29	2.01	4.81	-	9.40	3.0 ~ 11.6	1990	620 ~ 3330	10.0	9.1
	16 + 16 + 25 + 71	1.00	1.00	1.56	4.44	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.18	1.18	1.84	5.20	-	9.40	3.0 ~ 11.6	1980	630 ~ 3310	9.9	9.1
	16 + 16 + 35 + 35	1.25	1.25	2.75	2.75	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.47	1.47	3.23	3.23	-	9.40	3.0 ~ 11.6	2010	540 ~ 3380	10.1	9.2
	16 + 16 + 35 + 42	1.17	1.17	2.57	3.09	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.38	1.38	3.02	3.62	-	9.40	3.0 ~ 11.6	2000	540 ~ 3360	10.0	9.2
	16 + 16 + 35 + 50	1.09	1.09	2.39	3.43	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.29	1.29	2.81	4.01	-	9.40	3.0 ~ 11.6	1980	640 ~ 3300	9.9	9.1
	16 + 16 + 35 + 60	1.01	1.01	2.20	3.78	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.18	1.18	2.59	4.45	-	9.40	3.0 ~ 11.6	1980	640 ~ 3300	9.9	9.1
	16 + 16 + 35 + 71	0.93	0.93	2.03	4.11	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.09	1.09	2.38	4.84	-	9.40	3.0 ~ 11.6	1970	650 ~ 3290	9.9	9.0
	16 + 16 + 42 + 42	1.10	1.10	2.90	2.90	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.30	1.30	3.40	3.40	-	9.40	3.0 ~ 11.6	1990	550 ~ 3350	10.0	9.1
	16 + 16 + 42 + 50	1.03	1.03	2.71	3.23	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.21	1.21	3.18	3.8							

CU-4Z80WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)				
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
4 Rooms	16 + 20 + 25 + 25	1.48	1.86	2.33	2.33	-	8.00	2.3 ~ 9.2	1980	420 ~ 2870	9.7	8.9	1.75	2.19	2.73	2.73	-	9.40	3.0 ~ 11.6	2040	500 ~ 3430	10.2	9.4
	16 + 20 + 25 + 35	1.33	1.67	2.08	2.92	-	8.00	2.3 ~ 9.2	1930	420 ~ 2800	9.5	8.7	1.57	1.96	2.45	3.42	-	9.40	3.0 ~ 11.6	2020	530 ~ 3400	10.1	9.3
	16 + 20 + 25 + 42	1.24	1.55	1.94	3.27	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.46	1.83	2.28	3.83	-	9.40	3.0 ~ 11.6	2010	530 ~ 3380	10.1	9.2
	16 + 20 + 25 + 50	1.15	1.44	1.80	3.61	-	8.00	2.3 ~ 9.2	1880	480 ~ 2660	9.2	8.5	1.35	1.69	2.12	4.24	-	9.40	3.0 ~ 11.6	1990	630 ~ 3320	10.0	9.1
	16 + 20 + 25 + 60	1.06	1.32	1.65	3.97	-	8.00	2.3 ~ 9.2	1880	480 ~ 2660	9.2	8.5	1.24	1.55	1.94	4.67	-	9.40	3.0 ~ 11.6	1990	630 ~ 3320	10.0	9.1
	16 + 20 + 25 + 71	0.97	1.21	1.52	4.30	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.14	1.42	1.78	5.06	-	9.40	3.0 ~ 11.6	1980	640 ~ 3300	9.9	9.1
	16 + 20 + 35 + 35	1.21	1.51	2.64	2.64	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.42	1.78	3.10	3.10	-	9.40	3.0 ~ 11.6	2000	540 ~ 3360	10.0	9.2
	16 + 20 + 35 + 42	1.13	1.42	2.48	2.97	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.33	1.66	2.91	3.50	-	9.40	3.0 ~ 11.6	1990	550 ~ 3350	10.0	9.1
	16 + 20 + 35 + 50	1.06	1.32	2.31	3.31	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.24	1.55	2.72	3.89	-	9.40	3.0 ~ 11.6	1970	650 ~ 3290	9.9	9.0
	16 + 20 + 35 + 60	0.98	1.22	2.14	3.66	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.15	1.44	2.51	4.30	-	9.40	3.0 ~ 11.6	1970	650 ~ 3290	9.9	9.0
	16 + 20 + 35 + 71	0.90	1.13	1.97	4.00	-	8.00	2.3 ~ 9.2	1880	530 ~ 2660	9.2	8.5	1.06	1.32	2.32	4.70	-	9.40	3.0 ~ 11.6	1970	670 ~ 3280	9.9	9.0
	16 + 20 + 42 + 42	1.07	1.33	2.80	2.80	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.25	1.57	3.29	3.29	-	9.40	3.0 ~ 11.6	1990	550 ~ 3340	10.0	9.1
	16 + 20 + 42 + 50	1.00	1.25	2.63	3.12	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.18	1.47	3.08	3.67	-	9.40	3.0 ~ 11.6	1970	670 ~ 3280	9.9	9.0
	16 + 20 + 42 + 60	0.93	1.16	2.43	3.48	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.09	1.36	2.86	4.09	-	9.40	3.0 ~ 11.6	1970	670 ~ 3280	9.9	9.0
	16 + 20 + 50 + 50	0.94	1.18	2.94	2.94	-	8.00	2.3 ~ 9.2	1890	590 ~ 2610	9.3	8.5	1.10	1.38	3.46	3.46	-	9.40	3.0 ~ 11.6	2010	790 ~ 3300	10.1	9.2
	16 + 20 + 50 + 60	0.88	1.10	2.74	3.28	-	8.00	2.3 ~ 9.2	1890	590 ~ 2610	9.3	8.5	1.03	1.29	3.22	3.86	-	9.40	3.0 ~ 11.6	2010	790 ~ 3300	10.1	9.2
	16 + 25 + 25 + 25	1.40	2.20	2.20	2.20	-	8.00	2.3 ~ 9.2	1980	420 ~ 2870	9.7	8.9	1.66	2.58	2.58	2.58	-	9.40	3.0 ~ 11.6	2040	500 ~ 3430	10.2	9.4
	16 + 25 + 25 + 35	1.27	1.98	1.98	2.77	-	8.00	2.3 ~ 9.2	1930	420 ~ 2800	9.5	8.7	1.49	2.33	2.33	3.25	-	9.40	3.0 ~ 11.6	2020	530 ~ 3400	10.1	9.3
	16 + 25 + 25 + 42	1.19	1.85	1.85	3.11	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.39	2.18	2.18	3.65	-	9.40	3.0 ~ 11.6	2010	530 ~ 3380	10.1	9.2
	16 + 25 + 25 + 50	1.10	1.72	1.72	3.46	-	8.00	2.3 ~ 9.2	1880	480 ~ 2660	9.2	8.5	1.30	2.03	2.03	4.04	-	9.40	3.0 ~ 11.6	1990	630 ~ 3320	10.0	9.1
	16 + 25 + 25 + 60	1.02	1.59	1.59	3.80	-	8.00	2.3 ~ 9.2	1880	480 ~ 2660	9.2	8.5	1.19	1.87	1.87	4.47	-	9.40	3.0 ~ 11.6	1990	630 ~ 3320	10.0	9.1
	16 + 25 + 25 + 71	0.93	1.46	1.46	4.15	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.10	1.72	1.72	4.86	-	9.40	3.0 ~ 11.6	1980	640 ~ 3300	9.9	9.1
	16 + 25 + 35 + 35	1.15	1.81	2.52	2.52	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.35	2.13	2.96	2.96	-	9.40	3.0 ~ 11.6	2000	540 ~ 3360	10.0	9.2
	16 + 25 + 35 + 42	1.08	1.69	2.37	2.86	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.27	1.99	2.79	3.35	-	9.40	3.0 ~ 11.6	1990	550 ~ 3350	10.0	9.1
	16 + 25 + 35 + 50	1.02	1.59	2.22	3.17	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.19	1.87	2.61	3.73	-	9.40	3.0 ~ 11.6	1970	650 ~ 3290	9.9	9.0
	16 + 25 + 35 + 60	0.94	1.47	2.06	3.53	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.10	1.73	2.42	4.15	-	9.40	3.0 ~ 11.6	1970	650 ~ 3290	9.9	9.0
	16 + 25 + 35 + 71	0.87	1.36	1.90	3.87	-	8.00	2.3 ~ 9.2	1880	530 ~ 2660	9.2	8.5	1.02	1.60	2.24	4.54	-	9.40	3.0 ~ 11.6	1970	670 ~ 3280	9.9	9.0
	16 + 25 + 42 + 42	1.02	1.60	2.69	2.69	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.20	1.88	3.16	3.16	-	9.40	3.0 ~ 11.6	1990	550 ~ 3340	10.0	9.1
	16 + 25 + 42 + 50	0.96	1.50	2.53	3.01	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.13	1.77	2.97	3.53	-	9.40	3.0 ~ 11.6	1970	670 ~ 3280	9.9	9.0
	16 + 25 + 42 + 60	0.90	1.40	2.35	3.35	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.05	1.64	2.76	3.95	-	9.40	3.0 ~ 11.6	1970	670 ~ 3280	9.9	9.0
	16 + 25 + 50 + 50	0.90	1.42	2.84	2.84	-	8.00	2.3 ~ 9.2	1890	590 ~ 2610	9.3	8.5	1.07	1.67	3.33	3.33	-	9.40	3.0 ~ 11.6	2010	790 ~ 3300	10.1	9.2
	16 + 35 + 35 + 35	1.07	2.31	2.31	2.31	-	8.00	2.3 ~ 9.2	1930	470 ~ 2800	9.5	8.7	1.24	2.72	2.72	2.72	-	9.40	3.0 ~ 11.6	1980	550 ~ 3330	9.9	9.1
	16 + 35 + 35 + 42	1.00	2.19	2.19	2.62	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.18	2.57	2.57	3.08	-	9.40	3.0 ~ 11.6	1980	580 ~ 3320	9.9	9.1
	16 + 35 + 35 + 50	0.94	2.06	2.06	2.94	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.11	2.42	2.42	3.45	-	9.40	3.0 ~ 11.6	2000	680 ~ 3260	10.0	9.2
	16 + 35 + 35 + 60	0.88	1.92	1.92	3.28	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.03	2.25	2.25	3.87	-	9.40	3.0 ~ 11.6	2000	680 ~ 3260	10.0	9.2
	16 + 35 + 42 + 42	0.95	2.07	2.49	2.49	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.11	2.45	2.92	2.92	-	9.40	3.0 ~ 11.6	1970	580 ~ 3370	9.9	9.0
	16 + 35 + 42 + 50	0.90	1.96	2.35	2.79	-	8.00	2.3 ~ 9.2	1880	530 ~ 2660	9.2	8.5	1.05	2.30	2.76	3.29	-	9.40	3.0 ~ 11.6	2000	690 ~ 3310	10.0	9.2
	16 + 42 + 42 + 42	0.89	2.37	2.37	2.37	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.06	2.78	2.78	2.78	-	9.40	3.0 ~ 11.6	1970	590 ~ 3360	9.9	9.0
	20 + 20 + 20 + 20	2.00	2.00	2.00	2.00	-	8.00	2.3 ~ 9.2	1980	420 ~ 2870	9.7	8.9	2.35	2.35	2.35	2.35	-	9.40	3.0 ~ 11.6	2030	500 ~ 3420	10.2	9.3
	20 + 20 + 20 + 25	1.88	1.88	1.88	2.36	-	8.00	2.3 ~ 9.2	1980	420 ~ 2870	9.7	8.9	2.21	2.21	2.21	2.77	-	9.40	3.0 ~ 11.6	2030	500 ~ 3420	10.2	9.3
20 + 20 + 20 + 35	1.68	1.68	1.68	2.96	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.98	1.98	1.98	3.46	-	9.40	3.0 ~ 11.6	2010	530 ~ 3380	10.1	9.2	
20 + 20 + 20 + 42	1.57	1.57	1.57	3.29	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.84	1.84	1.84	3.88	-	9.40	3.0 ~ 11.6	2000	540 ~ 3370	10.0	9.2	
20 + 20 + 20 + 50	1.45	1.45	1.45	3.65	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.71	1.71	1.71	4.27	-	9.40	3.0 ~ 11.6	1980	640 ~ 3310	9.9	9.1	
20 + 20 + 20 + 60	1.33	1.33	1.33	4.01	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.57	1.57	1.57	4.69	-	9.40	3.0 ~ 11.6	1980	640 ~ 3310	9.9	9.1	
20 + 20 + 20 + 71	1.22	1.22	1.22	4.34	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.44	1.44	1.44	5.08	-	9.40	3.0 ~ 11.6	1970	640 ~ 3290	9.9	9.0	
20 + 20 + 25 + 25	1.78	1.78	2.22	2.22	-	8.00	2.3 ~ 9.2	1980	420 ~ 2870	9.7	8.9	2.09	2.09	2.61	2.61	-	9.40	3.0 ~ 11.6	2030	500 ~ 3420	10.2	9.3	
20 + 20 + 25 + 35	1.60	1.60	2.00	2.80	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.88	1.88	2.35	3.29	-	9.40	3.0 ~ 11.6	2010	530 ~ 3380	10.1	9.2	
20 + 20 + 25 + 42	1.50	1.50	1.87	3.13	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.76	1.76	2.20	3.68	-	9.40	3.0 ~ 11.6	2000	540 ~ 3370	10.0	9.2	
20 + 20 + 25 + 50	1.39	1.39	1.74	3.48	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.63	1.63	2.04	4.10	-	9.40	3.0 ~ 11.6	1980	640 ~ 3310	9.9	9.1	
20 + 20 + 25 + 60	1.28	1.28	1.60	3.84	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.50	1.50	1.88	4.52	-	9.40	3.0 ~ 11.6	1980	640 ~ 3310	9.9	9.1	
20 + 20 + 25 + 71	1.18	1.18	1.47	4.17	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.38	1.38	1.73	4.91	-	9.40	3.0 ~ 11.6	1970	640 ~ 3290	9.9	9.0	
20 + 20 + 35 + 35	1.45	1.45	2.55	2.55	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.71	1.71	2.99	2.99	-	9.40						

CU-4Z80WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)				
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
4 Rooms	20 + 20 + 50 + 50	1.14	1.14	2.86	2.86	-	8.00	2.3 ~ 9.2	1890	590 ~ 2610	9.3	8.5	1.34	1.34	3.36	3.36	-	9.40	3.0 ~ 11.6	2000	800 ~ 3290	10.0	9.2
	20 + 25 + 25 + 25	1.67	2.11	2.11	2.11	-	8.00	2.3 ~ 9.2	1980	420 ~ 2870	9.7	8.9	1.99	2.47	2.47	2.47	-	9.40	3.0 ~ 11.6	2030	500 ~ 3420	10.2	9.3
	20 + 25 + 25 + 35	1.52	1.90	1.90	2.68	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.79	2.24	2.24	3.13	-	9.40	3.0 ~ 11.6	2010	530 ~ 3380	10.1	9.2
	20 + 25 + 25 + 42	1.43	1.79	1.79	2.99	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.68	2.10	2.10	3.52	-	9.40	3.0 ~ 11.6	2000	540 ~ 3370	10.0	9.2
	20 + 25 + 25 + 50	1.33	1.67	1.67	3.33	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.57	1.96	1.96	3.91	-	9.40	3.0 ~ 11.6	1980	640 ~ 3310	9.9	9.1
	20 + 25 + 25 + 60	1.23	1.54	1.54	3.69	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.45	1.81	1.81	4.33	-	9.40	3.0 ~ 11.6	1980	640 ~ 3310	9.9	9.1
	20 + 25 + 25 + 71	1.13	1.42	1.42	4.03	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.33	1.67	1.67	4.73	-	9.40	3.0 ~ 11.6	1970	640 ~ 3290	9.9	9.0
	20 + 25 + 35 + 35	1.39	1.75	2.43	2.43	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.63	2.05	2.86	2.86	-	9.40	3.0 ~ 11.6	1990	550 ~ 3350	10.0	9.1
	20 + 25 + 35 + 42	1.31	1.64	2.30	2.75	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.54	1.93	2.70	3.23	-	9.40	3.0 ~ 11.6	1990	550 ~ 3340	10.0	9.1
	20 + 25 + 35 + 50	1.23	1.54	2.15	3.08	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.45	1.81	2.53	3.61	-	9.40	3.0 ~ 11.6	1970	670 ~ 3280	9.9	9.0
	20 + 25 + 35 + 60	1.14	1.43	2.00	3.43	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.34	1.68	2.35	4.03	-	9.40	3.0 ~ 11.6	1970	670 ~ 3280	9.9	9.0
	20 + 25 + 42 + 42	1.24	1.56	2.60	2.60	-	8.00	2.3 ~ 9.2	1930	460 ~ 2800	9.5	8.7	1.46	1.82	3.06	3.06	-	9.40	3.0 ~ 11.6	1980	570 ~ 3330	9.9	9.1
	20 + 25 + 42 + 50	1.17	1.46	2.45	2.92	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.37	1.72	2.88	3.43	-	9.40	3.0 ~ 11.6	2000	680 ~ 3270	10.0	9.2
	20 + 25 + 42 + 60	1.09	1.36	2.29	3.26	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.28	1.60	2.69	3.83	-	9.40	3.0 ~ 11.6	2000	680 ~ 3270	10.0	9.2
	20 + 25 + 50 + 50	1.10	1.38	2.76	2.76	-	8.00	2.3 ~ 9.2	1890	590 ~ 2610	9.3	8.5	1.30	1.62	3.24	3.24	-	9.40	3.0 ~ 11.6	2000	800 ~ 3290	10.0	9.2
	20 + 35 + 35 + 35	1.28	2.24	2.24	2.24	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.51	2.63	2.63	2.63	-	9.40	3.0 ~ 11.6	1980	580 ~ 3320	9.9	9.1
	20 + 35 + 35 + 42	1.21	2.12	2.12	2.55	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.42	2.49	2.49	3.00	-	9.40	3.0 ~ 11.6	1970	580 ~ 3370	9.9	9.0
	20 + 35 + 35 + 50	1.14	2.00	2.00	2.86	-	8.00	2.3 ~ 9.2	1880	530 ~ 2660	9.2	8.5	1.34	2.35	2.35	3.36	-	9.40	3.0 ~ 11.6	2000	690 ~ 3310	10.0	9.2
	20 + 35 + 42 + 42	1.15	2.01	2.42	2.42	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.35	2.37	2.84	2.84	-	9.40	3.0 ~ 11.6	1970	590 ~ 3360	9.9	9.0
	20 + 35 + 42 + 50	1.09	1.90	2.29	2.72	-	8.00	2.3 ~ 9.2	1880	530 ~ 2660	9.2	8.5	1.28	2.24	2.69	3.19	-	9.40	3.0 ~ 11.6	1990	700 ~ 3300	10.0	9.1
	20 + 42 + 42 + 42	1.10	2.30	2.30	2.30	-	8.00	2.3 ~ 9.2	1870	470 ~ 2730	9.2	8.4	1.30	2.70	2.70	2.70	-	9.40	3.0 ~ 11.6	2000	590 ~ 3350	10.0	9.2
	25 + 25 + 25 + 25	2.00	2.00	2.00	2.00	-	8.00	2.3 ~ 9.2	1980	420 ~ 2870	9.7	8.9	2.35	2.35	2.35	2.35	-	9.40	3.0 ~ 11.6	2030	500 ~ 3420	10.2	9.3
	25 + 25 + 25 + 35	1.82	1.82	1.82	2.54	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	2.14	2.14	2.14	2.98	-	9.40	3.0 ~ 11.6	2010	530 ~ 3380	10.1	9.2
	25 + 25 + 25 + 42	1.71	1.71	1.71	2.87	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	2.01	2.01	2.01	3.37	-	9.40	3.0 ~ 11.6	2000	540 ~ 3370	10.0	9.2
	25 + 25 + 25 + 50	1.60	1.60	1.60	3.20	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.88	1.88	1.88	3.76	-	9.40	3.0 ~ 11.6	1980	640 ~ 3310	9.9	9.1
	25 + 25 + 25 + 60	1.48	1.48	1.48	3.56	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.74	1.74	1.74	4.18	-	9.40	3.0 ~ 11.6	1980	640 ~ 3310	9.9	9.1
	25 + 25 + 25 + 71	1.37	1.37	1.37	3.89	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.61	1.61	1.61	4.57	-	9.40	3.0 ~ 11.6	1970	640 ~ 3290	9.9	9.0
	25 + 25 + 35 + 35	1.67	1.67	2.33	2.33	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.96	1.96	2.74	2.74	-	9.40	3.0 ~ 11.6	1990	550 ~ 3350	10.0	9.1
	25 + 25 + 35 + 42	1.57	1.57	2.20	2.66	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.85	1.85	2.59	3.11	-	9.40	3.0 ~ 11.6	1990	550 ~ 3340	10.0	9.1
	25 + 25 + 35 + 50	1.48	1.48	2.07	2.97	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.74	1.74	2.44	3.48	-	9.40	3.0 ~ 11.6	1970	670 ~ 3280	9.9	9.0
	25 + 25 + 35 + 60	1.38	1.38	1.93	3.31	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.62	1.62	2.27	3.89	-	9.40	3.0 ~ 11.6	1970	670 ~ 3280	9.9	9.0
	25 + 25 + 42 + 42	1.49	1.49	2.51	2.51	-	8.00	2.3 ~ 9.2	1930	460 ~ 2800	9.5	8.7	1.75	1.75	2.95	2.95	-	9.40	3.0 ~ 11.6	1980	570 ~ 3330	9.9	9.1
	25 + 25 + 42 + 50	1.41	1.41	2.37	2.81	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.65	1.65	2.78	3.32	-	9.40	3.0 ~ 11.6	2000	680 ~ 3270	10.0	9.2
	25 + 35 + 35 + 35	1.55	2.15	2.15	2.15	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.81	2.53	2.53	2.53	-	9.40	3.0 ~ 11.6	1980	580 ~ 3320	9.9	9.1
	25 + 35 + 35 + 42	1.46	2.04	2.04	2.46	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.72	2.40	2.40	2.88	-	9.40	3.0 ~ 11.6	1970	580 ~ 3370	9.9	9.0
25 + 35 + 35 + 50	1.38	1.93	1.93	2.76	-	8.00	2.3 ~ 9.2	1880	530 ~ 2660	9.2	8.5	1.62	2.27	2.27	3.24	-	9.40	3.0 ~ 11.6	2000	690 ~ 3310	10.0	9.2	
25 + 35 + 42 + 42	1.39	1.95	2.33	2.33	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.63	2.29	2.74	2.74	-	9.40	3.0 ~ 11.6	1970	590 ~ 3360	9.9	9.0	
35 + 35 + 35 + 35	2.00	2.00	2.00	2.00	-	8.00	2.3 ~ 9.2	1870	470 ~ 2730	9.2	8.4	2.35	2.35	2.35	2.35	-	9.40	3.0 ~ 11.6	2000	590 ~ 3350	10.0	9.2	
35 + 35 + 35 + 42	1.90	1.90	1.90	2.30	-	8.00	2.3 ~ 9.2	1870	470 ~ 2730	9.2	8.4	2.24	2.24	2.24	2.68	-	9.40	3.0 ~ 11.6	2000	600 ~ 3340	10.0	9.2	

CU-4Z80WBH-8: Free Multi Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)				
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
1 Room	16	1.60	-	-	-	-	1.60	1.3 ~ 2.3	450	250 ~ 690	2.4	2.2	2.60	-	-	-	-	2.60	1.2 ~ 3.2	700	290 ~ 1060	3.5	3.2
	20	2.00	-	-	-	-	2.00	1.8 ~ 2.9	550	340 ~ 860	2.8	2.6	3.20	-	-	-	-	3.20	1.2 ~ 4.1	840	290 ~ 1330	4.3	3.9
	25	2.50	-	-	-	-	2.50	1.8 ~ 2.9	680	340 ~ 860	3.5	3.2	3.60	-	-	-	-	3.60	1.2 ~ 4.3	1040	290 ~ 1330	5.4	4.9
	35	3.50	-	-	-	-	3.50	1.8 ~ 4.1	990	340 ~ 1410	5.0	4.6	4.50	-	-	-	-	4.50	1.2 ~ 5.8	1330	290 ~ 2200	6.8	6.2
	42	4.20	-	-	-	-	4.20	1.8 ~ 4.5	1420	340 ~ 2040	6.9	6.3	5.60	-	-	-	-	5.60	1.2 ~ 6.8	1820	290 ~ 3030	8.8	8.0
	50	5.00	-	-	-	-	5.00	1.9 ~ 5.4	1630	340 ~ 2150	7.9	7.3	6.80	-	-	-	-	6.80	1.2 ~ 6.9	2350	290 ~ 2840	11.3	10.4
	60	6.00	-	-	-	-	6.00	1.9 ~ 6.2	2080	340 ~ 2380	9.8	9.0	8.50	-	-	-	-	8.50	1.3 ~ 9.0	2500	320 ~ 2650	12.1	11.0
71	7.10	-	-	-	-	7.10	2.0 ~ 7.2	2580	370 ~ 2820	12.2	11.2	8.70	-	-	-	-	8.70	1.4 ~ 9.2	2650	380 ~ 2820	12.8	11.7	
2 Rooms	16 + 16	1.60	1.60	-	-	-	3.20	2.3 ~ 5.8	830	350 ~ 2090	4.3	4.0	2.60	2.60	-	-	-	5.20	2.2 ~ 8.2	1760	430 ~ 3040	8.6	7.9
	16 + 20	1.60	2.00	-	-	-	3.60	2.3 ~ 5.8	970	340 ~ 2090	5.0	4.6	2.58	3.22	-	-	-	5.80	2.2 ~ 8.2	1880	430 ~ 3030	9.2	8.5
	16 + 25	1.60	2.50	-	-	-	4.10	2.3 ~ 5.8	1170	340 ~ 2090	6.0	5.5	2.42	3.78	-	-	-	6.20	2.2 ~ 8.2	2020	430 ~ 3030	9.9	9.1
	16 + 35	1.60	3.50	-	-	-	5.10	2.3 ~ 5.8	1580	340 ~ 2020	8.0	7.3	2.23	4.87	-	-	-	7.10	2.2 ~ 8.6	2190	380 ~ 3110	10.8	9.9
	16 + 42	1.60	4.20	-	-	-	5.80	2.3 ~ 6.7	1920	340 ~ 2580	9.6	8.8	2.26	5.94	-	-	-	8.20	2.2 ~ 9.8	2570	370 ~ 3640	12	

CU-4Z80WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION											
	Cooling Capacity (kW)						Input Power (W)		Current (A)			Heating Capacity (kW)						Input Power (W)		Current (A)			
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	
2 Rooms	16 + 60	1.60	6.00	-	-	-	7.60	2.3 ~ 8.5	2790	320 ~ 3590	14.0	12.8	1.98	7.42	-	-	-	9.40	2.2 ~ 10.0	2660	330 ~ 3450	13.1	12.0
	16 + 71	1.47	6.53	-	-	-	8.00	2.3 ~ 8.5	2940	320 ~ 3440	14.7	13.5	1.73	7.67	-	-	-	9.40	2.2 ~ 10.3	2600	320 ~ 3620	12.8	11.7
	20 + 20	2.00	2.00	-	-	-	4.00	2.3 ~ 5.8	1110	340 ~ 2030	5.7	5.2	3.20	3.20	-	-	-	6.40	2.2 ~ 8.2	2060	390 ~ 3020	10.1	9.3
	20 + 25	2.00	2.50	-	-	-	4.50	2.3 ~ 5.8	1340	340 ~ 2030	6.8	6.2	3.02	3.78	-	-	-	6.80	2.2 ~ 8.2	2120	390 ~ 3020	10.4	9.5
	20 + 35	2.00	3.50	-	-	-	5.50	2.3 ~ 5.8	1750	340 ~ 1960	8.8	8.0	2.80	4.90	-	-	-	7.70	2.2 ~ 8.6	2370	370 ~ 3050	11.6	10.7
	20 + 42	2.00	4.20	-	-	-	6.20	2.3 ~ 7.2	2170	340 ~ 3000	10.9	10.0	2.84	5.96	-	-	-	8.80	2.2 ~ 10.0	2620	370 ~ 3750	12.9	11.8
	20 + 50	2.00	5.00	-	-	-	7.00	2.3 ~ 8.1	2310	320 ~ 3200	11.6	10.6	2.69	6.71	-	-	-	9.40	2.2 ~ 10.0	2650	320 ~ 3430	13.0	11.9
	20 + 60	2.00	6.00	-	-	-	8.00	2.3 ~ 8.5	3010	320 ~ 3590	15.1	13.8	2.35	7.05	-	-	-	9.40	2.2 ~ 10.0	2650	320 ~ 3430	13.0	11.9
	20 + 71	1.76	6.24	-	-	-	8.00	2.3 ~ 8.5	2870	350 ~ 3440	14.4	13.2	2.07	7.33	-	-	-	9.40	2.2 ~ 10.3	2590	320 ~ 3600	12.7	11.7
	25 + 25	2.50	2.50	-	-	-	5.00	2.3 ~ 5.8	1530	340 ~ 2030	7.7	7.1	3.60	3.60	-	-	-	7.20	2.2 ~ 8.6	2250	390 ~ 3130	11.1	10.1
	25 + 35	2.50	3.50	-	-	-	6.00	2.3 ~ 6.7	2040	340 ~ 2580	10.2	9.4	3.37	4.73	-	-	-	8.10	2.2 ~ 9.8	2520	370 ~ 3640	12.4	11.3
	25 + 42	2.50	4.20	-	-	-	6.70	2.3 ~ 7.2	2510	340 ~ 3000	12.6	11.5	3.43	5.77	-	-	-	9.20	2.2 ~ 10.0	2770	370 ~ 3750	13.6	12.5
	25 + 50	2.50	5.00	-	-	-	7.50	2.3 ~ 8.5	2650	320 ~ 3590	13.3	12.2	3.13	6.27	-	-	-	9.40	2.2 ~ 10.0	2650	320 ~ 3430	13.0	11.9
	25 + 60	2.35	5.65	-	-	-	8.00	2.3 ~ 8.5	3010	320 ~ 3590	15.1	13.8	2.76	6.64	-	-	-	9.40	2.2 ~ 10.0	2650	320 ~ 3430	13.0	11.9
	25 + 71	2.08	5.92	-	-	-	8.00	2.3 ~ 8.5	2870	350 ~ 3440	14.4	13.2	2.45	6.95	-	-	-	9.40	2.2 ~ 10.3	2590	320 ~ 3600	12.7	11.7
	35 + 35	3.50	3.50	-	-	-	7.00	2.3 ~ 8.1	2650	330 ~ 3730	13.3	12.2	4.50	4.50	-	-	-	9.00	2.2 ~ 10.0	2650	360 ~ 3670	13.0	11.9
	35 + 42	3.50	4.20	-	-	-	7.70	2.3 ~ 8.5	3140	330 ~ 4220	15.7	14.4	4.27	5.13	-	-	-	9.40	2.2 ~ 10.0	2790	350 ~ 3660	13.7	12.6
	35 + 50	3.29	4.71	-	-	-	8.00	2.3 ~ 8.5	2870	320 ~ 3440	14.4	13.2	3.87	5.53	-	-	-	9.40	2.2 ~ 10.0	2580	320 ~ 3400	12.7	11.6
	35 + 60	2.95	5.05	-	-	-	8.00	2.3 ~ 8.5	2870	320 ~ 3440	14.4	13.2	3.46	5.94	-	-	-	9.40	2.2 ~ 10.3	2580	320 ~ 3520	12.7	11.6
	35 + 71	2.64	5.36	-	-	-	8.00	2.3 ~ 8.6	2800	350 ~ 3440	14.0	12.8	3.10	6.30	-	-	-	9.40	2.2 ~ 10.5	2560	310 ~ 3630	12.6	11.5
	42 + 42	4.00	4.00	-	-	-	8.00	2.3 ~ 8.5	3440	330 ~ 4140	17.2	15.8	4.70	4.70	-	-	-	9.40	2.2 ~ 10.0	2780	350 ~ 3650	13.7	12.5
42 + 50	3.65	4.35	-	-	-	8.00	2.3 ~ 8.5	2870	320 ~ 3440	14.4	13.2	4.29	5.11	-	-	-	9.40	2.2 ~ 10.3	2560	320 ~ 3510	12.6	11.5	
42 + 60	3.29	4.71	-	-	-	8.00	2.3 ~ 8.6	2870	320 ~ 3520	14.4	13.2	3.87	5.53	-	-	-	9.40	2.2 ~ 10.3	2560	320 ~ 3510	12.6	11.5	
42 + 71	2.97	5.03	-	-	-	8.00	2.3 ~ 8.6	2800	350 ~ 3360	14.0	12.8	3.49	5.91	-	-	-	9.40	2.2 ~ 10.5	2550	310 ~ 3620	12.5	11.5	
50 + 50	4.00	4.00	-	-	-	8.00	2.3 ~ 8.6	2520	340 ~ 3050	12.6	11.6	4.70	4.70	-	-	-	9.40	2.2 ~ 10.3	2400	310 ~ 3290	11.8	10.8	
50 + 60	3.64	4.36	-	-	-	8.00	2.3 ~ 8.6	2520	340 ~ 3050	12.6	11.6	4.27	5.13	-	-	-	9.40	2.2 ~ 10.5	2400	310 ~ 3350	11.8	10.8	
50 + 71	3.31	4.69	-	-	-	8.00	2.3 ~ 8.6	2450	340 ~ 2980	12.3	11.2	3.88	5.52	-	-	-	9.40	2.2 ~ 10.5	2380	310 ~ 3330	11.7	10.7	
60 + 60	4.00	4.00	-	-	-	8.00	2.3 ~ 8.6	2520	340 ~ 3050	12.6	11.6	4.70	4.70	-	-	-	9.40	2.2 ~ 10.5	2400	310 ~ 3350	11.8	10.8	
60 + 71	3.66	4.34	-	-	-	8.00	2.3 ~ 8.6	2450	340 ~ 2980	12.3	11.2	4.31	5.09	-	-	-	9.40	2.2 ~ 10.5	2380	310 ~ 3330	11.7	10.7	
71 + 71	4.00	4.00	-	-	-	8.00	2.3 ~ 8.6	2380	380 ~ 2900	11.9	10.9	4.70	4.70	-	-	-	9.40	2.2 ~ 10.5	2370	320 ~ 3320	11.6	10.7	
3 Rooms	16 + 16 + 16	1.60	1.60	1.60	-	-	4.80	2.3 ~ 8.5	1230	350 ~ 3260	6.2	5.7	2.60	2.60	2.60	-	-	7.80	3.0 ~ 10.4	2180	440 ~ 3640	10.7	9.8
	16 + 16 + 20	1.60	1.60	2.00	-	-	5.20	2.3 ~ 8.5	1330	350 ~ 3260	6.7	6.2	2.58	2.58	3.24	-	-	8.40	3.0 ~ 10.4	2410	440 ~ 3560	11.8	10.9
	16 + 16 + 25	1.60	1.60	2.50	-	-	5.70	2.3 ~ 8.5	1540	350 ~ 3260	7.8	7.1	2.47	2.47	3.86	-	-	8.80	3.0 ~ 10.4	2390	440 ~ 3560	11.7	10.8
	16 + 16 + 35	1.60	1.60	3.50	-	-	6.70	2.3 ~ 8.5	1860	340 ~ 3180	9.3	8.5	2.24	2.24	4.92	-	-	9.40	3.0 ~ 10.4	2550	440 ~ 3530	12.5	11.5
	16 + 16 + 42	1.60	1.60	4.20	-	-	7.40	2.3 ~ 8.5	2220	340 ~ 3100	11.1	10.2	2.03	2.03	5.34	-	-	9.40	3.0 ~ 10.4	2540	430 ~ 3510	12.5	11.4
	16 + 16 + 50	1.56	1.56	4.88	-	-	8.00	2.3 ~ 8.6	2250	380 ~ 2880	11.3	10.3	1.83	1.83	5.74	-	-	9.40	3.0 ~ 10.4	2430	460 ~ 3300	11.9	10.9
	16 + 16 + 60	1.39	1.39	5.22	-	-	8.00	2.3 ~ 8.6	2250	380 ~ 2880	11.3	10.3	1.63	1.63	6.14	-	-	9.40	3.0 ~ 10.5	2430	460 ~ 3360	11.9	10.9
	16 + 16 + 71	1.24	1.24	5.52	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	1.46	1.46	6.48	-	-	9.40	3.0 ~ 10.5	2420	460 ~ 3340	11.9	10.9
	16 + 20 + 20	1.60	2.00	2.00	-	-	5.60	2.3 ~ 8.5	1490	350 ~ 3180	7.5	6.9	2.58	3.21	3.21	-	-	9.00	3.0 ~ 10.4	2430	440 ~ 3550	11.9	10.9
	16 + 20 + 25	1.60	2.00	2.50	-	-	6.10	2.3 ~ 8.5	1700	350 ~ 3180	8.6	7.9	2.47	3.08	3.85	-	-	9.40	3.0 ~ 10.4	2570	440 ~ 3550	12.6	11.6
	16 + 20 + 35	1.60	2.00	3.50	-	-	7.10	2.3 ~ 8.5	2030	340 ~ 3100	10.2	9.3	2.12	2.65	4.63	-	-	9.40	3.0 ~ 10.4	2540	430 ~ 3510	12.5	11.4
	16 + 20 + 42	1.60	2.00	4.20	-	-	7.80	2.3 ~ 8.5	2320	340 ~ 3100	11.6	10.6	1.93	2.41	5.06	-	-	9.40	3.0 ~ 10.4	2530	430 ~ 3500	12.4	11.4
	16 + 20 + 50	1.49	1.86	4.65	-	-	8.00	2.3 ~ 8.6	2250	380 ~ 2880	11.3	10.3	1.75	2.19	5.46	-	-	9.40	3.0 ~ 10.5	2420	460 ~ 3350	11.9	10.9
	16 + 20 + 60	1.33	1.67	5.00	-	-	8.00	2.3 ~ 8.6	2250	380 ~ 2880	11.3	10.3	1.57	1.96	5.87	-	-	9.40	3.0 ~ 10.5	2420	460 ~ 3350	11.9	10.9
	16 + 20 + 71	1.20	1.50	5.30	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	1.41	1.76	6.23	-	-	9.40	3.0 ~ 10.5	2410	460 ~ 3330	11.8	10.9
	16 + 25 + 25	1.60	2.50	2.50	-	-	6.60	2.3 ~ 8.5	1940	350 ~ 3180	9.7	8.9	2.28	3.56	3.56	-	-	9.40	3.0 ~ 10.4	2570	440 ~ 3550	12.6	11.6
	16 + 25 + 35	1.60	2.50	3.50	-	-	7.60	2.3 ~ 8.5	2340	340 ~ 3100	11.7	10.7	1.98	3.09	4.33	-	-	9.40	3.0 ~ 10.4	2540	430 ~ 3510	12.5	11.4
	16 + 25 + 42	1.54	2.41	4.05	-	-	8.00	2.3 ~ 8.6	2440	340 ~ 3180	12.2	11.2	1.81	2.83	4.76	-	-	9.40	3.0 ~ 10.4	2530	430 ~ 3500	12.4	11.4
	16 + 25 + 50	1.41	2.20	4.39	-	-	8.00	2.3 ~ 8.6	2250	380 ~ 2880	11.3	10.3	1.65	2.58	5.17	-	-	9.40	3.0 ~ 10.5	2420	460 ~ 3350	11.9	10.9
	16 + 25 + 60	1.27	1.98	4.75	-	-	8.00	2.3 ~ 8.8	2250	380 ~ 2950	11.3	10.3	1.49	2.33	5.58	-	-	9.40	3.0 ~ 10.5	2420	460 ~ 3350	11.9	10.9
	16 + 25 + 71	1.14	1.79	5.07	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	1.34	2.10	5.96	-	-	9.40	3.0 ~ 10.6	2410	460 ~ 3390	11.8	10.9
	16 + 35 + 35	1.48	3.26	3.26	-	-	8.00	2.3 ~ 8.6	2380	340 ~ 3100	11.9	10.9	1.74	3.83	3.83	-	-	9.40	3.0 ~ 10.5	2510	460 ~ 3540	12.3	11.3
	16 + 35 + 42	1.38	3.01	3.61	-	-	8.00	2.3 ~ 8.6	2380	340 ~ 3100	11.9	10.9	1.62	3.54	4.24	-	-	9.40	3.0 ~ 10.5	2500	460 ~ 3460	12.3	11.3
	16 + 35 + 50	1.27	2.77	3.96	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	1.49	3.26	4.65	-	-	9.40	3.0 ~ 10.5	2390	490 ~ 3310	11.7	10.8
16 + 35 + 60	1.15	2.52	4.33	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	1.35	2.96	5.09	-	-	9.40	3.					

CU-4Z80WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION										
	Cooling Capacity (kW)						Input Power (W)		Current (A)			Heating Capacity (kW)						Input Power (W)		Current (A)		
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
16 + 42 + 71	0.99	2.60	4.41	-	-	8.00	2.3 ~ 9.0	2130	380 ~ 2950	10.7	9.8	1.17	3.06	5.17	-	-	9.40	3.0 ~ 10.6	2370	490 ~ 3340	11.6	10.7
16 + 50 + 50	1.10	3.45	3.45	-	-	8.00	2.3 ~ 8.8	2070	430 ~ 2730	10.4	9.5	1.30	4.05	4.05	-	-	9.40	3.0 ~ 10.6	2300	550 ~ 3230	11.3	10.4
16 + 50 + 60	1.02	3.17	3.81	-	-	8.00	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.19	3.73	4.48	-	-	9.40	3.0 ~ 10.6	2300	550 ~ 3230	11.3	10.4
16 + 50 + 71	0.93	2.92	4.15	-	-	8.00	2.3 ~ 9.0	2070	470 ~ 2800	10.4	9.5	1.10	3.43	4.87	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
16 + 60 + 60	0.94	3.53	3.53	-	-	8.00	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.10	4.15	4.15	-	-	9.40	3.0 ~ 10.6	2300	550 ~ 3230	11.3	10.4
16 + 60 + 71	0.87	3.27	3.86	-	-	8.00	2.3 ~ 9.0	2070	470 ~ 2800	10.4	9.5	1.02	3.84	4.54	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
20 + 20 + 20	2.00	2.00	2.00	-	-	6.00	2.3 ~ 8.5	1650	340 ~ 3180	8.3	7.6	3.13	3.13	3.13	-	-	9.39	3.0 ~ 10.4	2560	440 ~ 3540	12.6	11.5
20 + 20 + 25	2.00	2.00	2.50	-	-	6.50	2.3 ~ 8.5	1880	340 ~ 3180	9.4	8.6	2.89	2.89	3.62	-	-	9.40	3.0 ~ 10.4	2560	440 ~ 3540	12.6	11.5
20 + 20 + 35	2.00	2.00	3.50	-	-	7.50	2.3 ~ 8.5	2210	340 ~ 3100	11.1	10.1	2.51	2.51	4.38	-	-	9.40	3.0 ~ 10.4	2530	430 ~ 3500	12.4	11.4
20 + 20 + 42	1.95	1.95	4.10	-	-	8.00	2.3 ~ 8.6	2440	340 ~ 3180	12.2	11.2	2.29	2.29	4.82	-	-	9.40	3.0 ~ 10.4	2520	460 ~ 3490	12.4	11.3
20 + 20 + 50	1.78	1.78	4.44	-	-	8.00	2.3 ~ 8.6	2190	380 ~ 2800	11.0	10.0	2.09	2.09	5.22	-	-	9.40	3.0 ~ 10.5	2410	460 ~ 3330	11.8	10.9
20 + 20 + 60	1.60	1.60	4.80	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	1.88	1.88	5.64	-	-	9.40	3.0 ~ 10.5	2410	460 ~ 3330	11.8	10.9
20 + 20 + 71	1.44	1.44	5.12	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2870	11.0	10.0	1.69	1.69	6.02	-	-	9.40	3.0 ~ 10.6	2400	460 ~ 3380	11.8	10.8
20 + 25 + 25	2.00	2.50	2.50	-	-	7.00	2.3 ~ 8.5	2040	340 ~ 3180	10.2	9.4	2.68	3.36	3.36	-	-	9.40	3.0 ~ 10.4	2560	440 ~ 3540	12.6	11.5
20 + 25 + 35	2.00	2.50	3.50	-	-	8.00	2.3 ~ 8.6	2440	340 ~ 3180	12.2	11.2	2.35	2.94	4.11	-	-	9.40	3.0 ~ 10.4	2530	430 ~ 3500	12.4	11.4
20 + 25 + 42	1.84	2.30	3.86	-	-	8.00	2.3 ~ 8.6	2440	340 ~ 3180	12.2	11.2	2.16	2.70	4.54	-	-	9.40	3.0 ~ 10.5	2520	460 ~ 3550	12.4	11.3
20 + 25 + 50	1.68	2.11	4.21	-	-	8.00	2.3 ~ 8.6	2190	380 ~ 2800	11.0	10.0	1.98	2.47	4.95	-	-	9.40	3.0 ~ 10.5	2410	460 ~ 3330	11.8	10.9
20 + 25 + 60	1.52	1.90	4.58	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	1.79	2.24	5.37	-	-	9.40	3.0 ~ 10.5	2410	460 ~ 3330	11.8	10.9
20 + 25 + 71	1.38	1.72	4.90	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2870	11.0	10.0	1.62	2.03	5.75	-	-	9.40	3.0 ~ 10.6	2400	460 ~ 3380	11.8	10.8
20 + 35 + 35	1.78	3.11	3.11	-	-	8.00	2.3 ~ 8.6	2380	340 ~ 3100	11.9	10.9	2.08	3.66	3.66	-	-	9.40	3.0 ~ 10.5	2500	460 ~ 3460	12.3	11.3
20 + 35 + 42	1.65	2.89	3.46	-	-	8.00	2.3 ~ 8.6	2380	340 ~ 3100	11.9	10.9	1.94	3.39	4.07	-	-	9.40	3.0 ~ 10.5	2490	460 ~ 3450	12.2	11.2
20 + 35 + 50	1.52	2.67	3.81	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	1.79	3.13	4.48	-	-	9.40	3.0 ~ 10.5	2390	490 ~ 3300	11.7	10.8
20 + 35 + 60	1.39	2.43	4.18	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	1.63	2.86	4.91	-	-	9.40	3.0 ~ 10.6	2390	490 ~ 3360	11.7	10.8
20 + 35 + 71	1.27	2.22	4.51	-	-	8.00	2.3 ~ 9.0	2130	380 ~ 2950	10.7	9.8	1.49	2.61	5.30	-	-	9.40	3.0 ~ 10.6	2370	490 ~ 3340	11.6	10.7
20 + 42 + 42	1.54	3.23	3.23	-	-	8.00	2.3 ~ 8.8	2380	340 ~ 3180	11.9	10.9	1.80	3.80	3.80	-	-	9.40	3.0 ~ 10.5	2480	460 ~ 3440	12.2	11.2
20 + 42 + 50	1.43	3.00	3.57	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2870	11.0	10.0	1.68	3.53	4.19	-	-	9.40	3.0 ~ 10.6	2380	490 ~ 3350	11.7	10.7
20 + 42 + 60	1.31	2.75	3.94	-	-	8.00	2.3 ~ 9.0	2190	380 ~ 3020	11.0	10.0	1.54	3.24	4.62	-	-	9.40	3.0 ~ 10.6	2380	490 ~ 3350	11.7	10.7
20 + 42 + 71	1.20	2.53	4.27	-	-	8.00	2.3 ~ 9.0	2130	380 ~ 2950	10.7	9.8	1.41	2.97	5.02	-	-	9.40	3.0 ~ 10.6	2370	490 ~ 3330	11.6	10.7
20 + 50 + 50	1.33	3.33	3.33	-	-	7.99	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.56	3.92	3.92	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
20 + 50 + 60	1.23	3.08	3.69	-	-	8.00	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.45	3.62	4.33	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
20 + 50 + 71	1.13	2.84	4.03	-	-	8.00	2.3 ~ 9.0	2070	470 ~ 2800	10.4	9.5	1.33	3.33	4.74	-	-	9.40	3.0 ~ 10.6	2280	580 ~ 3210	11.2	10.3
20 + 60 + 60	1.14	3.43	3.43	-	-	8.00	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.34	4.03	4.03	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
25 + 25 + 25	2.50	2.50	2.50	-	-	7.50	2.3 ~ 8.5	2280	340 ~ 3180	11.4	10.5	3.13	3.13	3.13	-	-	9.39	3.0 ~ 10.4	2560	440 ~ 3540	12.6	11.5
25 + 25 + 35	2.35	2.35	3.30	-	-	8.00	2.3 ~ 8.6	2440	340 ~ 3180	12.2	11.2	2.76	2.76	3.88	-	-	9.40	3.0 ~ 10.4	2530	430 ~ 3500	12.4	11.4
25 + 25 + 42	2.17	2.17	3.66	-	-	8.00	2.3 ~ 8.6	2440	340 ~ 3180	12.2	11.2	2.55	2.55	4.30	-	-	9.40	3.0 ~ 10.5	2520	460 ~ 3550	12.4	11.3
25 + 25 + 50	2.00	2.00	4.00	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	2.35	2.35	4.70	-	-	9.40	3.0 ~ 10.5	2410	460 ~ 3330	11.8	10.9
25 + 25 + 60	1.82	1.82	4.36	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	2.14	2.14	5.12	-	-	9.40	3.0 ~ 10.5	2410	460 ~ 3330	11.8	10.9
25 + 25 + 71	1.65	1.65	4.70	-	-	8.00	2.3 ~ 9.0	2190	380 ~ 3020	11.0	10.0	1.94	1.94	5.52	-	-	9.40	3.0 ~ 10.6	2400	460 ~ 3380	11.8	10.8
25 + 35 + 35	2.10	2.95	2.95	-	-	8.00	2.3 ~ 8.6	2380	340 ~ 3100	11.9	10.9	2.48	3.46	3.46	-	-	9.40	3.0 ~ 10.5	2500	460 ~ 3460	12.3	11.3
25 + 35 + 42	1.96	2.75	3.29	-	-	8.00	2.3 ~ 8.8	2380	340 ~ 3250	11.9	10.9	2.30	3.23	3.87	-	-	9.40	3.0 ~ 10.5	2490	460 ~ 3450	12.2	11.2
25 + 35 + 50	1.82	2.55	3.63	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	2.14	2.99	4.27	-	-	9.40	3.0 ~ 10.5	2390	490 ~ 3300	11.7	10.8
25 + 35 + 60	1.67	2.33	4.00	-	-	8.00	2.3 ~ 9.0	2190	380 ~ 3020	11.0	10.0	1.96	2.74	4.70	-	-	9.40	3.0 ~ 10.6	2390	490 ~ 3360	11.7	10.8
25 + 35 + 71	1.53	2.14	4.33	-	-	8.00	2.3 ~ 9.0	2130	380 ~ 2950	10.7	9.8	1.79	2.51	5.10	-	-	9.40	3.0 ~ 10.6	2370	490 ~ 3340	11.6	10.7
25 + 42 + 42	1.84	3.08	3.08	-	-	8.00	2.3 ~ 8.8	2380	340 ~ 3180	11.9	10.9	2.16	3.62	3.62	-	-	9.40	3.0 ~ 10.5	2480	460 ~ 3440	12.2	11.2
25 + 42 + 50	1.71	2.87	3.42	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2870	11.0	10.0	2.01	3.37	4.02	-	-	9.40	3.0 ~ 10.6	2380	490 ~ 3350	11.7	10.7
25 + 42 + 60	1.57	2.65	3.78	-	-	8.00	2.3 ~ 9.0	2190	380 ~ 3020	11.0	10.0	1.85	3.11	4.44	-	-	9.40	3.0 ~ 10.6	2380	490 ~ 3350	11.7	10.7
25 + 42 + 71	1.45	2.43	4.12	-	-	8.00	2.3 ~ 9.0	2130	380 ~ 2950	10.7	9.8	1.70	2.86	4.84	-	-	9.40	3.0 ~ 10.6	2370	490 ~ 3330	11.6	10.7
25 + 50 + 50	1.60	3.20	3.20	-	-	8.00	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.88	3.76	3.76	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
25 + 50 + 60	1.48	2.96	3.56	-	-	8.00	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.74	3.48	4.18	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
25 + 50 + 71	1.37	2.74	3.89	-	-	8.00	2.3 ~ 9.0	2070	470 ~ 2800	10.4	9.5	1.61	3.22	4.57	-	-	9.40	3.0 ~ 10.6	2280	580 ~ 3210	11.2	10.3
25 + 60 + 60	1.38	3.31	3.31	-	-	8.00	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.62	3.89	3.89	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
35 + 35 + 35	2.66	2.66	2.66	-	-	7.98	2.3 ~ 8.8	2320	340 ~ 3180	11.6	10.6	3.13	3.13	3.13	-	-	9.39	3.0 ~ 10.5	2480	460 ~ 3430	12.2	11.2
35 + 35 + 42	2.50	2.50	3.00	-	-	8.00	2.3 ~ 8.8	2320	340 ~ 3180	11.6	10.6	2.94	2.94	3.52	-	-	9.40	3.0 ~ 10.6	2470	460 ~ 3470	12.1	11.1
35 + 35 + 50	2.33	2.33	3.33	-	-	7.99	2.3 ~ 9.0	2130	380 ~ 3020	10.7	9.8	2.74	2.74	3.92	-	-	9.40	3.0 ~ 10.6	2360	490 ~ 3330	11.6	10.6
35 + 35 + 60	2.15	2.15	3.70	-	-																	

CU-4Z80WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION										HEATING OPERATION												
	Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)					
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	
3 Rooms	35 + 50 + 50	2.08	2.96	2.96	-	-	8.00	2.3 ~ 9.0	2070	470 ~ 2800	10.4	9.5	2.44	3.48	3.48	-	-	9.40	3.0 ~ 10.6	2270	580 ~ 3190	11.2	10.2
	35 + 50 + 60	1.93	2.76	3.31	-	-	8.00	2.3 ~ 9.0	2070	470 ~ 2800	10.4	9.5	2.27	3.24	3.89	-	-	9.40	3.0 ~ 10.6	2270	580 ~ 3190	11.2	10.2
	42 + 42 + 42	2.66	2.66	2.66	-	-	7.98	2.3 ~ 9.0	2320	340 ~ 3250	11.6	10.6	3.13	3.13	3.13	-	-	9.39	3.0 ~ 10.6	2450	460 ~ 3450	12.0	11.0
	42 + 42 + 50	2.51	2.51	2.98	-	-	8.00	2.3 ~ 9.0	2130	380 ~ 2950	10.7	9.8	2.95	2.95	3.50	-	-	9.40	3.0 ~ 10.6	2350	500 ~ 3300	11.5	10.6
	42 + 42 + 60	2.33	2.33	3.33	-	-	7.99	2.3 ~ 9.0	2130	380 ~ 2950	10.7	9.8	2.74	2.74	3.92	-	-	9.40	3.0 ~ 10.6	2350	500 ~ 3300	11.5	10.6
	42 + 50 + 50	2.36	2.82	2.82	-	-	8.00	2.3 ~ 9.0	2070	470 ~ 2800	10.4	9.5	2.78	3.31	3.31	-	-	9.40	3.0 ~ 10.6	2270	590 ~ 3180	11.2	10.2
4 Rooms	16 + 16 + 16 + 16	1.60	1.60	1.60	1.60	-	6.40	2.3 ~ 9.2	1610	420 ~ 3060	8.0	7.3	2.35	2.35	2.35	2.35	-	9.40	3.0 ~ 11.6	2300	490 ~ 3710	11.5	10.6
	16 + 16 + 16 + 20	1.60	1.60	1.60	2.00	-	6.80	2.3 ~ 9.2	1720	420 ~ 2990	8.5	7.8	2.21	2.21	2.21	2.77	-	9.40	3.0 ~ 11.6	2290	500 ~ 3700	11.5	10.5
	16 + 16 + 16 + 25	1.60	1.60	1.60	2.50	-	7.30	2.3 ~ 9.2	1880	420 ~ 2990	9.2	8.5	2.06	2.06	2.06	3.22	-	9.40	3.0 ~ 11.6	2290	500 ~ 3700	11.5	10.5
	16 + 16 + 16 + 35	1.54	1.54	1.54	3.38	-	8.00	2.3 ~ 9.2	2100	420 ~ 2990	10.3	9.5	1.81	1.81	1.81	3.97	-	9.40	3.0 ~ 11.6	2270	500 ~ 3660	11.4	10.4
	16 + 16 + 16 + 42	1.42	1.42	1.42	3.74	-	8.00	2.3 ~ 9.2	2100	420 ~ 2990	10.3	9.5	1.67	1.67	1.67	4.39	-	9.40	3.0 ~ 11.6	2260	510 ~ 3650	11.3	10.4
	16 + 16 + 16 + 50	1.31	1.31	1.31	4.07	-	8.00	2.3 ~ 9.2	2000	480 ~ 2850	9.8	9.0	1.53	1.53	1.53	4.81	-	9.40	3.0 ~ 11.6	2240	600 ~ 3580	11.2	10.3
	16 + 16 + 16 + 60	1.19	1.19	1.19	4.43	-	8.00	2.3 ~ 9.2	2000	480 ~ 2850	9.8	9.0	1.39	1.39	1.39	5.23	-	9.40	3.0 ~ 11.6	2240	600 ~ 3580	11.2	10.3
	16 + 16 + 16 + 71	1.08	1.08	1.08	4.76	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.26	1.26	1.26	5.62	-	9.40	3.0 ~ 11.6	2230	630 ~ 3560	11.2	10.2
	16 + 16 + 20 + 20	1.60	1.60	2.00	2.00	-	7.20	2.3 ~ 9.2	1830	420 ~ 2990	9.0	8.2	2.09	2.09	2.61	2.61	-	9.40	3.0 ~ 11.6	2280	500 ~ 3680	11.4	10.5
	16 + 16 + 20 + 25	1.60	1.60	2.00	2.50	-	7.70	2.3 ~ 9.2	1990	420 ~ 2990	9.8	9.0	1.95	1.95	2.44	3.06	-	9.40	3.0 ~ 11.6	2280	500 ~ 3680	11.4	10.5
	16 + 16 + 20 + 35	1.47	1.47	1.84	3.22	-	8.00	2.3 ~ 9.2	2050	420 ~ 2990	10.1	9.2	1.73	1.73	2.16	3.78	-	9.40	3.0 ~ 11.6	2260	510 ~ 3650	11.3	10.4
	16 + 16 + 20 + 42	1.36	1.36	1.70	3.58	-	8.00	2.3 ~ 9.2	2050	420 ~ 2990	10.1	9.2	1.60	1.60	2.00	4.20	-	9.40	3.0 ~ 11.6	2260	530 ~ 3640	11.3	10.4
	16 + 16 + 20 + 50	1.25	1.25	1.57	3.93	-	8.00	2.3 ~ 9.2	2000	480 ~ 2780	9.8	9.0	1.47	1.47	1.84	4.62	-	9.40	3.0 ~ 11.6	2230	620 ~ 3570	11.2	10.2
	16 + 16 + 20 + 60	1.14	1.14	1.43	4.29	-	8.00	2.3 ~ 9.2	2000	480 ~ 2780	9.8	9.0	1.34	1.34	1.68	5.04	-	9.40	3.0 ~ 11.6	2230	620 ~ 3570	11.2	10.2
	16 + 16 + 20 + 71	1.04	1.04	1.30	4.62	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.22	1.22	1.53	5.43	-	9.40	3.0 ~ 11.6	2220	630 ~ 3550	11.1	10.2
	16 + 16 + 25 + 25	1.56	1.56	2.44	2.44	-	8.00	2.3 ~ 9.2	2100	420 ~ 2990	10.3	9.5	1.83	1.83	2.87	2.87	-	9.40	3.0 ~ 11.6	2280	500 ~ 3680	11.4	10.5
	16 + 16 + 25 + 35	1.39	1.39	2.17	3.05	-	8.00	2.3 ~ 9.2	2050	420 ~ 2990	10.1	9.2	1.63	1.63	2.55	3.59	-	9.40	3.0 ~ 11.6	2260	510 ~ 3650	11.3	10.4
	16 + 16 + 25 + 42	1.29	1.29	2.02	3.40	-	8.00	2.3 ~ 9.2	2050	420 ~ 2990	10.1	9.2	1.52	1.52	2.37	3.99	-	9.40	3.0 ~ 11.6	2260	530 ~ 3640	11.3	10.4
	16 + 16 + 25 + 50	1.20	1.20	1.87	3.73	-	8.00	2.3 ~ 9.2	2000	480 ~ 2780	9.8	9.0	1.41	1.41	2.20	4.38	-	9.40	3.0 ~ 11.6	2230	620 ~ 3570	11.2	10.2
	16 + 16 + 25 + 60	1.09	1.09	1.71	4.11	-	8.00	2.3 ~ 9.2	2000	480 ~ 2780	9.8	9.0	1.29	1.29	2.01	4.81	-	9.40	3.0 ~ 11.6	2230	620 ~ 3570	11.2	10.2
	16 + 16 + 25 + 71	1.00	1.00	1.56	4.44	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.18	1.18	1.84	5.20	-	9.40	3.0 ~ 11.6	2220	630 ~ 3550	11.1	10.2
	16 + 16 + 35 + 35	1.25	1.25	2.75	2.75	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.47	1.47	3.23	3.23	-	9.40	3.0 ~ 11.6	2250	540 ~ 3620	11.3	10.3
	16 + 16 + 35 + 42	1.17	1.17	2.57	3.09	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.38	1.38	3.02	3.62	-	9.40	3.0 ~ 11.6	2240	540 ~ 3600	11.2	10.3
	16 + 16 + 35 + 50	1.09	1.09	2.39	3.43	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.29	1.29	2.81	4.01	-	9.40	3.0 ~ 11.6	2220	640 ~ 3540	11.1	10.2
	16 + 16 + 35 + 60	1.01	1.01	2.20	3.78	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.18	1.18	2.59	4.45	-	9.40	3.0 ~ 11.6	2220	640 ~ 3540	11.1	10.2
	16 + 16 + 35 + 71	0.93	0.93	2.03	4.11	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.09	1.09	2.38	4.84	-	9.40	3.0 ~ 11.6	2210	650 ~ 3530	11.1	10.1
	16 + 16 + 42 + 42	1.10	1.10	2.90	2.90	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.30	1.30	3.40	3.40	-	9.40	3.0 ~ 11.6	2230	550 ~ 3590	11.2	10.2
	16 + 16 + 42 + 50	1.03	1.03	2.71	3.23	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.21	1.21	3.18	3.80	-	9.40	3.0 ~ 11.6	2210	650 ~ 3530	11.1	10.1
	16 + 16 + 42 + 60	0.96	0.96	2.51	3.57	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.12	1.12	2.95	4.21	-	9.40	3.0 ~ 11.6	2210	650 ~ 3530	11.1	10.1
	16 + 16 + 42 + 71	0.88	0.88	2.32	3.92	-	8.00	2.3 ~ 9.2	2000	530 ~ 2780	9.8	9.0	1.04	1.04	2.72	4.60	-	9.40	3.0 ~ 11.6	2210	670 ~ 3520	11.1	10.1
	16 + 16 + 50 + 50	0.97	0.97	3.03	3.03	-	8.00	2.3 ~ 9.2	2010	580 ~ 2720	9.9	9.1	1.14	1.14	3.56	3.56	-	9.40	3.0 ~ 11.6	2250	780 ~ 3540	11.3	10.3
	16 + 16 + 50 + 60	0.90	0.90	2.82	3.38	-	8.00	2.3 ~ 9.2	2010	580 ~ 2720	9.9	9.1	1.06	1.06	3.31	3.97	-	9.40	3.0 ~ 11.6	2250	780 ~ 3540	11.3	10.3
	16 + 20 + 20 + 20	1.60	2.00	2.00	2.00	-	7.60	2.3 ~ 9.2	1990	420 ~ 2990	9.8	9.0	1.99	2.47	2.47	2.47	-	9.40	3.0 ~ 11.6	2280	500 ~ 3670	11.4	10.5
	16 + 20 + 20 + 25	1.58	1.98	1.98	2.46	-	8.00	2.3 ~ 9.2	2100	420 ~ 2990	10.3	9.5	1.86	2.32	2.32	2.90	-	9.40	3.0 ~ 11.6	2280	500 ~ 3670	11.4	10.5
	16 + 20 + 20 + 35	1.41	1.76	1.76	3.07	-	8.00	2.3 ~ 9.2	2050	420 ~ 2920	10.1	9.2	1.65	2.07	2.07	3.61	-	9.40	3.0 ~ 11.6	2260	530 ~ 3640	11.3	10.4
	16 + 20 + 20 + 42	1.31	1.63	1.63	3.43	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.53	1.92	1.92	4.03	-	9.40	3.0 ~ 11.6	2250	530 ~ 3620	11.3	10.3
	16 + 20 + 20 + 50	1.21	1.51	1.51	3.77	-	8.00	2.3 ~ 9.2	2000	480 ~ 2780	9.8	9.0	1.42	1.77	1.77	4.44	-	9.40	3.0 ~ 11.6	2230	630 ~ 3560	11.2	10.2
	16 + 20 + 20 + 60	1.10	1.38	1.38	4.14	-	8.00	2.3 ~ 9.2	2000	480 ~ 2780	9.8	9.0	1.30	1.62	1.62	4.86	-	9.40	3.0 ~ 11.6	2230	630 ~ 3560	11.2	10.2
	16 + 20 + 20 + 71	1.01	1.26	1.26	4.47	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.18	1.48	1.48	5.26	-	9.40	3.0 ~ 11.6	2220	640 ~ 3540	11.1	10.2
	16 + 20 + 25 + 25	1.48	1.86	2.33	2.33	-	8.00	2.3 ~ 9.2	2100	420 ~ 2990	10.3	9.5	1.75	2.19	2.73	2.73	-	9.40	3.0 ~ 11.6	2280	500 ~ 3670	11.4	10.5
	16 + 20 + 25 + 35	1.33	1.67	2.08	2.92	-	8.00	2.3 ~ 9.2	2050	420 ~ 2920	10.1	9.2	1.57	1.96</									

CU-4Z80WBH-8: Free Multi Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)				
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
4 Rooms	16 + 20 + 50 + 50	0.94	1.18	2.94	2.94	-	8.00	2.3 ~ 9.2	2010	590 ~ 2730	9.9	9.1	1.10	1.38	3.46	3.46	-	9.40	3.0 ~ 11.6	2250	790 ~ 3540	11.3	10.3
	16 + 20 + 50 + 60	0.88	1.10	2.74	3.28	-	8.00	2.3 ~ 9.2	2010	590 ~ 2730	9.9	9.1	1.03	1.29	3.22	3.86	-	9.40	3.0 ~ 11.6	2250	790 ~ 3540	11.3	10.3
	16 + 25 + 25 + 25	1.40	2.20	2.20	2.20	-	8.00	2.3 ~ 9.2	2100	420 ~ 2990	10.3	9.5	1.66	2.58	2.58	2.58	-	9.40	3.0 ~ 11.6	2280	500 ~ 3670	11.4	10.5
	16 + 25 + 25 + 35	1.27	1.98	1.98	2.77	-	8.00	2.3 ~ 9.2	2050	420 ~ 2920	10.1	9.2	1.49	2.33	2.33	3.25	-	9.40	3.0 ~ 11.6	2260	530 ~ 3640	11.3	10.4
	16 + 25 + 25 + 42	1.19	1.85	1.85	3.11	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.39	2.18	2.18	3.65	-	9.40	3.0 ~ 11.6	2250	530 ~ 3620	11.3	10.3
	16 + 25 + 25 + 50	1.10	1.72	1.72	3.46	-	8.00	2.3 ~ 9.2	2000	480 ~ 2780	9.8	9.0	1.30	2.03	2.03	4.04	-	9.40	3.0 ~ 11.6	2230	630 ~ 3560	11.2	10.2
	16 + 25 + 25 + 60	1.02	1.59	1.59	3.80	-	8.00	2.3 ~ 9.2	2000	480 ~ 2780	9.8	9.0	1.19	1.87	1.87	4.47	-	9.40	3.0 ~ 11.6	2230	630 ~ 3560	11.2	10.2
	16 + 25 + 25 + 71	0.93	1.46	1.46	4.15	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.10	1.72	1.72	4.86	-	9.40	3.0 ~ 11.6	2220	640 ~ 3540	11.1	10.2
	16 + 25 + 35 + 35	1.15	1.81	2.52	2.52	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.35	2.13	2.96	2.96	-	9.40	3.0 ~ 11.6	2240	540 ~ 3600	11.2	10.3
	16 + 25 + 35 + 42	1.08	1.69	2.37	2.86	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.27	1.99	2.79	3.35	-	9.40	3.0 ~ 11.6	2230	550 ~ 3590	11.2	10.2
	16 + 25 + 35 + 50	1.02	1.59	2.22	3.17	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.19	1.87	2.61	3.73	-	9.40	3.0 ~ 11.6	2210	650 ~ 3530	11.1	10.1
	16 + 25 + 35 + 60	0.94	1.47	2.06	3.53	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.10	1.73	2.42	4.15	-	9.40	3.0 ~ 11.6	2210	650 ~ 3530	11.1	10.1
	16 + 25 + 35 + 71	0.87	1.36	1.90	3.87	-	8.00	2.3 ~ 9.2	2000	530 ~ 2780	9.8	9.0	1.02	1.60	2.24	4.54	-	9.40	3.0 ~ 11.6	2210	670 ~ 3520	11.1	10.1
	16 + 25 + 42 + 42	1.02	1.60	2.69	2.69	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.20	1.88	3.16	3.16	-	9.40	3.0 ~ 11.6	2230	550 ~ 3580	11.2	10.2
	16 + 25 + 42 + 50	0.96	1.50	2.53	3.01	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.13	1.77	2.97	3.53	-	9.40	3.0 ~ 11.6	2210	670 ~ 3520	11.1	10.1
	16 + 25 + 42 + 60	0.90	1.40	2.35	3.35	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.05	1.64	2.76	3.95	-	9.40	3.0 ~ 11.6	2210	670 ~ 3520	11.1	10.1
	16 + 25 + 50 + 50	0.90	1.42	2.84	2.84	-	8.00	2.3 ~ 9.2	2010	590 ~ 2730	9.9	9.1	1.07	1.67	3.33	3.33	-	9.40	3.0 ~ 11.6	2250	790 ~ 3540	11.3	10.3
	16 + 35 + 35 + 35	1.07	2.31	2.31	2.31	-	8.00	2.3 ~ 9.2	2050	470 ~ 2920	10.1	9.2	1.24	2.72	2.72	2.72	-	9.40	3.0 ~ 11.6	2220	550 ~ 3570	11.1	10.2
	16 + 35 + 35 + 42	1.00	2.19	2.19	2.62	-	8.00	2.3 ~ 9.2	2050	470 ~ 2850	10.1	9.2	1.18	2.57	2.57	3.08	-	9.40	3.0 ~ 11.6	2220	580 ~ 3560	11.1	10.2
	16 + 35 + 35 + 50	0.94	2.06	2.06	2.94	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.11	2.42	2.42	3.45	-	9.40	3.0 ~ 11.6	2240	680 ~ 3500	11.2	10.3
	16 + 35 + 35 + 60	0.88	1.92	1.92	3.28	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.03	2.25	2.25	3.87	-	9.40	3.0 ~ 11.6	2240	680 ~ 3500	11.2	10.3
	16 + 35 + 42 + 42	0.95	2.07	2.49	2.49	-	8.00	2.3 ~ 9.2	2050	470 ~ 2850	10.1	9.2	1.11	2.45	2.92	2.92	-	9.40	3.0 ~ 11.6	2210	580 ~ 3610	11.1	10.1
	16 + 35 + 42 + 50	0.90	1.96	2.35	2.79	-	8.00	2.3 ~ 9.2	2000	530 ~ 2780	9.8	9.0	1.05	2.30	2.76	3.29	-	9.40	3.0 ~ 11.6	2240	690 ~ 3550	11.2	10.3
	16 + 42 + 42 + 42	0.89	2.37	2.37	2.37	-	8.00	2.3 ~ 9.2	2050	470 ~ 2850	10.1	9.2	1.06	2.78	2.78	2.78	-	9.40	3.0 ~ 11.6	2210	590 ~ 3600	11.1	10.1
	20 + 20 + 20 + 20	2.00	2.00	2.00	2.00	-	8.00	2.3 ~ 9.2	2100	420 ~ 2990	10.3	9.5	2.35	2.35	2.35	2.35	-	9.40	3.0 ~ 11.6	2270	500 ~ 3660	11.4	10.4
	20 + 20 + 20 + 25	1.88	1.88	1.88	2.36	-	8.00	2.3 ~ 9.2	2100	420 ~ 2990	10.3	9.5	2.21	2.21	2.21	2.77	-	9.40	3.0 ~ 11.6	2270	500 ~ 3660	11.4	10.4
	20 + 20 + 20 + 35	1.68	1.68	1.68	2.96	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.98	1.98	1.98	3.46	-	9.40	3.0 ~ 11.6	2250	530 ~ 3620	11.3	10.3
	20 + 20 + 20 + 42	1.57	1.57	1.57	3.29	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.84	1.84	1.84	3.88	-	9.40	3.0 ~ 11.6	2240	540 ~ 3610	11.2	10.3
	20 + 20 + 20 + 50	1.45	1.45	1.45	3.65	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.71	1.71	1.71	4.27	-	9.40	3.0 ~ 11.6	2220	640 ~ 3550	11.1	10.2
	20 + 20 + 20 + 60	1.33	1.33	1.33	4.01	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.57	1.57	1.57	4.69	-	9.40	3.0 ~ 11.6	2220	640 ~ 3550	11.1	10.2
	20 + 20 + 20 + 71	1.22	1.22	1.22	4.34	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.44	1.44	1.44	5.08	-	9.40	3.0 ~ 11.6	2210	640 ~ 3530	11.1	10.1
	20 + 20 + 25 + 25	1.78	1.78	2.22	2.22	-	8.00	2.3 ~ 9.2	2100	420 ~ 2990	10.3	9.5	2.09	2.09	2.61	2.61	-	9.40	3.0 ~ 11.6	2270	500 ~ 3660	11.4	10.4
	20 + 20 + 25 + 35	1.60	1.60	2.00	2.80	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.88	1.88	2.35	3.29	-	9.40	3.0 ~ 11.6	2250	530 ~ 3620	11.3	10.3
	20 + 20 + 25 + 42	1.50	1.50	1.87	3.13	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.76	1.76	2.20	3.68	-	9.40	3.0 ~ 11.6	2240	540 ~ 3610	11.2	10.3
	20 + 20 + 25 + 50	1.39	1.39	1.74	3.48	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.63	1.63	2.04	4.10	-	9.40	3.0 ~ 11.6	2220	640 ~ 3550	11.1	10.2
	20 + 20 + 25 + 60	1.28	1.28	1.60	3.84	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.50	1.50	1.88	4.52	-	9.40	3.0 ~ 11.6	2220	640 ~ 3550	11.1	10.2
	20 + 20 + 25 + 71	1.18	1.18	1.47	4.17	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.38	1.38	1.73	4.91	-	9.40	3.0 ~ 11.6	2210	640 ~ 3530	11.1	10.1
	20 + 20 + 35 + 35	1.45	1.45	2.55	2.55	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.71	1.71	2.99	2.99	-	9.40	3.0 ~ 11.6	2230	550 ~ 3590	11.2	10.2
	20 + 20 + 35 + 42	1.37	1.37	2.39	2.87	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.61	1.61	2.81	3.37	-	9.40	3.0 ~ 11.6	2230	550 ~ 3580	11.2	10.2
	20 + 20 + 35 + 50	1.28	1.28	2.24	3.20	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.50	1.50	2.63	3.77	-	9.40	3.0 ~ 11.6	2210	670 ~ 3520	11.1	10.1
20 + 20 + 35 + 60	1.19	1.19	2.07	3.55	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.39	1.39	2.44	4.18	-	9.40	3.0 ~ 11.6	2210	670 ~ 3520	11.1	10.1	
20 + 20 + 35 + 71	1.10	1.10	1.92	3.88	-	8.00	2.3 ~ 9.2	2000	530 ~ 2780	9.8	9.0	1.29	1.29	2.25	4.57	-	9.40	3.0 ~ 11.6	2240	680 ~ 3510	11.2	10.3	
20 + 20 + 42 + 42	1.29	1.29	2.71	2.71	-	8.00	2.3 ~ 9.2	2050	460 ~ 2920	10.1	9.2	1.52	1.52	3.18	3.18	-	9.40	3.0 ~ 11.6	2220	570 ~ 3570	11.1	10.2	
20 + 20 + 42 + 50	1.21	1.21	2.55	3.03	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.42	1.42	2.99	3.57	-	9.40	3.0 ~ 11.6	2240	680 ~ 3510	11.2	10.3	
20 + 20 + 42 + 60	1.13	1.13	2.37	3.37	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.32	1.32	2.78	3.98	-	9.40	3.0 ~ 11.6	2240	680 ~ 3510	11.2	10.3	
20 + 20 + 50 + 50	1.14	1.14	2.86	2.86	-	8.00	2.3 ~ 9.2	2010	590 ~ 2730	9.9	9.1	1.34	1.34	3.36	3.36	-	9.40	3.0 ~ 11.6	2240	800 ~ 3530	11.2	10.3	
20 + 25 + 25 + 25	1.67	2.11	2.11	2.11	-	8.00	2.3 ~ 9.2	2100	420 ~ 2990	10.3	9.5	1.99	2.47	2.47	2.47	-	9.40	3.0 ~ 11.6	2270	500 ~ 3660	11.4	10.4	
20 + 25 + 25 + 35	1.52	1.90	1.90	2.68	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.79	2.24	2.24	3.13	-	9.40	3.0 ~ 11.6	2250	530 ~ 3620	11.3	10.3	
20 + 25 + 25 + 42	1.43	1.79	1.79	2.99	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.68	2.10	2.10	3.52	-	9.40	3.0 ~ 11.6	2240	540 ~ 3610	11.2	10.3	
20 + 25 + 25 + 50	1.33	1.67	1.67	3.33	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.57	1.96	1.96	3.91	-	9.40	3.0 ~ 11.6	2220	640 ~ 3550	11.1	10.2	
20 + 25 + 25 + 60	1.23	1.54	1.54	3.69	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.45	1.81	1.81	4.33	-	9.40	3.0 ~ 11.6	2220	640 ~ 3550	11.1	10.2	
20 + 25 + 25 + 71	1.13	1.42	1.42	4.03	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.33	1.67										

CU-4Z80WBH-8: Free Multi Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)				
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
4 Rooms	20 + 35 + 35 + 35	1.28	2.24	2.24	2.24	-	8.00	2.3 ~ 9.2	2050	470 ~ 2850	10.1	9.2	1.51	2.63	2.63	2.63	-	9.40	3.0 ~ 11.6	2220	580 ~ 3560	11.1	10.2
	20 + 35 + 35 + 42	1.21	2.12	2.12	2.55	-	8.00	2.3 ~ 9.2	2050	470 ~ 2850	10.1	9.2	1.42	2.49	2.49	3.00	-	9.40	3.0 ~ 11.6	2210	580 ~ 3610	11.1	10.1
	20 + 35 + 35 + 50	1.14	2.00	2.00	2.86	-	8.00	2.3 ~ 9.2	2000	530 ~ 2780	9.8	9.0	1.34	2.35	2.35	3.36	-	9.40	3.0 ~ 11.6	2240	690 ~ 3550	11.2	10.3
	20 + 35 + 42 + 42	1.15	2.01	2.42	2.42	-	8.00	2.3 ~ 9.2	2050	470 ~ 2850	10.1	9.2	1.35	2.37	2.84	2.84	-	9.40	3.0 ~ 11.6	2210	590 ~ 3600	11.1	10.1
	20 + 35 + 42 + 50	1.09	1.90	2.29	2.72	-	8.00	2.3 ~ 9.2	2000	530 ~ 2780	9.8	9.0	1.28	2.24	2.69	3.19	-	9.40	3.0 ~ 11.6	2230	700 ~ 3540	11.2	10.2
	20 + 42 + 42 + 42	1.10	2.30	2.30	2.30	-	8.00	2.3 ~ 9.2	1990	470 ~ 2850	9.8	9.0	1.30	2.70	2.70	2.70	-	9.40	3.0 ~ 11.6	2240	590 ~ 3590	11.2	10.3
	25 + 25 + 25 + 25	2.00	2.00	2.00	2.00	-	8.00	2.3 ~ 9.2	2100	420 ~ 2990	10.3	9.5	2.35	2.35	2.35	2.35	-	9.40	3.0 ~ 11.6	2270	500 ~ 3660	11.4	10.4
	25 + 25 + 25 + 35	1.82	1.82	1.82	2.54	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	2.14	2.14	2.14	2.98	-	9.40	3.0 ~ 11.6	2250	530 ~ 3620	11.3	10.3
	25 + 25 + 25 + 42	1.71	1.71	1.71	2.87	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	2.01	2.01	2.01	3.37	-	9.40	3.0 ~ 11.6	2240	540 ~ 3610	11.2	10.3
	25 + 25 + 25 + 50	1.60	1.60	1.60	3.20	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.88	1.88	1.88	3.76	-	9.40	3.0 ~ 11.6	2220	640 ~ 3550	11.1	10.2
	25 + 25 + 25 + 60	1.48	1.48	1.48	3.56	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.74	1.74	1.74	4.18	-	9.40	3.0 ~ 11.6	2220	640 ~ 3550	11.1	10.2
	25 + 25 + 25 + 71	1.37	1.37	1.37	3.89	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.61	1.61	1.61	4.57	-	9.40	3.0 ~ 11.6	2210	640 ~ 3530	11.1	10.1
	25 + 25 + 35 + 35	1.67	1.67	2.33	2.33	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.96	1.96	2.74	2.74	-	9.40	3.0 ~ 11.6	2230	550 ~ 3590	11.2	10.2
	25 + 25 + 35 + 42	1.57	1.57	2.20	2.66	-	8.00	2.3 ~ 9.2	2050	430 ~ 2920	10.1	9.2	1.85	1.85	2.59	3.11	-	9.40	3.0 ~ 11.6	2230	550 ~ 3580	11.2	10.2
	25 + 25 + 35 + 50	1.48	1.48	2.07	2.97	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.74	1.74	2.44	3.48	-	9.40	3.0 ~ 11.6	2210	670 ~ 3520	11.1	10.1
	25 + 25 + 35 + 60	1.38	1.38	1.93	3.31	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.62	1.62	2.27	3.89	-	9.40	3.0 ~ 11.6	2210	670 ~ 3520	11.1	10.1
	25 + 25 + 42 + 42	1.49	1.49	2.51	2.51	-	8.00	2.3 ~ 9.2	2050	460 ~ 2920	10.1	9.2	1.75	1.75	2.95	2.95	-	9.40	3.0 ~ 11.6	2220	570 ~ 3570	11.1	10.2
	25 + 25 + 42 + 50	1.41	1.41	2.37	2.81	-	8.00	2.3 ~ 9.2	2000	520 ~ 2780	9.8	9.0	1.65	1.65	2.78	3.32	-	9.40	3.0 ~ 11.6	2240	680 ~ 3510	11.2	10.3
	25 + 35 + 35 + 35	1.55	2.15	2.15	2.15	-	8.00	2.3 ~ 9.2	2050	470 ~ 2850	10.1	9.2	1.81	2.53	2.53	2.53	-	9.40	3.0 ~ 11.6	2220	580 ~ 3560	11.1	10.2
	25 + 35 + 35 + 42	1.46	2.04	2.04	2.46	-	8.00	2.3 ~ 9.2	2050	470 ~ 2850	10.1	9.2	1.72	2.40	2.40	2.88	-	9.40	3.0 ~ 11.6	2210	580 ~ 3610	11.1	10.1
25 + 35 + 35 + 50	1.38	1.93	1.93	2.76	-	8.00	2.3 ~ 9.2	2000	530 ~ 2780	9.8	9.0	1.62	2.27	2.27	3.24	-	9.40	3.0 ~ 11.6	2240	690 ~ 3550	11.2	10.3	
25 + 35 + 42 + 42	1.39	1.95	2.33	2.33	-	8.00	2.3 ~ 9.2	2050	470 ~ 2850	10.1	9.2	1.63	2.29	2.74	2.74	-	9.40	3.0 ~ 11.6	2210	590 ~ 3600	11.1	10.1	
35 + 35 + 35 + 35	2.00	2.00	2.00	2.00	-	8.00	2.3 ~ 9.2	1990	470 ~ 2850	9.8	9.0	2.35	2.35	2.35	2.35	-	9.40	3.0 ~ 11.6	2240	590 ~ 3590	11.2	10.3	
35 + 35 + 35 + 42	1.90	1.90	1.90	2.30	-	8.00	2.3 ~ 9.2	1990	470 ~ 2850	9.8	9.0	2.24	2.24	2.24	2.68	-	9.40	3.0 ~ 11.6	2240	600 ~ 3580	11.2	10.3	

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION									
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)		
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max
1 Room	16	1.60	-	-	-	1.60	1.3 ~ 2.3	420	250 ~ 660	2.2	2.0	2.60	-	-	-	2.60	1.2 ~ 3.2	640	290 ~ 1000	3.3	3.0
	20	2.00	-	-	-	2.00	1.8 ~ 2.9	520	340 ~ 830	2.7	2.5	3.20	-	-	-	3.20	1.2 ~ 4.1	780	290 ~ 1270	4.0	3.7
	25	2.50	-	-	-	2.50	1.8 ~ 2.9	650	340 ~ 830	3.4	3.1	3.60	-	-	-	3.60	1.2 ~ 4.3	980	290 ~ 1270	5.1	4.7
	35	3.50	-	-	-	3.50	1.8 ~ 4.1	960	340 ~ 1380	4.8	4.4	4.50	-	-	-	4.50	1.2 ~ 5.8	1270	290 ~ 2140	6.5	5.9
	42	4.20	-	-	-	4.20	1.8 ~ 4.5	1390	340 ~ 2010	6.8	6.2	5.60	-	-	-	5.60	1.2 ~ 6.8	1760	290 ~ 2970	8.5	7.8
	50	5.00	-	-	-	5.00	1.9 ~ 5.4	1630	340 ~ 2150	7.9	7.3	6.80	-	-	-	6.80	1.2 ~ 6.9	2350	290 ~ 2840	11.3	10.4
	60	6.00	-	-	-	6.00	1.9 ~ 6.2	2050	340 ~ 2350	9.7	8.9	8.50	-	-	-	8.50	1.3 ~ 9.0	2440	320 ~ 2590	11.8	10.8
	71	7.10	-	-	-	7.10	2.0 ~ 7.2	2550	370 ~ 2790	12.1	11.1	8.70	-	-	-	8.70	1.4 ~ 9.2	2590	380 ~ 2760	12.5	11.4
2 Rooms	16 + 16	1.60	1.60	-	-	3.20	2.3 ~ 5.8	700	260 ~ 1780	3.7	3.4	2.60	2.60	-	-	5.20	2.0 ~ 8.2	1460	220 ~ 2490	7.2	6.6
	16 + 20	1.60	2.00	-	-	3.60	2.3 ~ 5.8	830	250 ~ 1780	4.3	4.0	2.58	3.22	-	-	5.80	2.0 ~ 8.2	1620	220 ~ 2480	8.0	7.4
	16 + 25	1.60	2.50	-	-	4.10	2.3 ~ 5.8	1000	250 ~ 1780	5.2	4.7	2.42	3.78	-	-	6.20	2.0 ~ 8.2	1760	220 ~ 2480	8.6	7.9
	16 + 35	1.60	3.50	-	-	5.10	2.3 ~ 5.8	1360	250 ~ 1720	6.9	6.3	2.23	4.87	-	-	7.10	2.0 ~ 8.6	1990	210 ~ 2560	9.8	9.0
	16 + 42	1.60	4.20	-	-	5.80	2.3 ~ 6.7	1670	250 ~ 2170	8.4	7.7	2.26	5.94	-	-	8.20	2.0 ~ 10.1	2350	210 ~ 3110	11.5	10.6
	16 + 50	1.60	5.00	-	-	6.60	2.3 ~ 7.2	1880	240 ~ 2170	9.4	8.6	2.28	7.12	-	-	9.40	2.0 ~ 11.0	2550	160 ~ 3120	12.5	11.5
	16 + 60	1.60	6.00	-	-	7.60	2.3 ~ 8.6	2410	240 ~ 3120	12.1	11.1	2.34	8.76	-	-	11.10	2.0 ~ 11.0	2970	160 ~ 3120	14.6	13.4
	16 + 71	1.60	7.10	-	-	8.70	2.3 ~ 9.1	2960	230 ~ 3200	14.8	13.6	2.08	9.22	-	-	11.30	2.0 ~ 13.0	2910	160 ~ 4060	14.3	13.1
	20 + 20	2.00	2.00	-	-	4.00	2.3 ~ 5.8	960	250 ~ 1720	5.0	4.5	3.20	3.20	-	-	6.40	2.0 ~ 8.2	1790	220 ~ 2470	8.8	8.1
	20 + 25	2.00	2.50	-	-	4.50	2.3 ~ 5.8	1160	250 ~ 1720	5.9	5.4	3.02	3.78	-	-	6.80	2.0 ~ 8.2	1910	220 ~ 2470	9.4	8.6
	20 + 35	2.00	3.50	-	-	5.50	2.3 ~ 5.8	1510	250 ~ 1670	7.6	7.0	2.80	4.90	-	-	7.70	2.0 ~ 8.6	2160	210 ~ 2500	10.6	9.7
	20 + 42	2.00	4.20	-	-	6.20	2.3 ~ 7.2	1880	250 ~ 2530	9.4	8.6	2.84	5.96	-	-	8.80	2.0 ~ 11.0	2500	200 ~ 3310	12.3	11.3
	20 + 50	2.00	5.00	-	-	7.00	2.3 ~ 8.1	1990	240 ~ 2650	10.0	9.1	2.86	7.14	-	-	10.00	2.0 ~ 11.0	2730	160 ~ 3060	13.4	12.3
	20 + 60	2.00	6.00	-	-	8.00	2.3 ~ 8.6	2590	240 ~ 3050	13.0	11.9	2.93	8.77	-	-	11.70	2.0 ~ 11.9	3060	160 ~ 3550	15.0	13.8
	20 + 71	2.00	7.10	-	-	9.10	2.3 ~ 10.0	3130	260 ~ 4070	15.7	14.4	2.62	9.28	-	-	11.90	2.0 ~ 13.0	3140	160 ~ 4050	15.4	14.1
	25 + 25	2.50	2.50	-	-	5.00	2.3 ~ 5.8	1310	250 ~ 1720	6.6	6.1	3.60	3.60	-	-	7.20	2.0 ~ 8.6	2050	220 ~ 2580	10.1	9.2
	25 + 35	2.50	3.50	-	-	6.00	2.3 ~ 6.7	1770	250 ~ 2170	8.9	8.1	3.38	4.72	-	-	8.10	2.0 ~ 10.1	2300	210 ~ 3110	11.3	10.4
	25 + 42	2.50	4.20	-	-	6.70	2.3 ~ 7.2	2170	250 ~ 2530	10.9	10.0	3.43	5.77	-	-	9.20	2.0 ~ 11.0	2650	200 ~ 3310	13.0	11.9
25 + 50	2.50	5.00	-	-	7.50	2.3 ~ 8.6	2290	240 ~ 3050	11.5	10.5	3.47	6.93	-	-	10.40	2.0 ~ 11.0	2760	160 ~ 3060	13.6	12.4	
25 + 60	2.50	6.00	-	-	8.50	2.3 ~ 9.1	2980	240 ~ 3330	14.9	13.7	3.53	8.47	-	-	12.00	2.0 ~ 13.0	3210	160 ~ 4060	15.8	14.5	

* Specification based on JIS C 9612 standard.
 * A minimum of 2 indoor units must be connected.

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)				
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
2 Rooms	25 + 71	2.50	7.10	-	-	-	9.60	2.3 ~ 10.1	3570	260 ~ 4220	17.9	16.4	3.13	8.87	-	-	-	12.00	2.0 ~ 13.0	3190	160 ~ 4050	15.7	14.4
	35 + 35	3.50	3.50	-	-	-	7.00	2.3 ~ 8.1	2290	250 ~ 3100	11.5	10.5	4.50	4.50	-	-	-	9.00	2.0 ~ 11.0	2530	200 ~ 3300	12.4	11.4
	35 + 42	3.50	4.20	-	-	-	7.70	2.3 ~ 8.6	2710	250 ~ 3590	13.6	12.4	4.59	5.51	-	-	-	10.10	2.0 ~ 11.0	2880	200 ~ 3240	14.1	13.0
	35 + 50	3.50	5.00	-	-	-	8.50	2.3 ~ 9.1	2850	230 ~ 3200	14.3	13.1	4.65	6.65	-	-	-	11.30	2.0 ~ 13.0	2840	160 ~ 4040	14.0	12.8
	35 + 60	3.50	6.00	-	-	-	9.50	2.3 ~ 10.1	3610	230 ~ 4220	18.1	16.6	4.42	7.58	-	-	-	12.00	2.0 ~ 13.0	3130	160 ~ 4040	15.4	14.1
	35 + 71	3.30	6.70	-	-	-	10.00	2.3 ~ 10.4	3860	260 ~ 4380	19.3	17.7	3.96	8.04	-	-	-	12.00	2.0 ~ 13.8	3120	160 ~ 4390	15.3	14.1
	42 + 42	4.20	4.20	-	-	-	8.40	2.3 ~ 9.1	3380	250 ~ 4000	16.9	15.5	5.60	5.60	-	-	-	11.20	2.0 ~ 13.0	3020	190 ~ 4230	14.8	13.6
	42 + 50	4.20	5.00	-	-	-	9.20	2.3 ~ 10.0	3270	230 ~ 4070	16.4	15.0	5.48	6.52	-	-	-	12.00	2.0 ~ 13.0	3120	160 ~ 3970	15.3	14.1
	42 + 60	4.12	5.88	-	-	-	10.00	2.3 ~ 10.4	4070	230 ~ 4370	20.4	18.7	4.94	7.06	-	-	-	12.00	2.0 ~ 13.8	3120	160 ~ 4390	15.3	14.1
	42 + 71	3.72	6.28	-	-	-	10.00	2.3 ~ 10.4	3790	260 ~ 4380	19.0	17.4	4.46	7.54	-	-	-	12.00	2.0 ~ 13.8	3110	160 ~ 4380	15.3	14.0
	50 + 50	5.00	5.00	-	-	-	10.00	2.3 ~ 10.4	3310	250 ~ 3650	16.6	15.2	6.00	6.00	-	-	-	12.00	2.0 ~ 13.8	2910	170 ~ 4140	14.3	13.1
	50 + 60	4.55	5.45	-	-	-	10.00	2.3 ~ 10.4	3310	250 ~ 3650	16.6	15.2	5.45	6.55	-	-	-	12.00	2.0 ~ 13.8	2910	170 ~ 4140	14.3	13.1
	50 + 71	4.13	5.87	-	-	-	10.00	2.3 ~ 10.4	3170	250 ~ 3520	15.9	14.5	4.96	7.04	-	-	-	12.00	2.0 ~ 13.8	2890	170 ~ 4120	14.2	13.0
	60 + 60	5.00	5.00	-	-	-	10.00	2.3 ~ 10.4	3310	250 ~ 3650	16.6	15.2	6.00	6.00	-	-	-	12.00	2.0 ~ 13.8	2910	170 ~ 4140	14.3	13.1
	60 + 71	4.58	5.42	-	-	-	10.00	2.3 ~ 10.4	3170	250 ~ 3520	15.9	14.5	5.50	6.50	-	-	-	12.00	2.0 ~ 13.8	2890	170 ~ 4120	14.2	13.0
71 + 71	5.00	5.00	-	-	-	10.00	2.3 ~ 10.4	3040	280 ~ 3380	15.2	13.9	6.00	6.00	-	-	-	12.00	2.0 ~ 13.8	2880	180 ~ 4100	14.1	13.0	
3 Rooms	16 + 16 + 16	1.60	1.60	1.60	-	-	4.80	2.3 ~ 8.5	1050	260 ~ 2680	5.4	4.9	2.60	2.60	2.60	-	-	7.80	2.7 ~ 12.3	1920	230 ~ 3640	9.4	8.6
	16 + 16 + 20	1.60	1.60	2.00	-	-	5.20	2.3 ~ 8.5	1160	260 ~ 2680	5.9	5.4	2.58	2.58	3.24	-	-	8.40	2.7 ~ 12.3	2140	230 ~ 3620	10.5	9.6
	16 + 16 + 25	1.60	1.60	2.50	-	-	5.70	2.3 ~ 8.5	1350	260 ~ 2680	6.8	6.3	2.47	2.47	3.86	-	-	8.80	2.7 ~ 12.3	2210	230 ~ 3620	10.9	10.0
	16 + 16 + 35	1.60	1.60	3.50	-	-	6.70	2.3 ~ 8.5	1670	260 ~ 2610	8.4	7.7	2.32	2.32	5.06	-	-	9.70	2.7 ~ 12.3	2520	230 ~ 3540	12.4	11.3
	16 + 16 + 42	1.60	1.60	4.20	-	-	7.40	2.3 ~ 8.5	2010	250 ~ 2550	10.1	9.2	2.34	2.34	6.12	-	-	10.80	2.7 ~ 12.3	2650	230 ~ 3520	13.0	11.9
	16 + 16 + 50	1.60	1.60	5.00	-	-	8.20	2.3 ~ 8.7	2170	280 ~ 2350	10.9	10.0	2.34	2.34	7.32	-	-	12.00	2.7 ~ 12.9	2870	250 ~ 3610	14.1	12.9
	16 + 16 + 60	1.60	1.60	6.00	-	-	9.20	2.3 ~ 10.1	2510	280 ~ 3060	12.6	11.5	2.09	2.09	7.82	-	-	12.00	2.7 ~ 13.6	2870	250 ~ 3970	14.1	12.9
	16 + 16 + 71	1.55	1.55	6.90	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.86	1.86	8.28	-	-	12.00	2.7 ~ 13.6	2860	250 ~ 3890	14.1	12.9
	16 + 20 + 20	1.60	2.00	2.00	-	-	5.60	2.3 ~ 8.5	1300	260 ~ 2610	6.6	6.0	2.58	3.21	3.21	-	-	9.00	2.7 ~ 12.3	2250	230 ~ 3610	11.1	10.1
	16 + 20 + 25	1.60	2.00	2.50	-	-	6.10	2.3 ~ 8.5	1510	260 ~ 2610	7.6	7.0	2.47	3.08	3.85	-	-	9.40	2.7 ~ 12.3	2390	230 ~ 3610	11.7	10.8
	16 + 20 + 35	1.60	2.00	3.50	-	-	7.10	2.3 ~ 8.5	1840	250 ~ 2550	9.2	8.4	2.32	2.90	5.08	-	-	10.30	2.7 ~ 12.3	2550	230 ~ 3520	12.5	11.5
	16 + 20 + 42	1.60	2.00	4.20	-	-	7.80	2.3 ~ 8.5	2120	250 ~ 2550	10.6	9.7	2.34	2.92	6.14	-	-	11.40	2.7 ~ 12.9	2790	230 ~ 3800	13.7	12.6
	16 + 20 + 50	1.60	2.00	5.00	-	-	8.60	2.3 ~ 9.6	2360	280 ~ 2680	11.8	10.8	2.23	2.79	6.98	-	-	12.00	2.7 ~ 13.6	2860	250 ~ 3890	14.1	12.9
	16 + 20 + 60	1.60	2.00	6.00	-	-	9.60	2.3 ~ 10.1	2680	280 ~ 3000	13.4	12.3	2.00	2.50	7.50	-	-	12.00	2.7 ~ 13.6	2860	250 ~ 3890	14.1	12.9
	16 + 20 + 71	1.50	1.87	6.63	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.80	2.24	7.96	-	-	12.00	2.7 ~ 13.8	2850	250 ~ 4000	14.0	12.8
	16 + 25 + 25	1.60	2.50	2.50	-	-	6.60	2.3 ~ 8.5	1720	260 ~ 2610	8.7	8.0	2.38	3.71	3.71	-	-	9.80	2.7 ~ 12.3	2590	230 ~ 3610	12.7	11.7
	16 + 25 + 35	1.60	2.50	3.50	-	-	7.60	2.3 ~ 8.5	2120	250 ~ 2550	10.6	9.7	2.25	3.52	4.93	-	-	10.70	2.7 ~ 12.3	2690	230 ~ 3520	13.2	12.1
	16 + 25 + 42	1.60	2.50	4.20	-	-	8.30	2.3 ~ 8.7	2420	250 ~ 2600	12.1	11.1	2.28	3.55	5.97	-	-	11.80	2.7 ~ 12.9	2930	230 ~ 3800	14.4	13.2
	16 + 25 + 50	1.60	2.50	5.00	-	-	9.10	2.3 ~ 10.1	2450	280 ~ 3000	12.3	11.2	2.11	3.30	6.59	-	-	12.00	2.7 ~ 13.6	2860	250 ~ 3890	14.1	12.9
	16 + 25 + 60	1.58	2.48	5.94	-	-	10.00	2.3 ~ 10.7	2930	280 ~ 3540	14.7	13.4	1.90	2.97	7.13	-	-	12.00	2.7 ~ 13.6	2860	250 ~ 3890	14.1	12.9
	16 + 25 + 71	1.43	2.23	6.34	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.71	2.68	7.61	-	-	12.00	2.7 ~ 13.8	2850	250 ~ 4000	14.0	12.8
	16 + 35 + 35	1.60	3.50	3.50	-	-	8.60	2.3 ~ 9.6	2550	250 ~ 2990	12.8	11.7	2.16	4.72	4.72	-	-	11.60	2.7 ~ 13.6	2820	230 ~ 4140	13.9	12.7
	16 + 35 + 42	1.60	3.50	4.20	-	-	9.30	2.3 ~ 10.1	2830	250 ~ 3390	14.2	13.0	2.06	4.52	5.42	-	-	12.00	2.7 ~ 13.6	2950	240 ~ 4130	14.5	13.3
	16 + 35 + 50	1.58	3.47	4.95	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.90	4.16	5.94	-	-	12.00	2.7 ~ 13.6	2780	250 ~ 3860	13.7	12.5
	16 + 35 + 60	1.44	3.15	5.41	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.73	3.78	6.49	-	-	12.00	2.7 ~ 13.8	2780	250 ~ 3980	13.7	12.5
	16 + 35 + 71	1.31	2.87	5.82	-	-	10.00	2.3 ~ 10.7	2800	280 ~ 3260	14.0	12.8	1.58	3.44	6.98	-	-	12.00	2.7 ~ 13.8	2770	270 ~ 3960	13.6	12.5
	16 + 42 + 42	1.60	4.20	4.20	-	-	10.00	2.3 ~ 10.7	3260	250 ~ 3970	16.3	15.0	1.92	5.04	5.04	-	-	12.00	2.7 ~ 13.6	2940	240 ~ 4050	14.4	13.2
	16 + 42 + 50	1.48	3.89	4.63	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.78	4.67	5.55	-	-	12.00	2.7 ~ 13.8	2770	270 ~ 3970	13.6	12.5
	16 + 42 + 60	1.36	3.56	5.08	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.63	4.27	6.10	-	-	12.00	2.7 ~ 13.8	2770	270 ~ 3970	13.6	12.5
	16 + 42 + 71	1.24	3.26	5.50	-	-	10.00	2.3 ~ 10.7	2800	280 ~ 3260	14.0	12.8	1.49	3.91	6.60	-	-	12.00	2.7 ~ 14.1	2760	270 ~ 4070	13.6	12.4
	16 + 50 + 50	1.38	4.31	4.31	-	-	10.00	2.3 ~ 10.7	2610	320 ~ 3000	13.1	12.0	1.66	5.17	5.17	-	-	12.00	2.7 ~ 13.8	2660	300 ~ 3760	13.1	12.0
	16 + 50 + 60	1.27	3.97	4.76	-	-	10.00	2.3 ~ 10.7	2610	320 ~ 3000	13.1	12.0	1.53	4.76	5.71	-	-	12.00	2.7 ~ 13.8	2660	300 ~ 3760	13.1	12.0
	16 + 50 + 71	1.17	3.65	5.18	-	-	10.00	2.3 ~ 10.7	2550	340 ~ 2930	12.8	11.7	1.40	4.38	6.22	-	-	12.00	2.7 ~ 14.1	2650	310 ~ 3920	13.0	11.9</

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)				
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
3 Rooms	20 + 25 + 25	2.00	2.50	2.50	-	-	7.00	2.3 ~ 8.5	1840	260 ~ 2610	9.2	8.4	2.98	3.71	3.71	-	-	10.40	2.7 ~ 12.3	2610	230 ~ 3600	12.8	11.8
	20 + 25 + 35	2.00	2.50	3.50	-	-	8.00	2.3 ~ 8.5	2240	250 ~ 2550	11.2	10.3	2.83	3.53	4.94	-	-	11.30	2.7 ~ 12.9	2740	230 ~ 3800	13.5	12.3
	20 + 25 + 42	2.00	2.50	4.20	-	-	8.70	2.3 ~ 9.6	2600	250 ~ 3060	13.0	11.9	2.76	3.45	5.79	-	-	12.00	2.7 ~ 13.6	3020	230 ~ 4150	14.8	13.6
	20 + 25 + 50	2.00	2.50	5.00	-	-	9.50	2.3 ~ 10.1	2700	280 ~ 3000	13.5	12.4	2.53	3.16	6.31	-	-	12.00	2.7 ~ 13.6	2850	250 ~ 3880	14.0	12.8
	20 + 25 + 60	1.91	2.38	5.71	-	-	10.00	2.3 ~ 10.7	2930	280 ~ 3470	14.7	13.4	2.29	2.86	6.85	-	-	12.00	2.7 ~ 13.8	2850	250 ~ 4000	14.0	12.8
	20 + 25 + 71	1.72	2.16	6.12	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3330	14.4	13.2	2.07	2.59	7.34	-	-	12.00	2.7 ~ 13.8	2790	250 ~ 3980	13.7	12.6
	20 + 35 + 35	2.00	3.50	3.50	-	-	9.00	2.3 ~ 9.6	2720	250 ~ 2990	13.6	12.5	2.66	4.67	4.67	-	-	12.00	2.7 ~ 13.6	2950	240 ~ 4130	14.5	13.3
	20 + 35 + 42	2.00	3.50	4.20	-	-	9.70	2.3 ~ 10.7	2990	250 ~ 3970	15.0	13.7	2.47	4.33	5.20	-	-	12.00	2.7 ~ 13.6	2940	240 ~ 4050	14.4	13.2
	20 + 35 + 50	1.91	3.33	4.76	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	2.29	4.00	5.71	-	-	12.00	2.7 ~ 13.8	2770	270 ~ 3970	13.6	12.5
	20 + 35 + 60	1.74	3.04	5.22	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	2.09	3.65	6.26	-	-	12.00	2.7 ~ 13.8	2770	270 ~ 3970	13.6	12.5
	20 + 35 + 71	1.59	2.78	5.63	-	-	10.00	2.3 ~ 10.7	2800	280 ~ 3260	14.0	12.8	1.91	3.33	6.76	-	-	12.00	2.7 ~ 13.8	2760	270 ~ 3950	13.6	12.4
	20 + 42 + 42	1.92	4.04	4.04	-	-	10.00	2.3 ~ 10.7	3260	250 ~ 3970	16.3	15.0	2.30	4.85	4.85	-	-	12.00	2.7 ~ 13.6	2930	240 ~ 4040	14.4	13.2
	20 + 42 + 50	1.79	3.75	4.46	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3330	14.4	13.2	2.14	4.50	5.36	-	-	12.00	2.7 ~ 13.8	2760	270 ~ 3950	13.6	12.4
	20 + 42 + 60	1.64	3.44	4.92	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3330	14.4	13.2	1.97	4.13	5.90	-	-	12.00	2.7 ~ 13.8	2760	270 ~ 3950	13.6	12.4
	20 + 42 + 71	1.50	3.16	5.34	-	-	10.00	2.3 ~ 10.7	2740	280 ~ 3260	13.7	12.6	1.80	3.79	6.41	-	-	12.00	2.7 ~ 14.1	2750	270 ~ 4060	13.5	12.4
	20 + 50 + 50	1.66	4.17	4.17	-	-	10.00	2.3 ~ 10.7	2620	320 ~ 3000	13.1	12.0	2.00	5.00	5.00	-	-	12.00	2.7 ~ 13.8	2650	310 ~ 3740	13.0	11.9
	20 + 50 + 60	1.54	3.85	4.61	-	-	10.00	2.3 ~ 10.7	2620	320 ~ 3000	13.1	12.0	1.85	4.62	5.53	-	-	12.00	2.7 ~ 14.1	2650	310 ~ 3920	13.0	11.9
	20 + 50 + 71	1.42	3.55	5.03	-	-	10.00	2.3 ~ 10.7	2550	350 ~ 2930	12.8	11.7	1.70	4.26	6.04	-	-	12.00	2.7 ~ 14.1	2640	320 ~ 3900	13.0	11.9
	20 + 60 + 60	1.42	4.29	4.29	-	-	10.00	2.3 ~ 10.7	2620	320 ~ 3000	13.1	12.0	1.72	5.14	5.14	-	-	12.00	2.7 ~ 14.1	2650	310 ~ 3920	13.0	11.9
	20 + 60 + 71	1.33	3.97	4.70	-	-	10.00	2.3 ~ 10.7	2550	350 ~ 2930	12.8	11.7	1.59	4.77	5.64	-	-	12.00	2.7 ~ 14.4	2640	320 ~ 4020	13.0	11.9
	20 + 71 + 71	1.24	4.38	4.38	-	-	10.00	2.3 ~ 10.7	2490	350 ~ 2870	12.5	11.4	1.48	5.26	5.26	-	-	12.00	2.7 ~ 14.4	2670	330 ~ 4010	13.1	12.0
	25 + 25 + 25	2.50	2.50	2.50	-	-	7.50	2.3 ~ 8.5	2070	260 ~ 2610	10.4	9.5	3.60	3.60	3.60	-	-	10.80	2.7 ~ 12.3	2670	230 ~ 3600	13.1	12.0
	25 + 25 + 35	2.50	2.50	3.50	-	-	8.50	2.3 ~ 9.6	2550	250 ~ 3060	12.8	11.7	3.44	3.44	4.82	-	-	11.70	2.7 ~ 13.6	2880	230 ~ 4160	14.1	13.0
	25 + 25 + 42	2.50	2.50	4.20	-	-	9.20	2.3 ~ 10.1	2830	250 ~ 3460	14.2	13.0	3.26	3.26	5.48	-	-	12.00	2.7 ~ 13.6	3020	230 ~ 4150	14.8	13.6
	25 + 25 + 50	2.50	2.50	5.00	-	-	10.00	2.3 ~ 10.7	2930	280 ~ 3470	14.7	13.4	3.00	3.00	6.00	-	-	12.00	2.7 ~ 13.6	2850	250 ~ 3880	14.0	12.8
	25 + 25 + 60	2.27	2.27	5.46	-	-	10.00	2.3 ~ 10.7	2930	280 ~ 3470	14.7	13.4	2.73	2.73	6.54	-	-	12.00	2.7 ~ 13.8	2850	250 ~ 4000	14.0	12.8
	25 + 25 + 71	2.07	2.07	5.86	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3330	14.4	13.2	2.48	2.48	7.04	-	-	12.00	2.7 ~ 13.8	2790	250 ~ 3980	13.7	12.6
	25 + 35 + 35	2.50	3.50	3.50	-	-	9.50	2.3 ~ 10.1	2960	250 ~ 3390	14.8	13.6	3.16	4.42	4.42	-	-	12.00	2.7 ~ 13.6	2950	240 ~ 4130	14.5	13.3
	25 + 35 + 42	2.45	3.43	4.12	-	-	10.00	2.3 ~ 10.7	3260	250 ~ 3970	16.3	15.0	2.94	4.12	4.94	-	-	12.00	2.7 ~ 13.6	2940	240 ~ 4050	14.4	13.2
	25 + 35 + 50	2.27	3.18	4.55	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	2.73	3.82	5.45	-	-	12.00	2.7 ~ 13.8	2770	270 ~ 3970	13.6	12.5
	25 + 35 + 60	2.08	2.92	5.00	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	2.50	3.50	6.00	-	-	12.00	2.7 ~ 13.8	2770	270 ~ 3970	13.6	12.5
	25 + 35 + 71	1.91	2.67	5.42	-	-	10.00	2.3 ~ 10.7	2800	280 ~ 3260	14.0	12.8	2.29	3.21	6.50	-	-	12.00	2.7 ~ 14.1	2760	270 ~ 4070	13.6	12.4
	25 + 42 + 42	2.30	3.85	3.85	-	-	10.00	2.3 ~ 10.7	3260	250 ~ 3970	16.3	15.0	2.76	4.62	4.62	-	-	12.00	2.7 ~ 13.8	2930	240 ~ 4160	14.4	13.2
	25 + 42 + 50	2.14	3.59	4.27	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3330	14.4	13.2	2.56	4.31	5.13	-	-	12.00	2.7 ~ 13.8	2760	270 ~ 3950	13.6	12.4
	25 + 42 + 60	1.97	3.31	4.72	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3330	14.4	13.2	2.36	3.97	5.67	-	-	12.00	2.7 ~ 14.1	2760	270 ~ 4070	13.6	12.4
	25 + 42 + 71	1.82	3.04	5.14	-	-	10.00	2.3 ~ 10.7	2740	280 ~ 3260	13.7	12.6	2.18	3.65	6.17	-	-	12.00	2.7 ~ 14.1	2750	270 ~ 4060	13.5	12.4
	25 + 50 + 50	2.00	4.00	4.00	-	-	10.00	2.3 ~ 10.7	2620	320 ~ 3000	13.1	12.0	2.40	4.80	4.80	-	-	12.00	2.7 ~ 13.8	2650	310 ~ 3740	13.0	11.9
	25 + 50 + 60	1.86	3.70	4.44	-	-	10.00	2.3 ~ 10.7	2620	320 ~ 3000	13.1	12.0	2.23	4.44	5.33	-	-	12.00	2.7 ~ 14.1	2650	310 ~ 3920	13.0	11.9
	25 + 50 + 71	1.72	3.42	4.86	-	-	10.00	2.3 ~ 10.7	2550	350 ~ 2930	12.8	11.7	2.05	4.11	5.84	-	-	12.00	2.7 ~ 14.1	2640	320 ~ 3900	13.0	11.9
	25 + 60 + 60	1.72	4.14	4.14	-	-	10.00	2.3 ~ 10.7	2620	320 ~ 3000	13.1	12.0	2.06	4.97	4.97	-	-	12.00	2.7 ~ 14.1	2650	310 ~ 3920	13.0	11.9
	25 + 60 + 71	1.60	3.85	4.55	-	-	10.00	2.3 ~ 10.7	2550	350 ~ 2930	12.8	11.7	1.92	4.62	5.46	-	-	12.00	2.7 ~ 14.4	2640	320 ~ 4020	13.0	11.9
	25 + 71 + 71	1.50	4.25	4.25	-	-	10.00	2.3 ~ 10.7	2490	350 ~ 2870	12.5	11.4	1.80	5.10	5.10	-	-	12.00	2.7 ~ 14.4	2670	330 ~ 4010	13.1	12.0
35 + 35 + 35	3.33	3.33	3.33	-	-	9.99	2.3 ~ 10.7	3190	250 ~ 3890	16.0	14.6	4.00	4.00	4.00	-	-	12.00	2.7 ~ 13.8	2920	240 ~ 4150	14.3	13.1	
35 + 35 + 42	3.13	3.13	3.74	-	-	10.00	2.3 ~ 10.7	3190	250 ~ 3820	16.0	14.6	3.75	3.75	4.50	-	-	12.00	2.7 ~ 13.8	2910	240 ~ 4140	14.3	13.1	
35 + 35 + 50	2.92	2.92	4.16	-	-	10.00	2.3 ~ 10.7	2800	280 ~ 3260	14.0	12.8	3.50	3.50	5.00	-	-	12.00	2.7 ~ 13.8	2750	270 ~ 3930	13.5	12.4	
35 + 35 + 60	2.69	2.69	4.62	-	-	10.00	2.3 ~ 10.7	2800	280 ~ 3260	14.0	12.8	3.23	3.23	5.54	-	-	12.00	2.7 ~ 14.1	2750	270 ~ 4050	13.5	12.4	
35 + 35 + 71	2.48	2.48	5.04	-	-	10.00	2.3 ~ 10.7	2740	310 ~ 3200	13.7	12.6	2.98	2.98	6.04	-	-	12.00	2.7 ~ 14.1	2730	270 ~ 4030	13.4	12.3	
35 + 42 + 42	2.94	3.53	3.53	-	-	10.00	2.3 ~ 10.7	3130	250 ~ 3820	15.7	14.4	3.52	4.24	4.24	-	-	12.00	2.7 ~ 13.8	2900	250 ~ 4130	14.2	13.1	
35 + 42 + 50	2.76	3.31	3.93	-	-	10.00	2.3 ~ 10.7	2800	280 ~ 3260	14.0	12.8	3.31	3.97	4.72	-	-	12.00	2.7 ~ 14.1	2740	270 ~ 4040	13.5	12.3	
35 + 42 + 60	2.55	3.07	4.38	-	-	10.00	2.3 ~ 10.7	2800	280 ~ 3260	14.0	12.8	3.07	3.68	5.25	-	-	12.00	2.7 ~ 14.1	2740	270 ~ 4040	13.5	12.3	
35 + 42 + 71	2.36	2.84	4.80	-	-	10.00	2.3 ~ 10.7	2740	310 ~ 3200	13.7	12.6	2.84	3.41	5.75	-	-	12.00	2.7 ~ 14.1	2720	280 ~ 4020	13.4	12.2	
35 + 50 + 50	2.60	3.70	3.70	-	-	10.00	2.3 ~ 10.7	2550	350 ~ 2930	12.8	11.7	3.12	4.44	4.44	-	-	12.00	2.7 ~ 14.1	2670	330 ~ 3890	13.1	12.0	
35 + 50 + 60	2.41	3.45	4.14	-	-	10.00	2.3 ~ 10.7	2550	350 ~ 2930	12.8	11.7	2.90	4.14	4.96	-	-	12.00	2.7 ~ 14.1	2670	330 ~ 3890	13.1	12.0	
35 + 50 + 71	2.24																						

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION											HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)			Heating Capacity (kW)						Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	
3 Rooms	42 + 42 + 60	2.92	2.92	4.16	-	-	10.00	2.3 ~ 10.7	2740	280 ~ 3260	13.7	12.6	3.50	3.50	5.00	-	-	12.00	2.7 ~ 14.1	2730	280 ~ 4020	13.4	12.3	
	42 + 42 + 71	2.71	2.71	4.58	-	-	10.00	2.3 ~ 10.7	2680	310 ~ 3130	13.4	12.3	3.25	3.25	5.50	-	-	12.00	2.7 ~ 14.4	2710	280 ~ 4130	13.3	12.2	
	42 + 50 + 50	2.96	3.52	3.52	-	-	10.00	2.3 ~ 10.7	2550	350 ~ 2930	12.8	11.7	3.54	4.23	4.23	-	-	12.00	2.7 ~ 14.1	2670	330 ~ 3870	13.1	12.0	
	42 + 50 + 60	2.76	3.29	3.95	-	-	10.00	2.3 ~ 10.7	2550	350 ~ 2930	12.8	11.7	3.32	3.95	4.73	-	-	12.00	2.7 ~ 14.4	2670	330 ~ 3990	13.1	12.0	
	42 + 50 + 71	2.58	3.07	4.35	-	-	10.00	2.3 ~ 10.7	2490	350 ~ 2870	12.5	11.4	3.09	3.68	5.23	-	-	12.00	2.7 ~ 14.4	2650	340 ~ 3980	13.0	11.9	
	42 + 60 + 60	2.60	3.70	3.70	-	-	10.00	2.3 ~ 10.7	2550	350 ~ 2930	12.8	11.7	3.12	4.44	4.44	-	-	12.00	2.7 ~ 14.4	2670	330 ~ 3990	13.1	12.0	
	42 + 60 + 71	2.43	3.47	4.10	-	-	10.00	2.3 ~ 10.7	2490	350 ~ 2870	12.5	11.4	2.92	4.16	4.92	-	-	12.00	2.7 ~ 14.4	2650	340 ~ 3980	13.0	11.9	
	50 + 50 + 50	3.33	3.33	3.33	-	-	9.99	2.3 ~ 10.7	2380	390 ~ 2740	11.9	10.9	4.00	4.00	4.00	-	-	12.00	2.7 ~ 14.4	2620	400 ~ 3910	12.9	11.8	
	50 + 50 + 60	3.13	3.13	3.74	-	-	10.00	2.3 ~ 10.7	2440	390 ~ 2740	12.2	11.2	3.75	3.75	4.50	-	-	12.00	2.7 ~ 14.4	2620	400 ~ 3910	12.9	11.8	
	50 + 50 + 71	2.92	2.92	4.16	-	-	10.00	2.3 ~ 10.7	2380	390 ~ 2750	11.9	10.9	3.51	3.51	4.98	-	-	12.00	2.7 ~ 14.4	2610	410 ~ 3890	12.8	11.8	
	50 + 60 + 60	2.94	3.53	3.53	-	-	10.00	2.3 ~ 10.7	2440	390 ~ 2740	12.2	11.2	3.52	4.24	4.24	-	-	12.00	2.7 ~ 14.4	2620	400 ~ 3910	12.9	11.8	
	50 + 60 + 71	2.77	3.31	3.92	-	-	10.00	2.3 ~ 10.7	2380	390 ~ 2750	11.9	10.9	3.31	3.98	4.71	-	-	12.00	2.7 ~ 14.4	2610	410 ~ 3890	12.8	11.8	
	60 + 60 + 60	3.33	3.33	3.33	-	-	9.99	2.3 ~ 10.7	2380	390 ~ 2740	11.9	10.9	4.00	4.00	4.00	-	-	12.00	2.7 ~ 14.4	2620	400 ~ 3910	12.9	11.8	
	4 Rooms	16 + 16 + 16 + 16	1.60	1.60	1.60	1.60	-	6.40	2.3 ~ 10.6	1480	310 ~ 3560	7.5	6.9	2.60	2.60	2.60	2.60	-	10.40	3.4 ~ 14.2	2400	340 ~ 4160	11.8	10.8
		16 + 16 + 16 + 20	1.60	1.60	1.60	2.00	-	6.80	2.3 ~ 10.6	1620	310 ~ 3560	8.2	7.5	2.59	2.59	2.59	3.23	-	11.00	3.4 ~ 14.2	2540	340 ~ 4150	12.5	11.4
16 + 16 + 16 + 25		1.60	1.60	1.60	2.50	-	7.30	2.3 ~ 10.6	1780	310 ~ 3560	8.9	8.2	2.50	2.50	2.50	3.90	-	11.40	3.4 ~ 14.2	2600	340 ~ 4150	12.8	11.7	
16 + 16 + 16 + 35		1.60	1.60	1.60	3.50	-	8.30	2.3 ~ 10.6	2170	310 ~ 3480	10.9	10.0	2.31	2.31	2.31	5.07	-	12.00	3.4 ~ 14.2	2760	340 ~ 4110	13.6	12.4	
16 + 16 + 16 + 42		1.60	1.60	1.60	4.20	-	9.00	2.3 ~ 10.6	2460	310 ~ 3480	12.3	11.3	2.13	2.13	2.13	5.61	-	12.00	3.4 ~ 14.2	2750	340 ~ 4100	13.5	12.4	
16 + 16 + 16 + 50		1.60	1.60	1.60	5.00	-	9.80	2.3 ~ 10.6	2660	350 ~ 3190	13.3	12.2	1.96	1.96	1.96	6.12	-	12.00	3.4 ~ 14.2	2690	390 ~ 3950	13.2	12.1	
16 + 16 + 16 + 60		1.48	1.48	1.48	5.56	-	10.00	2.3 ~ 10.6	2790	350 ~ 3190	14.0	12.8	1.78	1.78	1.78	6.66	-	12.00	3.4 ~ 14.2	2690	390 ~ 3950	13.2	12.1	
16 + 16 + 16 + 71		1.34	1.34	1.34	5.98	-	10.00	2.3 ~ 10.6	2730	380 ~ 3120	13.7	12.5	1.61	1.61	1.61	7.17	-	12.00	3.4 ~ 14.2	2680	400 ~ 3930	13.2	12.1	
16 + 16 + 20 + 20		1.60	1.60	2.00	2.00	-	7.20	2.3 ~ 10.6	1730	310 ~ 3480	8.7	8.0	2.58	2.58	3.22	3.22	-	11.60	3.4 ~ 14.2	2630	340 ~ 4130	12.9	11.8	
16 + 16 + 20 + 25		1.60	1.60	2.00	2.50	-	7.70	2.3 ~ 10.6	1930	310 ~ 3480	9.7	8.9	2.49	2.49	3.12	3.90	-	12.00	3.4 ~ 14.2	2770	340 ~ 4130	13.6	12.5	
16 + 16 + 20 + 35		1.60	1.60	2.00	3.50	-	8.70	2.3 ~ 10.6	2330	310 ~ 3410	11.7	10.7	2.21	2.21	2.76	4.82	-	12.00	3.4 ~ 14.2	2750	340 ~ 4100	13.5	12.4	
16 + 16 + 20 + 42		1.60	1.60	2.00	4.20	-	9.40	2.3 ~ 10.6	2620	310 ~ 3410	13.1	12.0	2.04	2.04	2.56	5.36	-	12.00	3.4 ~ 14.2	2740	340 ~ 4080	13.5	12.3	
16 + 16 + 20 + 50		1.57	1.57	1.96	4.90	-	10.00	2.3 ~ 10.6	2790	350 ~ 3190	14.0	12.8	1.88	1.88	2.36	5.88	-	12.00	3.4 ~ 14.2	2680	400 ~ 3930	13.2	12.1	
16 + 16 + 20 + 60		1.43	1.43	1.79	5.35	-	10.00	2.3 ~ 10.6	2790	350 ~ 3190	14.0	12.8	1.71	1.71	2.15	6.43	-	12.00	3.4 ~ 14.2	2680	400 ~ 3930	13.2	12.1	
16 + 16 + 20 + 71		1.30	1.30	1.63	5.77	-	10.00	2.3 ~ 10.8	2730	380 ~ 3260	13.7	12.5	1.56	1.56	1.95	6.93	-	12.00	3.4 ~ 14.2	2670	400 ~ 3920	13.1	12.0	
16 + 16 + 25 + 25		1.60	1.60	2.50	2.50	-	8.20	2.3 ~ 10.6	2110	310 ~ 3480	10.6	9.7	2.34	2.34	3.66	3.66	-	12.00	3.4 ~ 14.2	2770	340 ~ 4130	13.6	12.5	
16 + 16 + 25 + 35		1.60	1.60	2.50	3.50	-	9.20	2.3 ~ 10.6	2560	310 ~ 3410	12.8	11.7	2.09	2.09	3.26	4.56	-	12.00	3.4 ~ 14.2	2750	340 ~ 4100	13.5	12.4	
16 + 16 + 25 + 42		1.60	1.60	2.50	4.20	-	9.90	2.3 ~ 10.6	2920	310 ~ 3410	14.6	13.4	1.94	1.94	3.03	5.09	-	12.00	3.4 ~ 14.2	2740	340 ~ 4080	13.5	12.3	
16 + 16 + 25 + 50		1.50	1.50	2.34	4.66	-	10.00	2.3 ~ 10.6	2790	350 ~ 3190	14.0	12.8	1.79	1.79	2.81	5.61	-	12.00	3.4 ~ 14.2	2680	400 ~ 3930	13.2	12.1	
16 + 16 + 25 + 60		1.37	1.37	2.14	5.12	-	10.00	2.3 ~ 10.6	2790	350 ~ 3190	14.0	12.8	1.64	1.64	2.57	6.15	-	12.00	3.4 ~ 14.2	2680	400 ~ 3930	13.2	12.1	
16 + 16 + 25 + 71		1.25	1.25	1.95	5.55	-	10.00	2.3 ~ 10.8	2730	380 ~ 3260	13.7	12.5	1.50	1.50	2.34	6.66	-	12.00	3.4 ~ 14.4	2670	400 ~ 3980	13.1	12.0	
16 + 16 + 35 + 35		1.57	1.57	3.43	3.43	-	10.00	2.3 ~ 10.6	2920	320 ~ 3410	14.6	13.4	1.88	1.88	4.12	4.12	-	12.00	3.4 ~ 14.2	2720	360 ~ 4060	13.4	12.2	
16 + 16 + 35 + 42		1.47	1.47	3.21	3.85	-	10.00	2.3 ~ 10.6	2920	320 ~ 3330	14.6	13.4	1.76	1.76	3.86	4.62	-	12.00	3.4 ~ 14.2	2710	360 ~ 3980	13.3	12.2	
16 + 16 + 35 + 50		1.37	1.37	2.99	4.27	-	10.00	2.3 ~ 10.6	2730	380 ~ 3120	13.7	12.5	1.64	1.64	3.59	5.13	-	12.00	3.4 ~ 14.2	2660	420 ~ 3900	13.1	12.0	
16 + 16 + 35 + 60		1.26	1.26	2.76	4.72	-	10.00	2.3 ~ 10.8	2730	380 ~ 3260	13.7	12.5	1.51	1.51	3.31	5.67	-	12.00	3.4 ~ 14.2	2660	420 ~ 3900	13.1	12.0	
16 + 16 + 35 + 71		1.16	1.16	2.54	5.14	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.39	1.39	3.05	6.17	-	12.00	3.4 ~ 14.4	2650	420 ~ 3940	13.0	11.9	
16 + 16 + 42 + 42		1.38	1.38	3.62	3.62	-	10.00	2.3 ~ 10.6	2920	320 ~ 3330	14.6	13.4	1.66	1.66	4.34	4.34	-	12.00	3.4 ~ 14.2	2700	370 ~ 3970	13.3	12.2	
16 + 16 + 42 + 50		1.29	1.29	3.39	4.03	-	10.00	2.3 ~ 10.8	2730	380 ~ 3260	13.7	12.5	1.55	1.55	4.06	4.84	-	12.00	3.4 ~ 14.2	2650	420 ~ 3890	13.0	11.9	
16 + 16 + 42 + 60		1.19	1.19	3.14	4.48	-	10.00	2.3 ~ 10.8	2730	380 ~ 3260	13.7	12.5	1.43	1.43	3.77	5.37	-	12.00	3.4 ~ 14.4	2650	420 ~ 3950	13.0	11.9	
16 + 16 + 42 + 71		1.10	1.10	2.90	4.90	-	10.00	2.3 ~ 11.0	2730	390 ~ 3340	13.7	12.5	1.32	1.32	3.48	5.88	-	12.00	3.4 ~ 14.4	2640	430 ~ 3930	13.0	11.9	
16 + 16 + 50 + 50		1.21	1.21	3.79	3.79	-	10.00	2.3 ~ 10.8	2610	430 ~ 3060	13.1	12.0	1.45	1.45	4.55	4.55	-	12.00	3.4 ~ 14.4	2610	490 ~ 3870	12.8	11.8	
16 + 16 + 50 + 60		1.13	1.13	3.52	4.22	-	10.00	2.3 ~ 11.0	2610	430 ~ 3200	13.1	12.0	1.35	1.35	4.23	5.07	-	12.00	3.4 ~ 14.4	2610	490 ~ 3870	12.8	11.8	
16 + 16 + 50 + 71		1.05	1.05	3.27	4.63	-	10.00	2.3 ~ 11.0	2610	460 ~ 3200	13.1	12.0	1.25	1.25	3.93	5.57	-	12.00	3.4 ~ 14.4	2650	510 ~ 3860	13.0	11.9	
16 + 16 + 60 + 60	1.05	1.05	3.95	3.95	-	10.00	2.3 ~ 11.0	2610																

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION										
	Cooling Capacity (kW)						Input Power (W)		Current (A)			Heating Capacity (kW)						Input Power (W)		Current (A)		
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
16 + 20 + 25 + 50	1.45	1.80	2.25	4.50	-	10.00	2.3 ~ 10.6	2730	360 ~ 3120	13.7	12.5	1.73	2.16	2.70	5.41	-	12.00	3.4 ~ 14.2	2670	400 ~ 3920	13.1	12.0
16 + 20 + 25 + 60	1.32	1.65	2.07	4.96	-	10.00	2.3 ~ 10.8	2730	360 ~ 3260	13.7	12.5	1.59	1.98	2.48	5.95	-	12.00	3.4 ~ 14.2	2670	400 ~ 3920	13.1	12.0
16 + 20 + 25 + 71	1.21	1.52	1.89	5.38	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.46	1.82	2.27	6.45	-	12.00	3.4 ~ 14.4	2660	420 ~ 3960	13.1	12.0
16 + 20 + 35 + 35	1.51	1.89	3.30	3.30	-	10.00	2.3 ~ 10.6	2920	320 ~ 3330	14.6	13.4	1.82	2.26	3.96	3.96	-	12.00	3.4 ~ 14.2	2710	360 ~ 3980	13.3	12.2
16 + 20 + 35 + 42	1.42	1.77	3.10	3.71	-	10.00	2.3 ~ 10.6	2920	320 ~ 3330	14.6	13.4	1.70	2.12	3.72	4.46	-	12.00	3.4 ~ 14.2	2700	370 ~ 3970	13.3	12.2
16 + 20 + 35 + 50	1.33	1.65	2.89	4.13	-	10.00	2.3 ~ 10.8	2730	380 ~ 3260	13.7	12.5	1.59	1.98	3.47	4.96	-	12.00	3.4 ~ 14.2	2650	420 ~ 3890	13.0	11.9
16 + 20 + 35 + 60	1.22	1.53	2.67	4.58	-	10.00	2.3 ~ 10.8	2730	380 ~ 3260	13.7	12.5	1.47	1.83	3.21	5.49	-	12.00	3.4 ~ 14.4	2650	420 ~ 3950	13.0	11.9
16 + 20 + 35 + 71	1.13	1.41	2.46	5.00	-	10.00	2.3 ~ 11.0	2660	390 ~ 3340	13.3	12.2	1.35	1.69	2.96	6.00	-	12.00	3.4 ~ 14.4	2640	430 ~ 3930	13.0	11.9
16 + 20 + 42 + 42	1.33	1.67	3.50	3.50	-	10.00	2.3 ~ 10.6	2860	320 ~ 3330	14.3	13.1	1.60	2.00	4.20	4.20	-	12.00	3.4 ~ 14.2	2690	370 ~ 3960	13.2	12.1
16 + 20 + 42 + 50	1.25	1.56	3.28	3.91	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.50	1.88	3.94	4.68	-	12.00	3.4 ~ 14.4	2640	420 ~ 3930	13.0	11.9
16 + 20 + 42 + 60	1.16	1.45	3.04	4.35	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.39	1.74	3.65	5.22	-	12.00	3.4 ~ 14.4	2640	420 ~ 3930	13.0	11.9
16 + 20 + 42 + 71	1.07	1.34	2.82	4.77	-	10.00	2.3 ~ 11.0	2660	390 ~ 3270	13.3	12.2	1.29	1.61	3.38	5.72	-	12.00	3.4 ~ 14.4	2630	430 ~ 3920	12.9	11.8
16 + 20 + 50 + 50	1.18	1.47	3.68	3.67	-	10.00	2.3 ~ 10.8	2610	430 ~ 3060	13.1	12.0	1.42	1.76	4.41	4.41	-	12.00	3.4 ~ 14.4	2650	500 ~ 3860	13.0	11.9
16 + 20 + 50 + 60	1.10	1.37	3.42	4.11	-	10.00	2.3 ~ 11.0	2610	430 ~ 3200	13.1	12.0	1.32	1.64	4.11	4.93	-	12.00	3.4 ~ 14.4	2650	500 ~ 3860	13.0	11.9
16 + 20 + 50 + 71	1.03	1.27	3.18	4.52	-	10.00	2.3 ~ 11.0	2610	470 ~ 3130	13.1	12.0	1.22	1.53	3.82	5.43	-	12.00	3.4 ~ 14.4	2640	510 ~ 3900	13.0	11.9
16 + 20 + 60 + 60	1.03	1.27	3.85	3.85	-	10.00	2.3 ~ 11.0	2610	430 ~ 3200	13.1	12.0	1.23	1.53	4.62	4.62	-	12.00	3.4 ~ 14.4	2650	500 ~ 3860	13.0	11.9
16 + 20 + 60 + 71	0.96	1.20	3.59	4.25	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.15	1.44	4.31	5.10	-	12.00	3.4 ~ 14.4	2640	510 ~ 3900	13.0	11.9
16 + 20 + 71 + 71	0.90	1.12	3.99	3.99	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.08	1.34	4.79	4.79	-	12.00	3.4 ~ 14.4	2630	520 ~ 3890	12.9	11.8
16 + 25 + 25 + 25	1.60	2.50	2.50	2.50	-	9.10	2.3 ~ 10.6	2490	310 ~ 3480	12.5	11.4	2.10	3.30	3.30	3.30	-	12.00	3.4 ~ 14.2	2760	340 ~ 4120	13.6	12.4
16 + 25 + 25 + 35	1.58	2.48	2.48	3.46	-	10.00	2.3 ~ 10.6	2920	310 ~ 3410	14.6	13.4	1.90	2.97	2.97	4.16	-	12.00	3.4 ~ 14.2	2740	340 ~ 4080	13.5	12.3
16 + 25 + 25 + 42	1.49	2.31	2.31	3.89	-	10.00	2.3 ~ 10.6	2920	310 ~ 3410	14.6	13.4	1.78	2.78	2.78	4.66	-	12.00	3.4 ~ 14.2	2730	350 ~ 4070	13.4	12.3
16 + 25 + 25 + 50	1.38	2.16	2.16	4.30	-	10.00	2.3 ~ 10.6	2730	360 ~ 3120	13.7	12.5	1.66	2.59	2.59	5.16	-	12.00	3.4 ~ 14.2	2670	400 ~ 3920	13.1	12.0
16 + 25 + 25 + 60	1.28	1.98	1.98	4.76	-	10.00	2.3 ~ 10.8	2730	360 ~ 3260	13.7	12.5	1.53	2.38	2.38	5.71	-	12.00	3.4 ~ 14.2	2670	400 ~ 3920	13.1	12.0
16 + 25 + 25 + 71	1.18	1.82	1.82	5.18	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.40	2.19	2.19	6.22	-	12.00	3.4 ~ 14.4	2660	420 ~ 3960	13.1	12.0
16 + 25 + 35 + 35	1.45	2.25	3.15	3.15	-	10.00	2.3 ~ 10.6	2920	320 ~ 3330	14.6	13.4	1.74	2.70	3.78	3.78	-	12.00	3.4 ~ 14.2	2710	360 ~ 3980	13.3	12.2
16 + 25 + 35 + 42	1.36	2.12	2.97	3.55	-	10.00	2.3 ~ 10.6	2920	320 ~ 3330	14.6	13.4	1.63	2.54	3.56	4.27	-	12.00	3.4 ~ 14.2	2700	370 ~ 3970	13.3	12.2
16 + 25 + 35 + 50	1.27	1.98	2.78	3.97	-	10.00	2.3 ~ 10.8	2730	380 ~ 3260	13.7	12.5	1.53	2.38	3.33	4.76	-	12.00	3.4 ~ 14.2	2650	420 ~ 3890	13.0	11.9
16 + 25 + 35 + 60	1.18	1.84	2.57	4.41	-	10.00	2.3 ~ 10.8	2730	380 ~ 3260	13.7	12.5	1.41	2.21	3.09	5.29	-	12.00	3.4 ~ 14.4	2650	420 ~ 3950	13.0	11.9
16 + 25 + 35 + 71	1.09	1.70	2.38	4.83	-	10.00	2.3 ~ 11.0	2660	390 ~ 3340	13.3	12.2	1.31	2.04	2.86	5.79	-	12.00	3.4 ~ 14.4	2640	430 ~ 3930	13.0	11.9
16 + 25 + 42 + 42	1.28	2.00	3.36	3.36	-	10.00	2.3 ~ 10.8	2860	320 ~ 3480	14.3	13.1	1.54	2.40	4.03	4.03	-	12.00	3.4 ~ 14.2	2690	370 ~ 3960	13.2	12.1
16 + 25 + 42 + 50	1.20	1.88	3.16	3.76	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.44	2.26	3.79	4.51	-	12.00	3.4 ~ 14.4	2640	420 ~ 3930	13.0	11.9
16 + 25 + 42 + 60	1.12	1.75	2.94	4.19	-	10.00	2.3 ~ 11.0	2730	390 ~ 3340	13.7	12.5	1.35	2.10	3.52	5.03	-	12.00	3.4 ~ 14.4	2640	420 ~ 3930	13.0	11.9
16 + 25 + 42 + 71	1.04	1.62	2.73	4.61	-	10.00	2.3 ~ 11.0	2660	390 ~ 3270	13.3	12.2	1.25	1.95	3.27	5.53	-	12.00	3.4 ~ 14.4	2630	430 ~ 3920	12.9	11.8
16 + 25 + 50 + 50	1.13	1.77	3.55	3.55	-	10.00	2.3 ~ 10.8	2610	430 ~ 3060	13.1	12.0	1.36	2.12	4.26	4.26	-	12.00	3.4 ~ 14.4	2650	500 ~ 3860	13.0	11.9
16 + 25 + 50 + 60	1.06	1.66	3.31	3.97	-	10.00	2.3 ~ 11.0	2610	430 ~ 3200	13.1	12.0	1.27	1.99	3.97	4.77	-	12.00	3.4 ~ 14.4	2650	500 ~ 3860	13.0	11.9
16 + 25 + 50 + 71	0.99	1.54	3.09	4.38	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.19	1.85	3.70	5.26	-	12.00	3.4 ~ 14.4	2640	510 ~ 3900	13.0	11.9
16 + 25 + 60 + 60	0.99	1.55	3.73	3.73	-	10.00	2.3 ~ 11.2	2610	430 ~ 3270	13.1	12.0	1.20	1.86	4.47	4.47	-	12.00	3.4 ~ 14.4	2650	500 ~ 3860	13.0	11.9
16 + 25 + 60 + 71	0.93	1.45	3.49	4.13	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.12	1.74	4.19	4.95	-	12.00	3.4 ~ 14.4	2640	510 ~ 3900	13.0	11.9
16 + 25 + 71 + 71	0.87	1.37	3.88	3.88	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.05	1.63	4.66	4.66	-	12.00	3.4 ~ 14.4	2630	520 ~ 3890	12.9	11.8
16 + 35 + 35 + 35	1.33	2.89	2.89	2.89	-	10.00	2.3 ~ 10.8	2860	340 ~ 3410	14.3	13.1	1.59	3.47	3.47	3.47	-	12.00	3.4 ~ 14.2	2690	370 ~ 3950	13.2	12.1
16 + 35 + 35 + 42	1.26	2.73	2.73	3.28	-	10.00	2.3 ~ 10.8	2860	350 ~ 3410	14.3	13.1	1.50	3.28	3.28	3.94	-	12.00	3.4 ~ 14.4	2680	370 ~ 4060	13.2	12.1
16 + 35 + 35 + 50	1.18	2.57	2.57	3.68	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.41	3.09	3.09	4.41	-	12.00	3.4 ~ 14.4	2630	430 ~ 3910	12.9	11.8
16 + 35 + 35 + 60	1.10	2.40	2.40	4.10	-	10.00	2.3 ~ 11.0	2730	390 ~ 3340	13.7	12.5	1.32	2.88	2.88	4.92	-	12.00	3.4 ~ 14.4	2630	430 ~ 3910	12.9	11.8
16 + 35 + 35 + 71	1.02	2.23	2.23	4.52	-	10.00	2.3 ~ 11.0	2660	390 ~ 3270	13.3	12.2	1.22	2.68	2.68	5.42	-	12.00	3.4 ~ 14.4	2620	450 ~ 3960	12.9	11.8
16 + 35 + 42 + 42	1.19	2.59	3.11	3.11	-	10.00	2.3 ~ 10.8	2860	350 ~ 3410	14.3	13.1	1.43	3.11	3.73	3.73	-	12.00	3.4 ~ 14.4	2710	370 ~ 4040	13.3	12.2
16 + 35 + 42 + 50	1.12	2.45	2.94	3.49	-	10.00	2.3 ~ 11.0	2660	390 ~ 3340	13.3	12.2	1.34	2.94	3.52	4.20	-	12.00	3.4 ~ 14.4	2620	450 ~ 3960	12.9	11.8
16 + 35 + 42 + 60	1.05	2.29	2.75	3.91	-	10.00	2.3 ~ 11.0	2660	390 ~ 3340	13.3	12.2	1.25	2.75	3.29	4.71	-	12.00	3.4 ~ 14.4	2620	450 ~ 3960	12.9	11.8
16 + 35 + 42 + 71	0.98	2.13	2.56	4.33	-	10.00	2.3 ~ 11.2	2670	400 ~ 3410	13.4	12.2	1.17	2.56	3.07	5.20	-	12.00	3.4 ~ 14.4	2650	450 ~ 3940	13.0	11.9
16 + 35 + 50 + 50	1.06	2.32	3.31	3.31	-	10.00	2.3 ~ 11.0	2610	470 ~ 3130	13.1	12.0	1.28	2.78	3.97	3.97	-	12.00	3.4 ~ 14.4	2630	520 ~ 3890	12.9	11.8
16 + 35 + 50 + 60	0.99	2.17	3.11	3.73	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.19	2.61	3.73	4.47	-	12.00	3.4 ~ 14.4	2630	520 ~ 3890	12.9	11.8
16 + 35 + 50 + 71	0.93	2.03	2.91	4.13	-	10.00	2.3 ~ 11.2	2610														

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION										
	Cooling Capacity (kW)						Input Power (W)		Current (A)			Heating Capacity (kW)						Input Power (W)		Current (A)		
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
16 + 42 + 50 + 71	0.89	2.35	2.79	3.97	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.07	2.82	3.35	4.76	-	12.00	3.4 ~ 14.4	2620	540 ~ 3870	12.9	11.8
16 + 42 + 60 + 60	0.90	2.36	3.37	3.37	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.08	2.84	4.04	4.04	-	12.00	3.4 ~ 14.4	2630	530 ~ 3880	12.9	11.8
16 + 50 + 50 + 50	0.97	3.01	3.01	3.01	-	10.00	2.3 ~ 11.2	2570	520 ~ 3220	12.9	11.8	1.17	3.61	3.61	3.61	-	12.00	3.4 ~ 14.4	2660	630 ~ 3880	13.1	12.0
16 + 50 + 50 + 60	0.91	2.84	2.84	3.41	-	10.00	2.3 ~ 11.2	2570	520 ~ 3220	12.9	11.8	1.09	3.41	3.41	4.09	-	12.00	3.4 ~ 14.4	2660	630 ~ 3880	13.1	12.0
20 + 20 + 20 + 20	2.00	2.00	2.00	2.00	-	8.00	2.3 ~ 10.6	2050	310 ~ 3480	10.3	9.4	3.00	3.00	3.00	3.00	-	12.00	3.4 ~ 14.2	2750	340 ~ 4110	13.5	12.4
20 + 20 + 20 + 25	2.00	2.00	2.00	2.50	-	8.50	2.3 ~ 10.6	2230	310 ~ 3480	11.2	10.2	2.82	2.82	2.82	3.54	-	12.00	3.4 ~ 14.2	2750	340 ~ 4110	13.5	12.4
20 + 20 + 20 + 35	2.00	2.00	2.00	3.50	-	9.50	2.3 ~ 10.6	2690	320 ~ 3410	13.5	12.3	2.53	2.53	2.53	4.41	-	12.00	3.4 ~ 14.2	2730	350 ~ 4070	13.4	12.3
20 + 20 + 20 + 42	1.96	1.96	1.96	4.12	-	10.00	2.3 ~ 10.6	2920	320 ~ 3410	14.6	13.4	2.35	2.35	2.35	4.95	-	12.00	3.4 ~ 14.2	2720	360 ~ 4050	13.4	12.2
20 + 20 + 20 + 50	1.82	1.82	1.82	4.54	-	10.00	2.3 ~ 10.6	2730	380 ~ 3120	13.7	12.5	2.18	2.18	2.18	5.46	-	12.00	3.4 ~ 14.2	2660	420 ~ 3910	13.1	12.0
20 + 20 + 20 + 60	1.67	1.67	1.67	4.99	-	10.00	2.3 ~ 10.6	2730	380 ~ 3120	13.7	12.5	2.00	2.00	2.00	6.00	-	12.00	3.4 ~ 14.2	2660	420 ~ 3910	13.1	12.0
20 + 20 + 20 + 71	1.53	1.53	1.53	5.41	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.83	1.83	1.83	6.51	-	12.00	3.4 ~ 14.4	2650	420 ~ 3950	13.0	11.9
20 + 20 + 25 + 25	2.00	2.00	2.50	2.50	-	9.00	2.3 ~ 10.6	2460	310 ~ 3480	12.3	11.3	2.67	2.67	3.33	3.33	-	12.00	3.4 ~ 14.2	2750	340 ~ 4110	13.5	12.4
20 + 20 + 25 + 35	2.00	2.00	2.50	3.50	-	10.00	2.3 ~ 10.6	2920	320 ~ 3410	14.6	13.4	2.40	2.40	3.00	4.20	-	12.00	3.4 ~ 14.2	2730	350 ~ 4070	13.4	12.3
20 + 20 + 25 + 42	1.87	1.87	2.34	3.92	-	10.00	2.3 ~ 10.6	2920	320 ~ 3410	14.6	13.4	2.24	2.24	2.81	4.71	-	12.00	3.4 ~ 14.2	2720	360 ~ 4050	13.4	12.2
20 + 20 + 25 + 50	1.74	1.74	2.17	4.35	-	10.00	2.3 ~ 10.6	2730	380 ~ 3120	13.7	12.5	2.09	2.09	2.61	5.21	-	12.00	3.4 ~ 14.2	2660	420 ~ 3910	13.1	12.0
20 + 20 + 25 + 60	1.60	1.60	2.00	4.80	-	10.00	2.3 ~ 10.8	2730	380 ~ 3260	13.7	12.5	1.92	1.92	2.40	5.76	-	12.00	3.4 ~ 14.2	2660	420 ~ 3910	13.1	12.0
20 + 20 + 25 + 71	1.47	1.47	1.84	5.22	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.76	1.76	2.22	6.26	-	12.00	3.4 ~ 14.4	2650	420 ~ 3950	13.0	11.9
20 + 20 + 35 + 35	1.82	1.82	3.18	3.18	-	10.00	2.3 ~ 10.6	2860	320 ~ 3330	14.3	13.1	2.18	2.18	3.82	3.82	-	12.00	3.4 ~ 14.2	2700	370 ~ 3970	13.3	12.2
20 + 20 + 35 + 42	1.71	1.71	2.99	3.59	-	10.00	2.3 ~ 10.6	2860	320 ~ 3330	14.3	13.1	2.05	2.05	3.59	4.31	-	12.00	3.4 ~ 14.2	2690	370 ~ 3960	13.2	12.1
20 + 20 + 35 + 50	1.60	1.60	2.80	4.00	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.92	1.92	3.36	4.80	-	12.00	3.4 ~ 14.2	2640	420 ~ 3880	13.0	11.9
20 + 20 + 35 + 60	1.48	1.48	2.60	4.44	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.78	1.78	3.11	5.33	-	12.00	3.4 ~ 14.4	2640	420 ~ 3930	13.0	11.9
20 + 20 + 35 + 71	1.37	1.37	2.40	4.86	-	10.00	2.3 ~ 11.0	2660	390 ~ 3270	13.3	12.2	1.64	1.64	2.88	5.84	-	12.00	3.4 ~ 14.4	2630	430 ~ 3920	12.9	11.8
20 + 20 + 42 + 42	1.61	1.61	3.39	3.39	-	10.00	2.3 ~ 10.8	2860	340 ~ 3480	14.3	13.1	1.94	1.94	4.06	4.06	-	12.00	3.4 ~ 14.2	2680	370 ~ 3950	13.2	12.1
20 + 20 + 42 + 50	1.52	1.52	3.18	3.78	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.82	1.82	3.82	4.54	-	12.00	3.4 ~ 14.4	2630	430 ~ 3920	12.9	11.8
20 + 20 + 42 + 60	1.41	1.41	2.96	4.22	-	10.00	2.3 ~ 11.0	2730	390 ~ 3340	13.7	12.5	1.69	1.69	3.55	5.07	-	12.00	3.4 ~ 14.4	2630	430 ~ 3920	12.9	11.8
20 + 20 + 42 + 71	1.31	1.31	2.75	4.63	-	10.00	2.3 ~ 11.0	2660	390 ~ 3270	13.3	12.2	1.57	1.57	3.29	5.57	-	12.00	3.4 ~ 14.4	2620	440 ~ 3960	12.9	11.8
20 + 20 + 50 + 50	1.43	1.43	3.57	3.57	-	10.00	2.3 ~ 10.8	2610	440 ~ 3060	13.1	12.0	1.71	1.71	4.29	4.29	-	12.00	3.4 ~ 14.4	2640	510 ~ 3910	13.0	11.9
20 + 20 + 50 + 60	1.33	1.33	3.34	4.00	-	10.00	2.3 ~ 11.0	2610	440 ~ 3200	13.1	12.0	1.60	1.60	4.00	4.80	-	12.00	3.4 ~ 14.4	2640	510 ~ 3910	13.0	11.9
20 + 20 + 50 + 71	1.24	1.24	3.11	4.41	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.49	1.49	3.73	5.29	-	12.00	3.4 ~ 14.4	2630	520 ~ 3890	12.9	11.8
20 + 20 + 60 + 60	1.25	1.25	3.75	3.75	-	10.00	2.3 ~ 11.2	2610	440 ~ 3270	13.1	12.0	1.50	1.50	4.50	4.50	-	12.00	3.4 ~ 14.4	2640	510 ~ 3910	13.0	11.9
20 + 20 + 60 + 71	1.17	1.17	3.51	4.15	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.40	1.40	4.22	4.98	-	12.00	3.4 ~ 14.4	2630	520 ~ 3890	12.9	11.8
20 + 20 + 71 + 71	1.10	1.10	3.90	3.90	-	10.00	2.3 ~ 11.2	2620	480 ~ 3210	13.1	12.0	1.32	1.32	4.68	4.68	-	12.00	3.4 ~ 14.4	2630	530 ~ 3880	12.9	11.8
20 + 25 + 25 + 25	2.00	2.50	2.50	2.50	-	9.50	2.3 ~ 10.6	2690	310 ~ 3480	13.5	12.3	2.52	3.16	3.16	3.16	-	12.00	3.4 ~ 14.2	2750	340 ~ 4110	13.5	12.4
20 + 25 + 25 + 35	1.91	2.38	2.38	3.33	-	10.00	2.3 ~ 10.6	2920	320 ~ 3410	14.6	13.4	2.29	2.86	2.86	3.99	-	12.00	3.4 ~ 14.2	2730	350 ~ 4070	13.4	12.3
20 + 25 + 25 + 42	1.79	2.23	2.23	3.75	-	10.00	2.3 ~ 10.6	2920	320 ~ 3410	14.6	13.4	2.14	2.68	2.68	4.50	-	12.00	3.4 ~ 14.2	2720	360 ~ 4050	13.4	12.2
20 + 25 + 25 + 50	1.67	2.08	2.08	4.17	-	10.00	2.3 ~ 10.6	2730	380 ~ 3120	13.7	12.5	2.00	2.50	2.50	5.00	-	12.00	3.4 ~ 14.2	2660	420 ~ 3910	13.1	12.0
20 + 25 + 25 + 60	1.54	1.92	1.92	4.62	-	10.00	2.3 ~ 10.8	2730	380 ~ 3260	13.7	12.5	1.85	2.31	2.31	5.53	-	12.00	3.4 ~ 14.4	2660	420 ~ 3970	13.1	12.0
20 + 25 + 25 + 71	1.42	1.77	1.77	5.04	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.70	2.13	2.13	6.04	-	12.00	3.4 ~ 14.4	2650	420 ~ 3950	13.0	11.9
20 + 25 + 35 + 35	1.75	2.17	3.04	3.04	-	10.00	2.3 ~ 10.6	2860	320 ~ 3330	14.3	13.1	2.09	2.61	3.65	3.65	-	12.00	3.4 ~ 14.2	2700	370 ~ 3970	13.3	12.2
20 + 25 + 35 + 42	1.64	2.05	2.87	3.44	-	10.00	2.3 ~ 10.8	2860	320 ~ 3480	14.3	13.1	1.97	2.46	3.44	4.13	-	12.00	3.4 ~ 14.2	2690	370 ~ 3960	13.2	12.1
20 + 25 + 35 + 50	1.54	1.92	2.69	3.85	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.85	2.31	3.23	4.61	-	12.00	3.4 ~ 14.4	2640	420 ~ 3930	13.0	11.9
20 + 25 + 35 + 60	1.43	1.79	2.50	4.28	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.72	2.14	3.00	5.14	-	12.00	3.4 ~ 14.4	2640	420 ~ 3930	13.0	11.9
20 + 25 + 35 + 71	1.32	1.66	2.32	4.70	-	10.00	2.3 ~ 11.0	2660	390 ~ 3270	13.3	12.2	1.59	1.99	2.78	5.64	-	12.00	3.4 ~ 14.4	2630	430 ~ 3920	12.9	11.8
20 + 25 + 42 + 42	1.55	1.93	3.26	3.26	-	10.00	2.3 ~ 10.8	2860	340 ~ 3480	14.3	13.1	1.86	2.32	3.91	3.91	-	12.00	3.4 ~ 14.4	2680	370 ~ 4070	13.2	12.1
20 + 25 + 42 + 50	1.46	1.82	3.07	3.65	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	1.75	2.19	3.68	4.38	-	12.00	3.4 ~ 14.4	2630	430 ~ 3920	12.9	11.8
20 + 25 + 42 + 60	1.36	1.70	2.86	4.08	-	10.00	2.3 ~ 11.0	2730	390 ~ 3340	13.7	12.5	1.63	2.04	3.43	4.90	-	12.00	3.4 ~ 14.4	2630	430 ~ 3920	12.9	11.8
20 + 25 + 42 + 71	1.27	1.58	2.66	4.49	-	10.00	2.3 ~ 11.2	2660	390 ~ 3410	13.3	12.2	1.52	1.90	3.19	5.39	-	12.00	3.4 ~ 14.4	2620	440 ~ 3960	12.9	11.8
20 + 25 + 50 + 50	1.38	1.72	3.45	3.45	-	10.00	2.3 ~ 11.0	2610	440 ~ 3200	13.1	12.0	1.66	2.06	4.14	4.14	-	12.00	3.4 ~ 14.4	2640	510 ~ 3910	13.0	11.9
20 + 25 + 50 + 60	1.29	1.61	3.23	3.87	-	10.00	2.3 ~ 11.0	2610	440 ~ 3200	13.1	12.0	1.55	1.94	3.87	4.64	-	12.00	3.4 ~ 14.4	2640	510 ~ 3910	13.0	11.9
20 + 25 + 50 + 71	1.20	1.51	3.01	4.28	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.45	1.81	3.61	5.13	-	12.00	3.4 ~ 14.4	2630	520 ~ 3890	12.9	11.8
20 + 25 + 60 + 60	1.21	1.51	3.64	3.64	-	10.00	2.3 ~ 11.2	2610	440 ~ 3270	13.1	12.0	1.46	1.82	4.36	4.36	-						

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION											HEATING OPERATION										
		Cooling Capacity (kW)						Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
4 Rooms	20 + 35 + 42 + 60	1.27	2.23	2.68	3.82	-	10.00	2.3 ~ 11.0	2660	390 ~ 3270	13.3	12.2	1.53	2.68	3.21	4.58	-	12.00	3.4 ~ 14.4	2660	450 ~ 3950	13.1	12.0
	20 + 35 + 42 + 71	1.19	2.08	2.50	4.23	-	10.00	2.3 ~ 11.2	2670	420 ~ 3420	13.4	12.2	1.43	2.50	3.00	5.07	-	12.00	3.4 ~ 14.4	2650	460 ~ 3930	13.0	11.9
	20 + 35 + 50 + 50	1.29	2.25	3.23	3.23	-	10.00	2.3 ~ 11.0	2610	470 ~ 3130	13.1	12.0	1.55	2.71	3.87	3.87	-	12.00	3.4 ~ 14.4	2630	530 ~ 3880	12.9	11.8
	20 + 35 + 50 + 60	1.21	2.12	3.03	3.64	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.45	2.55	3.64	4.36	-	12.00	3.4 ~ 14.4	2630	530 ~ 3880	12.9	11.8
	20 + 35 + 50 + 71	1.14	1.99	2.84	4.03	-	10.00	2.3 ~ 11.2	2620	480 ~ 3280	13.1	12.0	1.36	2.39	3.41	4.84	-	12.00	3.4 ~ 14.4	2620	540 ~ 3870	12.9	11.8
	20 + 35 + 60 + 60	1.14	2.00	3.43	3.43	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.38	2.40	4.11	4.11	-	12.00	3.4 ~ 14.4	2630	530 ~ 3880	12.9	11.8
	20 + 42 + 42 + 42	1.36	2.88	2.88	2.88	-	10.00	2.3 ~ 11.0	2790	350 ~ 3480	14.0	12.8	1.65	3.45	3.45	3.45	-	12.00	3.4 ~ 14.4	2700	390 ~ 4020	13.3	12.2
	20 + 42 + 42 + 50	1.30	2.73	2.73	3.24	-	10.00	2.3 ~ 11.0	2660	390 ~ 3270	13.3	12.2	1.56	3.27	3.27	3.90	-	12.00	3.4 ~ 14.4	2650	450 ~ 3940	13.0	11.9
	20 + 42 + 42 + 60	1.22	2.56	2.56	3.66	-	10.00	2.3 ~ 11.2	2660	390 ~ 3410	13.3	12.2	1.47	3.07	3.07	4.39	-	12.00	3.4 ~ 14.4	2650	450 ~ 3940	13.0	11.9
	20 + 42 + 42 + 71	1.14	2.40	2.40	4.06	-	10.00	2.3 ~ 11.2	2670	420 ~ 3340	13.4	12.2	1.37	2.88	2.88	4.87	-	12.00	3.4 ~ 14.4	2640	460 ~ 3920	13.0	11.9
	20 + 42 + 50 + 50	1.23	2.59	3.09	3.09	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.49	3.11	3.70	3.70	-	12.00	3.4 ~ 14.4	2620	540 ~ 3870	12.9	11.8
	20 + 42 + 50 + 60	1.16	2.44	2.91	3.49	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.40	2.93	3.49	4.18	-	12.00	3.4 ~ 14.4	2620	540 ~ 3870	12.9	11.8
	20 + 42 + 50 + 71	1.09	2.30	2.73	3.88	-	10.00	2.3 ~ 11.2	2620	480 ~ 3210	13.1	12.0	1.31	2.75	3.28	4.66	-	12.00	3.4 ~ 14.4	2660	550 ~ 3860	13.1	12.0
	20 + 42 + 60 + 60	1.10	2.30	3.30	3.30	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.32	2.76	3.96	3.96	-	12.00	3.4 ~ 14.4	2620	540 ~ 3870	12.9	11.8
	20 + 50 + 50 + 50	1.18	2.94	2.94	2.94	-	10.00	2.3 ~ 11.2	2570	550 ~ 3220	12.9	11.8	1.41	3.53	3.53	3.53	-	12.00	3.4 ~ 14.4	2690	630 ~ 3870	13.2	12.1
	20 + 50 + 50 + 60	1.11	2.78	2.78	3.33	-	10.00	2.3 ~ 11.2	2570	550 ~ 3220	12.9	11.8	1.34	3.33	3.33	4.00	-	12.00	3.4 ~ 14.4	2690	630 ~ 3870	13.2	12.1
	25 + 25 + 25 + 25	2.50	2.50	2.50	2.50	-	10.00	2.3 ~ 10.6	2990	310 ~ 3480	15.0	13.7	3.00	3.00	3.00	3.00	-	12.00	3.4 ~ 14.2	2750	340 ~ 4110	13.5	12.4
	25 + 25 + 25 + 35	2.27	2.27	2.27	3.19	-	10.00	2.3 ~ 10.6	2920	320 ~ 3410	14.6	13.4	2.73	2.73	2.73	3.81	-	12.00	3.4 ~ 14.2	2730	350 ~ 4070	13.4	12.3
	25 + 25 + 25 + 42	2.14	2.14	2.14	3.58	-	10.00	2.3 ~ 10.6	2920	320 ~ 3410	14.6	13.4	2.56	2.56	2.56	4.32	-	12.00	3.4 ~ 14.2	2720	360 ~ 4050	13.4	12.2
	25 + 25 + 25 + 50	2.00	2.00	2.00	4.00	-	10.00	2.3 ~ 10.8	2730	380 ~ 3260	13.7	12.5	2.40	2.40	2.40	4.80	-	12.00	3.4 ~ 14.2	2660	420 ~ 3910	13.1	12.0
	25 + 25 + 25 + 60	1.85	1.85	1.85	4.45	-	10.00	2.3 ~ 10.8	2730	380 ~ 3260	13.7	12.5	2.22	2.22	2.22	5.34	-	12.00	3.4 ~ 14.4	2660	420 ~ 3970	13.1	12.0
	25 + 25 + 25 + 71	1.71	1.71	1.71	4.87	-	10.00	2.3 ~ 11.0	2730	390 ~ 3340	13.7	12.5	2.05	2.05	2.05	5.85	-	12.00	3.4 ~ 14.4	2650	420 ~ 3950	13.0	11.9
	25 + 25 + 35 + 35	2.08	2.08	2.92	2.92	-	10.00	2.3 ~ 10.6	2860	320 ~ 3330	14.3	13.1	2.50	2.50	3.50	3.50	-	12.00	3.4 ~ 14.2	2700	370 ~ 3970	13.3	12.2
	25 + 25 + 35 + 42	1.97	1.97	2.76	3.30	-	10.00	2.3 ~ 10.8	2860	320 ~ 3480	14.3	13.1	2.36	2.36	3.31	3.97	-	12.00	3.4 ~ 14.2	2690	370 ~ 3960	13.2	12.1
	25 + 25 + 35 + 50	1.85	1.85	2.60	3.70	-	10.00	2.3 ~ 10.8	2730	390 ~ 3190	13.7	12.5	2.22	2.22	3.12	4.44	-	12.00	3.4 ~ 14.4	2640	420 ~ 3930	13.0	11.9
	25 + 25 + 35 + 60	1.72	1.72	2.42	4.14	-	10.00	2.3 ~ 11.0	2730	390 ~ 3340	13.7	12.5	2.07	2.07	2.90	4.96	-	12.00	3.4 ~ 14.4	2640	420 ~ 3930	13.0	11.9
	25 + 25 + 35 + 71	1.60	1.60	2.25	4.55	-	10.00	2.3 ~ 11.0	2660	390 ~ 3270	13.3	12.2	1.92	1.92	2.70	5.46	-	12.00	3.4 ~ 14.4	2630	430 ~ 3920	12.9	11.8
	25 + 25 + 42 + 42	1.87	1.87	3.13	3.13	-	10.00	2.3 ~ 10.8	2860	340 ~ 3480	14.3	13.1	2.24	2.24	3.76	3.76	-	12.00	3.4 ~ 14.4	2680	370 ~ 4070	13.2	12.1
	25 + 25 + 42 + 50	1.76	1.76	2.96	3.52	-	10.00	2.3 ~ 11.0	2730	390 ~ 3340	13.7	12.5	2.11	2.11	3.55	4.23	-	12.00	3.4 ~ 14.4	2630	430 ~ 3920	12.9	11.8
	25 + 25 + 42 + 60	1.64	1.64	2.77	3.95	-	10.00	2.3 ~ 11.0	2730	390 ~ 3340	13.7	12.5	1.97	1.97	3.32	4.74	-	12.00	3.4 ~ 14.4	2630	430 ~ 3920	12.9	11.8
	25 + 25 + 42 + 71	1.53	1.53	2.58	4.36	-	10.00	2.3 ~ 11.2	2660	390 ~ 3410	13.3	12.2	1.84	1.84	3.09	5.23	-	12.00	3.4 ~ 14.4	2620	440 ~ 3960	12.9	11.8
	25 + 25 + 50 + 50	1.67	1.67	3.33	3.33	-	10.00	2.3 ~ 11.0	2610	440 ~ 3200	13.1	12.0	2.00	2.00	4.00	4.00	-	12.00	3.4 ~ 14.4	2640	510 ~ 3910	13.0	11.9
	25 + 25 + 50 + 60	1.56	1.56	3.13	3.75	-	10.00	2.3 ~ 11.2	2610	440 ~ 3270	13.1	12.0	1.88	1.88	3.75	4.49	-	12.00	3.4 ~ 14.4	2640	510 ~ 3910	13.0	11.9
	25 + 25 + 50 + 71	1.46	1.46	2.93	4.15	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.75	1.75	3.52	4.98	-	12.00	3.4 ~ 14.4	2630	520 ~ 3890	12.9	11.8
	25 + 25 + 60 + 60	1.47	1.47	3.53	3.53	-	10.00	2.3 ~ 11.2	2610	440 ~ 3270	13.1	12.0	1.76	1.76	4.24	4.24	-	12.00	3.4 ~ 14.4	2640	510 ~ 3910	13.0	11.9
	25 + 25 + 60 + 71	1.38	1.38	3.32	3.92	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.66	1.66	3.98	4.70	-	12.00	3.4 ~ 14.4	2630	520 ~ 3890	12.9	11.8
	25 + 35 + 35 + 35	1.93	2.69	2.69	2.69	-	10.00	2.3 ~ 10.8	2860	350 ~ 3410	14.3	13.1	2.31	3.23	3.23	3.23	-	12.00	3.4 ~ 14.4	2680	370 ~ 4060	13.2	12.1
	25 + 35 + 35 + 42	1.83	2.55	2.55	3.07	-	10.00	2.3 ~ 10.8	2860	350 ~ 3410	14.3	13.1	2.19	3.07	3.07	3.67	-	12.00	3.4 ~ 14.4	2710	370 ~ 4040	13.3	12.2
	25 + 35 + 35 + 50	1.73	2.41	2.41	3.45	-	10.00	2.3 ~ 11.0	2660	390 ~ 3340	13.3	12.2	2.07	2.90	2.90	4.13	-	12.00	3.4 ~ 14.4	2620	450 ~ 3960	12.9	11.8
	25 + 35 + 35 + 60	1.61	2.26	2.26	3.87	-	10.00	2.3 ~ 11.0	2660	390 ~ 3340	13.3	12.2	1.94	2.71	2.71	4.64	-	12.00	3.4 ~ 14.4	2620	450 ~ 3960	12.9	11.8
25 + 35 + 35 + 71	1.51	2.11	2.11	4.27	-	10.00	2.3 ~ 11.2	2670	420 ~ 3410	13.4	12.2	1.81	2.53	2.53	5.13	-	12.00	3.4 ~ 14.4	2650	450 ~ 3940	13.0	11.9	
25 + 35 + 42 + 42	1.74	2.42	2.92	2.92	-	10.00	2.3 ~ 11.0	2860	350 ~ 3560	14.3	13.1	2.08	2.92	3.50	3.50	-	12.00	3.4 ~ 14.4	2700	390 ~ 4030	13.3	12.2	
25 + 35 + 42 + 50	1.65	2.30	2.76	3.29	-	10.00	2.3 ~ 11.0	2660	390 ~ 3270	13.3	12.2	1.97	2.76	3.32	3.95	-	12.00	3.4 ~ 14.4	2660	450 ~ 3950	13.1	12.0	
25 + 35 + 42 + 60	1.55	2.16	2.59	3.70	-	10.00	2.3 ~ 11.2	2660	390 ~ 3410	13.3	12.2	1.86	2.59	3.11	4.44	-	12.00	3.4 ~ 14.4	2660	450 ~ 3950	13.1	12.0	
25 + 35 + 42 + 71	1.45	2.02	2.43	4.10	-	10.00	2.3 ~ 11.2	2670	420 ~ 3420	13.4	12.2	1.74	2.43	2.91	4.92	-	12.00	3.4 ~ 14.4	2650	460 ~ 3930	13.0	11.9	
25 + 35 + 50 + 50	1.56	2.18	3.13	3.13	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.88	2.62	3.75	3.75	-	12.00	3.4 ~ 14.4	2630	530 ~ 3880	12.9	11.8	
25 + 35 + 50 + 60	1.47	2.06	2.94	3.53	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.76	2.47	3.53	4.24	-	12.00	3.4 ~ 14.4	2630	530 ~ 3880	12.9	11.8	
25 + 35 + 50 + 71	1.39	1.93	2.76	3.92	-	10.00	2.3 ~ 11.2	2620	480 ~ 3280	13.1	12.0	1.66	2.32	3.31	4.71	-	12.00	3.4 ~ 14.4	2620	540 ~ 3870	12.9	11.8	
25 + 35 + 60 + 60	1.40	1.94	3.33	3.33	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	1.67	2.33	4.00	4.00	-	12.00	3.4 ~ 14.4	2630	530 ~ 3880	12.9	11.8	
25 + 42 + 42 + 42	1.66	2.78	2.78	2.78	-	10.00	2.3 ~ 11.0	2790	350 ~ 3480	14.0	12.8	1.98	3.34	3.34	3.34	-	12.00	3.4 ~ 14.4	2700	390 ~ 4020	13.3	12.2	
25 + 42 + 42 + 50	1.58	2.64	2.64	3.14	-	10.00	2.3 ~																

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity	COOLING OPERATION												HEATING OPERATION											
	Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)					
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V		
4 Rooms	35 + 35 + 35 + 60	2.12	2.12	2.12	3.64	-	10.00	2.3 ~ 11.2	2660	390 ~ 3410	13.3	12.2	2.55	2.55	2.55	4.35	-	12.00	3.4 ~ 14.4	2650	460 ~ 3930	13.0	11.9	
	35 + 35 + 35 + 71	1.99	1.99	1.99	4.03	-	10.00	2.3 ~ 11.2	2670	430 ~ 3340	13.4	12.2	2.39	2.39	2.39	4.83	-	12.00	3.4 ~ 14.4	2640	470 ~ 3910	13.0	11.9	
	35 + 35 + 42 + 42	2.27	2.27	2.73	2.73	-	10.00	2.3 ~ 11.0	2790	350 ~ 3480	14.0	12.8	2.73	2.73	3.27	3.27	-	12.00	3.4 ~ 14.4	2680	400 ~ 4000	13.2	12.1	
	35 + 35 + 42 + 50	2.16	2.16	2.59	3.09	-	10.00	2.3 ~ 11.2	2670	420 ~ 3410	13.4	12.2	2.59	2.59	3.12	3.70	-	12.00	3.4 ~ 14.4	2640	470 ~ 3920	13.0	11.9	
	35 + 35 + 42 + 60	2.03	2.03	2.45	3.49	-	10.00	2.3 ~ 11.2	2670	420 ~ 3410	13.4	12.2	2.44	2.44	2.93	4.19	-	12.00	3.4 ~ 14.4	2640	470 ~ 3920	13.0	11.9	
	35 + 35 + 42 + 71	1.91	1.91	2.30	3.88	-	10.00	2.3 ~ 11.2	2670	430 ~ 3340	13.4	12.2	2.30	2.30	2.75	4.65	-	12.00	3.4 ~ 14.4	2630	480 ~ 3900	12.9	11.8	
	35 + 35 + 50 + 50	2.06	2.06	2.94	2.94	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	2.47	2.47	3.53	3.53	-	12.00	3.4 ~ 14.4	2650	550 ~ 3850	13.0	11.9	
	35 + 35 + 50 + 60	1.94	1.94	2.79	3.33	-	10.00	2.3 ~ 11.2	2610	470 ~ 3280	13.1	12.0	2.33	2.33	3.33	4.01	-	12.00	3.4 ~ 14.4	2650	550 ~ 3850	13.0	11.9	
	35 + 42 + 42 + 42	2.17	2.61	2.61	2.61	-	10.00	2.3 ~ 11.2	2790	350 ~ 3640	14.0	12.8	2.61	3.13	3.13	3.13	-	12.00	3.4 ~ 14.4	2670	400 ~ 3980	13.1	12.0	
	35 + 42 + 42 + 50	2.07	2.49	2.49	2.95	-	10.00	2.3 ~ 11.2	2670	420 ~ 3420	13.4	12.2	2.49	2.98	2.98	3.55	-	12.00	3.4 ~ 14.4	2630	480 ~ 3900	12.9	11.8	
	35 + 42 + 42 + 60	1.96	2.35	2.35	3.34	-	10.00	2.3 ~ 11.2	2670	420 ~ 3420	13.4	12.2	2.35	2.82	2.82	4.01	-	12.00	3.4 ~ 14.4	2630	480 ~ 3900	12.9	11.8	
	35 + 42 + 50 + 50	1.99	2.37	2.82	2.82	-	10.00	2.3 ~ 11.2	2620	470 ~ 3280	13.1	12.0	2.37	2.85	3.39	3.39	-	12.00	3.4 ~ 14.4	2650	560 ~ 3840	13.0	11.9	
	42 + 42 + 42 + 42	2.50	2.50	2.50	2.50	-	10.00	2.3 ~ 11.2	2790	350 ~ 3560	14.0	12.8	3.00	3.00	3.00	3.00	-	12.00	3.4 ~ 14.4	2660	400 ~ 3970	13.1	12.0	
	42 + 42 + 42 + 50	2.39	2.39	2.39	2.83	-	10.00	2.3 ~ 11.2	2670	420 ~ 3340	13.4	12.2	2.86	2.86	2.86	3.42	-	12.00	3.4 ~ 14.4	2620	480 ~ 3890	12.9	11.8	
5 Rooms	16 + 16 + 16 + 16 + 16	1.60	1.60	1.60	1.60	8.00	2.3 ~ 11.5	1840	390 ~ 3660	9.0	8.4	2.40	2.40	2.40	2.40	2.40	12.00	3.4 ~ 14.5	2750	540 ~ 4020	13.0	12.0		
	16 + 16 + 16 + 16 + 20	1.60	1.60	1.60	1.60	2.00	8.40	2.3 ~ 11.5	1950	390 ~ 3660	9.6	8.9	2.29	2.29	2.29	2.29	2.84	12.00	3.4 ~ 14.5	2740	560 ~ 4010	13.0	12.0	
	16 + 16 + 16 + 16 + 25	1.60	1.60	1.60	1.60	2.50	8.90	2.3 ~ 11.5	2120	390 ~ 3660	10.4	9.6	2.16	2.16	2.16	2.16	3.36	12.00	3.4 ~ 14.5	2740	560 ~ 4010	13.0	12.0	
	16 + 16 + 16 + 16 + 35	1.60	1.60	1.60	1.60	3.50	9.90	2.3 ~ 11.5	2540	420 ~ 3590	12.5	11.5	1.94	1.94	1.94	1.94	4.24	12.00	3.4 ~ 14.5	2770	570 ~ 3970	13.1	12.1	
	16 + 16 + 16 + 16 + 42	1.51	1.51	1.51	1.51	3.96	10.00	2.3 ~ 11.5	2600	430 ~ 3590	12.8	11.8	1.81	1.81	1.81	1.81	4.76	12.00	3.4 ~ 14.5	2760	580 ~ 4020	13.1	12.1	
	16 + 16 + 16 + 16 + 50	1.40	1.40	1.40	1.40	4.40	10.00	2.3 ~ 11.5	2550	480 ~ 3450	12.5	11.6	1.68	1.68	1.68	1.68	5.28	12.00	3.4 ~ 14.5	2780	680 ~ 3950	13.1	12.2	
	16 + 16 + 16 + 16 + 60	1.29	1.29	1.29	1.29	4.84	10.00	2.3 ~ 11.5	2550	480 ~ 3450	12.5	11.6	1.55	1.55	1.55	1.55	5.80	12.00	3.4 ~ 14.5	2780	680 ~ 3950	13.1	12.2	
	16 + 16 + 16 + 16 + 71	1.19	1.19	1.19	1.19	5.24	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.42	1.42	1.42	1.42	6.32	12.00	3.4 ~ 14.5	2770	700 ~ 3940	13.1	12.1	
	16 + 16 + 16 + 20 + 20	1.60	1.60	1.60	2.00	8.00	2.3 ~ 11.5	2120	420 ~ 3580	10.4	9.6	2.18	2.18	2.18	2.18	2.73	12.00	3.4 ~ 14.5	2740	560 ~ 3990	13.0	12.0		
	16 + 16 + 16 + 20 + 25	1.60	1.60	1.60	2.00	2.50	9.30	2.3 ~ 11.5	2290	420 ~ 3580	11.3	10.4	2.06	2.06	2.06	2.59	3.23	12.00	3.4 ~ 14.5	2740	560 ~ 3990	13.0	12.0	
	16 + 16 + 16 + 20 + 35	1.55	1.55	1.55	1.95	3.40	10.00	2.3 ~ 11.5	2600	430 ~ 3590	12.8	11.8	1.86	1.86	1.86	2.34	4.08	12.00	3.4 ~ 14.5	2760	580 ~ 4020	13.1	12.1	
	16 + 16 + 16 + 20 + 42	1.45	1.45	1.45	1.83	3.82	10.00	2.3 ~ 11.5	2600	430 ~ 3590	12.8	11.8	1.75	1.75	1.75	2.18	4.57	12.00	3.4 ~ 14.5	2750	600 ~ 4010	13.0	12.0	
	16 + 16 + 16 + 20 + 50	1.36	1.36	1.36	1.69	4.23	10.00	2.3 ~ 11.5	2560	510 ~ 3450	12.6	11.6	1.63	1.63	1.63	2.03	5.08	12.00	3.4 ~ 14.5	2770	700 ~ 3940	13.1	12.1	
	16 + 16 + 16 + 20 + 60	1.25	1.25	1.25	1.56	4.69	10.00	2.3 ~ 11.5	2560	510 ~ 3450	12.6	11.6	1.50	1.50	1.50	1.88	5.62	12.00	3.4 ~ 14.5	2770	700 ~ 3940	13.1	12.1	
	16 + 16 + 16 + 20 + 71	1.15	1.15	1.15	1.44	5.11	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.38	1.38	1.38	1.73	6.13	12.00	3.4 ~ 14.5	2760	710 ~ 3930	13.1	12.1	
	16 + 16 + 16 + 25 + 25	1.60	1.60	1.60	2.50	2.50	9.80	2.3 ~ 11.5	2540	420 ~ 3580	12.5	11.5	1.96	1.96	1.96	3.06	3.06	12.00	3.4 ~ 14.5	2740	560 ~ 3990	13.0	12.0	
	16 + 16 + 16 + 25 + 35	1.48	1.48	1.48	2.32	3.24	10.00	2.3 ~ 11.5	2600	430 ~ 3590	12.8	11.8	1.78	1.78	1.78	2.78	3.88	12.00	3.4 ~ 14.5	2760	580 ~ 4020	13.1	12.1	
	16 + 16 + 16 + 25 + 42	1.39	1.39	1.39	2.18	3.65	10.00	2.3 ~ 11.5	2600	430 ~ 3590	12.8	11.8	1.67	1.67	1.67	2.61	4.38	12.00	3.4 ~ 14.5	2750	600 ~ 4010	13.0	12.0	
	16 + 16 + 16 + 25 + 50	1.30	1.30	1.30	2.03	4.07	10.00	2.3 ~ 11.5	2560	510 ~ 3450	12.6	11.6	1.56	1.56	1.56	2.44	4.88	12.00	3.4 ~ 14.5	2770	700 ~ 3940	13.1	12.1	
	16 + 16 + 16 + 25 + 60	1.20	1.20	1.20	1.89	4.51	10.00	2.3 ~ 11.5	2560	510 ~ 3450	12.6	11.6	1.44	1.44	1.44	2.27	5.41	12.00	3.4 ~ 14.5	2770	700 ~ 3940	13.1	12.1	
	16 + 16 + 16 + 25 + 71	1.11	1.11	1.11	1.74	4.93	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.33	1.33	1.33	2.09	5.92	12.00	3.4 ~ 14.5	2760	710 ~ 3930	13.1	12.1	
	16 + 16 + 16 + 35 + 35	1.36	1.36	1.36	2.96	2.96	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	1.62	1.62	1.62	3.57	3.57	12.00	3.4 ~ 14.5	2740	600 ~ 3990	13.0	12.0	
	16 + 16 + 16 + 35 + 42	1.28	1.28	1.28	2.80	3.36	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	1.54	1.54	1.54	3.36	4.02	12.00	3.4 ~ 14.5	2740	610 ~ 3980	13.0	12.0	
	16 + 16 + 16 + 35 + 50	1.20	1.20	1.20	2.64	3.76	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.44	1.44	1.44	3.17	4.51	12.00	3.4 ~ 14.5	2760	720 ~ 3970	13.1	12.1	
	16 + 16 + 16 + 35 + 60	1.12	1.12	1.12	2.45	4.19	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.34	1.34	1.34	2.95	5.03	12.00	3.4 ~ 14.5	2760	720 ~ 3970	13.1	12.1	
	16 + 16 + 16 + 35 + 71	1.04	1.04	1.04	2.27	4.61	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.25	1.25	1.25	2.73	5.52	12.00	3.4 ~ 14.5	2790	740 ~ 3960	13.2	12.2	
	16 + 16 + 16 + 42 + 42	1.22	1.22	1.22	3.17	3.17	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	1.46	1.46	1.46	3.81	3.81	12.00	3.4 ~ 14.5	2730	630 ~ 3970	12.9	11.9	
	16 + 16 + 16 + 42 + 50	1.14	1.14	1.14	3.01	3.57	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.37	1.37	1.37	3.60	4.29	12.00	3.4 ~ 14.5	2750	740 ~ 3960	13.0	12.0	
	16 + 16 + 16 + 42 + 60	1.07	1.07	1.07	2.80	3.99	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.28	1.28	1.28	3.36	4.80	12.00	3.4 ~ 14.5	2750	740 ~ 3960	13.0	12.0	
	16 + 16 + 16 + 42 + 71	0.99	0.99	0.99	2.62	4.41	10.00	2.3 ~ 11.5	2500	520 ~ 3390	12.3	11.4	1.19	1.19	1.19	3.14	5.29	12.00	3.4 ~ 14.5	2790	750 ~ 3950	13.2	12.2	
16 + 16 + 16 + 50 + 50	1.08	1.08	1.08	3.38	3.38	10.00	2.3 ~ 11.5	2520	600 ~ 3330															

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)				
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
5 Rooms	16 + 16 + 20 + 25 + 50	1.26	1.26	1.57	1.97	3.94	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.51	1.51	1.90	2.36	4.72	12.00	3.4 ~ 14.5	2770	710 ~ 3930	13.1	12.1
	16 + 16 + 20 + 25 + 60	1.17	1.17	1.46	1.82	4.38	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.40	1.40	1.75	2.19	5.26	12.00	3.4 ~ 14.5	2770	710 ~ 3930	13.1	12.1
	16 + 16 + 20 + 25 + 71	1.08	1.08	1.35	1.69	4.80	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.30	1.30	1.62	2.03	5.75	12.00	3.4 ~ 14.5	2760	720 ~ 3920	13.1	12.1
	16 + 16 + 20 + 35 + 35	1.31	1.31	1.64	2.87	2.87	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	1.57	1.57	1.98	3.44	3.44	12.00	3.4 ~ 14.5	2740	610 ~ 3980	13.0	12.0
	16 + 16 + 20 + 35 + 42	1.24	1.24	1.55	2.71	3.26	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	1.49	1.49	1.86	3.26	3.90	12.00	3.4 ~ 14.5	2730	630 ~ 3970	12.9	11.9
	16 + 16 + 20 + 35 + 50	1.17	1.17	1.46	2.55	3.65	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.40	1.40	1.75	3.07	4.38	12.00	3.4 ~ 14.5	2750	740 ~ 3960	13.0	12.0
	16 + 16 + 20 + 35 + 60	1.09	1.09	1.36	2.38	4.08	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.31	1.31	1.63	2.86	4.89	12.00	3.4 ~ 14.5	2750	740 ~ 3960	13.0	12.0
	16 + 16 + 20 + 35 + 71	1.01	1.01	1.27	2.22	4.49	10.00	2.3 ~ 11.5	2500	520 ~ 3390	12.3	11.4	1.22	1.22	1.52	2.66	5.38	12.00	3.4 ~ 14.5	2790	750 ~ 3950	13.2	12.2
	16 + 16 + 20 + 42 + 42	1.18	1.18	1.46	3.09	3.09	10.00	2.3 ~ 11.5	2540	440 ~ 3520	12.5	11.5	1.41	1.41	1.76	3.71	3.71	12.00	3.4 ~ 14.5	2770	640 ~ 3960	13.1	12.1
	16 + 16 + 20 + 42 + 50	1.11	1.11	1.39	2.92	3.47	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.33	1.33	1.67	3.50	4.17	12.00	3.4 ~ 14.5	2790	750 ~ 3950	13.2	12.2
	16 + 16 + 20 + 42 + 60	1.04	1.04	1.30	2.73	3.89	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.25	1.25	1.56	3.27	4.67	12.00	3.4 ~ 14.5	2790	750 ~ 3950	13.2	12.2
	16 + 16 + 20 + 42 + 71	0.97	0.97	1.21	2.55	4.30	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.17	1.17	1.45	3.05	5.16	12.00	3.4 ~ 14.5	2780	760 ~ 3940	13.1	12.2
	16 + 16 + 20 + 50 + 50	1.05	1.05	1.32	3.29	3.29	10.00	2.3 ~ 11.5	2520	610 ~ 3330	12.4	11.5	1.26	1.26	1.58	3.95	3.95	12.00	3.4 ~ 14.5	2830	870 ~ 3970	13.4	12.4
	16 + 16 + 20 + 50 + 60	0.99	0.99	1.23	3.09	3.70	10.00	2.3 ~ 11.5	2520	610 ~ 3330	12.4	11.5	1.19	1.19	1.48	3.70	4.44	12.00	3.4 ~ 14.5	2830	870 ~ 3970	13.4	12.4
	16 + 16 + 20 + 50 + 71	0.92	0.92	1.17	2.89	4.10	10.00	2.3 ~ 11.5	2530	620 ~ 3340	12.4	11.5	1.11	1.11	1.39	3.47	4.92	12.00	3.4 ~ 14.5	2870	900 ~ 4010	13.6	12.6
	16 + 16 + 20 + 60 + 60	0.93	0.93	1.16	3.49	3.49	10.00	2.3 ~ 11.5	2520	610 ~ 3330	12.4	11.5	1.12	1.12	1.40	4.18	4.18	12.00	3.4 ~ 14.5	2830	870 ~ 3970	13.4	12.4
	16 + 16 + 20 + 60 + 71	0.87	0.87	1.10	3.28	3.88	10.00	2.3 ~ 11.5	2530	620 ~ 3340	12.4	11.5	1.05	1.05	1.31	3.93	4.66	12.00	3.4 ~ 14.5	2870	900 ~ 4010	13.6	12.6
	16 + 16 + 25 + 25 + 25	1.49	1.49	2.34	2.34	2.34	10.00	2.3 ~ 11.5	2600	420 ~ 3590	12.8	11.8	1.80	1.80	2.80	2.80	2.80	12.00	3.4 ~ 14.5	2770	570 ~ 3980	13.1	12.1
	16 + 16 + 25 + 25 + 35	1.37	1.37	2.14	2.14	2.98	10.00	2.3 ~ 11.5	2600	430 ~ 3590	12.8	11.8	1.64	1.64	2.56	2.56	3.60	12.00	3.4 ~ 14.5	2750	600 ~ 4010	13.0	12.0
	16 + 16 + 25 + 25 + 42	1.29	1.29	2.02	2.02	3.38	10.00	2.3 ~ 11.5	2600	430 ~ 3510	12.8	11.8	1.55	1.55	2.42	2.42	4.06	12.00	3.4 ~ 14.5	2750	600 ~ 4000	13.0	12.0
	16 + 16 + 25 + 25 + 50	1.21	1.21	1.89	1.89	3.80	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.45	1.45	2.27	2.27	4.56	12.00	3.4 ~ 14.5	2770	710 ~ 3930	13.1	12.1
	16 + 16 + 25 + 25 + 60	1.13	1.13	1.76	1.76	4.22	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.35	1.35	2.11	2.11	5.08	12.00	3.4 ~ 14.5	2770	710 ~ 3930	13.1	12.1
	16 + 16 + 25 + 25 + 71	1.05	1.05	1.63	1.63	4.64	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.25	1.25	1.96	1.96	5.58	12.00	3.4 ~ 14.5	2760	720 ~ 3920	13.1	12.1
	16 + 16 + 25 + 35 + 35	1.26	1.26	1.96	2.76	2.76	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	1.51	1.51	2.36	3.31	3.31	12.00	3.4 ~ 14.5	2740	610 ~ 3980	13.0	12.0
	16 + 16 + 25 + 35 + 42	1.19	1.19	1.88	2.61	3.13	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	1.43	1.43	2.25	3.13	3.76	12.00	3.4 ~ 14.5	2730	630 ~ 3970	12.9	11.9
	16 + 16 + 25 + 35 + 50	1.13	1.13	1.76	2.46	3.52	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.35	1.35	2.11	2.96	4.23	12.00	3.4 ~ 14.5	2750	740 ~ 3960	13.0	12.0
	16 + 16 + 25 + 35 + 60	1.05	1.05	1.65	2.30	3.95	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.26	1.26	1.98	2.76	4.74	12.00	3.4 ~ 14.5	2750	740 ~ 3960	13.0	12.0
	16 + 16 + 25 + 35 + 71	0.98	0.98	1.53	2.15	4.36	10.00	2.3 ~ 11.5	2500	520 ~ 3390	12.3	11.4	1.18	1.18	1.84	2.58	5.22	12.00	3.4 ~ 14.5	2790	750 ~ 3950	13.2	12.2
	16 + 16 + 25 + 42 + 42	1.13	1.13	1.78	2.98	2.98	10.00	2.3 ~ 11.5	2540	440 ~ 3520	12.5	11.5	1.36	1.36	2.14	3.57	3.57	12.00	3.4 ~ 14.5	2770	640 ~ 3960	13.1	12.1
	16 + 16 + 25 + 42 + 50	1.07	1.07	1.68	2.82	3.36	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.29	1.29	2.01	3.38	4.03	12.00	3.4 ~ 14.5	2790	750 ~ 3950	13.2	12.2
	16 + 16 + 25 + 42 + 60	1.01	1.01	1.57	2.64	3.77	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.21	1.21	1.89	3.17	4.52	12.00	3.4 ~ 14.5	2790	750 ~ 3950	13.2	12.2
	16 + 16 + 25 + 42 + 71	0.94	0.94	1.47	2.47	4.18	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.13	1.13	1.77	2.96	5.01	12.00	3.4 ~ 14.5	2780	760 ~ 3940	13.1	12.2
	16 + 16 + 25 + 50 + 50	1.02	1.02	1.60	3.18	3.18	10.00	2.3 ~ 11.5	2520	610 ~ 3330	12.4	11.5	1.22	1.22	1.92	3.82	3.82	12.00	3.4 ~ 14.5	2830	870 ~ 3970	13.4	12.4
	16 + 16 + 25 + 50 + 60	0.96	0.96	1.50	2.99	3.59	10.00	2.3 ~ 11.5	2520	610 ~ 3330	12.4	11.5	1.15	1.15	1.80	3.59	4.31	12.00	3.4 ~ 14.5	2830	870 ~ 3970	13.4	12.4
	16 + 16 + 25 + 50 + 71	0.90	0.90	1.40	2.81	3.99	10.00	2.3 ~ 11.5	2530	620 ~ 3340	12.4	11.5	1.08	1.08	1.69	3.37	4.78	12.00	3.4 ~ 14.5	2870	900 ~ 4010	13.6	12.6
	16 + 16 + 25 + 60 + 60	0.90	0.90	1.42	3.39	3.39	10.00	2.3 ~ 11.5	2520	610 ~ 3330	12.4	11.5	1.08	1.08	1.70	4.07	4.07	12.00	3.4 ~ 14.5	2830	870 ~ 3970	13.4	12.4
	16 + 16 + 35 + 35 + 35	1.16	1.16	2.56	2.56	2.56	10.00	2.3 ~ 11.5	2550	460 ~ 3520	12.5	11.6	1.41	1.41	3.06	3.06	3.06	12.00	3.4 ~ 14.5	2760	640 ~ 3950	13.1	12.1
	16 + 16 + 35 + 35 + 42	1.11	1.11	2.43	2.43	2.92	10.00	2.3 ~ 11.5	2550	470 ~ 3520	12.5	11.6	1.33	1.33	2.92	2.92	3.50	12.00	3.4 ~ 14.5	2760	650 ~ 3940	13.1	12.1
	16 + 16 + 35 + 35 + 50	1.05	1.05	2.30	2.30	3.30	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.26	1.26	2.76	2.76	3.96	12.00	3.4 ~ 14.5	2780	760 ~ 3940	13.1	12.2
	16 + 16 + 35 + 35 + 60	0.99	0.99	2.16	2.16	3.70	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.19	1.19	2.59	2.59	4.44	12.00	3.4 ~ 14.5	2780	760 ~ 3940	13.1	12.2
16 + 16 + 35 + 35 + 71	0.93	0.93	2.02	2.02	4.10	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.11	1.11	2.43	2.43	4.92	12.00	3.4 ~ 14.5	2780	780 ~ 3930	13.1	12.2	
16 + 16 + 35 + 42 + 42	1.06	1.06	2.32	2.78	2.78	10.00	2.3 ~ 11.5	2550	470 ~ 3440	12.5	11.6	1.27	1.27	2.78	3.34	3.34	12.00	3.4 ~ 14.5	2750	650 ~ 3980	13.0	12.0	
16 + 16 + 35 + 42 + 50	1.01	1.01	2.20	2.64	3.14	10.00	2.3 ~ 11.5	2500	520 ~ 3390	12.3	11.4	1.21	1.21	2.64	3.17	3.77	12.00	3.4 ~ 14.5	2780	780 ~ 3930	13.1	12.2	
16 + 16 + 35 + 42 + 60	0.95	0.95	2.07	2.49	3.54	10.00	2.3 ~ 11.5	2500	520 ~ 3390	12.3	11.4	1.14	1.14	2.49	2.98	4.25	12.00	3.4 ~ 14.5	2780	780 ~ 3930	13.1	12.2	
16 + 16 + 35 + 42 + 71	0.89	0.89	1.95	2.33	3.94	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.07	1.07	2.33	2.80	4.73	12.00	3.4 ~ 14.5	2810	790 ~ 3970	13.3	12.3	
16 + 16 + 35 + 50 + 50	0.96	0.96	2.10	2.99	2.99	10.00	2.3 ~ 11.5	2530	620 ~ 3340	12.4	11.5	1.15	1.15	2.52	3.59	3.59	12.00	3.4 ~ 14.5	2860	910 ~ 4000	13.5	12.5	
16 + 16 + 35 + 50 + 60	0.90	0.90	1.99	2.82	3.39	10.00	2.3 ~ 11.5	2530	620 ~ 3340	12.4	11.5	1.08	1.08	2.38	3.39	4.07	12.00	3.4 ~ 14.5	2860	910 ~ 4000	13.5	12.5	
16 + 16 + 42 + 42 + 42	1.01	1.01	2.66	2.66	2.66	10.00	2.3 ~ 11.5	2550	470 ~ 3440	12.5	11.6	1.23	1.23	3.18	3.18	3.18	12.00	3.4 ~ 14.5	2740	670 ~ 397			

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)				
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
5 Rooms	16 + 20 + 20 + 25 + 25	1.50	1.89	1.89	2.36	2.36	10.00	2.3 ~ 11.5	2600	420 ~ 3590	12.8	11.8	1.82	2.26	2.26	2.83	2.83	12.00	3.4 ~ 14.5	2770	570 ~ 4030	13.1	12.1
	16 + 20 + 20 + 25 + 35	1.38	1.72	1.72	2.16	3.02	10.00	2.3 ~ 11.5	2600	430 ~ 3510	12.8	11.8	1.66	2.07	2.07	2.59	3.61	12.00	3.4 ~ 14.5	2750	600 ~ 4000	13.0	12.0
	16 + 20 + 20 + 25 + 42	1.30	1.63	1.63	2.03	3.41	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	1.56	1.95	1.95	2.44	4.10	12.00	3.4 ~ 14.5	2740	610 ~ 3990	13.0	12.0
	16 + 20 + 20 + 25 + 50	1.22	1.53	1.53	1.91	3.81	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.47	1.83	1.83	2.29	4.58	12.00	3.4 ~ 14.5	2760	720 ~ 3920	13.1	12.1
	16 + 20 + 20 + 25 + 60	1.13	1.42	1.42	1.77	4.26	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.36	1.70	1.70	2.13	5.11	12.00	3.4 ~ 14.5	2760	720 ~ 3920	13.1	12.1
	16 + 20 + 20 + 25 + 71	1.05	1.32	1.32	1.64	4.67	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.26	1.58	1.58	1.97	5.61	12.00	3.4 ~ 14.5	2750	730 ~ 3970	13.0	12.0
	16 + 20 + 20 + 35 + 35	1.26	1.59	1.59	2.78	2.78	10.00	2.3 ~ 11.5	2540	440 ~ 3510	12.5	11.5	1.52	1.90	1.90	3.34	3.34	12.00	3.4 ~ 14.5	2730	630 ~ 3970	12.9	11.9
	16 + 20 + 20 + 35 + 42	1.21	1.50	1.50	2.63	3.16	10.00	2.3 ~ 11.5	2540	440 ~ 3520	12.5	11.5	1.45	1.80	1.80	3.16	3.79	12.00	3.4 ~ 14.5	2770	640 ~ 3960	13.1	12.1
	16 + 20 + 20 + 35 + 50	1.13	1.42	1.42	2.48	3.55	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.36	1.70	1.70	2.98	4.26	12.00	3.4 ~ 14.5	2790	750 ~ 3950	13.2	12.2
	16 + 20 + 20 + 35 + 60	1.07	1.32	1.32	2.32	3.97	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.27	1.59	1.59	2.78	4.77	12.00	3.4 ~ 14.5	2790	750 ~ 3950	13.2	12.2
	16 + 20 + 20 + 35 + 71	1.00	1.23	1.23	2.16	4.38	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.19	1.48	1.48	2.59	5.26	12.00	3.4 ~ 14.5	2780	760 ~ 3940	13.1	12.2
	16 + 20 + 20 + 42 + 42	1.14	1.43	1.43	3.00	3.00	10.00	2.3 ~ 11.5	2550	460 ~ 3520	12.5	11.6	1.38	1.71	1.71	3.60	3.60	12.00	3.4 ~ 14.5	2760	640 ~ 3950	13.1	12.1
	16 + 20 + 20 + 42 + 50	1.08	1.35	1.35	2.84	3.38	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.30	1.62	1.62	3.41	4.05	12.00	3.4 ~ 14.5	2790	760 ~ 3950	13.2	12.2
	16 + 20 + 20 + 42 + 60	1.01	1.27	1.27	2.66	3.79	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.22	1.52	1.52	3.19	4.55	12.00	3.4 ~ 14.5	2790	760 ~ 3950	13.2	12.2
	16 + 20 + 20 + 42 + 71	0.95	1.18	1.18	2.49	4.20	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.14	1.42	1.42	2.98	5.04	12.00	3.4 ~ 14.5	2780	780 ~ 3930	13.1	12.2
	16 + 20 + 20 + 50 + 50	1.02	1.28	1.28	3.21	3.21	10.00	2.3 ~ 11.5	2530	610 ~ 3330	12.4	11.5	1.22	1.54	1.54	3.85	3.85	12.00	3.4 ~ 14.5	2870	890 ~ 3960	13.6	12.6
	16 + 20 + 20 + 50 + 60	0.96	1.21	1.21	3.01	3.61	10.00	2.3 ~ 11.5	2530	610 ~ 3330	12.4	11.5	1.16	1.45	1.45	3.61	4.33	12.00	3.4 ~ 14.5	2870	890 ~ 3960	13.6	12.6
	16 + 20 + 20 + 50 + 71	0.90	1.13	1.13	2.82	4.02	10.00	2.3 ~ 11.5	2530	650 ~ 3340	12.4	11.5	1.08	1.36	1.36	3.39	4.81	12.00	3.4 ~ 14.5	2860	900 ~ 4000	13.5	12.5
	16 + 20 + 20 + 60 + 60	0.90	1.14	1.14	3.41	3.41	10.00	2.3 ~ 11.5	2530	610 ~ 3330	12.4	11.5	1.10	1.36	1.36	4.09	4.09	12.00	3.4 ~ 14.5	2870	890 ~ 3960	13.6	12.6
	16 + 20 + 25 + 25 + 25	1.45	1.80	2.25	2.25	2.25	10.00	2.3 ~ 11.5	2600	420 ~ 3590	12.8	11.8	1.74	2.16	2.70	2.70	2.70	12.00	3.4 ~ 14.5	2770	570 ~ 4030	13.1	12.1
	16 + 20 + 25 + 25 + 35	1.32	1.65	2.07	2.07	2.89	10.00	2.3 ~ 11.5	2600	430 ~ 3510	12.8	11.8	1.59	1.98	2.48	2.48	3.47	12.00	3.4 ~ 14.5	2750	600 ~ 4000	13.0	12.0
	16 + 20 + 25 + 25 + 42	1.26	1.56	1.95	1.95	3.28	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	1.50	1.88	2.34	2.34	3.94	12.00	3.4 ~ 14.5	2740	610 ~ 3990	13.0	12.0
	16 + 20 + 25 + 25 + 50	1.18	1.47	1.84	1.84	3.67	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.41	1.76	2.21	2.21	4.41	12.00	3.4 ~ 14.5	2760	720 ~ 3920	13.1	12.1
	16 + 20 + 25 + 25 + 60	1.10	1.37	1.71	1.71	4.11	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.33	1.64	2.05	2.05	4.93	12.00	3.4 ~ 14.5	2760	720 ~ 3920	13.1	12.1
	16 + 20 + 25 + 25 + 71	1.03	1.27	1.59	1.59	4.52	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.22	1.53	1.91	1.91	5.43	12.00	3.4 ~ 14.5	2750	730 ~ 3970	13.0	12.0
	16 + 20 + 25 + 35 + 35	1.22	1.53	1.91	2.67	2.67	10.00	2.3 ~ 11.5	2540	440 ~ 3510	12.5	11.5	1.47	1.83	2.28	3.21	3.21	12.00	3.4 ~ 14.5	2730	630 ~ 3970	12.9	11.9
	16 + 20 + 25 + 35 + 42	1.16	1.45	1.81	2.54	3.04	10.00	2.3 ~ 11.5	2540	440 ~ 3520	12.5	11.5	1.40	1.74	2.17	3.04	3.65	12.00	3.4 ~ 14.5	2770	640 ~ 3960	13.1	12.1
	16 + 20 + 25 + 35 + 50	1.10	1.37	1.71	2.40	3.42	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.32	1.64	2.05	2.88	4.11	12.00	3.4 ~ 14.5	2790	750 ~ 3950	13.2	12.2
	16 + 20 + 25 + 35 + 60	1.03	1.28	1.60	2.24	3.85	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.23	1.54	1.92	2.69	4.62	12.00	3.4 ~ 14.5	2790	750 ~ 3950	13.2	12.2
	16 + 20 + 25 + 35 + 71	0.96	1.20	1.50	2.10	4.24	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.15	1.44	1.80	2.51	5.10	12.00	3.4 ~ 14.5	2780	760 ~ 3940	13.1	12.2
	16 + 20 + 25 + 42 + 42	1.10	1.38	1.72	2.90	2.90	10.00	2.3 ~ 11.5	2550	460 ~ 3520	12.5	11.6	1.32	1.66	2.06	3.48	3.48	12.00	3.4 ~ 14.5	2760	640 ~ 3950	13.1	12.1
	16 + 20 + 25 + 42 + 50	1.05	1.31	1.63	2.75	3.26	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.26	1.57	1.96	3.29	3.92	12.00	3.4 ~ 14.5	2790	760 ~ 3950	13.2	12.2
	16 + 20 + 25 + 42 + 60	0.98	1.23	1.53	2.58	3.68	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.18	1.47	1.84	3.09	4.42	12.00	3.4 ~ 14.5	2790	760 ~ 3950	13.2	12.2
	16 + 20 + 25 + 42 + 71	0.92	1.15	1.44	2.41	4.08	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.10	1.38	1.72	2.90	4.90	12.00	3.4 ~ 14.5	2780	780 ~ 3930	13.1	12.2
	16 + 20 + 25 + 50 + 50	0.99	1.24	1.55	3.11	3.11	10.00	2.3 ~ 11.5	2530	610 ~ 3330	12.4	11.5	1.19	1.49	1.86	3.73	3.73	12.00	3.4 ~ 14.5	2870	890 ~ 3960	13.6	12.6
	16 + 20 + 25 + 50 + 60	0.94	1.17	1.46	2.92	3.51	10.00	2.3 ~ 11.5	2530	610 ~ 3330	12.4	11.5	1.13	1.40	1.75	3.51	4.21	12.00	3.4 ~ 14.5	2870	890 ~ 3960	13.6	12.6
	16 + 20 + 25 + 50 + 71	0.88	1.10	1.37	2.75	3.90	10.00	2.3 ~ 11.5	2530	650 ~ 3340	12.4	11.5	1.05	1.32	1.65	3.30	4.68	12.00	3.4 ~ 14.5	2860	900 ~ 4000	13.5	12.5
	16 + 20 + 25 + 60 + 60	0.88	1.10	1.38	3.32	3.32	10.00	2.3 ~ 11.5	2530	610 ~ 3330	12.4	11.5	1.06	1.33	1.65	3.98	3.98	12.00	3.4 ~ 14.5	2870	890 ~ 3960	13.6	12.6
	16 + 20 + 35 + 35 + 35	1.14	1.42	2.48	2.48	2.48	10.00	2.3 ~ 11.5	2550	470 ~ 3440	12.5	11.6	1.36	1.70	2.98	2.98	2.98	12.00	3.4 ~ 14.5	2760	650 ~ 3940	13.1	12.1
	16 + 20 + 35 + 35 + 42	1.09	1.35	2.36	2.36	2.84	10.00	2.3 ~ 11.5	2550	470 ~ 3440	12.5	11.6	1.30	1.62	2.84	2.84	3.40	12.00	3.4 ~ 14.5	2750	650 ~ 3980	13.0	12.0
	16 + 20 + 35 + 35 + 50	1.03	1.28	2.24	2.24	3.21	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.23	1.54	2.69	2.69	3.85	12.00	3.4 ~ 14.5	2780	780 ~ 3930	13.1	12.2
	16 + 20 + 35 + 35 + 60	0.97	1.20	2.11	2.11	3.61	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.16	1.45	2.53	2.53	4.33	12.00	3.4 ~ 14.5	2780	780 ~ 3930	13.1	12.2
	16 + 20 + 35 + 35 + 71	0.90	1.13	1.98	1.98	4.01	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.09	1.36	2.37	2.37	4.81	12.00	3.4 ~ 14.5	2810	790 ~ 3970	13.3	12.3
	16 + 20 + 35 + 42 + 42	1.03	1.29	2.26	2.71	2.71	10.00	2.3 ~ 11.5	2550	470 ~ 3440	12.5	11.6	1.24	1.55	2.71	3.25	3.25	12.00	3.4 ~ 14.5	2740	670 ~ 3970	13.0	12.0
	16 + 20 + 35 + 42 + 50	0.98	1.23	2.15	2.58	3.06	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.18	1.47	2.58	3.09	3.68	12.00	3.4 ~ 14.5	2820	790 ~ 3980	13.3	12.3
	16 + 20 + 35 + 42 + 60	0.92	1.16	2.02	2.43	3.47	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.11	1.39	2.43	2.91	4.16	12.00	3.4 ~ 14.5	2820	790 ~ 3980	13.3	12.3
	16 + 20 + 35 + 50 + 50	0.94	1.17	2.05	2.92	2.92	10.00	2.3 ~ 11.5	2530	620 ~ 3340	12.4	11.5	1.12	1.40	2.46	3.51	3.51	12.00	3.4 ~ 14.5	2860	930 ~ 3990	13.5	12.5
	16 + 20 + 35 + 50 + 60	0.89	1.11	1.93	2.76	3.31	10.00	2.3 ~ 11.5	2530	620 ~ 3340	12.4	11.5	1.06	1.33	2.32	3.31	3.98	12.00	3.4 ~ 14.5	2860	930 ~ 3990	13.5	12.5
	16 + 20 + 42 + 42 + 42	1.00	1.23																				

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION										
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)			
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V
5 Rooms	16 + 25 + 25 + 35 + 42	1.12	1.75	2.45	2.93	10.00	2.3 ~ 11.5	2540	440 ~ 3520	12.5	11.5	1.34	2.10	2.10	2.94	3.52	12.00	3.4 ~ 14.5	2770	640 ~ 3960	13.1	12.1
	16 + 25 + 25 + 35 + 50	1.06	1.66	2.32	3.30	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.27	1.99	1.99	2.78	3.97	12.00	3.4 ~ 14.5	2790	750 ~ 3950	13.2	12.2
	16 + 25 + 25 + 35 + 60	1.00	1.55	2.17	3.73	10.00	2.3 ~ 11.5	2560	520 ~ 3380	12.6	11.6	1.20	1.86	1.86	2.61	4.47	12.00	3.4 ~ 14.5	2790	750 ~ 3950	13.2	12.2
	16 + 25 + 25 + 35 + 71	0.94	1.45	2.03	4.13	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.13	1.74	1.74	2.44	4.95	12.00	3.4 ~ 14.5	2780	760 ~ 3940	13.1	12.2
	16 + 25 + 25 + 42 + 42	1.06	1.67	2.80	2.80	10.00	2.3 ~ 11.5	2550	460 ~ 3520	12.5	11.6	1.28	2.00	2.00	3.36	3.36	12.00	3.4 ~ 14.5	2760	640 ~ 3950	13.1	12.1
	16 + 25 + 25 + 42 + 50	1.02	1.58	2.66	3.16	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.22	1.90	1.90	3.19	3.79	12.00	3.4 ~ 14.5	2790	760 ~ 3950	13.2	12.2
	16 + 25 + 25 + 42 + 60	0.95	1.49	2.50	3.57	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.14	1.79	1.79	3.00	4.28	12.00	3.4 ~ 14.5	2790	760 ~ 3950	13.2	12.2
	16 + 25 + 25 + 42 + 71	0.89	1.40	2.35	3.96	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.07	1.68	1.68	2.82	4.75	12.00	3.4 ~ 14.5	2780	780 ~ 3930	13.1	12.2
	16 + 25 + 25 + 50 + 50	0.96	1.51	3.01	3.01	10.00	2.3 ~ 11.5	2530	610 ~ 3330	12.4	11.5	1.16	1.81	1.81	3.61	3.61	12.00	3.4 ~ 14.5	2870	890 ~ 3960	13.6	12.6
	16 + 25 + 25 + 50 + 60	0.91	1.42	2.84	3.41	10.00	2.3 ~ 11.5	2530	610 ~ 3330	12.4	11.5	1.10	1.70	1.70	3.41	4.09	12.00	3.4 ~ 14.5	2870	890 ~ 3960	13.6	12.6
	16 + 25 + 35 + 35 + 35	1.10	1.70	2.40	2.40	10.00	2.3 ~ 11.5	2550	470 ~ 3440	12.5	11.6	1.32	2.04	2.88	2.88	2.88	12.00	3.4 ~ 14.5	2760	650 ~ 3940	13.1	12.1
	16 + 25 + 35 + 35 + 42	1.05	1.63	2.29	2.74	10.00	2.3 ~ 11.5	2550	470 ~ 3440	12.5	11.6	1.25	1.96	2.75	2.75	3.29	12.00	3.4 ~ 14.5	2750	650 ~ 3980	13.0	12.0
	16 + 25 + 35 + 35 + 50	1.00	1.55	2.17	3.11	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.19	1.86	2.61	2.61	3.73	12.00	3.4 ~ 14.5	2780	780 ~ 3930	13.1	12.2
	16 + 25 + 35 + 35 + 60	0.94	1.46	2.05	3.50	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.12	1.75	2.46	2.46	4.21	12.00	3.4 ~ 14.5	2780	780 ~ 3930	13.1	12.2
	16 + 25 + 35 + 35 + 71	0.89	1.37	1.92	3.90	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.05	1.65	2.31	2.31	4.68	12.00	3.4 ~ 14.5	2810	790 ~ 3970	13.3	12.3
	16 + 25 + 35 + 42 + 42	1.00	1.56	2.18	2.63	10.00	2.3 ~ 11.5	2550	470 ~ 3440	12.5	11.6	1.20	1.88	2.62	3.15	3.15	12.00	3.4 ~ 14.5	2740	670 ~ 3970	13.0	12.0
	16 + 25 + 35 + 42 + 50	0.95	1.49	2.08	2.98	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.14	1.79	2.50	3.00	3.57	12.00	3.4 ~ 14.5	2820	790 ~ 3980	13.3	12.3
	16 + 25 + 35 + 42 + 60	0.90	1.40	1.97	3.37	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.08	1.69	2.36	2.83	4.04	12.00	3.4 ~ 14.5	2820	790 ~ 3980	13.3	12.3
	16 + 25 + 35 + 50 + 50	0.91	1.42	1.99	2.84	10.00	2.3 ~ 11.5	2530	620 ~ 3340	12.4	11.5	1.09	1.70	2.39	3.41	3.41	12.00	3.4 ~ 14.5	2860	930 ~ 3990	13.5	12.5
	16 + 25 + 42 + 42 + 42	0.97	1.50	2.51	2.51	10.00	2.3 ~ 11.5	2550	470 ~ 3440	12.5	11.6	1.15	1.79	3.02	3.02	3.02	12.00	3.4 ~ 14.5	2740	680 ~ 3960	13.0	12.0
	16 + 25 + 42 + 42 + 50	0.91	1.43	2.40	2.86	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.10	1.71	2.88	2.88	3.43	12.00	3.4 ~ 14.5	2810	800 ~ 3970	13.3	12.3
	16 + 25 + 42 + 50 + 50	0.87	1.37	2.30	2.73	10.00	2.3 ~ 11.5	2530	650 ~ 3340	12.4	11.5	1.05	1.64	2.75	3.28	3.28	12.00	3.4 ~ 14.5	2900	940 ~ 3990	13.7	12.7
	16 + 35 + 35 + 35 + 35	1.04	2.24	2.24	2.24	10.00	2.3 ~ 11.5	2550	470 ~ 3450	12.5	11.6	1.24	2.69	2.69	2.69	2.69	12.00	3.4 ~ 14.5	2740	680 ~ 3970	13.0	12.0
	16 + 35 + 35 + 35 + 42	0.98	2.15	2.15	2.57	10.00	2.3 ~ 11.5	2550	470 ~ 3450	12.5	11.6	1.18	2.58	2.58	3.08	3.08	12.00	3.4 ~ 14.5	2780	680 ~ 3960	13.1	12.2
	16 + 35 + 35 + 35 + 50	0.94	2.05	2.05	2.91	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.12	2.46	2.46	3.50	3.50	12.00	3.4 ~ 14.5	2810	810 ~ 3960	13.3	12.3
	16 + 35 + 35 + 35 + 60	0.88	1.94	1.94	3.30	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.06	2.32	2.32	3.98	3.98	12.00	3.4 ~ 14.5	2810	810 ~ 3960	13.3	12.3
	16 + 35 + 35 + 42 + 42	0.94	2.06	2.47	2.47	10.00	2.3 ~ 11.5	2550	480 ~ 3450	12.5	11.6	1.14	2.47	2.47	2.96	2.96	12.00	3.4 ~ 14.5	2770	690 ~ 3950	13.1	12.1
	16 + 35 + 35 + 42 + 50	0.90	1.97	2.36	2.80	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.08	2.36	2.36	2.83	3.37	12.00	3.4 ~ 14.5	2810	820 ~ 3950	13.3	12.3
	16 + 35 + 42 + 42 + 42	0.91	1.98	2.37	2.37	10.00	2.3 ~ 11.5	2550	480 ~ 3450	12.5	11.6	1.08	2.37	2.85	2.85	2.85	12.00	3.4 ~ 14.5	2770	710 ~ 3940	13.1	12.1
	20 + 20 + 20 + 20 + 20	2.00	2.00	2.00	2.00	10.00	2.3 ~ 11.5	2600	430 ~ 3590	12.8	11.8	2.40	2.40	2.40	2.40	2.40	12.00	3.4 ~ 14.5	2760	580 ~ 4020	13.1	12.1
	20 + 20 + 20 + 20 + 25	1.90	1.90	1.90	2.40	10.00	2.3 ~ 11.5	2600	430 ~ 3590	12.8	11.8	2.29	2.29	2.29	2.29	2.84	12.00	3.4 ~ 14.5	2760	580 ~ 4020	13.1	12.1
	20 + 20 + 20 + 20 + 35	1.74	1.74	1.74	3.04	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	2.09	2.09	2.09	2.09	3.64	12.00	3.4 ~ 14.5	2740	610 ~ 3990	13.0	12.0
	20 + 20 + 20 + 20 + 42	1.64	1.64	1.64	3.44	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	1.97	1.97	1.97	1.97	4.12	12.00	3.4 ~ 14.5	2730	610 ~ 3980	12.9	11.9
	20 + 20 + 20 + 20 + 50	1.54	1.54	1.54	3.84	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.85	1.85	1.85	1.85	4.60	12.00	3.4 ~ 14.5	2760	720 ~ 3970	13.1	12.1
	20 + 20 + 20 + 20 + 60	1.43	1.43	1.43	4.28	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.71	1.71	1.71	1.71	5.16	12.00	3.4 ~ 14.5	2760	720 ~ 3970	13.1	12.1
	20 + 20 + 20 + 20 + 71	1.32	1.32	1.32	4.72	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.59	1.59	1.59	1.59	5.64	12.00	3.4 ~ 14.5	2790	750 ~ 3960	13.2	12.2
	20 + 20 + 20 + 25 + 25	1.82	1.82	2.27	2.27	10.00	2.3 ~ 11.5	2600	430 ~ 3590	12.8	11.8	2.18	2.18	2.18	2.73	2.73	12.00	3.4 ~ 14.5	2760	580 ~ 4020	13.1	12.1
	20 + 20 + 20 + 25 + 35	1.67	1.67	2.08	2.91	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	2.00	2.00	2.00	2.50	3.50	12.00	3.4 ~ 14.5	2740	610 ~ 3990	13.0	12.0
	20 + 20 + 20 + 25 + 42	1.57	1.57	1.98	3.31	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	1.89	1.89	1.89	2.36	3.97	12.00	3.4 ~ 14.5	2730	610 ~ 3980	12.9	11.9
	20 + 20 + 20 + 25 + 50	1.48	1.48	1.86	3.70	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.78	1.78	1.78	2.22	4.44	12.00	3.4 ~ 14.5	2760	720 ~ 3970	13.1	12.1
20 + 20 + 20 + 25 + 60	1.38	1.38	1.72	4.14	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.66	1.66	1.66	2.06	4.96	12.00	3.4 ~ 14.5	2760	720 ~ 3970	13.1	12.1	
20 + 20 + 20 + 25 + 71	1.28	1.28	1.61	4.55	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.54	1.54	1.54	1.92	5.46	12.00	3.4 ~ 14.5	2790	750 ~ 3960	13.2	12.2	
20 + 20 + 20 + 35 + 35	1.54	1.54	2.69	2.69	10.00	2.3 ~ 11.5	2550	460 ~ 3520	12.5	11.6	1.84	1.84	1.84	3.24	3.24	12.00	3.4 ~ 14.5	2770	640 ~ 3960	13.1	12.1	
20 + 20 + 20 + 35 + 42	1.46	1.46	2.55	3.07	10.00	2.3 ~ 11.5	2550	460 ~ 3520	12.5	11.6	1.75	1.75	1.75	3.07	3.68	12.00	3.4 ~ 14.5	2760	640 ~ 3950	13.1	12.1	
20 + 20 + 20 + 35 + 50	1.38	1.38	2.41	3.45	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.66	1.66	1.66	2.89	4.13	12.00	3.4 ~ 14.5	2790	760 ~ 3950	13.2	12.2	
20 + 20 + 20 + 35 + 60	1.29	1.29	2.26	3.87	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.55	1.55	1.55	2.71	4.64	12.00	3.4 ~ 14.5	2790	760 ~ 3950	13.2	12.2	
20 + 20 + 20 + 35 + 71	1.20	1.20	2.12	4.28	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.45	1.45	1.45	2.53	5.12	12.00	3.4 ~ 14.5	2780	780 ~ 3930	13.1	12.2	
20 + 20 + 20 + 42 + 42	1.38	1.38	2.93	2.93	10.00	2.3 ~ 11.5	2550	470 ~ 3520	12.5	11.6	1.66	1.66	1.66	3.51	3.51	12.00	3.4 ~ 14.5	2760	650 ~ 3930	13.1	12.1	
20 + 20 + 20 + 42 + 50	1.32	1.32	2.76	3.28	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.58	1.58	1.58	3.32	3.94	12.00	3.4 ~ 14.5	2780	760 ~ 3940	13.1	12.2	
20 + 20 + 20 + 42 + 60	1.23	1.23	2.61	3.70	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.48	1.48	1.48	3.12	4.44							

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION										
	Cooling Capacity (kW)						Input Power (W)		Current (A)			Heating Capacity (kW)						Input Power (W)		Current (A)		
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
20 + 20 + 25 + 25 + 60	1.33	1.33	1.67	1.67	4.00	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.60	1.60	2.00	2.00	4.80	12.00	3.4 ~ 14.5	2760	720 ~ 3970	13.1	12.1
20 + 20 + 25 + 25 + 71	1.24	1.24	1.55	1.55	4.42	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.49	1.49	1.86	1.86	5.30	12.00	3.4 ~ 14.5	2790	750 ~ 3960	13.2	12.2
20 + 20 + 25 + 35 + 35	1.48	1.48	1.86	2.59	2.59	10.00	2.3 ~ 11.5	2550	460 ~ 3520	12.5	11.6	1.78	1.78	2.22	3.11	3.11	12.00	3.4 ~ 14.5	2770	640 ~ 3960	13.1	12.1
20 + 20 + 25 + 35 + 42	1.41	1.41	1.76	2.46	2.96	10.00	2.3 ~ 11.5	2550	460 ~ 3520	12.5	11.6	1.69	1.69	2.11	2.96	3.55	12.00	3.4 ~ 14.5	2760	640 ~ 3950	13.1	12.1
20 + 20 + 25 + 35 + 50	1.33	1.33	1.68	2.33	3.33	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.60	1.60	2.00	2.80	4.00	12.00	3.4 ~ 14.5	2790	760 ~ 3950	13.2	12.2
20 + 20 + 25 + 35 + 60	1.25	1.25	1.56	2.19	3.75	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.50	1.50	1.88	2.63	4.49	12.00	3.4 ~ 14.5	2790	760 ~ 3950	13.2	12.2
20 + 20 + 25 + 35 + 71	1.17	1.17	1.46	2.05	4.15	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.40	1.40	1.76	2.46	4.98	12.00	3.4 ~ 14.5	2780	780 ~ 3930	13.1	12.2
20 + 20 + 25 + 42 + 42	1.34	1.34	1.68	2.82	2.82	10.00	2.3 ~ 11.5	2550	470 ~ 3520	12.5	11.6	1.61	1.61	2.02	3.38	3.38	12.00	3.4 ~ 14.5	2760	650 ~ 3930	13.1	12.1
20 + 20 + 25 + 42 + 50	1.27	1.27	1.60	2.68	3.18	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.53	1.53	1.91	3.21	3.82	12.00	3.4 ~ 14.5	2780	760 ~ 3940	13.1	12.2
20 + 20 + 25 + 42 + 60	1.20	1.20	1.50	2.51	3.59	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.44	1.44	1.80	3.02	4.30	12.00	3.4 ~ 14.5	2780	760 ~ 3940	13.1	12.2
20 + 20 + 25 + 42 + 71	1.12	1.12	1.41	2.36	3.99	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.35	1.35	1.69	2.83	4.78	12.00	3.4 ~ 14.5	2780	780 ~ 3980	13.1	12.2
20 + 20 + 25 + 50 + 50	1.21	1.21	1.52	3.03	3.03	10.00	2.3 ~ 11.5	2530	610 ~ 3330	12.4	11.5	1.45	1.45	1.82	3.64	3.64	12.00	3.4 ~ 14.5	2870	900 ~ 4010	13.6	12.6
20 + 20 + 25 + 50 + 60	1.14	1.14	1.43	2.86	3.43	10.00	2.3 ~ 11.5	2530	610 ~ 3330	12.4	11.5	1.37	1.37	1.72	3.43	4.11	12.00	3.4 ~ 14.5	2870	900 ~ 4010	13.6	12.6
20 + 20 + 35 + 35 + 35	1.37	1.37	2.42	2.42	2.42	10.00	2.3 ~ 11.5	2550	470 ~ 3440	12.5	11.6	1.65	1.65	2.90	2.90	2.90	12.00	3.4 ~ 14.5	2750	650 ~ 3980	13.0	12.0
20 + 20 + 35 + 35 + 42	1.32	1.32	2.30	2.30	2.76	10.00	2.3 ~ 11.5	2550	470 ~ 3440	12.5	11.6	1.58	1.58	2.76	2.76	3.32	12.00	3.4 ~ 14.5	2740	670 ~ 3970	13.0	12.0
20 + 20 + 35 + 35 + 50	1.25	1.25	2.19	2.19	3.12	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.50	1.50	2.63	2.63	3.74	12.00	3.4 ~ 14.5	2820	790 ~ 3980	13.3	12.3
20 + 20 + 35 + 35 + 60	1.18	1.18	2.06	2.06	3.52	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.41	1.41	2.47	2.47	4.24	12.00	3.4 ~ 14.5	2820	790 ~ 3980	13.3	12.3
20 + 20 + 35 + 35 + 71	1.11	1.11	1.93	1.93	3.92	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.33	1.33	2.32	2.32	4.70	12.00	3.4 ~ 14.5	2810	800 ~ 3960	13.3	12.3
20 + 20 + 35 + 42 + 42	1.26	1.26	2.20	2.64	2.64	10.00	2.3 ~ 11.5	2550	470 ~ 3450	12.5	11.6	1.51	1.51	2.64	3.17	3.17	12.00	3.4 ~ 14.5	2740	680 ~ 3960	13.0	12.0
20 + 20 + 35 + 42 + 50	1.20	1.20	2.10	2.51	2.99	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.44	1.44	2.51	3.02	3.59	12.00	3.4 ~ 14.5	2810	800 ~ 3970	13.3	12.3
20 + 20 + 35 + 42 + 60	1.13	1.13	1.98	2.37	3.39	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.36	1.36	2.37	2.85	4.06	12.00	3.4 ~ 14.5	2810	800 ~ 3970	13.3	12.3
20 + 20 + 35 + 50 + 50	1.14	1.14	2.00	2.86	2.86	10.00	2.3 ~ 11.5	2540	650 ~ 3340	12.5	11.5	1.37	1.37	2.40	3.43	3.43	12.00	3.4 ~ 14.5	2900	940 ~ 3990	13.7	12.7
20 + 20 + 42 + 42 + 42	1.19	1.19	2.54	2.54	2.54	10.00	2.3 ~ 11.5	2550	470 ~ 3450	12.5	11.6	1.44	1.44	3.04	3.04	3.04	12.00	3.4 ~ 14.5	2780	680 ~ 3950	13.1	12.2
20 + 20 + 42 + 42 + 50	1.15	1.15	2.41	2.41	2.88	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.38	1.38	2.90	2.90	3.44	12.00	3.4 ~ 14.5	2810	810 ~ 3960	13.3	12.3
20 + 20 + 42 + 50 + 50	1.10	1.10	2.30	2.75	2.75	10.00	2.3 ~ 11.5	2540	650 ~ 3340	12.5	11.5	1.32	1.32	2.76	3.30	3.30	12.00	3.4 ~ 14.5	2900	950 ~ 4030	13.7	12.7
20 + 25 + 25 + 25 + 25	1.68	2.08	2.08	2.08	2.08	10.00	2.3 ~ 11.5	2600	430 ~ 3590	12.8	11.8	2.00	2.50	2.50	2.50	2.50	12.00	3.4 ~ 14.5	2760	580 ~ 4020	13.1	12.1
20 + 25 + 25 + 25 + 35	1.55	1.92	1.92	1.92	2.69	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	1.85	2.31	2.31	2.31	3.22	12.00	3.4 ~ 14.5	2740	610 ~ 3990	13.0	12.0
20 + 25 + 25 + 25 + 42	1.47	1.82	1.82	1.82	3.07	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	1.75	2.19	2.19	2.19	3.68	12.00	3.4 ~ 14.5	2730	610 ~ 3980	12.9	11.9
20 + 25 + 25 + 25 + 50	1.39	1.72	1.72	1.72	3.45	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.66	2.07	2.07	2.07	4.13	12.00	3.4 ~ 14.5	2760	720 ~ 3970	13.1	12.1
20 + 25 + 25 + 25 + 60	1.30	1.61	1.61	1.61	3.87	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.54	1.94	1.94	1.94	4.64	12.00	3.4 ~ 14.5	2760	720 ~ 3970	13.1	12.1
20 + 25 + 25 + 25 + 71	1.20	1.51	1.51	1.51	4.27	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.45	1.81	1.81	1.81	5.12	12.00	3.4 ~ 14.5	2790	750 ~ 3960	13.2	12.2
20 + 25 + 25 + 35 + 35	1.42	1.79	1.79	2.50	2.50	10.00	2.3 ~ 11.5	2550	460 ~ 3520	12.5	11.6	1.72	2.14	2.14	3.00	3.00	12.00	3.4 ~ 14.5	2770	640 ~ 3960	13.1	12.1
20 + 25 + 25 + 35 + 42	1.36	1.70	1.70	2.38	2.86	10.00	2.3 ~ 11.5	2550	460 ~ 3520	12.5	11.6	1.63	2.04	2.04	2.86	3.43	12.00	3.4 ~ 14.5	2760	640 ~ 3950	13.1	12.1
20 + 25 + 25 + 35 + 50	1.29	1.61	1.61	2.26	3.23	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.45	1.94	1.94	2.71	3.86	12.00	3.4 ~ 14.5	2790	760 ~ 3950	13.2	12.2
20 + 25 + 25 + 35 + 60	1.21	1.52	1.52	2.12	3.63	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.55	1.82	1.82	2.55	4.36	12.00	3.4 ~ 14.5	2790	760 ~ 3950	13.2	12.2
20 + 25 + 25 + 35 + 71	1.14	1.42	1.42	1.99	4.03	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.37	1.70	1.70	2.39	4.84	12.00	3.4 ~ 14.5	2780	780 ~ 3930	13.1	12.2
20 + 25 + 25 + 42 + 42	1.30	1.62	1.62	2.73	2.73	10.00	2.3 ~ 11.5	2550	470 ~ 3520	12.5	11.6	1.56	1.95	1.95	3.27	3.27	12.00	3.4 ~ 14.5	2760	650 ~ 3930	13.1	12.1
20 + 25 + 25 + 42 + 50	1.24	1.54	1.54	2.59	3.09	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.49	1.85	1.85	3.11	3.70	12.00	3.4 ~ 14.5	2780	760 ~ 3940	13.1	12.2
20 + 25 + 25 + 42 + 60	1.17	1.45	1.45	2.44	3.49	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.40	1.74	1.74	2.93	4.19	12.00	3.4 ~ 14.5	2780	760 ~ 3940	13.1	12.2
20 + 25 + 25 + 42 + 71	1.09	1.37	1.37	2.30	3.87	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.31	1.64	1.64	2.75	4.66	12.00	3.4 ~ 14.5	2780	780 ~ 3980	13.1	12.2
20 + 25 + 25 + 50 + 50	1.18	1.47	1.47	2.94	2.94	10.00	2.3 ~ 11.5	2530	610 ~ 3330	12.4	11.5	1.42	1.76	1.76	3.53	3.53	12.00	3.4 ~ 14.5	2870	900 ~ 4010	13.6	12.6
20 + 25 + 25 + 50 + 60	1.11	1.39	1.39	2.78	3.33	10.00	2.3 ~ 11.5	2530	610 ~ 3330	12.4	11.5	1.33	1.67	1.67	3.33	4.00	12.00	3.4 ~ 14.5	2870	900 ~ 4010	13.6	12.6
20 + 25 + 35 + 35 + 35	1.34	1.67	2.33	2.33	2.33	10.00	2.3 ~ 11.5	2550	470 ~ 3440	12.5	11.6	1.60	2.00	2.80	2.80	2.80	12.00	3.4 ~ 14.5	2750	650 ~ 3980	13.0	12.0
20 + 25 + 35 + 35 + 42	1.27	1.59	2.23	2.23	2.68	10.00	2.3 ~ 11.5	2550	470 ~ 3440	12.5	11.6	1.53	1.91	2.68	2.68	3.20	12.00	3.4 ~ 14.5	2740	670 ~ 3970	13.0	12.0
20 + 25 + 35 + 35 + 50	1.21	1.52	2.12	2.12	3.03	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.45	1.82	2.55	2.55	3.63	12.00	3.4 ~ 14.5	2820	790 ~ 3980	13.3	12.3
20 + 25 + 35 + 35 + 60	1.14	1.43	2.00	2.00	3.43	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.38	1.71	2.40	2.40	4.11	12.00	3.4 ~ 14.5	2820	790 ~ 3980	13.3	12.3
20 + 25 + 35 + 42 + 42	1.23	1.52	2.13	2.56	2.56	10.00	2.3 ~ 11.5	2550	470 ~ 3450	12.5	11.6	1.47	1.83	2.56	3.07	3.07	12.00	3.4 ~ 14.5	2740	680 ~ 3960	13.0	12.0
20 + 25 + 35 + 42 + 50	1.17	1.45	2.03	2.44	2.91	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.40	1.74	2.44	2.93	3.49	12.00	3.4 ~ 14.5	2810	800 ~ 3970	13.3	12.3
20 + 25 + 35 + 42 + 60	1.10	1.37	1.92	2																		

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)				
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
5 Rooms	25 + 25 + 25 + 25 + 35	1.85	1.85	1.85	1.85	2.60	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	2.22	2.22	2.22	2.22	3.12	12.00	3.4 ~ 14.5	2740	610 ~ 3990	13.0	12.0
	25 + 25 + 25 + 25 + 42	1.76	1.76	1.76	1.76	2.96	10.00	2.3 ~ 11.5	2540	430 ~ 3510	12.5	11.5	2.11	2.11	2.11	2.11	3.56	12.00	3.4 ~ 14.5	2730	610 ~ 3980	12.9	11.9
	25 + 25 + 25 + 25 + 50	1.67	1.67	1.67	1.67	3.32	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	2.00	2.00	2.00	2.00	4.00	12.00	3.4 ~ 14.5	2760	720 ~ 3970	13.1	12.1
	25 + 25 + 25 + 25 + 60	1.56	1.56	1.56	1.56	3.76	10.00	2.3 ~ 11.5	2560	510 ~ 3380	12.6	11.6	1.88	1.88	1.88	1.88	4.48	12.00	3.4 ~ 14.5	2760	720 ~ 3970	13.1	12.1
	25 + 25 + 25 + 25 + 71	1.46	1.46	1.46	1.46	4.16	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.75	1.75	1.75	1.75	5.00	12.00	3.4 ~ 14.5	2790	750 ~ 3960	13.2	12.2
	25 + 25 + 25 + 35 + 35	1.72	1.72	1.72	2.42	2.42	10.00	2.3 ~ 11.5	2550	460 ~ 3520	12.5	11.6	2.06	2.06	2.06	2.91	2.91	12.00	3.4 ~ 14.5	2770	640 ~ 3960	13.1	12.1
	25 + 25 + 25 + 35 + 42	1.64	1.64	1.64	2.31	2.77	10.00	2.3 ~ 11.5	2550	460 ~ 3520	12.5	11.6	1.97	1.97	1.97	2.77	3.32	12.00	3.4 ~ 14.5	2760	640 ~ 3950	13.1	12.1
	25 + 25 + 25 + 35 + 50	1.56	1.56	1.56	2.19	3.13	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.88	1.88	1.88	2.62	3.74	12.00	3.4 ~ 14.5	2790	760 ~ 3950	13.2	12.2
	25 + 25 + 25 + 35 + 60	1.47	1.47	1.47	2.06	3.53	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.76	1.76	1.76	2.48	4.24	12.00	3.4 ~ 14.5	2790	760 ~ 3950	13.2	12.2
	25 + 25 + 25 + 35 + 71	1.38	1.38	1.38	1.93	3.93	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.66	1.66	1.66	2.32	4.70	12.00	3.4 ~ 14.5	2780	780 ~ 3930	13.1	12.2
	25 + 25 + 25 + 42 + 42	1.58	1.58	1.58	2.63	2.63	10.00	2.3 ~ 11.5	2550	470 ~ 3520	12.5	11.6	1.88	1.88	1.88	3.18	3.18	12.00	3.4 ~ 14.5	2760	650 ~ 3930	13.1	12.1
	25 + 25 + 25 + 42 + 50	1.50	1.50	1.50	2.51	2.99	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.80	1.80	1.80	3.02	3.58	12.00	3.4 ~ 14.5	2780	760 ~ 3940	13.1	12.2
	25 + 25 + 25 + 42 + 60	1.41	1.41	1.41	2.38	3.39	10.00	2.3 ~ 11.5	2500	520 ~ 3380	12.3	11.4	1.69	1.69	1.69	2.86	4.07	12.00	3.4 ~ 14.5	2780	760 ~ 3940	13.1	12.2
	25 + 25 + 25 + 50 + 50	1.42	1.42	1.42	2.87	2.87	10.00	2.3 ~ 11.5	2530	610 ~ 3330	12.4	11.5	1.72	1.72	1.72	3.42	3.42	12.00	3.4 ~ 14.5	2870	900 ~ 4010	13.6	12.6
	25 + 25 + 35 + 35 + 35	1.61	1.61	2.26	2.26	2.26	10.00	2.3 ~ 11.5	2550	470 ~ 3440	12.5	11.6	1.95	1.95	2.70	2.70	2.70	12.00	3.4 ~ 14.5	2750	650 ~ 3980	13.0	12.0
	25 + 25 + 35 + 35 + 42	1.54	1.54	2.16	2.16	2.60	10.00	2.3 ~ 11.5	2550	470 ~ 3440	12.5	11.6	1.85	1.85	2.59	2.59	3.12	12.00	3.4 ~ 14.5	2740	670 ~ 3970	13.0	12.0
	25 + 25 + 35 + 35 + 50	1.47	1.47	2.06	2.06	2.94	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.76	1.76	2.47	2.47	3.54	12.00	3.4 ~ 14.5	2820	790 ~ 3980	13.3	12.3
	25 + 25 + 35 + 35 + 60	1.39	1.39	1.94	1.94	3.34	10.00	2.3 ~ 11.5	2510	550 ~ 3390	12.3	11.4	1.67	1.67	2.33	2.33	4.00	12.00	3.4 ~ 14.5	2820	790 ~ 3980	13.3	12.3
	25 + 25 + 35 + 42 + 42	1.48	1.48	2.06	2.49	2.49	10.00	2.3 ~ 11.5	2550	470 ~ 3450	12.5	11.6	1.78	1.78	2.48	2.98	2.98	12.00	3.4 ~ 14.5	2740	680 ~ 3960	13.0	12.0
	25 + 25 + 35 + 42 + 50	1.41	1.41	1.99	2.37	2.82	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.69	1.69	2.37	2.85	3.40	12.00	3.4 ~ 14.5	2810	800 ~ 3970	13.3	12.3
25 + 25 + 42 + 42 + 42	1.43	1.43	2.38	2.38	2.38	10.00	2.3 ~ 11.5	2550	470 ~ 3450	12.5	11.6	1.71	1.71	2.86	2.86	2.86	12.00	3.4 ~ 14.5	2780	680 ~ 3950	13.1	12.2	
25 + 35 + 35 + 35 + 35	1.52	2.12	2.12	2.12	2.12	10.00	2.3 ~ 11.5	2550	470 ~ 3450	12.5	11.6	1.80	2.55	2.55	2.55	2.55	12.00	3.4 ~ 14.5	2780	680 ~ 3960	13.1	12.2	
25 + 35 + 35 + 35 + 42	1.46	2.03	2.03	2.03	2.45	10.00	2.3 ~ 11.5	2550	480 ~ 3450	12.5	11.6	1.75	2.44	2.44	2.44	2.93	12.00	3.4 ~ 14.5	2770	690 ~ 3950	13.1	12.1	
25 + 35 + 35 + 35 + 50	1.40	1.94	1.94	1.94	2.78	10.00	2.3 ~ 11.5	2510	560 ~ 3390	12.3	11.4	1.68	2.33	2.33	2.33	3.33	12.00	3.4 ~ 14.5	2810	820 ~ 3950	13.3	12.3	
25 + 35 + 35 + 42 + 42	1.40	1.96	1.96	2.34	2.34	10.00	2.3 ~ 11.5	2550	480 ~ 3450	12.5	11.6	1.68	2.35	2.35	2.81	2.81	12.00	3.4 ~ 14.5	2770	710 ~ 3940	13.1	12.1	
35 + 35 + 35 + 35 + 35	2.00	2.00	2.00	2.00	2.00	10.00	2.3 ~ 11.5	2550	510 ~ 3450	12.5	11.6	2.40	2.40	2.40	2.40	2.40	12.00	3.4 ~ 14.5	2760	710 ~ 3930	13.1	12.1	
35 + 35 + 35 + 35 + 42	1.92	1.92	1.92	1.92	2.32	10.00	2.3 ~ 11.5	2560	510 ~ 3450	12.6	11.6	2.31	2.31	2.31	2.31	2.76	12.00	3.4 ~ 14.5	2760	720 ~ 3980	13.1	12.1	

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION									
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)		
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max
1 Room	16	1.60	-	-	-	1.60	1.3 ~ 2.3	450	250 ~ 690	2.4	2.2	2.60	-	-	-	2.60	1.2 ~ 3.2	700	290 ~ 1060	3.5	3.2
	20	2.00	-	-	-	2.00	1.8 ~ 2.9	550	340 ~ 860	2.8	2.6	3.20	-	-	-	3.20	1.2 ~ 4.1	840	290 ~ 1330	4.3	3.9
	25	2.50	-	-	-	2.50	1.8 ~ 2.9	680	340 ~ 860	3.5	3.2	3.60	-	-	-	3.60	1.2 ~ 4.3	1040	290 ~ 1330	5.4	4.9
	35	3.50	-	-	-	3.50	1.8 ~ 4.1	990	340 ~ 1410	5.0	4.6	4.50	-	-	-	4.50	1.2 ~ 5.8	1330	290 ~ 2200	6.8	6.2
	42	4.20	-	-	-	4.20	1.8 ~ 4.5	1420	340 ~ 2040	6.9	6.3	5.60	-	-	-	5.60	1.2 ~ 6.8	1820	290 ~ 3030	8.8	8.0
	50	5.00	-	-	-	5.00	1.9 ~ 5.4	1630	340 ~ 2150	7.9	7.3	6.80	-	-	-	6.80	1.2 ~ 6.9	2350	290 ~ 2840	11.3	10.4
	60	6.00	-	-	-	6.00	1.9 ~ 6.2	2080	340 ~ 2380	9.8	9.0	8.50	-	-	-	8.50	1.3 ~ 9.0	2500	320 ~ 2650	12.1	11.0
71	7.10	-	-	-	7.10	2.0 ~ 7.2	2580	370 ~ 2820	12.2	11.2	8.70	-	-	-	8.70	1.4 ~ 9.2	2650	380 ~ 2820	12.8	11.7	
2 Rooms	16 + 16	1.60	1.60	-	-	3.20	2.3 ~ 5.8	760	260 ~ 1840	4.0	3.7	2.60	2.60	-	-	5.20	2.0 ~ 8.2	1580	220 ~ 2610	7.8	7.2
	16 + 20	1.60	2.00	-	-	3.60	2.3 ~ 5.8	890	250 ~ 1840	4.6	4.3	2.58	3.22	-	-	5.80	2.0 ~ 8.2	1740	220 ~ 2600	8.6	7.9
	16 + 25	1.60	2.50	-	-	4.10	2.3 ~ 5.8	1060	250 ~ 1840	5.4	5.0	2.42	3.78	-	-	6.20	2.0 ~ 8.2	1880	220 ~ 2600	9.2	8.5
	16 + 35	1.60	3.50	-	-	5.10	2.3 ~ 5.8	1420	250 ~ 1780	7.2	6.6	2.23	4.87	-	-	7.10	2.0 ~ 8.6	2110	210 ~ 2680	10.4	9.5
	16 + 42	1.60	4.20	-	-	5.80	2.3 ~ 6.7	1730	250 ~ 2230	8.7	8.0	2.26	5.94	-	-	8.20	2.0 ~ 10.1	2470	210 ~ 3230	12.1	11.1
	16 + 50	1.60	5.00	-	-	6.60	2.3 ~ 7.2	1940	240 ~ 2230	9.7	8.9	2.28	7.12	-	-	9.40	2.0 ~ 11.0	2670	160 ~ 3240	13.1	12.0
	16 + 60	1.60	6.00	-	-	7.60	2.3 ~ 8.6	2470	240 ~ 3180	12.4	11.3	2.34	8.76	-	-	11.10	2.0 ~ 11.0	3090	160 ~ 3240	15.2	13.9
	16 + 71	1.60	7.10	-	-	8.70	2.3 ~ 9.1	3020	230 ~ 3260	15.1	13.9	2.08	9.22	-	-	11.30	2.0 ~ 13.0	3030	160 ~ 4180	14.9	13.6
	20 + 20	2.00	2.00	-	-	4.00	2.3 ~ 5.8	1020	250 ~ 1780	5.3	4.8	3.20	3.20	-	-	6.40	2.0 ~ 8.2	1910	220 ~ 2590	9.4	8.6
	20 + 25	2.00	2.50	-	-	4.50	2.3 ~ 5.8	1220	250 ~ 1780	6.2	5.7	3.02	3.78	-	-	6.80	2.0 ~ 8.2	2030	220 ~ 2590	10.0	9.1
	20 + 35	2.00	3.50	-	-	5.50	2.3 ~ 5.8	1570	250 ~ 1730	7.9	7.3	2.80	4.90	-	-	7.70	2.0 ~ 8.6	2280	210 ~ 2620	11.2	10.3
	20 + 42	2.00	4.20	-	-	6.20	2.3 ~ 7.2	1940	250 ~ 2590	9.7	8.9	2.84	5.96	-	-	8.80	2.0 ~ 11.0	2620	200 ~ 3430	12.9	11.8
	20 + 50	2.00	5.00	-	-	7.00	2.3 ~ 8.1	2050	240 ~ 2710	10.3	9.4	2.86	7.14	-	-	10.00	2.0 ~ 11.0	2850	160 ~ 3180	14.0	12.8
	20 + 60	2.00	6.00	-	-	8.00	2.3 ~ 8.6	2650	240 ~ 3110	13.3	12.2	2.93	8.77	-	-	11.70	2.0 ~ 11.9	3180	160 ~ 3670	15.6	14.3
	20 + 71	2.00	7.10	-	-	9.10	2.3 ~ 10.0	3190	260 ~ 4130	16.0	14.6	2.62	9.28	-	-	11.90	2.0 ~ 13.0	3260	160 ~ 4170	16.0	14.7
	25 + 25	2.50	2.50	-	-	5.00	2.3 ~ 5.8	1370	250 ~ 1780	6.9	6.3	3.60	3.60	-	-	7.20	2.0 ~ 8.6	2170	220 ~ 2700	10.7	9.8
	25 + 35	2.50	3.50	-	-	6.00	2.3 ~ 6.7	1830	250 ~ 2230	9.2	8.4	3.38	4.72	-	-	8.10	2.0 ~ 10.1	2420	21		

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION											
		Cooling Capacity (kW)					Input Power (W)		Current (A)			Heating Capacity (kW)					Input Power (W)		Current (A)				
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
2 Rooms	25 + 50	2.50	5.00	-	-	-	7.50	2.3 ~ 8.6	2350	240 ~ 3110	11.8	10.8	3.47	6.93	-	-	-	10.40	2.0 ~ 11.0	2880	160 ~ 3180	14.1	13.0
	25 + 60	2.50	6.00	-	-	-	8.50	2.3 ~ 9.1	3040	240 ~ 3390	15.2	13.9	3.53	8.47	-	-	-	12.00	2.0 ~ 13.0	3330	160 ~ 4180	16.4	15.0
	25 + 71	2.50	7.10	-	-	-	9.60	2.3 ~ 10.1	3630	260 ~ 4280	18.2	16.7	3.13	8.87	-	-	-	12.00	2.0 ~ 13.0	3310	160 ~ 4170	16.3	14.9
	35 + 35	3.50	3.50	-	-	-	7.00	2.3 ~ 8.1	2350	250 ~ 3160	11.8	10.8	4.50	4.50	-	-	-	9.00	2.0 ~ 11.0	2650	200 ~ 3420	13.0	11.9
	35 + 42	3.50	4.20	-	-	-	7.70	2.3 ~ 8.6	2770	250 ~ 3650	13.9	12.7	4.59	5.51	-	-	-	10.10	2.0 ~ 11.0	3000	200 ~ 3360	14.7	13.5
	35 + 50	3.50	5.00	-	-	-	8.50	2.3 ~ 9.1	2910	230 ~ 3260	14.6	13.3	4.65	6.65	-	-	-	11.30	2.0 ~ 13.0	2960	160 ~ 4160	14.5	13.3
	35 + 60	3.50	6.00	-	-	-	9.50	2.3 ~ 10.1	3670	230 ~ 4280	18.4	16.8	4.42	7.58	-	-	-	12.00	2.0 ~ 13.0	3250	160 ~ 4160	16.0	14.6
	35 + 71	3.30	6.70	-	-	-	10.00	2.3 ~ 10.4	3920	260 ~ 4440	19.6	18.0	3.96	8.04	-	-	-	12.00	2.0 ~ 13.8	3240	160 ~ 4510	15.9	14.6
	42 + 42	4.20	4.20	-	-	-	8.40	2.3 ~ 9.1	3440	250 ~ 4060	17.2	15.8	5.60	5.60	-	-	-	11.20	2.0 ~ 13.0	3140	190 ~ 4350	15.4	14.1
	42 + 50	4.20	5.00	-	-	-	9.20	2.3 ~ 10.0	3330	230 ~ 4130	16.7	15.3	5.48	6.52	-	-	-	12.00	2.0 ~ 13.0	3240	160 ~ 4090	15.9	14.6
	42 + 60	4.12	5.88	-	-	-	10.00	2.3 ~ 10.4	4130	230 ~ 4430	20.7	18.9	4.94	7.06	-	-	-	12.00	2.0 ~ 13.8	3240	160 ~ 4510	15.9	14.6
	42 + 71	3.72	6.28	-	-	-	10.00	2.3 ~ 10.4	3850	260 ~ 4440	19.3	17.7	4.46	7.54	-	-	-	12.00	2.0 ~ 13.8	3230	160 ~ 4500	15.9	14.5
	50 + 50	5.00	5.00	-	-	-	10.00	2.3 ~ 10.4	3370	250 ~ 3710	16.9	15.5	6.00	6.00	-	-	-	12.00	2.0 ~ 13.8	3030	170 ~ 4260	14.9	13.6
	50 + 60	4.55	5.45	-	-	-	10.00	2.3 ~ 10.4	3370	250 ~ 3710	16.9	15.5	5.45	6.55	-	-	-	12.00	2.0 ~ 13.8	3030	170 ~ 4260	14.9	13.6
	50 + 71	4.13	5.87	-	-	-	10.00	2.3 ~ 10.4	3230	250 ~ 3580	16.2	14.8	4.96	7.04	-	-	-	12.00	2.0 ~ 13.8	3010	170 ~ 4240	14.8	13.6
	60 + 60	5.00	5.00	-	-	-	10.00	2.3 ~ 10.4	3370	250 ~ 3710	16.9	15.5	6.00	6.00	-	-	-	12.00	2.0 ~ 13.8	3030	170 ~ 4260	14.9	13.6
	60 + 71	4.58	5.42	-	-	-	10.00	2.3 ~ 10.4	3230	250 ~ 3580	16.2	14.8	5.50	6.50	-	-	-	12.00	2.0 ~ 13.8	3010	170 ~ 4240	14.8	13.6
71 + 71	5.00	5.00	-	-	-	10.00	2.3 ~ 10.4	3100	280 ~ 3440	15.5	14.2	6.00	6.00	-	-	-	12.00	2.0 ~ 13.8	3000	180 ~ 4220	14.7	13.5	
3 Rooms	16 + 16 + 16	1.60	1.60	1.60	-	-	4.80	2.3 ~ 8.5	1140	260 ~ 2770	5.8	5.3	2.60	2.60	2.60	-	-	7.80	2.7 ~ 12.3	2100	230 ~ 3820	10.3	9.5
	16 + 16 + 20	1.60	1.60	2.00	-	-	5.20	2.3 ~ 8.5	1250	260 ~ 2770	6.3	5.8	2.58	2.58	3.24	-	-	8.40	2.7 ~ 12.3	2320	230 ~ 3800	11.4	10.4
	16 + 16 + 25	1.60	1.60	2.50	-	-	5.70	2.3 ~ 8.5	1440	260 ~ 2770	7.3	6.7	2.47	2.47	3.86	-	-	8.80	2.7 ~ 12.3	2390	230 ~ 3800	11.7	10.8
	16 + 16 + 35	1.60	1.60	3.50	-	-	6.70	2.3 ~ 8.5	1760	260 ~ 2700	8.8	8.1	2.32	2.32	5.06	-	-	9.70	2.7 ~ 12.3	2700	230 ~ 3720	13.3	12.2
	16 + 16 + 42	1.60	1.60	4.20	-	-	7.40	2.3 ~ 8.5	2100	250 ~ 2640	10.5	9.6	2.34	2.34	6.12	-	-	10.80	2.7 ~ 12.3	2830	230 ~ 3700	13.9	12.7
	16 + 16 + 50	1.60	1.60	5.00	-	-	8.20	2.3 ~ 8.7	2260	280 ~ 2440	11.3	10.4	2.34	2.34	7.32	-	-	12.00	2.7 ~ 12.9	3050	250 ~ 3790	15.0	13.7
	16 + 16 + 60	1.60	1.60	6.00	-	-	9.20	2.3 ~ 10.1	2600	280 ~ 3150	13.0	11.9	2.09	2.09	7.82	-	-	12.00	2.7 ~ 13.6	3050	250 ~ 4150	15.0	13.7
	16 + 16 + 71	1.55	1.55	6.90	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3490	14.8	13.6	1.86	1.86	8.28	-	-	12.00	2.7 ~ 13.6	3040	250 ~ 4070	14.9	13.7
	16 + 20 + 20	1.60	2.00	2.00	-	-	5.60	2.3 ~ 8.5	1390	260 ~ 2700	7.0	6.4	2.58	3.21	3.21	-	-	9.00	2.7 ~ 12.3	2430	230 ~ 3790	11.9	10.9
	16 + 20 + 25	1.60	2.00	2.50	-	-	6.10	2.3 ~ 8.5	1600	260 ~ 2700	8.1	7.4	2.47	3.08	3.85	-	-	9.40	2.7 ~ 12.3	2570	230 ~ 3790	12.6	11.6
	16 + 20 + 35	1.60	2.00	3.50	-	-	7.10	2.3 ~ 8.5	1930	250 ~ 2640	9.7	8.9	2.32	2.90	5.08	-	-	10.30	2.7 ~ 12.3	2730	230 ~ 3700	13.4	12.3
	16 + 20 + 42	1.60	2.00	4.20	-	-	7.80	2.3 ~ 8.5	2210	250 ~ 2640	11.1	10.1	2.34	2.92	6.14	-	-	11.40	2.7 ~ 12.9	2970	230 ~ 3980	14.6	13.4
	16 + 20 + 50	1.60	2.00	5.00	-	-	8.60	2.3 ~ 9.6	2450	280 ~ 2770	12.3	11.2	2.23	2.79	6.98	-	-	12.00	2.7 ~ 13.6	3040	250 ~ 4070	14.9	13.7
	16 + 20 + 60	1.60	2.00	6.00	-	-	9.60	2.3 ~ 10.1	2770	280 ~ 3090	13.9	12.7	2.00	2.50	7.50	-	-	12.00	2.7 ~ 13.6	3040	250 ~ 4070	14.9	13.7
	16 + 20 + 71	1.50	1.87	6.63	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3490	14.8	13.6	1.80	2.24	7.96	-	-	12.00	2.7 ~ 13.8	3030	250 ~ 4180	14.9	13.6
	16 + 25 + 25	1.60	2.50	2.50	-	-	6.60	2.3 ~ 8.5	1810	260 ~ 2700	9.1	8.3	2.38	3.71	3.71	-	-	9.80	2.7 ~ 12.3	2770	230 ~ 3790	13.6	12.5
	16 + 25 + 35	1.60	2.50	3.50	-	-	7.60	2.3 ~ 8.5	2210	250 ~ 2640	11.1	10.1	2.25	3.52	4.93	-	-	10.70	2.7 ~ 12.3	2870	230 ~ 3700	14.1	12.9
	16 + 25 + 42	1.60	2.50	4.20	-	-	8.30	2.3 ~ 8.7	2510	250 ~ 2690	12.6	11.5	2.28	3.55	5.97	-	-	11.80	2.7 ~ 12.9	3110	230 ~ 3980	15.3	14.0
	16 + 25 + 50	1.60	2.50	5.00	-	-	9.10	2.3 ~ 10.1	2540	280 ~ 3090	12.7	11.7	2.11	3.30	6.59	-	-	12.00	2.7 ~ 13.6	3040	250 ~ 4070	14.9	13.7
	16 + 25 + 60	1.58	2.48	5.94	-	-	10.00	2.3 ~ 10.7	3020	280 ~ 3630	15.1	13.9	1.90	2.97	7.13	-	-	12.00	2.7 ~ 13.6	3040	250 ~ 4070	14.9	13.7
	16 + 25 + 71	1.43	2.23	6.34	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3490	14.8	13.6	1.71	2.68	7.61	-	-	12.00	2.7 ~ 13.8	3030	250 ~ 4180	14.9	13.6
	16 + 35 + 35	1.60	3.50	3.50	-	-	8.60	2.3 ~ 9.6	2640	250 ~ 3080	13.2	12.1	2.16	4.72	4.72	-	-	11.60	2.7 ~ 13.6	3000	230 ~ 4320	14.7	13.5
	16 + 35 + 42	1.60	3.50	4.20	-	-	9.30	2.3 ~ 10.1	2920	250 ~ 3480	14.6	13.4	2.06	4.52	5.42	-	-	12.00	2.7 ~ 13.6	3130	240 ~ 4310	15.4	14.1
	16 + 35 + 50	1.58	3.47	4.95	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3490	14.8	13.6	1.90	4.16	5.94	-	-	12.00	2.7 ~ 13.6	2960	250 ~ 4040	14.5	13.3
	16 + 35 + 60	1.44	3.15	5.41	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3490	14.8	13.6	1.73	3.78	6.49	-	-	12.00	2.7 ~ 13.8	2960	250 ~ 4160	14.5	13.3
	16 + 35 + 71	1.31	2.87	5.82	-	-	10.00	2.3 ~ 10.7	2890	280 ~ 3350	14.5	13.3	1.58	3.44	6.98	-	-	12.00	2.7 ~ 13.8	2950	270 ~ 4140	14.5	13.3
	16 + 42 + 42	1.60	4.20	4.20	-	-	10.00	2.3 ~ 10.7	3350	250 ~ 4060	16.8	15.4	1.92	5.04	5.04	-	-	12.00	2.7 ~ 13.6	3120	240 ~ 4230	15.3	14.1
	16 + 42 + 50	1.48	3.89	4.63	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3490	14.8	13.6	1.78	4.67	5.55	-	-	12.00	2.7 ~ 13.8	2950	270 ~ 4150	14.5	13.3
	16 + 42 + 60	1.36	3.56	5.08	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3490	14.8	13.6	1.63	4.27	6.10	-	-	12.00	2.7 ~ 13.8	2950	270 ~ 4150	14.5	13.3
	16 + 42 + 71	1.24	3.26	5.50	-	-	10.00	2.3 ~ 10.7	2890	280 ~ 3350	14.5	13.3	1.49	3.91	6.60	-	-	12.00	2.7 ~ 14.1	2940	270 ~ 4250	14.4	13.2
	16 + 50 + 50	1.38	4.31	4.31	-	-	10.00	2.3 ~ 10.7	2700	320 ~ 3090	13.5	12.4	1.66	5.17	5.17	-	-	12.00	2.7 ~ 13.8	2840	300 ~ 3940	14.0	12.8
	16 + 50 + 60																						

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor unit capacity		COOLING OPERATION											HEATING OPERATION										
		Cooling Capacity (kW)						Input Power (W)		Current (A)			Heating Capacity (kW)						Input Power (W)		Current (A)		
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
3 Rooms	20 + 20 + 60	2.00	2.00	6.00	-	-	10.00	2.3 ~ 10.7	3020	280 ~ 3560	15.1	13.9	2.40	2.40	7.20	-	-	12.00	2.7 ~ 13.6	3030	250 ~ 4060	14.9	13.6
	20 + 20 + 71	1.80	1.80	6.40	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3420	14.8	13.6	2.16	2.16	7.68	-	-	12.00	2.7 ~ 13.8	2970	250 ~ 4160	14.6	13.4
	20 + 25 + 25	2.00	2.50	2.50	-	-	7.00	2.3 ~ 8.5	1930	260 ~ 2700	9.7	8.9	2.98	3.71	3.71	-	-	10.40	2.7 ~ 12.3	2790	230 ~ 3780	13.7	12.6
	20 + 25 + 35	2.00	2.50	3.50	-	-	8.00	2.3 ~ 8.5	2330	250 ~ 2640	11.7	10.7	2.83	3.53	4.94	-	-	11.30	2.7 ~ 12.9	2920	230 ~ 3980	14.3	13.1
	20 + 25 + 42	2.00	2.50	4.20	-	-	8.70	2.3 ~ 9.6	2690	250 ~ 3150	13.5	12.3	2.76	3.45	5.79	-	-	12.00	2.7 ~ 13.6	3200	230 ~ 4330	15.7	14.4
	20 + 25 + 50	2.00	2.50	5.00	-	-	9.50	2.3 ~ 10.1	2790	280 ~ 3090	14.0	12.8	2.53	3.16	6.31	-	-	12.00	2.7 ~ 13.6	3030	250 ~ 4060	14.9	13.6
	20 + 25 + 60	1.91	2.38	5.71	-	-	10.00	2.3 ~ 10.7	3020	280 ~ 3560	15.1	13.9	2.29	2.86	6.85	-	-	12.00	2.7 ~ 13.8	3030	250 ~ 4180	14.9	13.6
	20 + 25 + 71	1.72	2.16	6.12	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3420	14.8	13.6	2.07	2.59	7.34	-	-	12.00	2.7 ~ 13.8	2970	250 ~ 4160	14.6	13.4
	20 + 35 + 35	2.00	3.50	3.50	-	-	9.00	2.3 ~ 9.6	2810	250 ~ 3080	14.1	12.9	2.66	4.67	4.67	-	-	12.00	2.7 ~ 13.6	3130	240 ~ 4310	15.4	14.1
	20 + 35 + 42	2.00	3.50	4.20	-	-	9.70	2.3 ~ 10.7	3080	250 ~ 4060	15.4	14.1	2.47	4.33	5.20	-	-	12.00	2.7 ~ 13.6	3120	240 ~ 4230	15.3	14.1
	20 + 35 + 50	1.91	3.33	4.76	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3490	14.8	13.6	2.29	4.00	5.71	-	-	12.00	2.7 ~ 13.8	2950	270 ~ 4150	14.5	13.3
	20 + 35 + 60	1.74	3.04	5.22	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3490	14.8	13.6	2.09	3.65	6.26	-	-	12.00	2.7 ~ 13.8	2950	270 ~ 4150	14.5	13.3
	20 + 35 + 71	1.59	2.78	5.63	-	-	10.00	2.3 ~ 10.7	2890	280 ~ 3350	14.5	13.3	1.91	3.33	6.76	-	-	12.00	2.7 ~ 13.8	2940	270 ~ 4130	14.4	13.2
	20 + 42 + 42	1.92	4.04	4.04	-	-	10.00	2.3 ~ 10.7	3350	250 ~ 4060	16.8	15.4	2.30	4.85	4.85	-	-	12.00	2.7 ~ 13.6	3110	240 ~ 4220	15.3	14.0
	20 + 42 + 50	1.79	3.75	4.46	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3420	14.8	13.6	2.14	4.50	5.36	-	-	12.00	2.7 ~ 13.8	2940	270 ~ 4130	14.4	13.2
	20 + 42 + 60	1.64	3.44	4.92	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3420	14.8	13.6	1.97	4.13	5.90	-	-	12.00	2.7 ~ 13.8	2940	270 ~ 4130	14.4	13.2
	20 + 42 + 71	1.50	3.16	5.34	-	-	10.00	2.3 ~ 10.7	2830	280 ~ 3350	14.2	13.0	1.80	3.79	6.41	-	-	12.00	2.7 ~ 14.1	2930	270 ~ 4240	14.4	13.2
	20 + 50 + 50	1.66	4.17	4.17	-	-	10.00	2.3 ~ 10.7	2710	320 ~ 3090	13.6	12.4	2.00	5.00	5.00	-	-	12.00	2.7 ~ 13.8	2830	310 ~ 3920	13.9	12.7
	20 + 50 + 60	1.54	3.85	4.61	-	-	10.00	2.3 ~ 10.7	2710	320 ~ 3090	13.6	12.4	1.85	4.62	5.53	-	-	12.00	2.7 ~ 14.1	2830	310 ~ 4100	13.9	12.7
	20 + 50 + 71	1.42	3.55	5.03	-	-	10.00	2.3 ~ 10.7	2640	350 ~ 3020	13.2	12.1	1.70	4.26	6.04	-	-	12.00	2.7 ~ 14.1	2820	320 ~ 4080	13.9	12.7
	20 + 60 + 60	1.42	4.29	4.29	-	-	10.00	2.3 ~ 10.7	2710	320 ~ 3090	13.6	12.4	1.72	5.14	5.14	-	-	12.00	2.7 ~ 14.1	2830	310 ~ 4100	13.9	12.7
	20 + 60 + 71	1.33	3.97	4.70	-	-	10.00	2.3 ~ 10.7	2640	350 ~ 3020	13.2	12.1	1.59	4.77	5.64	-	-	12.00	2.7 ~ 14.4	2820	320 ~ 4200	13.9	12.7
	20 + 71 + 71	1.24	4.38	4.38	-	-	10.00	2.3 ~ 10.7	2580	350 ~ 2960	12.9	11.8	1.48	5.26	5.26	-	-	12.00	2.7 ~ 14.4	2850	330 ~ 4190	14.0	12.8
	25 + 25 + 25	2.50	2.50	2.50	-	-	7.50	2.3 ~ 8.5	2160	260 ~ 2700	10.8	9.9	3.60	3.60	3.60	-	-	10.80	2.7 ~ 12.3	2850	230 ~ 3780	14.0	12.8
	25 + 25 + 35	2.50	2.50	3.50	-	-	8.50	2.3 ~ 9.6	2640	250 ~ 3150	13.2	12.1	3.44	3.44	4.82	-	-	11.70	2.7 ~ 13.6	3060	230 ~ 4340	15.0	13.8
	25 + 25 + 42	2.50	2.50	4.20	-	-	9.20	2.3 ~ 10.1	2920	250 ~ 3550	14.6	13.4	3.26	3.26	5.48	-	-	12.00	2.7 ~ 13.6	3200	230 ~ 4330	15.7	14.4
	25 + 25 + 50	2.50	2.50	5.00	-	-	10.00	2.3 ~ 10.7	3020	280 ~ 3560	15.1	13.9	3.00	3.00	6.00	-	-	12.00	2.7 ~ 13.6	3030	250 ~ 4060	14.9	13.6
	25 + 25 + 60	2.27	2.27	5.46	-	-	10.00	2.3 ~ 10.7	3020	280 ~ 3560	15.1	13.9	2.73	2.73	6.54	-	-	12.00	2.7 ~ 13.8	3030	250 ~ 4180	14.9	13.6
	25 + 25 + 71	2.07	2.07	5.86	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3420	14.8	13.6	2.48	2.48	7.04	-	-	12.00	2.7 ~ 13.8	2970	250 ~ 4160	14.6	13.4
	25 + 35 + 35	2.50	3.50	3.50	-	-	9.50	2.3 ~ 10.1	3050	250 ~ 3480	15.3	14.0	3.16	4.42	4.42	-	-	12.00	2.7 ~ 13.6	3130	240 ~ 4310	15.4	14.1
	25 + 35 + 42	2.45	3.43	4.12	-	-	10.00	2.3 ~ 10.7	3350	250 ~ 4060	16.8	15.4	2.94	4.12	4.94	-	-	12.00	2.7 ~ 13.6	3120	240 ~ 4230	15.3	14.1
	25 + 35 + 50	2.27	3.18	4.55	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3490	14.8	13.6	2.73	3.82	5.45	-	-	12.00	2.7 ~ 13.8	2950	270 ~ 4150	14.5	13.3
	25 + 35 + 60	2.08	2.92	5.00	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3490	14.8	13.6	2.50	3.50	6.00	-	-	12.00	2.7 ~ 13.8	2950	270 ~ 4150	14.5	13.3
	25 + 35 + 71	1.91	2.67	5.42	-	-	10.00	2.3 ~ 10.7	2890	280 ~ 3350	14.5	13.3	2.29	3.21	6.50	-	-	12.00	2.7 ~ 14.1	2940	270 ~ 4250	14.4	13.2
	25 + 42 + 42	2.30	3.85	3.85	-	-	10.00	2.3 ~ 10.7	3350	250 ~ 4060	16.8	15.4	2.76	4.62	4.62	-	-	12.00	2.7 ~ 13.8	3110	240 ~ 4340	15.3	14.0
25 + 42 + 50	2.14	3.59	4.27	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3420	14.8	13.6	2.56	4.31	5.13	-	-	12.00	2.7 ~ 13.8	2940	270 ~ 4130	14.4	13.2	
25 + 42 + 60	1.97	3.31	4.72	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3420	14.8	13.6	2.36	3.97	5.67	-	-	12.00	2.7 ~ 14.1	2940	270 ~ 4250	14.4	13.2	
25 + 42 + 71	1.82	3.04	5.14	-	-	10.00	2.3 ~ 10.7	2830	280 ~ 3350	14.2	13.0	2.18	3.65	6.17	-	-	12.00	2.7 ~ 14.1	2930	270 ~ 4240	14.4	13.2	
25 + 50 + 50	2.00	4.00	4.00	-	-	10.00	2.3 ~ 10.7	2710	320 ~ 3090	13.6	12.4	2.40	4.80	4.80	-	-	12.00	2.7 ~ 13.8	2830	310 ~ 3920	13.9	12.7	
25 + 50 + 60	1.86	3.70	4.44	-	-	10.00	2.3 ~ 10.7	2710	320 ~ 3090	13.6	12.4	2.23	4.44	5.33	-	-	12.00	2.7 ~ 14.1	2830	310 ~ 4100	13.9	12.7	
25 + 50 + 71	1.72	3.42	4.86	-	-	10.00	2.3 ~ 10.7	2640	350 ~ 3020	13.2	12.1	2.05	4.11	5.84	-	-	12.00	2.7 ~ 14.1	2820	320 ~ 4080	13.9	12.7	
25 + 60 + 60	1.72	4.14	4.14	-	-	10.00	2.3 ~ 10.7	2710	320 ~ 3090	13.6	12.4	2.06	4.97	4.97	-	-	12.00	2.7 ~ 14.1	2830	310 ~ 4100	13.9	12.7	
25 + 60 + 71	1.60	3.85	4.55	-	-	10.00	2.3 ~ 10.7	2640	350 ~ 3020	13.2	12.1	1.92	4.62	5.46	-	-	12.00	2.7 ~ 14.4	2820	320 ~ 4200	13.9	12.7	
25 + 71 + 71	1.50	4.25	4.25	-	-	10.00	2.3 ~ 10.7	2580	350 ~ 2960	12.9	11.8	1.80	5.10	5.10	-	-	12.00	2.7 ~ 14.4	2850	330 ~ 4190	14.0	12.8	
35 + 35 + 35	3.33	3.33	3.33	-	-	9.99	2.3 ~ 10.7	3280	250 ~ 3980	16.4	15.0	4.00	4.00	4.00	-	-	12.00	2.7 ~ 13.8	3100	240 ~ 4330	15.2	14.0	
35 + 35 + 42	3.13	3.13	3.74	-	-	10.00	2.3 ~ 10.7	3280	250 ~ 3910	16.4	15.0	3.75	3.75	4.50	-	-	12.00	2.7 ~ 13.8	3090	240 ~ 4320	15.2	13.9	
35 + 35 + 50	2.92	2.92	4.16	-	-	10.00	2.3 ~ 10.7	2890	280 ~ 3350	14.5	13.3	3.50	3.50	5.00	-	-	12.00	2.7 ~ 13.8	2930	270 ~ 4110	14.4	13.2	
35 + 35 + 60	2.69	2.69	4.62	-	-	10.00	2.3 ~ 10.7	2890	280 ~ 3350	14.5	13.3	3.23	3.23	5.54	-	-	12.00	2.7 ~ 14.1	2930	270 ~ 4230	14.4	13.2	
35 + 35 + 71	2.48	2.48	5.04	-	-	10.00	2.3 ~ 10.7	2830	310 ~ 3290	14.2	13.0	2.98	2.98	6.04	-	-	12.00	2.7 ~ 14.1	2910	270 ~ 4210	14.3	13.1	
35 + 42 + 42	2.94	3.53	3.53	-	-	10.00	2.3 ~ 10.7	3220	250 ~ 3910	16.1	14.8	3.52	4.24	4.24	-	-	12.00	2.7 ~ 13.8	3080	250 ~ 4310	15.1	13.9	
35 + 42 + 50	2.76	3.31	3.93	-	-	10.00	2.3 ~ 10.7	2890	280 ~ 3350	14.5	13.3	3.31	3.97	4.72	-	-	12.00	2.7 ~ 14.1	2920	270 ~ 4220	14.3	13.1	
35 + 42 + 60	2.55	3.07	4.38	-	-	10.00	2.3 ~ 10.7	2890	280 ~ 3350	14.5	13.3	3.07	3.68	5.25	-	-	12.00	2.7 ~ 14.1	2920	270 ~ 4220	14.3	13.1	
35 + 42 + 71	2.36	2.84	4.80	-	-	10.00	2.3 ~ 10.7	2830	310 ~ 3290	14.2	13.0	2.84	3.41	5.75	-	-	12.00	2.7 ~ 14.1	2900	280 ~ 4200	14.2	13.1	
35 + 50 + 50	2.60	3.																					

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor unit capacity		COOLING OPERATION												HEATING OPERATION											
		Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)					
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V		
3 Rooms	42 + 42 + 42	3.33	3.33	3.33	-	-	9.99	2.3 ~ 10.7	3220	250 ~ 3840	16.1	14.8	4.00	4.00	4.00	-	-	12.00	2.7 ~ 13.8	3070	250 ~ 4230	15.1	13.8		
	42 + 42 + 50	3.13	3.13	3.74	-	-	10.00	2.3 ~ 10.7	2830	280 ~ 3350	14.2	13.0	3.76	3.76	4.48	-	-	12.00	2.7 ~ 14.1	2910	280 ~ 4200	14.3	13.1		
	42 + 42 + 60	2.92	2.92	4.16	-	-	10.00	2.3 ~ 10.7	2830	280 ~ 3350	14.2	13.0	3.50	3.50	5.00	-	-	12.00	2.7 ~ 14.1	2910	280 ~ 4200	14.3	13.1		
	42 + 42 + 71	2.71	2.71	4.58	-	-	10.00	2.3 ~ 10.7	2770	310 ~ 3220	13.9	12.7	3.25	3.25	5.50	-	-	12.00	2.7 ~ 14.4	2890	280 ~ 4310	14.2	13.0		
	42 + 50 + 50	2.96	3.52	3.52	-	-	10.00	2.3 ~ 10.7	2640	350 ~ 3020	13.2	12.1	3.54	4.23	4.23	-	-	12.00	2.7 ~ 14.1	2850	330 ~ 4050	14.0	12.8		
	42 + 50 + 60	2.76	3.29	3.95	-	-	10.00	2.3 ~ 10.7	2640	350 ~ 3020	13.2	12.1	3.32	3.95	4.73	-	-	12.00	2.7 ~ 14.4	2850	330 ~ 4170	14.0	12.8		
	42 + 50 + 71	2.58	3.07	4.35	-	-	10.00	2.3 ~ 10.7	2580	350 ~ 2960	12.9	11.8	3.09	3.68	5.23	-	-	12.00	2.7 ~ 14.4	2830	340 ~ 4160	13.9	12.7		
	42 + 60 + 60	2.60	3.70	3.70	-	-	10.00	2.3 ~ 10.7	2640	350 ~ 3020	13.2	12.1	3.12	4.44	4.44	-	-	12.00	2.7 ~ 14.4	2850	330 ~ 4170	14.0	12.8		
	42 + 60 + 71	2.43	3.47	4.10	-	-	10.00	2.3 ~ 10.7	2580	350 ~ 2960	12.9	11.8	2.92	4.16	4.92	-	-	12.00	2.7 ~ 14.4	2830	340 ~ 4160	13.9	12.7		
	50 + 50 + 50	3.33	3.33	3.33	-	-	9.99	2.3 ~ 10.7	2470	390 ~ 2830	12.4	11.3	4.00	4.00	4.00	-	-	12.00	2.7 ~ 14.4	2800	400 ~ 4090	13.8	12.6		
	50 + 50 + 60	3.13	3.13	3.74	-	-	10.00	2.3 ~ 10.7	2530	390 ~ 2830	12.7	11.6	3.75	3.75	4.50	-	-	12.00	2.7 ~ 14.4	2800	400 ~ 4090	13.8	12.6		
	50 + 50 + 71	2.92	2.92	4.16	-	-	10.00	2.3 ~ 10.7	2470	390 ~ 2840	12.4	11.3	3.51	3.51	4.98	-	-	12.00	2.7 ~ 14.4	2790	410 ~ 4070	13.7	12.6		
	50 + 60 + 60	2.94	3.53	3.53	-	-	10.00	2.3 ~ 10.7	2530	390 ~ 2830	12.7	11.6	3.52	4.24	4.24	-	-	12.00	2.7 ~ 14.4	2800	400 ~ 4090	13.8	12.6		
	50 + 60 + 71	2.77	3.31	3.92	-	-	10.00	2.3 ~ 10.7	2470	390 ~ 2840	12.4	11.3	3.31	3.98	4.71	-	-	12.00	2.7 ~ 14.4	2790	410 ~ 4070	13.7	12.6		
	60 + 60 + 60	3.33	3.33	3.33	-	-	9.99	2.3 ~ 10.7	2470	390 ~ 2830	12.4	11.3	4.00	4.00	4.00	-	-	12.00	2.7 ~ 14.4	2800	400 ~ 4090	13.8	12.6		
	4 Rooms	16 + 16 + 16 + 16	1.60	1.60	1.60	1.60	-	6.40	2.3 ~ 10.6	1600	310 ~ 3680	8.1	7.4	2.60	2.60	2.60	2.60	-	10.40	3.4 ~ 14.2	2640	340 ~ 4400	13.0	11.9	
16 + 16 + 16 + 20		1.60	1.60	1.60	2.00	-	6.80	2.3 ~ 10.6	1740	310 ~ 3680	8.8	8.1	2.59	2.59	2.59	3.23	-	11.00	3.4 ~ 14.2	2780	340 ~ 4390	13.7	12.5		
16 + 16 + 16 + 25		1.60	1.60	1.60	2.50	-	7.30	2.3 ~ 10.6	1900	310 ~ 3680	9.5	8.7	2.50	2.50	2.50	3.90	-	11.40	3.4 ~ 14.2	2840	340 ~ 4390	14.0	12.8		
16 + 16 + 16 + 35		1.60	1.60	1.60	3.50	-	8.30	2.3 ~ 10.6	2290	310 ~ 3600	11.5	10.5	2.31	2.31	2.31	5.07	-	12.00	3.4 ~ 14.2	3000	340 ~ 4350	14.7	13.5		
16 + 16 + 16 + 42		1.60	1.60	1.60	4.20	-	9.00	2.3 ~ 10.6	2580	310 ~ 3600	12.9	11.8	2.13	2.13	2.13	5.61	-	12.00	3.4 ~ 14.2	2990	340 ~ 4340	14.7	13.5		
16 + 16 + 16 + 50		1.60	1.60	1.60	5.00	-	9.80	2.3 ~ 10.6	2780	350 ~ 3310	13.9	12.8	1.96	1.96	1.96	6.12	-	12.00	3.4 ~ 14.2	2930	390 ~ 4190	14.4	13.2		
16 + 16 + 16 + 60		1.48	1.48	1.48	5.56	-	10.00	2.3 ~ 10.6	2910	350 ~ 3310	14.6	13.3	1.78	1.78	1.78	6.66	-	12.00	3.4 ~ 14.2	2930	390 ~ 4190	14.4	13.2		
16 + 16 + 16 + 71		1.34	1.34	1.34	5.98	-	10.00	2.3 ~ 10.6	2850	380 ~ 3240	14.3	13.1	1.61	1.61	1.61	7.17	-	12.00	3.4 ~ 14.2	2920	400 ~ 4170	14.3	13.1		
16 + 16 + 20 + 20		1.60	1.60	2.00	2.00	-	7.20	2.3 ~ 10.6	1850	310 ~ 3600	9.3	8.5	2.58	2.58	3.22	3.22	-	11.60	3.4 ~ 14.2	2870	340 ~ 4370	14.1	12.9		
16 + 16 + 20 + 25		1.60	1.60	2.00	2.50	-	7.70	2.3 ~ 10.6	2050	310 ~ 3600	10.3	9.4	2.49	2.49	3.12	3.90	-	12.00	3.4 ~ 14.2	3010	340 ~ 4370	14.8	13.6		
16 + 16 + 20 + 35		1.60	1.60	2.00	3.50	-	8.70	2.3 ~ 10.6	2450	310 ~ 3530	12.3	11.2	2.21	2.21	2.76	4.82	-	12.00	3.4 ~ 14.2	2990	340 ~ 4340	14.7	13.5		
16 + 16 + 20 + 42		1.60	1.60	2.00	4.20	-	9.40	2.3 ~ 10.6	2740	310 ~ 3530	13.7	12.6	2.04	2.04	2.56	5.36	-	12.00	3.4 ~ 14.2	2980	340 ~ 4320	14.6	13.4		
16 + 16 + 20 + 50		1.57	1.57	1.96	4.90	-	10.00	2.3 ~ 10.6	2910	350 ~ 3310	14.6	13.3	1.88	1.88	2.36	5.88	-	12.00	3.4 ~ 14.2	2920	400 ~ 4170	14.3	13.1		
16 + 16 + 20 + 60		1.43	1.43	1.79	5.35	-	10.00	2.3 ~ 10.6	2910	350 ~ 3310	14.6	13.3	1.71	1.71	2.15	6.43	-	12.00	3.4 ~ 14.2	2920	400 ~ 4170	14.3	13.1		
16 + 16 + 20 + 71		1.30	1.30	1.63	5.77	-	10.00	2.3 ~ 10.8	2850	380 ~ 3380	14.3	13.1	1.56	1.56	1.95	6.93	-	12.00	3.4 ~ 14.2	2910	400 ~ 4160	14.3	13.1		
16 + 16 + 25 + 25		1.60	1.60	2.50	2.50	-	8.20	2.3 ~ 10.6	2230	310 ~ 3600	11.2	10.2	2.34	2.34	3.66	3.66	-	12.00	3.4 ~ 14.2	3010	340 ~ 4370	14.8	13.6		
16 + 16 + 25 + 35		1.60	1.60	2.50	3.50	-	9.20	2.3 ~ 10.6	2680	310 ~ 3530	13.4	12.3	2.09	2.09	3.26	4.56	-	12.00	3.4 ~ 14.2	2990	340 ~ 4340	14.7	13.5		
16 + 16 + 25 + 42		1.60	1.60	2.50	4.20	-	9.90	2.3 ~ 10.6	3040	310 ~ 3530	15.2	13.9	1.94	1.94	3.03	5.09	-	12.00	3.4 ~ 14.2	2980	340 ~ 4320	14.6	13.4		
16 + 16 + 25 + 50		1.50	1.50	2.34	4.66	-	10.00	2.3 ~ 10.6	2910	350 ~ 3310	14.6	13.3	1.79	1.79	2.81	5.61	-	12.00	3.4 ~ 14.2	2920	400 ~ 4170	14.3	13.1		
16 + 16 + 25 + 60		1.37	1.37	2.14	5.12	-	10.00	2.3 ~ 10.6	2910	350 ~ 3310	14.6	13.3	1.64	1.64	2.57	6.15	-	12.00	3.4 ~ 14.2	2920	400 ~ 4170	14.3	13.1		
16 + 16 + 25 + 71		1.25	1.25	1.95	5.55	-	10.00	2.3 ~ 10.8	2850	380 ~ 3380	14.3	13.1	1.50	1.50	2.34	6.66	-	12.00	3.4 ~ 14.4	2910	400 ~ 4220	14.3	13.1		
16 + 16 + 35 + 35		1.57	1.57	3.43	3.43	-	10.00	2.3 ~ 10.6	3040	320 ~ 3530	15.2	13.9	1.88	1.88	4.12	4.12	-	12.00	3.4 ~ 14.2	2960	360 ~ 4300	14.5	13.3		
16 + 16 + 35 + 42		1.47	1.47	3.21	3.85	-	10.00	2.3 ~ 10.6	3040	320 ~ 3450	15.2	13.9	1.76	1.76	3.86	4.62	-	12.00	3.4 ~ 14.2	2950	360 ~ 4220	14.5	13.3		
16 + 16 + 35 + 50		1.37	1.37	2.99	4.27	-	10.00	2.3 ~ 10.6	2850	380 ~ 3240	14.3	13.1	1.64	1.64	3.59	5.13	-	12.00	3.4 ~ 14.2	2900	420 ~ 4140	14.2	13.1		
16 + 16 + 35 + 60		1.26	1.26	2.76	4.72	-	10.00	2.3 ~ 10.8	2850	380 ~ 3380	14.3	13.1	1.51	1.51	3.31	5.67	-	12.00	3.4 ~ 14.2	2900	420 ~ 4140	14.2	13.1		
16 + 16 + 35 + 71		1.16	1.16	2.54	5.14	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.39	1.39	3.05	6.17	-	12.00	3.4 ~ 14.4	2890	420 ~ 4180	14.2	13.0		
16 + 16 + 42 + 42		1.38	1.38	3.62	3.62	-	10.00	2.3 ~ 10.6	3040	320 ~ 3450	15.2	13.9	1.66	1.66	4.34	4.34	-	12.00	3.4 ~ 14.2	2940	370 ~ 4210	14.4	13.2		
16 + 16 + 42 + 50		1.29	1.29	3.39	4.03	-	10.00	2.3 ~ 10.8	2850	380 ~ 3380	14.3	13.1	1.55	1.55	4.06	4.84	-	12.00	3.4 ~ 14.2	2890	420 ~ 4130	14.2	13.0		
16 + 16 + 42 + 60		1.19	1.19	3.14	4.48	-	10.00	2.3 ~ 10.8	2850	380 ~ 3380	14.3	13.1	1.43	1.43	3.77	5.37	-	12.00	3.4 ~ 14.4	2890	420 ~ 4190	14.2	13.0		
16 + 16 + 42 + 71		1.10	1.10	2.90	4.90	-	10.00	2.3 ~ 11.0	2850	390 ~ 3460	14.3	13.1	1.32	1.32	3.48	5.88	-	12.00	3.4 ~ 14.4	2880	430 ~ 4170	14.1	13.0		
16 + 16 + 50 + 50		1.21	1.21	3.79	3.79	-	10.00	2.3 ~ 10.8	2730	430 ~ 3180	13.7	12.5	1.45	1.45	4.55	4.55	-	12.00	3.4 ~ 14.4	2850	490 ~ 4110	14.0	12.8		
16 + 16 + 50 + 60		1.13	1.13	3.52	4.22	-	10.00	2.3 ~ 11.0	2730	430 ~ 3320	13.7														

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION										
	Cooling Capacity (kW)						Input Power (W)		Current (A)			Heating Capacity (kW)						Input Power (W)		Current (A)		
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
16 + 20 + 25 + 35	1.60	2.00	2.50	3.50	-	9.60	2.3 ~ 10.6	2840	310 ~ 3530	14.2	13.0	2.00	2.50	3.13	4.37	-	12.00	3.4 ~ 14.2	2980	340 ~ 4320	14.6	13.4
16 + 20 + 25 + 42	1.55	1.94	2.43	4.08	-	10.00	2.3 ~ 10.6	3040	310 ~ 3530	15.2	13.9	1.87	2.33	2.91	4.89	-	12.00	3.4 ~ 14.2	2970	350 ~ 4310	14.6	13.4
16 + 20 + 25 + 50	1.45	1.80	2.25	4.50	-	10.00	2.3 ~ 10.6	2850	360 ~ 3240	14.3	13.1	1.73	2.16	2.70	5.41	-	12.00	3.4 ~ 14.2	2910	400 ~ 4160	14.3	13.1
16 + 20 + 25 + 60	1.32	1.65	2.07	4.96	-	10.00	2.3 ~ 10.8	2850	360 ~ 3380	14.3	13.1	1.59	1.98	2.48	5.95	-	12.00	3.4 ~ 14.2	2910	400 ~ 4160	14.3	13.1
16 + 20 + 25 + 71	1.21	1.52	1.89	5.38	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.46	1.82	2.27	6.45	-	12.00	3.4 ~ 14.4	2900	420 ~ 4200	14.2	13.1
16 + 20 + 35 + 35	1.51	1.89	3.30	3.30	-	10.00	2.3 ~ 10.6	3040	320 ~ 3450	15.2	13.9	1.82	2.26	3.96	3.96	-	12.00	3.4 ~ 14.2	2950	360 ~ 4220	14.5	13.3
16 + 20 + 35 + 42	1.42	1.77	3.10	3.71	-	10.00	2.3 ~ 10.6	3040	320 ~ 3450	15.2	13.9	1.70	2.12	3.72	4.46	-	12.00	3.4 ~ 14.2	2940	370 ~ 4210	14.4	13.2
16 + 20 + 35 + 50	1.33	1.65	2.89	4.13	-	10.00	2.3 ~ 10.8	2850	380 ~ 3380	14.3	13.1	1.59	1.98	3.47	4.96	-	12.00	3.4 ~ 14.2	2890	420 ~ 4130	14.2	13.0
16 + 20 + 35 + 60	1.22	1.53	2.67	4.58	-	10.00	2.3 ~ 10.8	2850	380 ~ 3380	14.3	13.1	1.47	1.83	3.21	5.49	-	12.00	3.4 ~ 14.4	2890	420 ~ 4190	14.2	13.0
16 + 20 + 35 + 71	1.13	1.41	2.46	5.00	-	10.00	2.3 ~ 11.0	2780	390 ~ 3460	13.9	12.8	1.35	1.69	2.96	6.00	-	12.00	3.4 ~ 14.4	2880	430 ~ 4170	14.1	13.0
16 + 20 + 42 + 42	1.33	1.67	3.50	3.50	-	10.00	2.3 ~ 10.6	2980	320 ~ 3450	14.9	13.7	1.60	2.00	4.20	4.20	-	12.00	3.4 ~ 14.2	2930	370 ~ 4200	14.4	13.2
16 + 20 + 42 + 50	1.25	1.56	3.28	3.91	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.50	1.88	3.94	4.68	-	12.00	3.4 ~ 14.4	2880	420 ~ 4170	14.1	13.0
16 + 20 + 42 + 60	1.16	1.45	3.04	4.35	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.39	1.74	3.65	5.22	-	12.00	3.4 ~ 14.4	2880	420 ~ 4170	14.1	13.0
16 + 20 + 42 + 71	1.07	1.34	2.82	4.77	-	10.00	2.3 ~ 11.0	2780	390 ~ 3390	13.9	12.8	1.29	1.61	3.38	5.72	-	12.00	3.4 ~ 14.4	2870	430 ~ 4160	14.1	12.9
16 + 20 + 50 + 50	1.18	1.47	3.68	3.67	-	10.00	2.3 ~ 10.8	2730	430 ~ 3180	13.7	12.5	1.42	1.76	4.41	4.41	-	12.00	3.4 ~ 14.4	2890	500 ~ 4100	14.2	13.0
16 + 20 + 50 + 60	1.10	1.37	3.42	4.11	-	10.00	2.3 ~ 11.0	2730	430 ~ 3320	13.7	12.5	1.32	1.64	4.11	4.93	-	12.00	3.4 ~ 14.4	2890	500 ~ 4100	14.2	13.0
16 + 20 + 50 + 71	1.03	1.27	3.18	4.52	-	10.00	2.3 ~ 11.0	2730	470 ~ 3250	13.7	12.5	1.22	1.53	3.82	5.43	-	12.00	3.4 ~ 14.4	2880	510 ~ 4140	14.1	13.0
16 + 20 + 60 + 60	1.03	1.27	3.85	3.85	-	10.00	2.3 ~ 11.0	2730	430 ~ 3320	13.7	12.5	1.23	1.53	4.62	4.62	-	12.00	3.4 ~ 14.4	2890	500 ~ 4100	14.2	13.0
16 + 20 + 60 + 71	0.96	1.20	3.59	4.25	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.15	1.44	4.31	5.10	-	12.00	3.4 ~ 14.4	2880	510 ~ 4140	14.1	13.0
16 + 20 + 71 + 71	0.90	1.12	3.99	3.99	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.08	1.34	4.79	4.79	-	12.00	3.4 ~ 14.4	2870	520 ~ 4130	14.1	12.9
16 + 25 + 25 + 25	1.60	2.50	2.50	2.50	-	9.10	2.3 ~ 10.6	2610	310 ~ 3600	13.1	12.0	2.10	3.30	3.30	3.30	-	12.00	3.4 ~ 14.2	3000	340 ~ 4360	14.7	13.5
16 + 25 + 25 + 35	1.58	2.48	2.48	3.46	-	10.00	2.3 ~ 10.6	3040	310 ~ 3530	15.2	13.9	1.90	2.97	2.97	4.16	-	12.00	3.4 ~ 14.2	2980	340 ~ 4320	14.6	13.4
16 + 25 + 25 + 42	1.49	2.31	2.31	3.89	-	10.00	2.3 ~ 10.6	3040	310 ~ 3530	15.2	13.9	1.78	2.78	2.78	4.66	-	12.00	3.4 ~ 14.2	2970	350 ~ 4310	14.6	13.4
16 + 25 + 25 + 50	1.38	2.16	2.16	4.30	-	10.00	2.3 ~ 10.6	2850	360 ~ 3240	14.3	13.1	1.66	2.59	2.59	5.16	-	12.00	3.4 ~ 14.2	2910	400 ~ 4160	14.3	13.1
16 + 25 + 25 + 60	1.28	1.98	1.98	4.76	-	10.00	2.3 ~ 10.8	2850	360 ~ 3380	14.3	13.1	1.53	2.38	2.38	5.71	-	12.00	3.4 ~ 14.2	2910	400 ~ 4160	14.3	13.1
16 + 25 + 25 + 71	1.18	1.82	1.82	5.18	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.40	2.19	2.19	6.22	-	12.00	3.4 ~ 14.4	2900	420 ~ 4200	14.2	13.1
16 + 25 + 35 + 35	1.45	2.25	3.15	3.15	-	10.00	2.3 ~ 10.6	3040	320 ~ 3450	15.2	13.9	1.74	2.70	3.78	3.78	-	12.00	3.4 ~ 14.2	2950	360 ~ 4220	14.5	13.3
16 + 25 + 35 + 42	1.36	2.12	2.97	3.55	-	10.00	2.3 ~ 10.6	3040	320 ~ 3450	15.2	13.9	1.63	2.54	3.56	4.27	-	12.00	3.4 ~ 14.2	2940	370 ~ 4210	14.4	13.2
16 + 25 + 35 + 50	1.27	1.98	2.78	3.97	-	10.00	2.3 ~ 10.8	2850	380 ~ 3380	14.3	13.1	1.53	2.38	3.33	4.76	-	12.00	3.4 ~ 14.2	2890	420 ~ 4130	14.2	13.0
16 + 25 + 35 + 60	1.18	1.84	2.57	4.41	-	10.00	2.3 ~ 10.8	2850	380 ~ 3380	14.3	13.1	1.41	2.21	3.09	5.29	-	12.00	3.4 ~ 14.4	2890	420 ~ 4190	14.2	13.0
16 + 25 + 35 + 71	1.09	1.70	2.38	4.83	-	10.00	2.3 ~ 11.0	2780	390 ~ 3460	13.9	12.8	1.31	2.04	2.86	5.79	-	12.00	3.4 ~ 14.4	2880	430 ~ 4170	14.1	13.0
16 + 25 + 42 + 42	1.28	2.00	3.36	3.36	-	10.00	2.3 ~ 10.8	2980	320 ~ 3600	14.9	13.7	1.54	2.40	4.03	4.03	-	12.00	3.4 ~ 14.2	2930	370 ~ 4200	14.4	13.2
16 + 25 + 42 + 50	1.20	1.88	3.16	3.76	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.44	2.26	3.79	4.51	-	12.00	3.4 ~ 14.4	2880	420 ~ 4170	14.1	13.0
16 + 25 + 42 + 60	1.12	1.75	2.94	4.19	-	10.00	2.3 ~ 11.0	2850	390 ~ 3460	14.3	13.1	1.35	2.10	3.52	5.03	-	12.00	3.4 ~ 14.4	2880	420 ~ 4170	14.1	13.0
16 + 25 + 42 + 71	1.04	1.62	2.73	4.61	-	10.00	2.3 ~ 11.0	2780	390 ~ 3390	13.9	12.8	1.25	1.95	3.27	5.53	-	12.00	3.4 ~ 14.4	2870	430 ~ 4160	14.1	12.9
16 + 25 + 50 + 50	1.13	1.77	3.55	3.55	-	10.00	2.3 ~ 10.8	2730	430 ~ 3180	13.7	12.5	1.36	2.12	4.26	4.26	-	12.00	3.4 ~ 14.4	2890	500 ~ 4100	14.2	13.0
16 + 25 + 50 + 60	1.06	1.66	3.31	3.97	-	10.00	2.3 ~ 11.0	2730	430 ~ 3320	13.7	12.5	1.27	1.99	3.97	4.77	-	12.00	3.4 ~ 14.4	2890	500 ~ 4100	14.2	13.0
16 + 25 + 50 + 71	0.99	1.54	3.09	4.38	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.19	1.85	3.70	5.26	-	12.00	3.4 ~ 14.4	2880	510 ~ 4140	14.1	13.0
16 + 25 + 60 + 60	0.99	1.55	3.73	3.73	-	10.00	2.3 ~ 11.2	2730	430 ~ 3390	13.7	12.5	1.20	1.86	4.47	4.47	-	12.00	3.4 ~ 14.4	2890	500 ~ 4100	14.2	13.0
16 + 25 + 60 + 71	0.93	1.45	3.49	4.13	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.12	1.74	4.19	4.95	-	12.00	3.4 ~ 14.4	2880	510 ~ 4140	14.1	13.0
16 + 25 + 71 + 71	0.87	1.37	3.88	3.88	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.05	1.63	4.66	4.66	-	12.00	3.4 ~ 14.4	2870	520 ~ 4130	14.1	12.9
16 + 35 + 35 + 35	1.33	2.89	2.89	2.89	-	10.00	2.3 ~ 10.8	2980	340 ~ 3530	14.9	13.7	1.59	3.47	3.47	3.47	-	12.00	3.4 ~ 14.2	2930	370 ~ 4190	14.4	13.2
16 + 35 + 35 + 42	1.26	2.73	2.73	3.28	-	10.00	2.3 ~ 10.8	2980	350 ~ 3530	14.9	13.7	1.50	3.28	3.28	3.94	-	12.00	3.4 ~ 14.4	2920	370 ~ 4300	14.3	13.1
16 + 35 + 35 + 50	1.18	2.57	2.57	3.68	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.41	3.09	3.09	4.41	-	12.00	3.4 ~ 14.4	2870	430 ~ 4150	14.1	12.9
16 + 35 + 35 + 60	1.10	2.40	2.40	4.10	-	10.00	2.3 ~ 11.0	2850	390 ~ 3460	14.3	13.1	1.32	2.88	2.88	4.92	-	12.00	3.4 ~ 14.4	2870	430 ~ 4150	14.1	12.9
16 + 35 + 35 + 71	1.02	2.23	2.23	4.52	-	10.00	2.3 ~ 11.0	2780	390 ~ 3390	13.9	12.8	1.22	2.68	2.68	5.42	-	12.00	3.4 ~ 14.4	2860	450 ~ 4200	14.1	12.9
16 + 35 + 42 + 42	1.19	2.59	3.11	3.11	-	10.00	2.3 ~ 10.8	2980	350 ~ 3530	14.9	13.7	1.43	3.11	3.73	3.73	-	12.00	3.4 ~ 14.4	2950	370 ~ 4280	14.5	13.3
16 + 35 + 42 + 50	1.12	2.45	2.94	3.49	-	10.00	2.3 ~ 11.0	2780	390 ~ 3460	13.9	12.8	1.34	2.94	3.52	4.20	-	12.00	3.4 ~ 14.4	2860	450 ~ 4200	14.1	12.9
16 + 35 + 42 + 60	1.05	2.29	2.75	3.91	-	10.00	2.3 ~ 11.0	2780	390 ~ 3460	13.9	12.8	1.25	2.75	3.29	4.71	-	12.00	3.4 ~ 14.4	2860	450 ~ 4200	14.1	12.9
16 + 35 + 42 + 71	0.98	2.13	2.56	4.33	-	10.00	2.3 ~ 11.2	2790	400 ~ 3530	14.0	12.8	1.17	2.56	3.07	5.20	-	12.00	3.4 ~ 14.4	2890	450 ~ 4180	14.2	13.0
16 + 35 + 50 + 50	1.06	2.32	3.31	3.31	-	10.00	2.3 ~ 11.0	2730	470 ~													

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION												HEATING OPERATION											
	Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)					
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V		
16 + 42 + 50 + 50	1.02	2.66	3.16	3.16	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.22	3.18	3.80	3.80	-	12.00	3.4 ~ 14.4	2870	530 ~ 4120	14.1	12.9		
16 + 42 + 50 + 60	0.95	2.50	2.98	3.57	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.14	3.00	3.57	4.29	-	12.00	3.4 ~ 14.4	2870	530 ~ 4120	14.1	12.9		
16 + 42 + 50 + 71	0.89	2.35	2.79	3.97	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.07	2.82	3.35	4.76	-	12.00	3.4 ~ 14.4	2860	540 ~ 4110	14.1	12.9		
16 + 42 + 60 + 60	0.90	2.36	3.37	3.37	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.08	2.84	4.04	4.04	-	12.00	3.4 ~ 14.4	2870	530 ~ 4120	14.1	12.9		
16 + 50 + 50 + 50	0.97	3.01	3.01	3.01	-	10.00	2.3 ~ 11.2	2690	520 ~ 3340	13.5	12.3	1.17	3.61	3.61	3.61	-	12.00	3.4 ~ 14.4	2900	630 ~ 4120	14.2	13.1		
16 + 50 + 50 + 60	0.91	2.84	2.84	3.41	-	10.00	2.3 ~ 11.2	2690	520 ~ 3340	13.5	12.3	1.09	3.41	3.41	4.09	-	12.00	3.4 ~ 14.4	2900	630 ~ 4120	14.2	13.1		
20 + 20 + 20 + 20	2.00	2.00	2.00	2.00	-	8.00	2.3 ~ 10.6	2170	310 ~ 3600	10.9	10.0	3.00	3.00	3.00	3.00	-	12.00	3.4 ~ 14.2	2990	340 ~ 4350	14.7	13.5		
20 + 20 + 20 + 25	2.00	2.00	2.00	2.50	-	8.50	2.3 ~ 10.6	2350	310 ~ 3600	11.8	10.8	2.82	2.82	2.82	3.54	-	12.00	3.4 ~ 14.2	2990	340 ~ 4350	14.7	13.5		
20 + 20 + 20 + 35	2.00	2.00	2.00	3.50	-	9.50	2.3 ~ 10.6	2810	320 ~ 3530	14.1	12.9	2.53	2.53	2.53	4.41	-	12.00	3.4 ~ 14.2	2970	350 ~ 4310	14.6	13.4		
20 + 20 + 20 + 42	1.96	1.96	1.96	4.12	-	10.00	2.3 ~ 10.6	3040	320 ~ 3530	15.2	13.9	2.35	2.35	2.35	4.95	-	12.00	3.4 ~ 14.2	2960	360 ~ 4290	14.5	13.3		
20 + 20 + 20 + 50	1.82	1.82	1.82	4.54	-	10.00	2.3 ~ 10.6	2850	380 ~ 3240	14.3	13.1	2.18	2.18	2.18	5.46	-	12.00	3.4 ~ 14.2	2900	420 ~ 4150	14.2	13.1		
20 + 20 + 20 + 60	1.67	1.67	1.67	4.99	-	10.00	2.3 ~ 10.6	2850	380 ~ 3240	14.3	13.1	2.00	2.00	2.00	6.00	-	12.00	3.4 ~ 14.2	2900	420 ~ 4150	14.2	13.1		
20 + 20 + 20 + 71	1.53	1.53	1.53	5.41	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.83	1.83	1.83	6.51	-	12.00	3.4 ~ 14.4	2890	420 ~ 4190	14.2	13.0		
20 + 20 + 25 + 25	2.00	2.00	2.50	2.50	-	9.00	2.3 ~ 10.6	2580	310 ~ 3600	12.9	11.8	2.67	2.67	3.33	3.33	-	12.00	3.4 ~ 14.2	2990	340 ~ 4350	14.7	13.5		
20 + 20 + 25 + 35	2.00	2.00	2.50	3.50	-	10.00	2.3 ~ 10.6	3040	320 ~ 3530	15.2	13.9	2.40	2.40	3.00	4.20	-	12.00	3.4 ~ 14.2	2970	350 ~ 4310	14.6	13.4		
20 + 20 + 25 + 42	1.87	1.87	2.34	3.92	-	10.00	2.3 ~ 10.6	3040	320 ~ 3530	15.2	13.9	2.24	2.24	2.81	4.71	-	12.00	3.4 ~ 14.2	2960	360 ~ 4290	14.5	13.3		
20 + 20 + 25 + 50	1.74	1.74	2.17	4.35	-	10.00	2.3 ~ 10.6	2850	380 ~ 3240	14.3	13.1	2.09	2.09	2.61	5.21	-	12.00	3.4 ~ 14.2	2900	420 ~ 4150	14.2	13.1		
20 + 20 + 25 + 60	1.60	1.60	2.00	4.80	-	10.00	2.3 ~ 10.8	2850	380 ~ 3380	14.3	13.1	1.92	1.92	2.40	5.76	-	12.00	3.4 ~ 14.2	2900	420 ~ 4150	14.2	13.1		
20 + 20 + 25 + 71	1.47	1.47	1.84	5.22	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.76	1.76	2.22	6.26	-	12.00	3.4 ~ 14.4	2890	420 ~ 4190	14.2	13.0		
20 + 20 + 35 + 35	1.82	1.82	3.18	3.18	-	10.00	2.3 ~ 10.6	2980	320 ~ 3450	14.9	13.7	2.18	2.18	3.82	3.82	-	12.00	3.4 ~ 14.2	2940	370 ~ 4210	14.4	13.2		
20 + 20 + 35 + 42	1.71	1.71	2.99	3.59	-	10.00	2.3 ~ 10.6	2980	320 ~ 3450	14.9	13.7	2.05	2.05	3.59	4.31	-	12.00	3.4 ~ 14.2	2930	370 ~ 4200	14.4	13.2		
20 + 20 + 35 + 50	1.60	1.60	2.80	4.00	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.92	1.92	3.36	4.80	-	12.00	3.4 ~ 14.2	2880	420 ~ 4120	14.1	13.0		
20 + 20 + 35 + 60	1.48	1.48	2.60	4.44	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.78	1.78	3.11	5.33	-	12.00	3.4 ~ 14.4	2880	420 ~ 4170	14.1	13.0		
20 + 20 + 35 + 71	1.37	1.37	2.40	4.86	-	10.00	2.3 ~ 11.0	2780	390 ~ 3390	13.9	12.8	1.64	1.64	2.88	5.84	-	12.00	3.4 ~ 14.4	2870	430 ~ 4160	14.1	12.9		
20 + 20 + 42 + 42	1.61	1.61	3.39	3.39	-	10.00	2.3 ~ 10.8	2980	340 ~ 3600	14.9	13.7	1.94	1.94	4.06	4.06	-	12.00	3.4 ~ 14.2	2920	370 ~ 4190	14.3	13.1		
20 + 20 + 42 + 50	1.52	1.52	3.18	3.78	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.82	1.82	3.82	4.54	-	12.00	3.4 ~ 14.4	2870	430 ~ 4160	14.1	12.9		
20 + 20 + 42 + 60	1.41	1.41	2.96	4.22	-	10.00	2.3 ~ 11.0	2850	390 ~ 3460	14.3	13.1	1.69	1.69	3.55	5.07	-	12.00	3.4 ~ 14.4	2870	430 ~ 4160	14.1	12.9		
20 + 20 + 42 + 71	1.31	1.31	2.75	4.63	-	10.00	2.3 ~ 11.0	2780	390 ~ 3390	13.9	12.8	1.57	1.57	3.29	5.57	-	12.00	3.4 ~ 14.4	2860	440 ~ 4200	14.1	12.9		
20 + 20 + 50 + 50	1.43	1.43	3.57	3.57	-	10.00	2.3 ~ 10.8	2730	440 ~ 3180	13.7	12.5	1.71	1.71	4.29	4.29	-	12.00	3.4 ~ 14.4	2880	510 ~ 4150	14.1	13.0		
20 + 20 + 50 + 60	1.33	1.33	3.34	4.00	-	10.00	2.3 ~ 11.0	2730	440 ~ 3320	13.7	12.5	1.60	1.60	4.00	4.80	-	12.00	3.4 ~ 14.4	2880	510 ~ 4150	14.1	13.0		
20 + 20 + 50 + 71	1.24	1.24	3.11	4.41	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.49	1.49	3.73	5.29	-	12.00	3.4 ~ 14.4	2870	520 ~ 4130	14.1	12.9		
20 + 20 + 60 + 60	1.25	1.25	3.75	3.75	-	10.00	2.3 ~ 11.2	2730	440 ~ 3390	13.7	12.5	1.50	1.50	4.50	4.50	-	12.00	3.4 ~ 14.4	2880	510 ~ 4150	14.1	13.0		
20 + 20 + 60 + 71	1.17	1.17	3.51	4.15	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.40	1.40	4.22	4.98	-	12.00	3.4 ~ 14.4	2870	520 ~ 4130	14.1	12.9		
20 + 20 + 71 + 71	1.10	1.10	3.90	3.90	-	10.00	2.3 ~ 11.2	2740	480 ~ 3330	13.7	12.6	1.32	1.32	4.68	4.68	-	12.00	3.4 ~ 14.4	2870	530 ~ 4120	14.1	12.9		
20 + 25 + 25 + 25	2.00	2.50	2.50	2.50	-	9.50	2.3 ~ 10.6	2810	310 ~ 3600	14.1	12.9	2.52	3.16	3.16	3.16	-	12.00	3.4 ~ 14.2	2990	340 ~ 4350	14.7	13.5		
20 + 25 + 25 + 35	1.91	2.38	2.38	3.33	-	10.00	2.3 ~ 10.6	3040	320 ~ 3530	15.2	13.9	2.29	2.86	2.86	3.99	-	12.00	3.4 ~ 14.2	2970	350 ~ 4310	14.6	13.4		
20 + 25 + 25 + 42	1.79	2.23	2.23	3.75	-	10.00	2.3 ~ 10.6	3040	320 ~ 3530	15.2	13.9	2.14	2.68	2.68	4.50	-	12.00	3.4 ~ 14.2	2960	360 ~ 4290	14.5	13.3		
20 + 25 + 25 + 50	1.67	2.08	2.08	4.17	-	10.00	2.3 ~ 10.6	2850	380 ~ 3240	14.3	13.1	2.00	2.50	2.50	5.00	-	12.00	3.4 ~ 14.2	2900	420 ~ 4150	14.2	13.1		
20 + 25 + 25 + 60	1.54	1.92	1.92	4.62	-	10.00	2.3 ~ 10.8	2850	380 ~ 3380	14.3	13.1	1.85	2.31	2.31	5.53	-	12.00	3.4 ~ 14.4	2900	420 ~ 4210	14.2	13.1		
20 + 25 + 25 + 71	1.42	1.77	1.77	5.04	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.70	2.13	2.13	6.04	-	12.00	3.4 ~ 14.4	2890	420 ~ 4190	14.2	13.0		
20 + 25 + 35 + 35	1.75	2.17	3.04	3.04	-	10.00	2.3 ~ 10.6	2980	320 ~ 3450	14.9	13.7	2.09	2.61	3.65	3.65	-	12.00	3.4 ~ 14.2	2940	370 ~ 4210	14.4	13.2		
20 + 25 + 35 + 42	1.64	2.05	2.87	3.44	-	10.00	2.3 ~ 10.8	2980	320 ~ 3600	14.9	13.7	1.97	2.46	3.44	4.13	-	12.00	3.4 ~ 14.2	2930	370 ~ 4200	14.4	13.2		
20 + 25 + 35 + 50	1.54	1.92	2.69	3.85	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.85	2.31	3.23	4.61	-	12.00	3.4 ~ 14.4	2880	420 ~ 4170	14.1	13.0		
20 + 25 + 35 + 60	1.43	1.79	2.50	4.28	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.72	2.14	3.00	5.14	-	12.00	3.4 ~ 14.4	2880	420 ~ 4170	14.1	13.0		
20 + 25 + 35 + 71	1.32	1.66	2.32	4.70	-	10.00	2.3 ~ 11.0	2780	390 ~ 3390	13.9	12.8	1.59	1.99	2.78	5.64	-	12.00	3.4 ~ 14.4	2870	430 ~ 4160	14.1	12.9		
20 + 25 + 42 + 42	1.55	1.93	3.26	3.26	-	10.00	2.3 ~ 10.8	2980	340 ~ 3600	14.9	13.7	1.86	2.32	3.91	3.91	-	12.00	3.4 ~ 14.4	2920	370 ~ 4310	14.3	13.1		
20 + 25 + 42 + 50	1.46	1.82	3.07	3.65	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	1.75	2.19	3.68	4.38	-	12.00	3.4 ~ 14.4	2870	430 ~ 4160	14.1	12.9		
20 + 25 + 42 + 60	1.36	1.70	2.86	4.08	-	10.00	2.3 ~ 11.0	2850	390 ~ 3460	14.3	13.1	1.63	2.04	3.43	4.90	-	12.00	3.4 ~ 14.4	2870	430 ~ 4160	14.1	12.9		
20 + 25 + 42 + 71	1.27	1.58	2.66	4.49	-	10.00	2.3 ~ 11.2	2780	390 ~ 3530	13.9	12.8	1.52	1.90	3.19	5.39	-	12.00	3.4 ~ 14.4	2860	440 ~ 4200	14.1	12.9		
20 + 25 + 50 + 50	1.38	1.72	3.45	3.45	-	10.00	2.3 ~ 11.0	2730	440 ~ 3320	13.7	12.5	1.66	2.06	4.14	4.14	-	12.00	3.4 ~ 14.4	2880	510 ~ 4150	14.1	13.0		
20 + 25 + 50 + 60	1.29	1.61	3.23	3.87	-	10.00	2.3 ~ 11.0	2730	440 ~ 3320	13.7	12.5	1.55	1.94	3.87	4.64	-								

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor unit capacity		COOLING OPERATION											HEATING OPERATION										
		Cooling Capacity (kW)						Input Power (W)		Current (A)			Heating Capacity (kW)						Input Power (W)		Current (A)		
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
4 Rooms	20 + 35 + 42 + 42	1.44	2.52	3.02	3.02	-	10.00	2.3 ~ 10.8	2980	350 ~ 3530	14.9	13.7	1.73	3.01	3.63	3.63	-	12.00	3.4 ~ 14.4	2940	390 ~ 4270	14.4	13.2
	20 + 35 + 42 + 50	1.36	2.38	2.86	3.40	-	10.00	2.3 ~ 11.0	2780	390 ~ 3390	13.9	12.8	1.63	2.86	3.43	4.08	-	12.00	3.4 ~ 14.4	2900	450 ~ 4190	14.2	13.1
	20 + 35 + 42 + 60	1.27	2.23	2.68	3.82	-	10.00	2.3 ~ 11.0	2780	390 ~ 3390	13.9	12.8	1.53	2.68	3.21	4.58	-	12.00	3.4 ~ 14.4	2900	450 ~ 4190	14.2	13.1
	20 + 35 + 42 + 71	1.19	2.08	2.50	4.23	-	10.00	2.3 ~ 11.2	2790	420 ~ 3540	14.0	12.8	1.43	2.50	3.00	5.07	-	12.00	3.4 ~ 14.4	2890	460 ~ 4170	14.2	13.0
	20 + 35 + 50 + 50	1.29	2.25	3.23	3.23	-	10.00	2.3 ~ 11.0	2730	470 ~ 3250	13.7	12.5	1.55	2.71	3.87	3.87	-	12.00	3.4 ~ 14.4	2870	530 ~ 4120	14.1	12.9
	20 + 35 + 50 + 60	1.21	2.12	3.03	3.64	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.45	2.55	3.64	4.36	-	12.00	3.4 ~ 14.4	2870	530 ~ 4120	14.1	12.9
	20 + 35 + 50 + 71	1.14	1.99	2.84	4.03	-	10.00	2.3 ~ 11.2	2740	480 ~ 3400	13.7	12.6	1.36	2.39	3.41	4.84	-	12.00	3.4 ~ 14.4	2860	540 ~ 4110	14.1	12.9
	20 + 35 + 60 + 60	1.14	2.00	3.43	3.43	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.38	2.40	4.11	4.11	-	12.00	3.4 ~ 14.4	2870	530 ~ 4120	14.1	12.9
	20 + 42 + 42 + 42	1.36	2.88	2.88	2.88	-	10.00	2.3 ~ 11.0	2910	350 ~ 3600	14.6	13.3	1.65	3.45	3.45	3.45	-	12.00	3.4 ~ 14.4	2940	390 ~ 4260	14.4	13.2
	20 + 42 + 42 + 50	1.30	2.73	2.73	3.24	-	10.00	2.3 ~ 11.0	2780	390 ~ 3390	13.9	12.8	1.56	3.27	3.27	3.90	-	12.00	3.4 ~ 14.4	2890	450 ~ 4180	14.2	13.0
	20 + 42 + 42 + 60	1.22	2.56	2.56	3.66	-	10.00	2.3 ~ 11.2	2780	390 ~ 3530	13.9	12.8	1.47	3.07	3.07	4.39	-	12.00	3.4 ~ 14.4	2890	450 ~ 4180	14.2	13.0
	20 + 42 + 42 + 71	1.14	2.40	2.40	4.06	-	10.00	2.3 ~ 11.2	2790	420 ~ 3460	14.0	12.8	1.37	2.88	2.88	4.87	-	12.00	3.4 ~ 14.4	2880	460 ~ 4160	14.1	13.0
	20 + 42 + 50 + 50	1.23	2.59	3.09	3.09	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.49	3.11	3.70	3.70	-	12.00	3.4 ~ 14.4	2860	540 ~ 4110	14.1	12.9
	20 + 42 + 50 + 60	1.16	2.44	2.91	3.49	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.40	2.93	3.49	4.18	-	12.00	3.4 ~ 14.4	2860	540 ~ 4110	14.1	12.9
	20 + 42 + 50 + 71	1.09	2.30	2.73	3.88	-	10.00	2.3 ~ 11.2	2740	480 ~ 3330	13.7	12.6	1.31	2.75	3.28	4.66	-	12.00	3.4 ~ 14.4	2900	550 ~ 4100	14.2	13.1
	20 + 42 + 60 + 60	1.10	2.30	3.30	3.30	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.32	2.76	3.96	3.96	-	12.00	3.4 ~ 14.4	2860	540 ~ 4110	14.1	12.9
	20 + 50 + 50 + 50	1.18	2.94	2.94	2.94	-	10.00	2.3 ~ 11.2	2690	550 ~ 3340	13.5	12.3	1.41	3.53	3.53	3.53	-	12.00	3.4 ~ 14.4	2930	630 ~ 4110	14.4	13.2
	20 + 50 + 50 + 60	1.11	2.78	2.78	3.33	-	10.00	2.3 ~ 11.2	2690	550 ~ 3340	13.5	12.3	1.34	3.33	3.33	4.00	-	12.00	3.4 ~ 14.4	2930	630 ~ 4110	14.4	13.2
	25 + 25 + 25 + 25	2.50	2.50	2.50	2.50	-	10.00	2.3 ~ 10.6	3110	310 ~ 3600	15.6	14.3	3.00	3.00	3.00	3.00	-	12.00	3.4 ~ 14.2	2990	340 ~ 4350	14.7	13.5
	25 + 25 + 25 + 35	2.27	2.27	2.27	3.19	-	10.00	2.3 ~ 10.6	3040	320 ~ 3530	15.2	13.9	2.73	2.73	2.73	3.81	-	12.00	3.4 ~ 14.2	2970	350 ~ 4310	14.6	13.4
	25 + 25 + 25 + 42	2.14	2.14	2.14	3.58	-	10.00	2.3 ~ 10.6	3040	320 ~ 3530	15.2	13.9	2.56	2.56	2.56	4.32	-	12.00	3.4 ~ 14.2	2960	360 ~ 4290	14.5	13.3
	25 + 25 + 25 + 50	2.00	2.00	2.00	4.00	-	10.00	2.3 ~ 10.8	2850	380 ~ 3380	14.3	13.1	2.40	2.40	2.40	4.80	-	12.00	3.4 ~ 14.2	2900	420 ~ 4150	14.2	13.1
	25 + 25 + 25 + 60	1.85	1.85	1.85	4.45	-	10.00	2.3 ~ 10.8	2850	380 ~ 3380	14.3	13.1	2.22	2.22	2.22	5.34	-	12.00	3.4 ~ 14.4	2900	420 ~ 4210	14.2	13.1
	25 + 25 + 25 + 71	1.71	1.71	1.71	4.87	-	10.00	2.3 ~ 11.0	2850	390 ~ 3460	14.3	13.1	2.05	2.05	2.05	5.85	-	12.00	3.4 ~ 14.4	2890	420 ~ 4190	14.2	13.0
	25 + 25 + 35 + 35	2.08	2.08	2.92	2.92	-	10.00	2.3 ~ 10.6	2980	320 ~ 3450	14.9	13.7	2.50	2.50	3.50	3.50	-	12.00	3.4 ~ 14.2	2940	370 ~ 4210	14.4	13.2
	25 + 25 + 35 + 42	1.97	1.97	2.76	3.30	-	10.00	2.3 ~ 10.8	2980	320 ~ 3600	14.9	13.7	2.36	2.36	3.31	3.97	-	12.00	3.4 ~ 14.2	2930	370 ~ 4200	14.4	13.2
	25 + 25 + 35 + 50	1.85	1.85	2.60	3.70	-	10.00	2.3 ~ 10.8	2850	390 ~ 3310	14.3	13.1	2.22	2.22	3.12	4.44	-	12.00	3.4 ~ 14.4	2880	420 ~ 4170	14.1	13.0
	25 + 25 + 35 + 60	1.72	1.72	2.42	4.14	-	10.00	2.3 ~ 11.0	2850	390 ~ 3460	14.3	13.1	2.07	2.07	2.90	4.96	-	12.00	3.4 ~ 14.4	2880	420 ~ 4170	14.1	13.0
	25 + 25 + 35 + 71	1.60	1.60	2.25	4.55	-	10.00	2.3 ~ 11.0	2780	390 ~ 3390	13.9	12.8	1.92	1.92	2.70	5.46	-	12.00	3.4 ~ 14.4	2870	430 ~ 4160	14.1	12.9
	25 + 25 + 42 + 42	1.87	1.87	3.13	3.13	-	10.00	2.3 ~ 10.8	2980	340 ~ 3600	14.9	13.7	2.24	2.24	3.76	3.76	-	12.00	3.4 ~ 14.4	2920	370 ~ 4310	14.3	13.1
	25 + 25 + 42 + 50	1.76	1.76	2.96	3.52	-	10.00	2.3 ~ 11.0	2850	390 ~ 3460	14.3	13.1	2.11	2.11	3.55	4.23	-	12.00	3.4 ~ 14.4	2870	430 ~ 4160	14.1	12.9
	25 + 25 + 42 + 60	1.64	1.64	2.77	3.95	-	10.00	2.3 ~ 11.0	2850	390 ~ 3460	14.3	13.1	1.97	1.97	3.32	4.74	-	12.00	3.4 ~ 14.4	2870	430 ~ 4160	14.1	12.9
	25 + 25 + 42 + 71	1.53	1.53	2.58	4.36	-	10.00	2.3 ~ 11.2	2780	390 ~ 3530	13.9	12.8	1.84	1.84	3.09	5.23	-	12.00	3.4 ~ 14.4	2860	440 ~ 4200	14.1	12.9
	25 + 25 + 50 + 50	1.67	1.67	3.33	3.33	-	10.00	2.3 ~ 11.0	2730	440 ~ 3320	13.7	12.5	2.00	2.00	4.00	4.00	-	12.00	3.4 ~ 14.4	2880	510 ~ 4150	14.1	13.0
	25 + 25 + 50 + 60	1.56	1.56	3.13	3.75	-	10.00	2.3 ~ 11.2	2730	440 ~ 3390	13.7	12.5	1.88	1.88	3.75	4.49	-	12.00	3.4 ~ 14.4	2880	510 ~ 4150	14.1	13.0
	25 + 25 + 50 + 71	1.46	1.46	2.93	4.15	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.75	1.75	3.52	4.98	-	12.00	3.4 ~ 14.4	2870	520 ~ 4130	14.1	12.9
	25 + 25 + 60 + 60	1.47	1.47	3.53	3.53	-	10.00	2.3 ~ 11.2	2730	440 ~ 3390	13.7	12.5	1.76	1.76	4.24	4.24	-	12.00	3.4 ~ 14.4	2880	510 ~ 4150	14.1	13.0
	25 + 25 + 60 + 71	1.38	1.38	3.32	3.92	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.66	1.66	3.98	4.70	-	12.00	3.4 ~ 14.4	2870	520 ~ 4130	14.1	12.9
	25 + 35 + 35 + 35	1.93	2.69	2.69	2.69	-	10.00	2.3 ~ 10.8	2980	350 ~ 3530	14.9	13.7	2.31	3.23	3.23	3.23	-	12.00	3.4 ~ 14.4	2920	370 ~ 4300	14.3	13.1
	25 + 35 + 35 + 42	1.83	2.55	2.55	3.07	-	10.00	2.3 ~ 10.8	2980	350 ~ 3530	14.9	13.7	2.19	3.07	3.07	3.67	-	12.00	3.4 ~ 14.4	2950	370 ~ 4280	14.5	13.3
25 + 35 + 35 + 50	1.73	2.41	2.41	3.45	-	10.00	2.3 ~ 11.0	2780	390 ~ 3460	13.9	12.8	2.07	2.90	2.90	4.13	-	12.00	3.4 ~ 14.4	2860	450 ~ 4200	14.1	12.9	
25 + 35 + 35 + 60	1.61	2.26	2.26	3.87	-	10.00	2.3 ~ 11.0	2780	390 ~ 3460	13.9	12.8	1.94	2.71	2.71	4.64	-	12.00	3.4 ~ 14.4	2860	450 ~ 4200	14.1	12.9	
25 + 35 + 35 + 71	1.51	2.11	2.11	4.27	-	10.00	2.3 ~ 11.2	2790	420 ~ 3530	14.0	12.8	1.81	2.53	2.53	5.13	-	12.00	3.4 ~ 14.4	2890	450 ~ 4180	14.2	13.0	
25 + 35 + 42 + 42	1.74	2.42	2.92	2.92	-	10.00	2.3 ~ 11.0	2980	350 ~ 3680	14.9	13.7	2.08	2.92	3.50	3.50	-	12.00	3.4 ~ 14.4	2940	390 ~ 4270	14.4	13.2	
25 + 35 + 42 + 50	1.65	2.30	2.76	3.29	-	10.00	2.3 ~ 11.0	2780	390 ~ 3390	13.9	12.8	1.97	2.76	3.32	3.95	-	12.00	3.4 ~ 14.4	2900	450 ~ 4190	14.2	13.1	
25 + 35 + 42 + 60	1.55	2.16	2.59	3.70	-	10.00	2.3 ~ 11.2	2780	390 ~ 3530	13.9	12.8	1.86	2.59	3.11	4.44	-	12.00	3.4 ~ 14.4	2900	450 ~ 4190	14.2	13.1	
25 + 35 + 42 + 71	1.45	2.02	2.43	4.10	-	10.00	2.3 ~ 11.2	2790	420 ~ 3540	14.0	12.8	1.74	2.43	2.91	4.92	-	12.00	3.4 ~ 14.4	2890	460 ~ 4170	14.2	13.0	
25 + 35 + 50 + 50	1.56	2.18	3.13	3.13	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.88	2.62	3.75	3.75	-	12.00	3.4 ~ 14.4	2870	530 ~ 4120	14.1	12.9	
25 + 35 + 50 + 60	1.47	2.06	2.94	3.53	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	1.76	2.47	3.53	4.24	-	12.00	3.4 ~ 14.4	2870	530 ~ 4120	14.1	12.9	
25 + 35 + 50 + 71	1.39	1.93	2.76	3.92	-	10.00	2.3 ~ 11.2	2740	480 ~ 3400	13.7	12.6	1.66	2.32	3.31	4.71	-	12.00	3.4 ~ 14.4	2860	540 ~ 4110	14.1	12.9	
25 + 35 + 60 + 60	1.40	1.94	3.33	3.33	-	10.00	2.3 ~ 11.2</																

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor unit capacity		COOLING OPERATION											HEATING OPERATION										
		Cooling Capacity (kW)						Input Power (W)		Current (A)			Heating Capacity (kW)						Input Power (W)		Current (A)		
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
4 Rooms	35 + 35 + 35 + 42	2.38	2.38	2.38	2.86	-	10.00	2.3 ~ 11.0	2910	350 ~ 3600	14.6	13.3	2.86	2.86	2.86	3.42	-	12.00	3.4 ~ 14.4	2930	390 ~ 4250	14.4	13.2
	35 + 35 + 35 + 50	2.26	2.26	2.26	3.22	-	10.00	2.3 ~ 11.0	2780	390 ~ 3390	13.9	12.8	2.71	2.71	2.71	3.87	-	12.00	3.4 ~ 14.4	2890	460 ~ 4170	14.2	13.0
	35 + 35 + 35 + 60	2.12	2.12	2.12	3.64	-	10.00	2.3 ~ 11.2	2780	390 ~ 3530	13.9	12.8	2.55	2.55	2.55	4.35	-	12.00	3.4 ~ 14.4	2890	460 ~ 4170	14.2	13.0
	35 + 35 + 35 + 71	1.99	1.99	1.99	4.03	-	10.00	2.3 ~ 11.2	2790	430 ~ 3460	14.0	12.8	2.39	2.39	2.39	4.83	-	12.00	3.4 ~ 14.4	2880	470 ~ 4150	14.1	13.0
	35 + 35 + 42 + 42	2.27	2.27	2.73	2.73	-	10.00	2.3 ~ 11.0	2910	350 ~ 3600	14.6	13.3	2.73	2.73	3.27	3.27	-	12.00	3.4 ~ 14.4	2920	400 ~ 4240	14.3	13.1
	35 + 35 + 42 + 50	2.16	2.16	2.59	3.09	-	10.00	2.3 ~ 11.2	2790	420 ~ 3530	14.0	12.8	2.59	2.59	3.12	3.70	-	12.00	3.4 ~ 14.4	2880	470 ~ 4160	14.1	13.0
	35 + 35 + 42 + 60	2.03	2.03	2.45	3.49	-	10.00	2.3 ~ 11.2	2790	420 ~ 3530	14.0	12.8	2.44	2.44	2.93	4.19	-	12.00	3.4 ~ 14.4	2880	470 ~ 4160	14.1	13.0
	35 + 35 + 42 + 71	1.91	1.91	2.30	3.88	-	10.00	2.3 ~ 11.2	2790	430 ~ 3460	14.0	12.8	2.30	2.30	2.75	4.65	-	12.00	3.4 ~ 14.4	2870	480 ~ 4140	14.1	12.9
	35 + 35 + 50 + 50	2.06	2.06	2.94	2.94	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	2.47	2.47	3.53	3.53	-	12.00	3.4 ~ 14.4	2890	550 ~ 4090	14.2	13.0
	35 + 35 + 50 + 60	1.94	1.94	2.79	3.33	-	10.00	2.3 ~ 11.2	2730	470 ~ 3400	13.7	12.5	2.33	2.33	3.33	4.01	-	12.00	3.4 ~ 14.4	2890	550 ~ 4090	14.2	13.0
	35 + 42 + 42 + 42	2.17	2.61	2.61	2.61	-	10.00	2.3 ~ 11.2	2910	350 ~ 3760	14.6	13.3	2.61	3.13	3.13	3.13	-	12.00	3.4 ~ 14.4	2910	400 ~ 4220	14.3	13.1
	35 + 42 + 42 + 50	2.07	2.49	2.49	2.95	-	10.00	2.3 ~ 11.2	2790	420 ~ 3540	14.0	12.8	2.49	2.98	2.98	3.55	-	12.00	3.4 ~ 14.4	2870	480 ~ 4140	14.1	12.9
	35 + 42 + 42 + 60	1.96	2.35	2.35	3.34	-	10.00	2.3 ~ 11.2	2790	420 ~ 3540	14.0	12.8	2.35	2.82	2.82	4.01	-	12.00	3.4 ~ 14.4	2870	480 ~ 4140	14.1	12.9
	35 + 42 + 50 + 50	1.99	2.37	2.82	2.82	-	10.00	2.3 ~ 11.2	2740	470 ~ 3400	13.7	12.6	2.37	2.85	3.39	3.39	-	12.00	3.4 ~ 14.4	2890	560 ~ 4080	14.2	13.0
42 + 42 + 42 + 42	2.50	2.50	2.50	2.50	-	10.00	2.3 ~ 11.2	2910	350 ~ 3680	14.6	13.3	3.00	3.00	3.00	3.00	-	12.00	3.4 ~ 14.4	2900	400 ~ 4210	14.2	13.1	
42 + 42 + 42 + 50	2.39	2.39	2.39	2.83	-	10.00	2.3 ~ 11.2	2790	420 ~ 3460	14.0	12.8	2.86	2.86	2.86	3.42	-	12.00	3.4 ~ 14.4	2860	480 ~ 4130	14.1	12.9	
5 Rooms	16 + 16 + 16 + 16 + 16	1.60	1.60	1.60	1.60	1.60	8.00	2.3 ~ 11.5	1990	390 ~ 3810	9.8	9.0	2.40	2.40	2.40	2.40	2.40	12.00	3.4 ~ 14.5	3050	540 ~ 4320	14.4	13.4
	16 + 16 + 16 + 16 + 20	1.60	1.60	1.60	1.60	2.00	8.40	2.3 ~ 11.5	2100	390 ~ 3810	10.3	9.5	2.29	2.29	2.29	2.29	2.84	12.00	3.4 ~ 14.5	3040	560 ~ 4310	14.4	13.3
	16 + 16 + 16 + 16 + 25	1.60	1.60	1.60	1.60	2.50	8.90	2.3 ~ 11.5	2270	390 ~ 3810	11.2	10.3	2.16	2.16	2.16	2.16	3.36	12.00	3.4 ~ 14.5	3040	560 ~ 4310	14.4	13.3
	16 + 16 + 16 + 16 + 35	1.60	1.60	1.60	1.60	3.50	9.90	2.3 ~ 11.5	2690	420 ~ 3740	13.2	12.2	1.94	1.94	1.94	1.94	4.24	12.00	3.4 ~ 14.5	3070	570 ~ 4270	14.5	13.4
	16 + 16 + 16 + 16 + 42	1.51	1.51	1.51	1.51	3.96	10.00	2.3 ~ 11.5	2750	430 ~ 3740	13.5	12.5	1.81	1.81	1.81	1.81	4.76	12.00	3.4 ~ 14.5	3060	580 ~ 4320	14.5	13.4
	16 + 16 + 16 + 16 + 50	1.40	1.40	1.40	1.40	4.40	10.00	2.3 ~ 11.5	2700	480 ~ 3600	13.3	12.3	1.68	1.68	1.68	1.68	5.28	12.00	3.4 ~ 14.5	3080	680 ~ 4250	14.6	13.5
	16 + 16 + 16 + 16 + 60	1.29	1.29	1.29	1.29	4.84	10.00	2.3 ~ 11.5	2700	480 ~ 3600	13.3	12.3	1.55	1.55	1.55	1.55	5.80	12.00	3.4 ~ 14.5	3080	680 ~ 4250	14.6	13.5
	16 + 16 + 16 + 16 + 71	1.19	1.19	1.19	1.19	5.24	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.42	1.42	1.42	1.42	6.32	12.00	3.4 ~ 14.5	3070	700 ~ 4240	14.5	13.4
	16 + 16 + 16 + 20 + 20	1.60	1.60	1.60	2.00	2.00	8.80	2.3 ~ 11.5	2270	420 ~ 3730	11.2	10.3	2.18	2.18	2.18	2.73	2.73	12.00	3.4 ~ 14.5	3040	560 ~ 4290	14.4	13.3
	16 + 16 + 16 + 20 + 25	1.60	1.60	1.60	2.00	2.50	9.30	2.3 ~ 11.5	2440	420 ~ 3730	12.0	11.1	2.06	2.06	2.06	2.59	3.23	12.00	3.4 ~ 14.5	3040	560 ~ 4290	14.4	13.3
	16 + 16 + 16 + 20 + 35	1.55	1.55	1.55	1.95	3.40	10.00	2.3 ~ 11.5	2750	430 ~ 3740	13.5	12.5	1.86	1.86	1.86	2.34	4.08	12.00	3.4 ~ 14.5	3060	580 ~ 4320	14.5	13.4
	16 + 16 + 16 + 20 + 42	1.45	1.45	1.45	1.83	3.82	10.00	2.3 ~ 11.5	2750	430 ~ 3740	13.5	12.5	1.75	1.75	1.75	2.18	4.57	12.00	3.4 ~ 14.5	3050	600 ~ 4310	14.4	13.4
	16 + 16 + 16 + 20 + 50	1.36	1.36	1.36	1.69	4.23	10.00	2.3 ~ 11.5	2710	510 ~ 3600	13.3	12.3	1.63	1.63	1.63	2.03	5.08	12.00	3.4 ~ 14.5	3070	700 ~ 4240	14.5	13.4
	16 + 16 + 16 + 20 + 60	1.25	1.25	1.25	1.56	4.69	10.00	2.3 ~ 11.5	2710	510 ~ 3600	13.3	12.3	1.50	1.50	1.50	1.88	5.62	12.00	3.4 ~ 14.5	3070	700 ~ 4240	14.5	13.4
	16 + 16 + 16 + 20 + 71	1.15	1.15	1.15	1.44	5.11	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.38	1.38	1.38	1.73	6.13	12.00	3.4 ~ 14.5	3060	710 ~ 4230	14.5	13.4
	16 + 16 + 16 + 25 + 25	1.60	1.60	1.60	2.50	2.50	9.80	2.3 ~ 11.5	2690	420 ~ 3730	13.2	12.2	1.96	1.96	1.96	3.06	3.06	12.00	3.4 ~ 14.5	3040	560 ~ 4290	14.4	13.3
	16 + 16 + 16 + 25 + 35	1.48	1.48	1.48	2.32	3.24	10.00	2.3 ~ 11.5	2750	430 ~ 3740	13.5	12.5	1.78	1.78	1.78	2.78	3.88	12.00	3.4 ~ 14.5	3060	580 ~ 4320	14.5	13.4
	16 + 16 + 16 + 25 + 42	1.39	1.39	1.39	2.18	3.65	10.00	2.3 ~ 11.5	2750	430 ~ 3740	13.5	12.5	1.67	1.67	1.67	2.61	4.38	12.00	3.4 ~ 14.5	3050	600 ~ 4310	14.4	13.4
	16 + 16 + 16 + 25 + 50	1.30	1.30	1.30	2.03	4.07	10.00	2.3 ~ 11.5	2710	510 ~ 3600	13.3	12.3	1.56	1.56	1.56	2.44	4.88	12.00	3.4 ~ 14.5	3070	700 ~ 4240	14.5	13.4
	16 + 16 + 16 + 25 + 60	1.20	1.20	1.20	1.89	4.51	10.00	2.3 ~ 11.5	2710	510 ~ 3600	13.3	12.3	1.44	1.44	1.44	2.27	5.41	12.00	3.4 ~ 14.5	3070	700 ~ 4240	14.5	13.4
	16 + 16 + 16 + 25 + 71	1.11	1.11	1.11	1.74	4.93	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.33	1.33	1.33	2.09	5.92	12.00	3.4 ~ 14.5	3060	710 ~ 4230	14.5	13.4
	16 + 16 + 16 + 35 + 35	1.36	1.36	1.36	2.96	2.96	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	1.62	1.62	1.62	3.57	3.57	12.00	3.4 ~ 14.5	3040	600 ~ 4290	14.4	13.3
	16 + 16 + 16 + 35 + 42	1.28	1.28	1.28	2.80	3.36	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	1.54	1.54	1.54	3.36	4.02	12.00	3.4 ~ 14.5	3040	610 ~ 4280	14.4	13.3
	16 + 16 + 16 + 35 + 50	1.20	1.20	1.20	2.64	3.76	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.44	1.44	1.44	3.17	4.51	12.00	3.4 ~ 14.5	3060	720 ~ 4270	14.5	13.4
	16 + 16 + 16 + 35 + 60	1.12	1.12	1.12	2.45	4.19	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.34	1.34	1.34	2.95	5.03	12.00	3.4 ~ 14.5	3060	720 ~ 4270	14.5	13.4
	16 + 16 + 16 + 35 + 71	1.04	1.04	1.04	2.27	4.61	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.25	1.25	1.25	2.73	5.52	12.00	3.4 ~ 14.5	3090	740 ~ 4260	14.6	13.5
	16 + 16 + 16 + 42 + 42	1.22	1.22	1.22	3.17	3.17	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	1.46	1.46	1.46	3.81	3.81	12.00	3.4 ~ 14.5	3030	630 ~ 4270	14.3	13.3
	16 + 16 + 16 + 42 + 50	1.14	1.14	1.14	3.01	3.57	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.37	1.37	1.37	3.60	4.29	12.00	3.4 ~ 14.5	3050	740 ~ 4260	14.4	13.4
	16 + 16 + 16 + 42 + 60	1.07	1.07	1.07	2.80	3.99	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.28	1.28	1.28	3.36	4.80	12.00	3.4 ~ 14.5	3050	740 ~ 4260	14.4	13.4
	16 + 16 + 16																						

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION										
	Cooling Capacity (kW)						Input Power (W)		Current (A)			Heating Capacity (kW)						Input Power (W)		Current (A)		
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
16 + 16 + 20 + 25 + 35	1.43	1.43	1.79	2.23	3.12	10.00	2.3 ~ 11.5	2750	430 ~ 3740	13.5	12.5	1.71	1.71	2.15	2.68	3.75	12.00	3.4 ~ 14.5	3050	600 ~ 4310	14.4	13.4
16 + 16 + 20 + 25 + 42	1.34	1.34	1.69	2.10	3.53	10.00	2.3 ~ 11.5	2750	430 ~ 3660	13.5	12.5	1.61	1.61	2.02	2.52	4.24	12.00	3.4 ~ 14.5	3050	600 ~ 4300	14.4	13.4
16 + 16 + 20 + 25 + 50	1.26	1.26	1.57	1.97	3.94	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.51	1.51	1.90	2.36	4.72	12.00	3.4 ~ 14.5	3070	710 ~ 4230	14.5	13.4
16 + 16 + 20 + 25 + 60	1.17	1.17	1.46	1.82	4.38	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.40	1.40	1.75	2.19	5.26	12.00	3.4 ~ 14.5	3070	710 ~ 4230	14.5	13.4
16 + 16 + 20 + 25 + 71	1.08	1.08	1.35	1.69	4.80	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.30	1.30	1.62	2.03	5.75	12.00	3.4 ~ 14.5	3060	720 ~ 4220	14.5	13.4
16 + 16 + 20 + 35 + 35	1.31	1.31	1.64	2.87	2.87	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	1.57	1.57	1.98	3.44	3.44	12.00	3.4 ~ 14.5	3040	610 ~ 4280	14.4	13.3
16 + 16 + 20 + 35 + 42	1.24	1.24	1.55	2.71	3.26	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	1.49	1.49	1.86	3.26	3.90	12.00	3.4 ~ 14.5	3030	630 ~ 4270	14.3	13.3
16 + 16 + 20 + 35 + 50	1.17	1.17	1.46	2.55	3.65	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.40	1.40	1.75	3.07	4.38	12.00	3.4 ~ 14.5	3050	740 ~ 4260	14.4	13.4
16 + 16 + 20 + 35 + 60	1.09	1.09	1.36	2.38	4.08	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.31	1.31	1.63	2.86	4.89	12.00	3.4 ~ 14.5	3050	740 ~ 4260	14.4	13.4
16 + 16 + 20 + 35 + 71	1.01	1.01	1.27	2.22	4.49	10.00	2.3 ~ 11.5	2650	520 ~ 3540	13.0	12.0	1.22	1.22	1.52	2.66	5.38	12.00	3.4 ~ 14.5	3090	750 ~ 4250	14.6	13.5
16 + 16 + 20 + 42 + 42	1.18	1.18	1.46	3.09	3.09	10.00	2.3 ~ 11.5	2690	440 ~ 3670	13.2	12.2	1.41	1.41	1.76	3.71	3.71	12.00	3.4 ~ 14.5	3070	640 ~ 4260	14.5	13.4
16 + 16 + 20 + 42 + 50	1.11	1.11	1.39	2.92	3.47	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.33	1.33	1.67	3.50	4.17	12.00	3.4 ~ 14.5	3090	750 ~ 4250	14.6	13.5
16 + 16 + 20 + 42 + 60	1.04	1.04	1.30	2.73	3.89	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.25	1.25	1.56	3.27	4.67	12.00	3.4 ~ 14.5	3090	750 ~ 4250	14.6	13.5
16 + 16 + 20 + 42 + 71	0.97	0.97	1.21	2.55	4.30	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.17	1.17	1.45	3.05	5.16	12.00	3.4 ~ 14.5	3080	760 ~ 4240	14.6	13.5
16 + 16 + 20 + 50 + 50	1.05	1.05	1.32	3.29	3.29	10.00	2.3 ~ 11.5	2670	610 ~ 3480	13.1	12.1	1.26	1.26	1.58	3.95	3.95	12.00	3.4 ~ 14.5	3130	870 ~ 4270	14.8	13.7
16 + 16 + 20 + 50 + 60	0.99	0.99	1.23	3.09	3.70	10.00	2.3 ~ 11.5	2670	610 ~ 3480	13.1	12.1	1.19	1.19	1.48	3.70	4.44	12.00	3.4 ~ 14.5	3130	870 ~ 4270	14.8	13.7
16 + 16 + 20 + 50 + 71	0.92	0.92	1.17	2.89	4.10	10.00	2.3 ~ 11.5	2680	620 ~ 3490	13.2	12.2	1.11	1.11	1.39	3.47	4.92	12.00	3.4 ~ 14.5	3170	900 ~ 4310	15.0	13.9
16 + 16 + 20 + 60 + 60	0.93	0.93	1.16	3.49	3.49	10.00	2.3 ~ 11.5	2670	610 ~ 3480	13.1	12.1	1.12	1.12	1.40	4.18	4.18	12.00	3.4 ~ 14.5	3130	870 ~ 4270	14.8	13.7
16 + 16 + 20 + 60 + 71	0.87	0.87	1.10	3.28	3.88	10.00	2.3 ~ 11.5	2680	620 ~ 3490	13.2	12.2	1.05	1.05	1.31	3.93	4.66	12.00	3.4 ~ 14.5	3170	900 ~ 4310	15.0	13.9
16 + 16 + 25 + 25 + 25	1.49	1.49	2.34	2.34	2.34	10.00	2.3 ~ 11.5	2750	420 ~ 3740	13.5	12.5	1.80	1.80	2.80	2.80	2.80	12.00	3.4 ~ 14.5	3070	570 ~ 4280	14.5	13.4
16 + 16 + 25 + 25 + 35	1.37	1.37	2.14	2.14	2.98	10.00	2.3 ~ 11.5	2750	430 ~ 3740	13.5	12.5	1.64	1.64	2.56	2.56	3.60	12.00	3.4 ~ 14.5	3050	600 ~ 4310	14.4	13.4
16 + 16 + 25 + 25 + 42	1.29	1.29	2.02	2.02	3.38	10.00	2.3 ~ 11.5	2750	430 ~ 3660	13.5	12.5	1.55	1.55	2.42	2.42	4.06	12.00	3.4 ~ 14.5	3050	600 ~ 4300	14.4	13.4
16 + 16 + 25 + 25 + 50	1.21	1.21	1.89	1.89	3.80	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.45	1.45	2.27	2.27	4.56	12.00	3.4 ~ 14.5	3070	710 ~ 4230	14.5	13.4
16 + 16 + 25 + 25 + 60	1.13	1.13	1.76	1.76	4.22	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.35	1.35	2.11	2.11	5.08	12.00	3.4 ~ 14.5	3070	710 ~ 4230	14.5	13.4
16 + 16 + 25 + 25 + 71	1.05	1.05	1.63	1.63	4.64	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.25	1.25	1.96	1.96	5.58	12.00	3.4 ~ 14.5	3060	720 ~ 4220	14.5	13.4
16 + 16 + 25 + 35 + 35	1.26	1.26	1.96	2.76	2.76	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	1.51	1.51	2.36	3.31	3.31	12.00	3.4 ~ 14.5	3040	610 ~ 4280	14.4	13.3
16 + 16 + 25 + 35 + 42	1.19	1.19	1.88	2.61	3.13	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	1.43	1.43	2.25	3.13	3.76	12.00	3.4 ~ 14.5	3030	630 ~ 4270	14.3	13.3
16 + 16 + 25 + 35 + 50	1.13	1.13	1.76	2.46	3.52	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.35	1.35	2.11	2.96	4.23	12.00	3.4 ~ 14.5	3050	740 ~ 4260	14.4	13.4
16 + 16 + 25 + 35 + 60	1.05	1.05	1.65	2.30	3.95	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.26	1.26	1.98	2.76	4.74	12.00	3.4 ~ 14.5	3050	740 ~ 4260	14.4	13.4
16 + 16 + 25 + 35 + 71	0.98	0.98	1.53	2.15	4.36	10.00	2.3 ~ 11.5	2650	520 ~ 3540	13.0	12.0	1.18	1.18	1.84	2.58	5.22	12.00	3.4 ~ 14.5	3090	750 ~ 4250	14.6	13.5
16 + 16 + 25 + 42 + 42	1.13	1.13	1.78	2.98	2.98	10.00	2.3 ~ 11.5	2690	440 ~ 3670	13.2	12.2	1.36	1.36	2.14	3.57	3.57	12.00	3.4 ~ 14.5	3070	640 ~ 4260	14.5	13.4
16 + 16 + 25 + 42 + 50	1.07	1.07	1.68	2.82	3.36	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.29	1.29	2.01	3.38	4.03	12.00	3.4 ~ 14.5	3090	750 ~ 4250	14.6	13.5
16 + 16 + 25 + 42 + 60	1.01	1.01	1.57	2.64	3.77	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.21	1.21	1.89	3.17	4.52	12.00	3.4 ~ 14.5	3090	750 ~ 4250	14.6	13.5
16 + 16 + 25 + 42 + 71	0.94	0.94	1.47	2.47	4.18	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.13	1.13	1.77	2.96	5.01	12.00	3.4 ~ 14.5	3080	760 ~ 4240	14.6	13.5
16 + 16 + 25 + 50 + 50	1.02	1.02	1.60	3.18	3.18	10.00	2.3 ~ 11.5	2670	610 ~ 3480	13.1	12.1	1.22	1.22	1.92	3.82	3.82	12.00	3.4 ~ 14.5	3130	870 ~ 4270	14.8	13.7
16 + 16 + 25 + 50 + 60	0.96	0.96	1.50	2.99	3.59	10.00	2.3 ~ 11.5	2670	610 ~ 3480	13.1	12.1	1.15	1.15	1.80	3.59	4.31	12.00	3.4 ~ 14.5	3130	870 ~ 4270	14.8	13.7
16 + 16 + 25 + 50 + 71	0.90	0.90	1.40	2.81	3.99	10.00	2.3 ~ 11.5	2680	620 ~ 3490	13.2	12.2	1.08	1.08	1.69	3.37	4.78	12.00	3.4 ~ 14.5	3170	900 ~ 4310	15.0	13.9
16 + 16 + 25 + 60 + 60	0.90	0.90	1.42	3.39	3.39	10.00	2.3 ~ 11.5	2670	610 ~ 3480	13.1	12.1	1.08	1.08	1.70	4.07	4.07	12.00	3.4 ~ 14.5	3130	870 ~ 4270	14.8	13.7
16 + 16 + 35 + 35 + 35	1.16	1.16	2.56	2.56	2.56	10.00	2.3 ~ 11.5	2700	460 ~ 3670	13.3	12.3	1.41	1.41	3.06	3.06	3.06	12.00	3.4 ~ 14.5	3060	640 ~ 4250	14.5	13.4
16 + 16 + 35 + 35 + 42	1.11	1.11	2.43	2.43	2.92	10.00	2.3 ~ 11.5	2700	470 ~ 3670	13.3	12.3	1.33	1.33	2.92	2.92	3.50	12.00	3.4 ~ 14.5	3060	650 ~ 4240	14.5	13.4
16 + 16 + 35 + 35 + 50	1.05	1.05	2.30	2.30	3.30	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.26	1.26	2.76	2.76	3.96	12.00	3.4 ~ 14.5	3080	760 ~ 4240	14.6	13.5
16 + 16 + 35 + 35 + 60	0.99	0.99	2.16	2.16	3.70	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.19	1.19	2.59	2.59	4.44	12.00	3.4 ~ 14.5	3080	760 ~ 4240	14.6	13.5
16 + 16 + 35 + 35 + 71	0.93	0.93	2.02	2.02	4.10	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.11	1.11	2.43	2.43	4.92	12.00	3.4 ~ 14.5	3080	780 ~ 4230	14.6	13.5
16 + 16 + 35 + 42 + 42	1.06	1.06	2.32	2.78	2.78	10.00	2.3 ~ 11.5	2700	470 ~ 3590	13.3	12.3	1.27	1.27	2.78	3.34	3.34	12.00	3.4 ~ 14.5	3050	650 ~ 4280	14.4	13.4
16 + 16 + 35 + 42 + 50	1.01	1.01	2.20	2.64	3.14	10.00	2.3 ~ 11.5	2650	520 ~ 3540	13.0	12.0	1.21	1.21	2.64	3.17	3.77	12.00	3.4 ~ 14.5	3080	780 ~ 4230	14.6	13.5
16 + 16 + 35 + 42 + 60	0.95	0.95	2.07	2.49	3.54	10.00	2.3 ~ 11.5	2650	520 ~ 3540	13.0	12.0	1.14	1.14	2.49	2.98	4.25	12.00	3.4 ~ 14.5	3080	780 ~ 4230	14.6	13.5
16 + 16 + 35 + 42 + 71	0.89	0.89	1.95	2.33	3.94	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.07	1.07	2.33	2.80	4.73	12.00	3.4 ~ 14.5	3110	790 ~ 4270	14.7	13.6
16 + 16 + 35 + 50 + 50	0.96	0.96	2.10	2.99	2.99	10.00	2.3 ~ 11.5	2680	620 ~ 3490	13.2	12.2	1.15	1.15	2.52	3.59	3.59	12.00	3.4 ~ 14.5	3160	910 ~ 4300	14.9	13.8</

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION												HEATING OPERATION											
	Cooling Capacity (kW)						Input Power (W)		Current (A)		Heating Capacity (kW)						Input Power (W)		Current (A)					
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V		
16 + 20 + 20 + 20 + 60	1.18	1.47	1.47	4.41	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.42	1.76	1.76	1.76	5.30	12.00	3.4 ~ 14.5	3060	720 ~ 4220	14.5	13.4			
16 + 20 + 20 + 20 + 71	1.09	1.36	1.36	4.83	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.31	1.63	1.63	1.63	5.80	12.00	3.4 ~ 14.5	3050	730 ~ 4270	14.4	13.4			
16 + 20 + 20 + 25 + 25	1.50	1.89	1.89	2.36	2.36	10.00	2.3 ~ 11.5	2750	420 ~ 3740	13.5	12.5	1.82	2.26	2.26	2.83	2.83	12.00	3.4 ~ 14.5	3070	570 ~ 4330	14.5	13.4		
16 + 20 + 20 + 25 + 35	1.38	1.72	1.72	2.16	3.02	10.00	2.3 ~ 11.5	2750	430 ~ 3660	13.5	12.5	1.66	2.07	2.07	2.59	3.61	12.00	3.4 ~ 14.5	3050	600 ~ 4300	14.4	13.4		
16 + 20 + 20 + 25 + 42	1.30	1.63	1.63	2.03	3.41	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	1.56	1.95	1.95	2.44	4.10	12.00	3.4 ~ 14.5	3040	610 ~ 4290	14.4	13.3		
16 + 20 + 20 + 25 + 50	1.22	1.53	1.53	1.91	3.81	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.47	1.83	1.83	2.29	4.58	12.00	3.4 ~ 14.5	3060	720 ~ 4220	14.5	13.4		
16 + 20 + 20 + 25 + 60	1.13	1.42	1.42	1.77	4.26	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.36	1.70	1.70	2.13	5.11	12.00	3.4 ~ 14.5	3060	720 ~ 4220	14.5	13.4		
16 + 20 + 20 + 25 + 71	1.05	1.32	1.32	1.64	4.67	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.26	1.58	1.58	1.97	5.61	12.00	3.4 ~ 14.5	3050	730 ~ 4270	14.4	13.4		
16 + 20 + 20 + 35 + 35	1.26	1.59	1.59	2.78	2.78	10.00	2.3 ~ 11.5	2690	440 ~ 3660	13.2	12.2	1.52	1.90	1.90	3.34	3.34	12.00	3.4 ~ 14.5	3030	630 ~ 4270	14.3	13.3		
16 + 20 + 20 + 35 + 42	1.21	1.50	1.50	2.63	3.16	10.00	2.3 ~ 11.5	2690	440 ~ 3670	13.2	12.2	1.45	1.80	1.80	3.16	3.79	12.00	3.4 ~ 14.5	3070	640 ~ 4260	14.5	13.4		
16 + 20 + 20 + 35 + 50	1.13	1.42	1.42	2.48	3.55	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.36	1.70	1.70	2.98	4.26	12.00	3.4 ~ 14.5	3090	750 ~ 4250	14.6	13.5		
16 + 20 + 20 + 35 + 60	1.07	1.32	1.32	2.32	3.97	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.27	1.59	1.59	2.78	4.77	12.00	3.4 ~ 14.5	3090	750 ~ 4250	14.6	13.5		
16 + 20 + 20 + 35 + 71	1.00	1.23	1.23	2.16	4.38	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.19	1.48	1.48	2.59	5.26	12.00	3.4 ~ 14.5	3080	760 ~ 4240	14.6	13.5		
16 + 20 + 20 + 42 + 42	1.14	1.43	1.43	3.00	3.00	10.00	2.3 ~ 11.5	2700	460 ~ 3670	13.3	12.3	1.38	1.71	1.71	3.60	3.60	12.00	3.4 ~ 14.5	3060	640 ~ 4250	14.5	13.4		
16 + 20 + 20 + 42 + 50	1.08	1.35	1.35	2.84	3.38	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.30	1.62	1.62	3.41	4.05	12.00	3.4 ~ 14.5	3090	760 ~ 4250	14.6	13.5		
16 + 20 + 20 + 42 + 60	1.01	1.27	1.27	2.66	3.79	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.22	1.52	1.52	3.19	4.55	12.00	3.4 ~ 14.5	3090	760 ~ 4250	14.6	13.5		
16 + 20 + 20 + 42 + 71	0.95	1.18	1.18	2.49	4.20	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.14	1.42	1.42	2.98	5.04	12.00	3.4 ~ 14.5	3080	780 ~ 4230	14.6	13.5		
16 + 20 + 20 + 50 + 50	1.02	1.28	1.28	3.21	3.21	10.00	2.3 ~ 11.5	2680	610 ~ 3480	13.2	12.2	1.22	1.54	1.54	3.85	3.85	12.00	3.4 ~ 14.5	3170	890 ~ 4260	15.0	13.9		
16 + 20 + 20 + 50 + 60	0.96	1.21	1.21	3.01	3.61	10.00	2.3 ~ 11.5	2680	610 ~ 3480	13.2	12.2	1.16	1.45	1.45	3.61	4.33	12.00	3.4 ~ 14.5	3170	890 ~ 4260	15.0	13.9		
16 + 20 + 20 + 50 + 71	0.90	1.13	1.13	2.82	4.02	10.00	2.3 ~ 11.5	2680	650 ~ 3490	13.2	12.2	1.08	1.36	1.36	3.39	4.81	12.00	3.4 ~ 14.5	3160	900 ~ 4300	14.9	13.8		
16 + 20 + 20 + 60 + 60	0.90	1.14	1.14	3.41	3.41	10.00	2.3 ~ 11.5	2680	610 ~ 3480	13.2	12.2	1.10	1.36	1.36	4.09	4.09	12.00	3.4 ~ 14.5	3170	890 ~ 4260	15.0	13.9		
16 + 20 + 25 + 25 + 25	1.45	1.80	2.25	2.25	2.25	10.00	2.3 ~ 11.5	2750	420 ~ 3740	13.5	12.5	1.74	2.16	2.70	2.70	2.70	12.00	3.4 ~ 14.5	3070	570 ~ 4330	14.5	13.4		
16 + 20 + 25 + 25 + 35	1.32	1.65	2.07	2.07	2.89	10.00	2.3 ~ 11.5	2750	430 ~ 3660	13.5	12.5	1.59	1.98	2.48	2.48	3.47	12.00	3.4 ~ 14.5	3050	600 ~ 4300	14.4	13.4		
16 + 20 + 25 + 25 + 42	1.26	1.56	1.95	1.95	3.28	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	1.50	1.88	2.34	2.34	3.94	12.00	3.4 ~ 14.5	3040	610 ~ 4290	14.4	13.3		
16 + 20 + 25 + 25 + 50	1.18	1.47	1.84	1.84	3.67	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.41	1.76	2.21	2.21	4.41	12.00	3.4 ~ 14.5	3060	720 ~ 4220	14.5	13.4		
16 + 20 + 25 + 25 + 60	1.10	1.37	1.71	1.71	4.11	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.33	1.64	2.05	2.05	4.93	12.00	3.4 ~ 14.5	3060	720 ~ 4220	14.5	13.4		
16 + 20 + 25 + 25 + 71	1.03	1.27	1.59	1.59	4.52	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.22	1.53	1.91	1.91	5.43	12.00	3.4 ~ 14.5	3050	730 ~ 4270	14.4	13.4		
16 + 20 + 25 + 35 + 35	1.22	1.53	1.91	2.67	2.67	10.00	2.3 ~ 11.5	2690	440 ~ 3660	13.2	12.2	1.47	1.83	2.28	3.21	3.21	12.00	3.4 ~ 14.5	3030	630 ~ 4270	14.3	13.3		
16 + 20 + 25 + 35 + 42	1.16	1.45	1.81	2.54	3.04	10.00	2.3 ~ 11.5	2690	440 ~ 3670	13.2	12.2	1.40	1.74	2.17	3.04	3.65	12.00	3.4 ~ 14.5	3070	640 ~ 4260	14.5	13.4		
16 + 20 + 25 + 35 + 50	1.10	1.37	1.71	2.40	3.42	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.32	1.64	2.05	2.88	4.11	12.00	3.4 ~ 14.5	3090	750 ~ 4250	14.6	13.5		
16 + 20 + 25 + 35 + 60	1.03	1.28	1.60	2.24	3.85	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.23	1.54	1.92	2.69	4.62	12.00	3.4 ~ 14.5	3090	750 ~ 4250	14.6	13.5		
16 + 20 + 25 + 35 + 71	0.96	1.20	1.50	2.10	4.24	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.15	1.44	1.80	2.51	5.10	12.00	3.4 ~ 14.5	3080	760 ~ 4240	14.6	13.5		
16 + 20 + 25 + 42 + 42	1.10	1.38	1.72	2.90	2.90	10.00	2.3 ~ 11.5	2700	460 ~ 3670	13.3	12.3	1.32	1.66	2.06	3.48	3.48	12.00	3.4 ~ 14.5	3060	640 ~ 4250	14.5	13.4		
16 + 20 + 25 + 42 + 50	1.05	1.31	1.63	2.75	3.26	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.26	1.57	1.96	3.29	3.92	12.00	3.4 ~ 14.5	3090	760 ~ 4250	14.6	13.5		
16 + 20 + 25 + 42 + 60	0.98	1.23	1.53	2.58	3.68	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.18	1.47	1.84	3.09	4.42	12.00	3.4 ~ 14.5	3090	760 ~ 4250	14.6	13.5		
16 + 20 + 25 + 42 + 71	0.92	1.15	1.44	2.41	4.08	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.10	1.38	1.72	2.90	4.90	12.00	3.4 ~ 14.5	3080	780 ~ 4230	14.6	13.5		
16 + 20 + 25 + 50 + 50	0.99	1.24	1.55	3.11	3.11	10.00	2.3 ~ 11.5	2680	610 ~ 3480	13.2	12.2	1.19	1.49	1.86	3.73	3.73	12.00	3.4 ~ 14.5	3170	890 ~ 4260	15.0	13.9		
16 + 20 + 25 + 50 + 60	0.94	1.17	1.46	2.92	3.51	10.00	2.3 ~ 11.5	2680	610 ~ 3480	13.2	12.2	1.13	1.40	1.75	3.51	4.21	12.00	3.4 ~ 14.5	3170	890 ~ 4260	15.0	13.9		
16 + 20 + 25 + 50 + 71	0.88	1.10	1.37	2.75	3.90	10.00	2.3 ~ 11.5	2680	650 ~ 3490	13.2	12.2	1.05	1.32	1.65	3.30	4.68	12.00	3.4 ~ 14.5	3160	900 ~ 4300	14.9	13.8		
16 + 20 + 25 + 60 + 60	0.88	1.10	1.38	3.32	3.32	10.00	2.3 ~ 11.5	2680	610 ~ 3480	13.2	12.2	1.06	1.33	1.65	3.98	3.98	12.00	3.4 ~ 14.5	3170	890 ~ 4260	15.0	13.9		
16 + 20 + 35 + 35 + 35	1.14	1.42	2.48	2.48	2.48	10.00	2.3 ~ 11.5	2700	470 ~ 3590	13.3	12.3	1.36	1.70	2.98	2.98	2.98	12.00	3.4 ~ 14.5	3060	650 ~ 4240	14.5	13.4		
16 + 20 + 35 + 35 + 42	1.09	1.35	2.36	2.36	2.84	10.00	2.3 ~ 11.5	2700	470 ~ 3590	13.3	12.3	1.30	1.62	2.84	2.84	3.40	12.00	3.4 ~ 14.5	3050	650 ~ 4280	14.4	13.4		
16 + 20 + 35 + 35 + 50	1.03	1.28	2.24	2.24	3.21	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.23	1.54	2.69	2.69	3.85	12.00	3.4 ~ 14.5	3080	780 ~ 4230	14.6	13.5		
16 + 20 + 35 + 35 + 60	0.97	1.20	2.11	2.11	3.61	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.16	1.45	2.53	2.53	4.33	12.00	3.4 ~ 14.5	3080	780 ~ 4230	14.6	13.5		
16 + 20 + 35 + 35 + 71	0.90	1.13	1.98	1.98	4.01	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.09	1.36	2.37	3.37	4.81	12.00	3.4 ~ 14.5	3110	790 ~ 4270	14.7	13.6		
16 + 20 + 35 + 42 + 42	1.03	1.29	2.26	2.71	2.71	10.00	2.3 ~ 11.5	2700	470 ~ 3590	13.3	12.3	1.24	1.55	2.71	3.25	3.25	12.00	3.4 ~ 14.5	3040	670 ~ 4270	14.4	13.3		
16 + 20 + 35 + 42 + 50	0.98	1.23	2.15	2.58	3.06	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.18	1.47	2.58	3.09	3.68	12.00	3.4 ~ 14.5	3120	790 ~ 4280	14.8	13.7		
16 + 20 + 35 + 42 + 60	0.92	1.16	2.02	2.43	3.47	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.11	1.39	2.43	2.91	4.16	12.00	3.4 ~ 14.5	3120	790 ~ 4280	14.8	13.7		
16 + 20 + 35 + 50 + 50	0.94	1.17	2.05	2.92	2.92	10.0																		

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION										
	Cooling Capacity (kW)						Input Power (W)		Current (A)			Heating Capacity (kW)						Input Power (W)		Current (A)		
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
16 + 25 + 25 + 25 + 71	1.00	1.54	1.54	1.54	4.38	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.19	1.85	1.85	1.85	5.26	12.00	3.4 ~ 14.5	3050	730 ~ 4270	14.4	13.4
16 + 25 + 25 + 35 + 35	1.18	1.84	1.84	2.57	2.57	10.00	2.3 ~ 11.5	2690	440 ~ 3660	13.2	12.2	1.40	2.21	2.21	3.09	3.09	12.00	3.4 ~ 14.5	3030	630 ~ 4270	14.3	13.3
16 + 25 + 25 + 35 + 42	1.12	1.75	1.75	2.45	2.93	10.00	2.3 ~ 11.5	2690	440 ~ 3670	13.2	12.2	1.34	2.10	2.10	2.94	3.52	12.00	3.4 ~ 14.5	3070	640 ~ 4260	14.5	13.4
16 + 25 + 25 + 35 + 50	1.06	1.66	1.66	2.32	3.30	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.27	1.99	1.99	2.78	3.97	12.00	3.4 ~ 14.5	3090	750 ~ 4250	14.6	13.5
16 + 25 + 25 + 35 + 60	1.00	1.55	1.55	2.17	3.73	10.00	2.3 ~ 11.5	2710	520 ~ 3530	13.3	12.3	1.20	1.86	1.86	2.61	4.47	12.00	3.4 ~ 14.5	3090	750 ~ 4250	14.6	13.5
16 + 25 + 25 + 35 + 71	0.94	1.45	1.45	2.03	4.13	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.13	1.74	1.74	2.44	4.95	12.00	3.4 ~ 14.5	3080	760 ~ 4240	14.6	13.5
16 + 25 + 25 + 42 + 42	1.06	1.67	1.67	2.80	2.80	10.00	2.3 ~ 11.5	2700	460 ~ 3670	13.3	12.3	1.28	2.00	2.00	3.36	3.36	12.00	3.4 ~ 14.5	3060	640 ~ 4250	14.5	13.4
16 + 25 + 25 + 42 + 50	1.02	1.58	1.58	2.66	3.16	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.22	1.90	1.90	3.19	3.79	12.00	3.4 ~ 14.5	3090	760 ~ 4250	14.6	13.5
16 + 25 + 25 + 42 + 60	0.95	1.49	1.49	2.50	3.57	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.14	1.79	1.79	3.00	4.28	12.00	3.4 ~ 14.5	3090	760 ~ 4250	14.6	13.5
16 + 25 + 25 + 42 + 71	0.89	1.40	1.40	2.35	3.96	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.07	1.68	1.68	2.82	4.75	12.00	3.4 ~ 14.5	3080	780 ~ 4230	14.6	13.5
16 + 25 + 25 + 50 + 50	0.96	1.51	1.51	3.01	3.01	10.00	2.3 ~ 11.5	2680	610 ~ 3480	13.2	12.2	1.16	1.81	1.81	3.61	3.61	12.00	3.4 ~ 14.5	3170	890 ~ 4260	15.0	13.9
16 + 25 + 25 + 50 + 60	0.91	1.42	1.42	2.84	3.41	10.00	2.3 ~ 11.5	2680	610 ~ 3480	13.2	12.2	1.10	1.70	1.70	3.41	4.09	12.00	3.4 ~ 14.5	3170	890 ~ 4260	15.0	13.9
16 + 25 + 35 + 35 + 35	1.10	1.70	2.40	2.40	2.40	10.00	2.3 ~ 11.5	2700	470 ~ 3590	13.3	12.3	1.32	2.04	2.88	2.88	2.88	12.00	3.4 ~ 14.5	3060	650 ~ 4240	14.5	13.4
16 + 25 + 35 + 35 + 42	1.05	1.63	2.29	2.29	2.74	10.00	2.3 ~ 11.5	2700	470 ~ 3590	13.3	12.3	1.25	1.96	2.75	2.75	3.29	12.00	3.4 ~ 14.5	3050	650 ~ 4280	14.4	13.4
16 + 25 + 35 + 35 + 50	1.00	1.55	2.17	2.17	3.11	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.19	1.86	2.61	2.61	3.73	12.00	3.4 ~ 14.5	3080	780 ~ 4230	14.6	13.5
16 + 25 + 35 + 35 + 60	0.94	1.46	2.05	2.05	3.50	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.12	1.75	2.46	2.46	4.21	12.00	3.4 ~ 14.5	3080	780 ~ 4230	14.6	13.5
16 + 25 + 35 + 35 + 71	0.89	1.37	1.92	1.92	3.90	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.05	1.65	2.31	2.31	4.68	12.00	3.4 ~ 14.5	3110	790 ~ 4270	14.7	13.6
16 + 25 + 35 + 42 + 42	1.00	1.56	2.18	2.63	2.63	10.00	2.3 ~ 11.5	2700	470 ~ 3590	13.3	12.3	1.20	1.88	2.62	3.15	3.15	12.00	3.4 ~ 14.5	3040	670 ~ 4270	14.4	13.3
16 + 25 + 35 + 42 + 50	0.95	1.49	2.08	2.50	2.98	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.14	1.79	2.50	3.00	3.57	12.00	3.4 ~ 14.5	3120	790 ~ 4280	14.8	13.7
16 + 25 + 35 + 42 + 60	0.90	1.40	1.97	2.36	3.37	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.08	1.69	2.36	2.83	4.04	12.00	3.4 ~ 14.5	3120	790 ~ 4280	14.8	13.7
16 + 25 + 35 + 50 + 50	0.91	1.42	1.99	2.84	2.84	10.00	2.3 ~ 11.5	2680	620 ~ 3490	13.2	12.2	1.09	1.70	2.39	3.41	3.41	12.00	3.4 ~ 14.5	3160	930 ~ 4290	14.9	13.8
16 + 25 + 42 + 42 + 42	0.97	1.50	2.51	2.51	2.51	10.00	2.3 ~ 11.5	2700	470 ~ 3590	13.3	12.3	1.15	1.79	3.02	3.02	3.02	12.00	3.4 ~ 14.5	3040	680 ~ 4260	14.4	13.3
16 + 25 + 42 + 42 + 50	0.91	1.43	2.40	2.40	2.86	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.10	1.71	2.88	2.88	3.43	12.00	3.4 ~ 14.5	3110	800 ~ 4270	14.7	13.6
16 + 25 + 42 + 50 + 50	0.87	1.37	2.30	2.73	2.73	10.00	2.3 ~ 11.5	2680	650 ~ 3490	13.2	12.2	1.05	1.64	2.75	3.28	3.28	12.00	3.4 ~ 14.5	3200	940 ~ 4290	15.1	14.0
16 + 35 + 35 + 35 + 35	1.04	2.24	2.24	2.24	2.24	10.00	2.3 ~ 11.5	2700	470 ~ 3600	13.3	12.3	1.24	2.69	2.69	2.69	2.69	12.00	3.4 ~ 14.5	3040	680 ~ 4270	14.4	13.3
16 + 35 + 35 + 35 + 42	0.98	2.15	2.15	2.15	2.57	10.00	2.3 ~ 11.5	2700	470 ~ 3600	13.3	12.3	1.18	2.58	2.58	2.58	3.08	12.00	3.4 ~ 14.5	3080	680 ~ 4260	14.6	13.5
16 + 35 + 35 + 35 + 50	0.94	2.05	2.05	2.05	2.91	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.12	2.46	2.46	2.46	3.50	12.00	3.4 ~ 14.5	3110	810 ~ 4260	14.7	13.6
16 + 35 + 35 + 35 + 60	0.88	1.94	1.94	1.94	3.30	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.06	2.32	2.32	2.32	3.98	12.00	3.4 ~ 14.5	3110	810 ~ 4260	14.7	13.6
16 + 35 + 35 + 42 + 42	0.94	2.06	2.06	2.47	2.47	10.00	2.3 ~ 11.5	2700	480 ~ 3600	13.3	12.3	1.14	2.47	2.47	2.96	2.96	12.00	3.4 ~ 14.5	3070	690 ~ 4250	14.5	13.4
16 + 35 + 35 + 42 + 50	0.90	1.97	1.97	2.36	2.80	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.08	2.36	2.36	2.83	3.37	12.00	3.4 ~ 14.5	3110	820 ~ 4250	14.7	13.6
16 + 35 + 42 + 42 + 42	0.91	1.98	2.37	2.37	2.37	10.00	2.3 ~ 11.5	2700	480 ~ 3600	13.3	12.3	1.08	2.37	2.85	2.85	2.85	12.00	3.4 ~ 14.5	3070	710 ~ 4240	14.5	13.4
20 + 20 + 20 + 20 + 20	2.00	2.00	2.00	2.00	2.00	10.00	2.3 ~ 11.5	2750	430 ~ 3740	13.5	12.5	2.40	2.40	2.40	2.40	2.40	12.00	3.4 ~ 14.5	3060	580 ~ 4320	14.5	13.4
20 + 20 + 20 + 20 + 25	1.90	1.90	1.90	1.90	2.40	10.00	2.3 ~ 11.5	2750	430 ~ 3740	13.5	12.5	2.29	2.29	2.29	2.29	2.84	12.00	3.4 ~ 14.5	3060	580 ~ 4320	14.5	13.4
20 + 20 + 20 + 20 + 35	1.74	1.74	1.74	1.74	3.04	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	2.09	2.09	2.09	2.09	3.64	12.00	3.4 ~ 14.5	3040	610 ~ 4290	14.4	13.3
20 + 20 + 20 + 20 + 42	1.64	1.64	1.64	1.64	3.44	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	1.97	1.97	1.97	1.97	4.12	12.00	3.4 ~ 14.5	3030	610 ~ 4280	14.3	13.3
20 + 20 + 20 + 20 + 50	1.54	1.54	1.54	1.54	3.84	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.85	1.85	1.85	1.85	4.60	12.00	3.4 ~ 14.5	3060	720 ~ 4270	14.5	13.4
20 + 20 + 20 + 20 + 60	1.43	1.43	1.43	1.43	4.28	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.71	1.71	1.71	1.71	5.16	12.00	3.4 ~ 14.5	3060	720 ~ 4270	14.5	13.4
20 + 20 + 20 + 20 + 71	1.32	1.32	1.32	1.32	4.72	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.59	1.59	1.59	1.59	5.64	12.00	3.4 ~ 14.5	3090	750 ~ 4260	14.6	13.5
20 + 20 + 20 + 25 + 25	1.82	1.82	1.82	2.27	2.27	10.00	2.3 ~ 11.5	2750	430 ~ 3740	13.5	12.5	2.18	2.18	2.18	2.73	2.73	12.00	3.4 ~ 14.5	3060	580 ~ 4320	14.5	13.4
20 + 20 + 20 + 25 + 35	1.67	1.67	1.67	2.08	2.91	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	2.00	2.00	2.00	2.50	3.50	12.00	3.4 ~ 14.5	3040	610 ~ 4290	14.4	13.3
20 + 20 + 20 + 25 + 42	1.57	1.57	1.57	1.98	3.31	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	1.89	1.89	1.89	2.36	3.97	12.00	3.4 ~ 14.5	3030	610 ~ 4280	14.3	13.3
20 + 20 + 20 + 25 + 50	1.48	1.48	1.48	1.86	3.70	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.78	1.78	1.78	2.22	4.44	12.00	3.4 ~ 14.5	3060	720 ~ 4270	14.5	13.4
20 + 20 + 20 + 25 + 60	1.38	1.38	1.38	1.72	4.14	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.66	1.66	1.66	2.06	4.96	12.00	3.4 ~ 14.5	3060	720 ~ 4270	14.5	13.4
20 + 20 + 20 + 25 + 71	1.28	1.28	1.28	1.61	4.55	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.54	1.54	1.54	1.92	5.46	12.00	3.4 ~ 14.5	3090	750 ~ 4260	14.6	13.5
20 + 20 + 20 + 35 + 35	1.54	1.54	1.54	2.69	2.69	10.00	2.3 ~ 11.5	2700	460 ~ 3670	13.3	12.3	1.84	1.84	1.84	3.24	3.24	12.00	3.4 ~ 14.5	3070	640 ~ 4260	14.5	13.4
20 + 20 + 20 + 35 + 42	1.46	1.46	1.46	2.55	3.07	10.00	2.3 ~ 11.5	2700	460 ~ 3670	13.3	12.3	1.75	1.75	1.75	3.07	3.68	12.00	3.4 ~ 14.5	3060	640 ~ 4250	14.5	13.4
20 + 20 + 20 + 35 + 50	1.38	1.38	1.38	2.41	3.45	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.66	1.66	1.66	2.89	4.13	12.00	3.4 ~ 14.5	3090	760 ~ 4250	14.6	13.5
20 + 20 + 20 + 35 + 60	1.29	1.29	1.29	2.26	3.87	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.55	1.55	1.55	2.71	4.64	12.00	3.4 ~ 14.5	3090	760 ~ 4250	14.6	13.5</

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION										
	Cooling Capacity (kW)						Input Power (W)		Current (A)			Heating Capacity (kW)						Input Power (W)		Current (A)		
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
20 + 20 + 25 + 25 + 42	1.52	1.52	1.89	1.89	3.18	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	1.82	1.82	2.27	2.27	3.82	12.00	3.4 ~ 14.5	3030	610 ~ 4280	14.3	13.3
20 + 20 + 25 + 25 + 50	1.43	1.43	1.79	1.79	3.56	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.71	1.71	2.14	2.14	4.30	12.00	3.4 ~ 14.5	3060	720 ~ 4270	14.5	13.4
20 + 20 + 25 + 25 + 60	1.33	1.33	1.67	1.67	4.00	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.60	1.60	2.00	2.00	4.80	12.00	3.4 ~ 14.5	3060	720 ~ 4270	14.5	13.4
20 + 20 + 25 + 25 + 71	1.24	1.24	1.55	1.55	4.42	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.49	1.49	1.86	1.86	5.30	12.00	3.4 ~ 14.5	3090	750 ~ 4260	14.6	13.5
20 + 20 + 25 + 35 + 35	1.48	1.48	1.86	2.59	2.59	10.00	2.3 ~ 11.5	2700	460 ~ 3670	13.3	12.3	1.78	1.78	2.22	3.11	3.11	12.00	3.4 ~ 14.5	3070	640 ~ 4260	14.5	13.4
20 + 20 + 25 + 35 + 42	1.41	1.41	1.76	2.46	2.96	10.00	2.3 ~ 11.5	2700	460 ~ 3670	13.3	12.3	1.69	1.69	2.11	2.96	3.55	12.00	3.4 ~ 14.5	3060	640 ~ 4250	14.5	13.4
20 + 20 + 25 + 35 + 50	1.33	1.33	1.68	2.33	3.33	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.60	1.60	2.00	2.80	4.00	12.00	3.4 ~ 14.5	3090	760 ~ 4250	14.6	13.5
20 + 20 + 25 + 35 + 60	1.25	1.25	1.56	2.19	3.75	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.50	1.50	1.88	2.63	4.49	12.00	3.4 ~ 14.5	3090	760 ~ 4250	14.6	13.5
20 + 20 + 25 + 35 + 71	1.17	1.17	1.46	2.05	4.15	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.40	1.40	1.76	2.46	4.98	12.00	3.4 ~ 14.5	3080	780 ~ 4230	14.6	13.5
20 + 20 + 25 + 42 + 42	1.34	1.34	1.68	2.82	2.82	10.00	2.3 ~ 11.5	2700	470 ~ 3670	13.3	12.3	1.61	1.61	2.02	3.38	3.38	12.00	3.4 ~ 14.5	3060	650 ~ 4230	14.5	13.4
20 + 20 + 25 + 42 + 50	1.27	1.27	1.60	2.68	3.18	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.53	1.53	1.91	3.21	3.82	12.00	3.4 ~ 14.5	3080	760 ~ 4240	14.6	13.5
20 + 20 + 25 + 42 + 60	1.20	1.20	1.50	2.51	3.59	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.44	1.44	1.80	3.02	4.30	12.00	3.4 ~ 14.5	3080	760 ~ 4240	14.6	13.5
20 + 20 + 25 + 42 + 71	1.12	1.12	1.41	2.36	3.99	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.35	1.35	1.69	2.83	4.78	12.00	3.4 ~ 14.5	3080	780 ~ 4280	14.6	13.5
20 + 20 + 25 + 50 + 50	1.21	1.21	1.52	3.03	3.03	10.00	2.3 ~ 11.5	2680	610 ~ 3480	13.2	12.2	1.45	1.45	1.82	3.64	3.64	12.00	3.4 ~ 14.5	3170	900 ~ 4310	15.0	13.9
20 + 20 + 25 + 50 + 60	1.14	1.14	1.43	2.86	3.43	10.00	2.3 ~ 11.5	2680	610 ~ 3480	13.2	12.2	1.37	1.37	1.72	3.43	4.11	12.00	3.4 ~ 14.5	3170	900 ~ 4310	15.0	13.9
20 + 20 + 35 + 35 + 35	1.37	1.37	2.42	2.42	2.42	10.00	2.3 ~ 11.5	2700	470 ~ 3590	13.3	12.3	1.65	1.65	2.90	2.90	2.90	12.00	3.4 ~ 14.5	3050	650 ~ 4280	14.4	13.4
20 + 20 + 35 + 35 + 42	1.32	1.32	2.30	2.30	2.76	10.00	2.3 ~ 11.5	2700	470 ~ 3590	13.3	12.3	1.58	1.58	2.76	2.76	3.32	12.00	3.4 ~ 14.5	3040	670 ~ 4270	14.4	13.3
20 + 20 + 35 + 35 + 50	1.25	1.25	2.19	2.19	3.12	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.50	1.50	2.63	2.63	3.74	12.00	3.4 ~ 14.5	3120	790 ~ 4280	14.8	13.7
20 + 20 + 35 + 35 + 60	1.18	1.18	2.06	2.06	3.52	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.41	1.41	2.47	2.47	4.24	12.00	3.4 ~ 14.5	3120	790 ~ 4280	14.8	13.7
20 + 20 + 35 + 35 + 71	1.11	1.11	1.93	1.93	3.92	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.33	1.33	2.32	2.32	4.70	12.00	3.4 ~ 14.5	3110	800 ~ 4260	14.7	13.6
20 + 20 + 35 + 42 + 42	1.26	1.26	2.20	2.64	2.64	10.00	2.3 ~ 11.5	2700	470 ~ 3600	13.3	12.3	1.51	1.51	2.64	3.17	3.17	12.00	3.4 ~ 14.5	3040	680 ~ 4260	14.4	13.3
20 + 20 + 35 + 42 + 50	1.20	1.20	2.10	2.51	2.99	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.44	1.44	2.51	3.02	3.59	12.00	3.4 ~ 14.5	3110	800 ~ 4270	14.7	13.6
20 + 20 + 35 + 42 + 60	1.13	1.13	1.98	2.37	3.39	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.36	1.36	2.37	2.85	4.06	12.00	3.4 ~ 14.5	3110	800 ~ 4270	14.7	13.6
20 + 20 + 35 + 50 + 50	1.14	1.14	2.00	2.86	2.86	10.00	2.3 ~ 11.5	2690	650 ~ 3490	13.2	12.2	1.37	1.37	2.40	3.43	3.43	12.00	3.4 ~ 14.5	3200	940 ~ 4290	15.1	14.0
20 + 20 + 42 + 42 + 42	1.19	1.19	2.54	2.54	2.54	10.00	2.3 ~ 11.5	2700	470 ~ 3600	13.3	12.3	1.44	1.44	3.04	3.04	3.04	12.00	3.4 ~ 14.5	3080	680 ~ 4250	14.6	13.5
20 + 20 + 42 + 42 + 50	1.15	1.15	2.41	2.41	2.88	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.38	1.38	2.90	2.90	3.44	12.00	3.4 ~ 14.5	3110	810 ~ 4260	14.7	13.6
20 + 20 + 42 + 50 + 50	1.10	1.10	2.30	2.75	2.75	10.00	2.3 ~ 11.5	2690	650 ~ 3490	13.2	12.2	1.32	1.32	2.76	3.30	3.30	12.00	3.4 ~ 14.5	3200	950 ~ 4330	15.1	14.0
20 + 25 + 25 + 25 + 25	1.68	2.08	2.08	2.08	2.08	10.00	2.3 ~ 11.5	2750	430 ~ 3740	13.5	12.5	2.00	2.50	2.50	2.50	2.50	12.00	3.4 ~ 14.5	3060	580 ~ 4320	14.5	13.4
20 + 25 + 25 + 25 + 35	1.55	1.92	1.92	1.92	2.69	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	1.85	2.31	2.31	2.31	3.22	12.00	3.4 ~ 14.5	3040	610 ~ 4290	14.4	13.3
20 + 25 + 25 + 25 + 42	1.47	1.82	1.82	1.82	3.07	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	1.75	2.19	2.19	2.19	3.68	12.00	3.4 ~ 14.5	3030	610 ~ 4280	14.3	13.3
20 + 25 + 25 + 25 + 50	1.39	1.72	1.72	1.72	3.45	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.66	2.07	2.07	2.07	4.13	12.00	3.4 ~ 14.5	3060	720 ~ 4270	14.5	13.4
20 + 25 + 25 + 25 + 60	1.30	1.61	1.61	1.61	3.87	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.54	1.94	1.94	1.94	4.64	12.00	3.4 ~ 14.5	3060	720 ~ 4270	14.5	13.4
20 + 25 + 25 + 25 + 71	1.20	1.51	1.51	1.51	4.27	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.45	1.81	1.81	1.81	5.12	12.00	3.4 ~ 14.5	3090	750 ~ 4260	14.6	13.5
20 + 25 + 25 + 35 + 35	1.42	1.79	1.79	2.50	2.50	10.00	2.3 ~ 11.5	2700	460 ~ 3670	13.3	12.3	1.72	2.14	2.14	3.00	3.00	12.00	3.4 ~ 14.5	3070	640 ~ 4260	14.5	13.4
20 + 25 + 25 + 35 + 42	1.36	1.70	1.70	2.38	2.86	10.00	2.3 ~ 11.5	2700	460 ~ 3670	13.3	12.3	1.63	2.04	2.04	2.86	3.43	12.00	3.4 ~ 14.5	3060	640 ~ 4250	14.5	13.4
20 + 25 + 25 + 35 + 50	1.29	1.61	1.61	2.26	3.23	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.55	1.94	1.94	2.71	3.86	12.00	3.4 ~ 14.5	3090	760 ~ 4250	14.6	13.5
20 + 25 + 25 + 35 + 60	1.21	1.52	1.52	2.12	3.63	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.45	1.82	1.82	2.55	4.36	12.00	3.4 ~ 14.5	3090	760 ~ 4250	14.6	13.5
20 + 25 + 25 + 35 + 71	1.14	1.42	1.42	1.99	4.03	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.37	1.70	1.70	2.39	4.84	12.00	3.4 ~ 14.5	3080	780 ~ 4230	14.6	13.5
20 + 25 + 25 + 42 + 42	1.30	1.62	1.62	2.73	2.73	10.00	2.3 ~ 11.5	2700	470 ~ 3670	13.3	12.3	1.56	1.95	1.95	3.27	3.27	12.00	3.4 ~ 14.5	3060	650 ~ 4230	14.5	13.4
20 + 25 + 25 + 42 + 50	1.24	1.54	1.54	2.59	3.09	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.49	1.85	1.85	3.11	3.70	12.00	3.4 ~ 14.5	3080	760 ~ 4240	14.6	13.5
20 + 25 + 25 + 42 + 60	1.17	1.45	1.45	2.44	3.49	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.40	1.74	1.74	2.93	4.19	12.00	3.4 ~ 14.5	3080	760 ~ 4240	14.6	13.5
20 + 25 + 25 + 42 + 71	1.09	1.37	1.37	2.30	3.87	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.31	1.64	1.64	2.75	4.66	12.00	3.4 ~ 14.5	3080	780 ~ 4280	14.6	13.5
20 + 25 + 25 + 50 + 50	1.18	1.47	1.47	2.94	2.94	10.00	2.3 ~ 11.5	2680	610 ~ 3480	13.2	12.2	1.42	1.76	1.76	3.53	3.53	12.00	3.4 ~ 14.5	3170	900 ~ 4310	15.0	13.9
20 + 25 + 25 + 50 + 60	1.11	1.39	1.39	2.78	3.33	10.00	2.3 ~ 11.5	2680	610 ~ 3480	13.2	12.2	1.33	1.67	1.67	3.33	4.00	12.00	3.4 ~ 14.5	3170	900 ~ 4310	15.0	13.9
20 + 25 + 35 + 35 + 35	1.34	1.67	2.33	2.33	2.33	10.00	2.3 ~ 11.5	2700	470 ~ 3590	13.3	12.3	1.60	2.00	2.80	2.80	2.80	12.00	3.4 ~ 14.5	3050	650 ~ 4280	14.4	13.4
20 + 25 + 35 + 35 + 42	1.27	1.59	2.23	2.23	2.68	10.00	2.3 ~ 11.5	2700	470 ~ 3590	13.3	12.3	1.53	1.91	2.68	2.68	3.20	12.00	3.4 ~ 14.5	3040	670 ~ 4270	14.4	13.3
20 + 25 + 35 + 35 + 50	1.21	1.52	2.12	2.12	3.03	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.45	1.82	2.55	2.55	3.63	12.00	3.4 ~ 14.5	3120	790 ~ 4280	14.8	13.7
20 + 25 + 35 + 35 + 60	1.14	1.43	2.00	2.00	3.43	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.38	1.71	2.40	2.40	4.11	12.00	3.4 ~ 14.5	3120	790 ~ 4280	14.8	13.7
20 + 25 + 35 + 42 + 42	1.23	1.52	2.13	2.56																		

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor unit capacity		COOLING OPERATION											HEATING OPERATION										
		Cooling Capacity (kW)						Input Power (W)		Current (A)			Heating Capacity (kW)						Input Power (W)		Current (A)		
		Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
5 Rooms	20 + 35 + 42 + 42 + 42	1.11	1.93	2.32	2.32	2.32	10.00	2.3 ~ 11.5	2700	480 ~ 3600	13.3	12.3	1.34	2.32	2.78	2.78	2.78	12.00	3.4 ~ 14.5	3060	710 ~ 4230	14.5	13.4
	25 + 25 + 25 + 25 + 25	2.00	2.00	2.00	2.00	2.00	10.00	2.3 ~ 11.5	2750	430 ~ 3740	13.5	12.5	2.40	2.40	2.40	2.40	2.40	12.00	3.4 ~ 14.5	3060	580 ~ 4320	14.5	13.4
	25 + 25 + 25 + 25 + 35	1.85	1.85	1.85	1.85	2.60	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	2.22	2.22	2.22	2.22	3.12	12.00	3.4 ~ 14.5	3040	610 ~ 4290	14.4	13.3
	25 + 25 + 25 + 25 + 42	1.76	1.76	1.76	1.76	2.96	10.00	2.3 ~ 11.5	2690	430 ~ 3660	13.2	12.2	2.11	2.11	2.11	2.11	3.56	12.00	3.4 ~ 14.5	3030	610 ~ 4280	14.3	13.3
	25 + 25 + 25 + 25 + 50	1.67	1.67	1.67	1.67	3.32	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	2.00	2.00	2.00	2.00	4.00	12.00	3.4 ~ 14.5	3060	720 ~ 4270	14.5	13.4
	25 + 25 + 25 + 25 + 60	1.56	1.56	1.56	1.56	3.76	10.00	2.3 ~ 11.5	2710	510 ~ 3530	13.3	12.3	1.88	1.88	1.88	1.88	4.48	12.00	3.4 ~ 14.5	3060	720 ~ 4270	14.5	13.4
	25 + 25 + 25 + 25 + 71	1.46	1.46	1.46	1.46	4.16	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.75	1.75	1.75	1.75	5.00	12.00	3.4 ~ 14.5	3090	750 ~ 4260	14.6	13.5
	25 + 25 + 25 + 35 + 35	1.72	1.72	1.72	2.42	2.42	10.00	2.3 ~ 11.5	2700	460 ~ 3670	13.3	12.3	2.06	2.06	2.06	2.91	2.91	12.00	3.4 ~ 14.5	3070	640 ~ 4260	14.5	13.4
	25 + 25 + 25 + 35 + 42	1.64	1.64	1.64	2.31	2.77	10.00	2.3 ~ 11.5	2700	460 ~ 3670	13.3	12.3	1.97	1.97	1.97	2.77	3.32	12.00	3.4 ~ 14.5	3060	640 ~ 4250	14.5	13.4
	25 + 25 + 25 + 35 + 50	1.56	1.56	1.56	2.19	3.13	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.88	1.88	1.88	2.62	3.74	12.00	3.4 ~ 14.5	3090	760 ~ 4250	14.6	13.5
	25 + 25 + 25 + 35 + 60	1.47	1.47	1.47	2.06	3.53	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.76	1.76	1.76	2.48	4.24	12.00	3.4 ~ 14.5	3090	760 ~ 4250	14.6	13.5
	25 + 25 + 25 + 35 + 71	1.38	1.38	1.38	1.93	3.93	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.66	1.66	1.66	2.32	4.70	12.00	3.4 ~ 14.5	3080	780 ~ 4230	14.6	13.5
	25 + 25 + 25 + 42 + 42	1.58	1.58	1.58	2.63	2.63	10.00	2.3 ~ 11.5	2700	470 ~ 3670	13.3	12.3	1.88	1.88	1.88	3.18	3.18	12.00	3.4 ~ 14.5	3060	650 ~ 4230	14.5	13.4
	25 + 25 + 25 + 42 + 50	1.50	1.50	1.50	2.51	2.99	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.80	1.80	1.80	3.02	3.58	12.00	3.4 ~ 14.5	3080	760 ~ 4240	14.6	13.5
	25 + 25 + 25 + 42 + 60	1.41	1.41	1.41	2.38	3.39	10.00	2.3 ~ 11.5	2650	520 ~ 3530	13.0	12.0	1.69	1.69	1.69	2.86	4.07	12.00	3.4 ~ 14.5	3080	760 ~ 4240	14.6	13.5
	25 + 25 + 25 + 50 + 50	1.42	1.42	1.42	2.87	2.87	10.00	2.3 ~ 11.5	2680	610 ~ 3480	13.2	12.2	1.72	1.72	1.72	3.42	3.42	12.00	3.4 ~ 14.5	3170	900 ~ 4310	15.0	13.9
	25 + 25 + 35 + 35 + 35	1.61	1.61	2.26	2.26	2.26	10.00	2.3 ~ 11.5	2700	470 ~ 3590	13.3	12.3	1.95	1.95	2.70	2.70	2.70	12.00	3.4 ~ 14.5	3050	650 ~ 4280	14.4	13.4
	25 + 25 + 35 + 35 + 42	1.54	1.54	2.16	2.16	2.60	10.00	2.3 ~ 11.5	2700	470 ~ 3590	13.3	12.3	1.85	1.85	2.59	2.59	3.12	12.00	3.4 ~ 14.5	3040	670 ~ 4270	14.4	13.3
	25 + 25 + 35 + 35 + 50	1.47	1.47	2.06	2.06	2.94	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.76	1.76	2.47	2.47	3.54	12.00	3.4 ~ 14.5	3120	790 ~ 4280	14.8	13.7
	25 + 25 + 35 + 35 + 60	1.39	1.39	1.94	1.94	3.34	10.00	2.3 ~ 11.5	2660	550 ~ 3540	13.1	12.1	1.67	1.67	2.33	2.33	4.00	12.00	3.4 ~ 14.5	3120	790 ~ 4280	14.8	13.7
25 + 25 + 35 + 42 + 42	1.48	1.48	2.06	2.49	2.49	10.00	2.3 ~ 11.5	2700	470 ~ 3600	13.3	12.3	1.78	1.78	2.48	2.98	2.98	12.00	3.4 ~ 14.5	3040	680 ~ 4260	14.4	13.3	
25 + 25 + 35 + 42 + 50	1.41	1.41	1.99	2.37	2.82	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.69	1.69	2.37	2.85	3.40	12.00	3.4 ~ 14.5	3110	800 ~ 4270	14.7	13.6	
25 + 25 + 42 + 42 + 42	1.43	1.43	2.38	2.38	2.38	10.00	2.3 ~ 11.5	2700	470 ~ 3600	13.3	12.3	1.71	1.71	2.86	2.86	2.86	12.00	3.4 ~ 14.5	3080	680 ~ 4250	14.6	13.5	
25 + 35 + 35 + 35 + 35	1.52	2.12	2.12	2.12	2.12	10.00	2.3 ~ 11.5	2700	470 ~ 3600	13.3	12.3	1.80	2.55	2.55	2.55	2.55	12.00	3.4 ~ 14.5	3080	680 ~ 4260	14.6	13.5	
25 + 35 + 35 + 35 + 42	1.46	2.03	2.03	2.03	2.45	10.00	2.3 ~ 11.5	2700	480 ~ 3600	13.3	12.3	1.75	2.44	2.44	2.44	2.93	12.00	3.4 ~ 14.5	3070	690 ~ 4250	14.5	13.4	
25 + 35 + 35 + 35 + 50	1.40	1.94	1.94	1.94	2.78	10.00	2.3 ~ 11.5	2660	560 ~ 3540	13.1	12.1	1.68	2.33	2.33	2.33	3.33	12.00	3.4 ~ 14.5	3110	820 ~ 4250	14.7	13.6	
25 + 35 + 35 + 42 + 42	1.40	1.96	1.96	2.34	2.34	10.00	2.3 ~ 11.5	2700	480 ~ 3600	13.3	12.3	1.68	2.35	2.35	2.81	2.81	12.00	3.4 ~ 14.5	3070	710 ~ 4240	14.5	13.4	
35 + 35 + 35 + 35 + 35	2.00	2.00	2.00	2.00	2.00	10.00	2.3 ~ 11.5	2700	510 ~ 3600	13.3	12.3	2.40	2.40	2.40	2.40	2.40	12.00	3.4 ~ 14.5	3060	710 ~ 4230	14.5	13.4	
35 + 35 + 35 + 35 + 42	1.92	1.92	1.92	1.92	2.32	10.00	2.3 ~ 11.5	2710	510 ~ 3600	13.3	12.3	2.31	2.31	2.31	2.31	2.76	12.00	3.4 ~ 14.5	3060	720 ~ 4280	14.5	13.4	

• Specification based on JIS C 9612 standard.
 • A minimum of 2 indoor units must be connected.

CU-2S18SKH: Only Wall-Mounted and Free Multi Indoor Combination

Indoor Unit Combination		Cooling Capacity (kW)					Input Power (W)		Current (A)		
		Room A	Room B	Room C	Room D	Total	min ~ max	Rated	min ~ max	220V	240V
1 Room	28	2.80	-	-	-	2.80	1.10 ~ 3.5	0.75	0.22 ~ 1.00	3.7	3.4
	32	3.20	-	-	-	3.20	1.10 ~ 4.0	0.92	0.22 ~ 1.22	4.5	4.2
2 Rooms	28 + 28	2.40	2.40	-	-	4.80	1.50 ~ 5.8	1.34	0.25 ~ 1.72	6.5	6.1
	28 + 32	2.30	2.70	-	-	5.00	1.50 ~ 5.9	1.52	0.25 ~ 1.74	7.4	6.9
	32 + 32	2.50	2.50	-	-	5.00	1.50 ~ 6.0	1.43	0.25 ~ 1.78	6.8	6.3

CU-3S27SBH: Only Wall-Mounted and Free Multi Indoor Combination

Indoor Unit Combination		Cooling Capacity (kW)					Input Power (W)		Current (A)		
		Room A	Room B	Room C	Room D	Total	min ~ max	Rated	min ~ max	220V	240V
1 Room	28	2.80	-	-	-	2.80	1.7 ~ 3.4	700	380 ~ 890	3.8	3.5
	32	3.20	-	-	-	3.20	1.7 ~ 4.0	800	380 ~ 1,200	4.3	3.9
	40	4.00	-	-	-	4.00	1.7 ~ 4.8	1,180	380 ~ 1,480	6.1	5.6
	50	5.00	-	-	-	5.00	1.9 ~ 5.8	1,460	400 ~ 1,890	7.4	6.8
2 Rooms	28 + 28	2.80	2.80	-	-	5.60	1.7 ~ 6.4	1,750	420 ~ 2,600	8.7	8.0
	28 + 32	2.80	3.20	-	-	6.00	1.7 ~ 6.5	2,010	420 ~ 2,600	10.0	9.2
	28 + 40	2.80	4.00	-	-	6.80	2.5 ~ 7.3	2,420	550 ~ 3,330	12.0	11.0
	28 + 50	2.69	4.81	-	-	7.50	2.7 ~ 7.7	2,810	530 ~ 3,310	13.9	12.7
	32 + 32	3.20	3.20	-	-	6.40	2.3 ~ 7.1	2,290	570 ~ 3,350	11.3	10.4
	32 + 40	3.20	4.00	-	-	7.20	2.5 ~ 7.4	2,770	550 ~ 3,330	13.7	12.5
	32 + 50	2.93	4.57	-	-	7.50	2.8 ~ 7.7	2,760	530 ~ 3,310	13.6	12.5
	40 + 40	3.75	3.75	-	-	7.50	2.7 ~ 7.6	2,870	540 ~ 3,310	14.2	13.0
	40 + 50	3.33	4.17	-	-	7.50	2.8 ~ 7.8	2,600	530 ~ 3,300	12.8	11.8
	50 + 50	3.75	3.75	-	-	7.50	2.9 ~ 8.0	2,440	520 ~ 3,300	12.1	11.1
3 Rooms	28 + 28 + 28	2.50	2.50	2.50	-	7.50	2.4 ~ 7.6	2,740	580 ~ 3,170	13.5	12.4
	28 + 28 + 32	2.39	2.39	2.72	-	7.50	2.4 ~ 7.7	2,690	580 ~ 3,170	13.3	12.2
	28 + 28 + 40	2.19	2.19	3.12	-	7.50	2.6 ~ 8.0	2,490	600 ~ 3,260	12.3	11.3
	28 + 28 + 50	1.98	1.98	3.54	-	7.50	2.8 ~ 8.0	2,250	600 ~ 2,910	11.1	10.2
	28 + 32 + 32	2.28	2.61	2.61	-	7.50	2.4 ~ 7.7	2,690	580 ~ 3,180	13.3	12.2
	28 + 32 + 40	2.10	2.40	3.00	-	7.50	2.6 ~ 8.0	2,450	600 ~ 3,200	12.1	11.1
	28 + 32 + 50	1.91	2.18	3.41	-	7.50	2.8 ~ 8.0	2,250	600 ~ 2,910	11.1	10.2
	28 + 40 + 40	1.94	2.78	2.78	-	7.50	2.7 ~ 8.0	2,290	600 ~ 3,020	11.3	10.4
	28 + 40 + 50	1.78	2.54	3.18	-	7.50	2.8 ~ 8.0	2,170	580 ~ 2,760	10.7	9.8
	28 + 50 + 50	1.64	2.93	2.93	-	7.50	2.8 ~ 8.0	2,070	520 ~ 2,650	10.2	9.4
	32 + 32 + 32	2.50	2.50	2.50	-	7.50	2.4 ~ 7.7	2,650	590 ~ 3,190	13.1	12.0
	32 + 32 + 40	2.31	2.31	2.88	-	7.50	2.6 ~ 8.0	2,450	600 ~ 3,210	12.1	11.1
	32 + 32 + 50	2.11	2.11	3.28	-	7.50	2.8 ~ 8.0	2,250	600 ~ 2,920	11.1	10.2
	32 + 40 + 40	2.14	2.68	2.68	-	7.50	2.8 ~ 8.0	2,290	600 ~ 2,960	11.3	10.4
	32 + 40 + 50	1.97	2.46	3.07	-	7.50	2.8 ~ 8.0	2,170	580 ~ 2,760	10.7	9.8
	32 + 50 + 50	1.82	2.84	2.84	-	7.50	2.8 ~ 8.0	2,060	520 ~ 2,650	10.2	9.4
	40 + 40 + 40	2.50	2.50	2.50	-	7.50	2.8 ~ 8.0	2,170	590 ~ 2,820	10.7	9.8
	40 + 40 + 50	2.31	2.31	2.88	-	7.50	2.8 ~ 8.0	2,070	540 ~ 2,650	10.2	9.4

• Specification based on JIS C 9612 standard.
• A minimum of 2 indoor units must be connected.

CU-3S28SBH: Only Wall-Mounted and Free Multi Indoor Combination

Indoor Unit Combination		Cooling Capacity (kW)					Input Power (W)		Current (A)		
		Room A	Room B	Room C	Room D	Total	min - max	Rated	min - max	220V	240V
1 Room	28	2.80	-	-	--	2.80	1.7 - 3.4	700	380 - 890	3.7	3.4
	32	3.20	-	-	-	3.20	1.7 - 4.0	800	380 - 1,200	4.2	3.9
	40	4.00	-	-	-	4.00	1.7 - 4.8	1,180	380 - 1,480	6.0	5.5
	50	5.00	-	-	-	5.00	1.9 - 5.8	1,460	400 - 1,890	7.3	6.7
	60	6.00	-	-	-	6.00	1.9 - 6.2	1920	400 - 2,070	9.3	8.6
2 Rooms	28 + 28	2.80	2.80	-	-	5.60	1.7 - 6.7	1,750	420 - 2,340	8.6	7.9
	28 + 32	2.80	3.20	-	-	6.00	1.7 - 6.7	2,010	420 - 2,340	9.8	9.0
	28 + 40	2.80	4.00	-	-	6.80	2.5 - 7.6	2,420	550 - 2,990	11.8	10.8
	28 + 50	2.69	4.81	-	-	7.50	2.7 - 8.0	2,810	530 - 2,980	13.7	12.6
	28 + 60	2.39	5.11	-	-	7.50	2.7 - 8.0	2,810	530 - 2,980	13.7	12.6
	32 + 32	3.20	3.20	-	-	6.40	2.3 - 7.4	2,290	570 - 3,010	11.2	10.3
	32 + 40	3.20	4.00	-	-	7.20	2.5 - 7.7	2,770	550 - 2,990	13.5	12.4
	32 + 50	2.93	4.57	-	-	7.50	2.8 - 8.0	2,760	530 - 2,970	13.5	12.4
	32 + 60	2.61	4.89	-	-	7.50	2.8 - 8.0	2,760	530 - 2,970	13.5	12.4
	40 + 40	3.75	3.75	-	-	7.50	2.7 - 7.9	2,870	540 - 2,980	14.0	12.9
	40 + 50	3.33	4.17	-	-	7.50	2.8 - 8.1	2,600	530 - 2,970	12.7	11.6
	40 + 60	3.00	4.50	-	-	7.50	2.8 - 8.1	2,600	530 - 2,970	12.7	11.6
	50 + 50	3.75	3.75	-	-	7.50	2.9 - 8.3	2,440	520 - 2,970	11.9	10.9
	50 + 60	3.41	4.09	-	-	7.50	2.9 - 8.3	2,440	520 - 2,970	11.9	10.9
	60 + 60	3.75	3.75	-	-	7.50	2.9 - 8.3	2,440	520 - 2,970	11.9	10.9
3 Rooms	28 + 28 + 28	2.50	2.50	2.50	-	7.50	2.4 - 7.9	2,740	580 - 2,840	13.4	12.3
	28 + 28 + 32	2.39	2.39	2.72	-	7.50	2.4 - 8.0	2,690	580 - 2,850	13.1	12.1
	28 + 28 + 40	2.19	2.19	3.12	-	7.50	2.6 - 8.4	2,490	600 - 2,930	12.2	11.2
	28 + 28 + 50	1.98	1.98	3.54	-	7.50	2.8 - 8.8	2,250	600 - 3,010	11.0	10.1
	28 + 28 + 60	1.81	1.81	3.88	-	7.50	2.8 - 8.8	2,250	600 - 3,010	11.0	10.1
	28 + 32 + 32	2.28	2.61	2.61	-	7.50	2.4 - 8.0	2,690	580 - 2,860	13.1	12.1
	28 + 32 + 40	2.10	2.40	3.00	-	7.50	2.6 - 8.4	2,450	600 - 2,930	12.0	11.0
	28 + 32 + 50	1.91	2.18	3.41	-	7.50	2.8 - 8.8	2,250	600 - 3,020	11.0	10.1
	28 + 32 + 60	1.75	2.00	3.75	-	7.50	2.8 - 8.8	2,250	600 - 3,020	11.0	10.1
	28 + 40 + 40	1.94	2.78	2.78	-	7.50	2.7 - 8.7	2,290	600 - 3,000	11.2	10.3
	28 + 40 + 50	1.78	2.54	3.18	-	7.50	2.8 - 9.0	2,170	580 - 3,050	10.6	9.7
	28 + 40 + 60	1.64	2.34	3.52	-	7.50	2.8 - 9.0	2,170	580 - 3,050	10.6	9.7
	28 + 50 + 50	1.64	2.93	2.93	-	7.50	2.8 - 9.0	2,070	520 - 2,830	10.1	9.3
	32 + 32 + 32	2.50	2.50	2.50	-	7.50	2.4 - 8.0	2,650	590 - 2,860	13.0	11.9
	32 + 32 + 40	2.31	2.31	2.88	-	7.50	2.6 - 8.4	2,450	600 - 2,940	12.0	11.0
	32 + 32 + 50	2.11	2.11	3.28	-	7.50	2.8 - 8.8	2,250	600 - 3,020	11.0	10.1
	32 + 32 + 60	1.94	1.94	3.62	-	7.50	2.8 - 8.8	2,250	600 - 3,020	11.0	10.1
	32 + 40 + 40	2.14	2.68	2.68	-	7.50	2.8 - 8.7	2,290	600 - 3,000	11.2	10.3
	32 + 40 + 50	1.97	2.46	3.07	-	7.50	2.8 - 9.0	2,170	580 - 3,060	10.6	9.7
	32 + 40 + 60	1.82	2.27	3.41	-	7.50	2.8 - 9.0	2,170	580 - 3,060	10.6	9.7
	32 + 50 + 50	1.82	2.84	2.84	-	7.50	2.8 - 9.0	2,060	520 - 2,830	10.1	9.2
40 + 40 + 40	2.50	2.50	2.50	-	7.50	2.8 - 9.0	2,170	590 - 3,040	10.6	9.7	
40 + 40 + 50	2.31	2.31	2.88	-	7.50	2.8 - 9.0	2,070	540 - 2,830	10.1	9.3	

• Specification based on JIS C 9612 standard.
 • A minimum of 2 indoor units must be connected.

CU-4S27SBH: Only Wall-Mounted and Free Multi Indoor Combination

Indoor Unit Combination		Cooling Capacity (kW)						Input Power (W)		Current (A)	
		Room A	Room B	Room C	Room D	Total	min - max	Rated	min - max	220V	240V
1 Rooms	28	2.800	-	-	-	2.80	1.7 - 3.4	700	380 - 890	3.8	3.5
	32	3.200	-	-	-	3.20	1.7 - 4.0	800	380 - 1,200	4.3	3.9
	40	4.000	-	-	-	4.00	1.7 - 4.8	1,180	380 - 1,480	6.1	5.6
	50	5.000	-	-	-	5.00	1.9 - 5.8	1,460	400 - 1,890	7.4	6.8
2 Rooms	28 + 28	2.800	2.800	-	-	5.60	1.7 - 6.4	1,750	420 - 2,600	8.7	8.0
	28 + 32	2.800	3.200	-	-	6.00	1.7 - 6.5	2,010	420 - 2,600	10.0	9.2
	28 + 40	2.800	4.000	-	-	6.80	2.5 - 7.3	2,420	550 - 3,330	12.0	11.0
	28 + 50	2.690	4.810	-	-	7.50	2.7 - 7.7	2,810	530 - 3,310	13.9	12.7
	32 + 32	3.200	3.200	-	-	6.40	2.3 - 7.1	2,290	570 - 3,350	11.3	10.4
	32 + 40	3.200	4.000	-	-	7.20	2.5 - 7.4	2,770	550 - 3,330	13.7	12.5
	32 + 50	2.930	4.570	-	-	7.50	2.8 - 7.7	2,760	530 - 3,310	13.6	12.5
	40 + 40	3.750	3.750	-	-	7.50	2.7 - 7.6	2,870	540 - 3,310	14.2	13.0
	40 + 50	3.330	4.170	-	-	7.50	2.8 - 7.8	2,600	530 - 3,300	12.8	11.8
	50 + 50	3.750	3.750	-	-	7.50	2.9 - 8.0	2,440	520 - 3,300	12.1	11.1
3 Rooms	28 + 28 + 28	2.500	2.500	2.500	-	7.50	2.4 - 7.6	2,740	580 - 3,170	13.5	12.4
	28 + 28 + 32	2.390	2.390	2.720	-	7.50	2.4 - 7.7	2,690	580 - 3,170	13.3	12.2
	28 + 28 + 40	2.190	2.190	3.120	-	7.50	2.6 - 8.0	2,490	600 - 3,260	12.3	11.3
	28 + 28 + 50	1.980	1.980	3.540	-	7.50	2.8 - 8.0	2,250	600 - 2,910	11.1	10.2
	28 + 32 + 32	2.280	2.610	2.610	-	7.50	2.4 - 7.7	2,690	580 - 3,180	13.3	12.2
	28 + 32 + 40	2.100	2.400	3.000	-	7.50	2.6 - 8.0	2,450	600 - 3,200	12.1	11.1
	28 + 32 + 50	1.910	2.180	3.410	-	7.50	2.8 - 8.0	2,250	600 - 2,910	11.1	10.2
	28 + 40 + 40	1.940	2.780	2.780	-	7.50	2.7 - 8.0	2,290	600 - 3,020	11.3	10.4
	28 + 40 + 50	1.780	2.540	3.180	-	7.50	2.8 - 8.0	2,170	580 - 2,760	10.7	9.8
	28 + 50 + 50	1.640	2.930	2.930	-	7.50	2.8 - 8.0	2,070	520 - 2,650	10.2	9.4
	32 + 32 + 32	2.500	2.500	2.500	-	7.50	2.4 - 7.7	2,650	590 - 3,190	13.1	12.0
	32 + 32 + 40	2.310	2.310	2.880	-	7.50	2.6 - 8.0	2,450	600 - 3,210	12.1	11.1
	32 + 32 + 50	2.110	2.110	3.280	-	7.50	2.8 - 8.0	2,250	600 - 2,920	11.1	10.2
	32 + 40 + 40	2.140	2.680	2.680	-	7.50	2.8 - 8.0	2,290	600 - 2,960	11.3	10.4
	32 + 40 + 50	1.970	2.460	3.070	-	7.50	2.8 - 8.0	2,170	580 - 2,760	10.7	9.8
	32 + 50 + 50	1.820	2.840	2.840	-	7.50	2.8 - 8.0	2,060	520 - 2,650	10.2	9.4
40 + 40 + 40	2.500	2.500	2.500	-	7.50	2.8 - 8.0	2,170	590 - 2,820	10.7	9.8	
40 + 40 + 50	2.310	2.310	2.880	-	7.50	2.8 - 8.0	2,070	540 - 2,650	10.2	9.4	
4 Rooms	28 + 28 + 28 + 28	1.875	1.875	1.875	1.875	7.50	2.8 - 8.0	2,060	520 - 2,650	10.2	9.4
	28 + 28 + 28 + 32	1.810	1.810	1.810	2.070	7.50	2.8 - 8.0	2,060	520 - 2,650	10.2	9.4
	28 + 28 + 28 + 40	1.690	1.690	1.690	2.430	7.50	2.8 - 8.0	2,060	520 - 2,590	10.2	9.4
	28 + 28 + 28 + 50	1.570	1.570	1.570	2.790	7.50	2.8 - 8.0	2,060	520 - 2,530	10.2	9.4
	28 + 28 + 32 + 32	1.750	1.750	2.000	2.000	7.50	2.8 - 8.0	2,060	520 - 2,650	10.2	9.4
	28 + 28 + 32 + 40	1.640	1.640	1.880	2.340	7.50	2.8 - 8.0	2,060	520 - 2,590	10.2	9.4
	28 + 32 + 32 + 32	1.680	1.940	1.940	1.940	7.50	2.8 - 8.0	2,060	520 - 2,650	10.2	9.4
	28 + 32 + 32 + 40	1.590	1.820	1.820	2.270	7.50	2.8 - 8.0	2,060	520 - 2,590	10.2	9.4
32 + 32 + 32 + 32	1.875	1.875	1.875	1.875	7.50	2.8 - 8.0	2,060	520 - 2,590	10.2	9.4	

• Specification based on JIS C 9612 standard.
• A minimum of 2 indoor units must be connected.

CU-4S34SBH: Only Wall-Mounted and Free Multi Indoor Combination

Indoor Unit Combination		Cooling Capacity (kW)					Input Power (W)		Current (A)		
		Room A	Room B	Room C	Room D	Total	min ~ max	Rated	min ~ max	220V	240V
1 Room	28	2.80	-	-	-	2.80	1.7 ~ 3.4	700	380 ~ 890	3.6	3.3
	32	3.20	-	-	-	3.20	1.7 ~ 4.0	800	380 ~ 1,200	4.1	3.8
	40	4.00	-	-	-	4.00	1.7 ~ 4.8	1,240	380 ~ 1,480	6.0	5.5
	50	5.00	-	-	-	5.00	1.9 ~ 5.8	1,550	400 ~ 1,890	7.5	6.9
	60	6.00	-	-	-	6.00	1.9 ~ 6.2	2,030	400 ~ 2,070	9.6	8.8
	70	7.00	-	-	-	7.00	2.0 ~ 7.2	2,490	400 ~ 2,770	11.8	10.8
2 Rooms	28 + 28	2.80	2.80	-	-	5.60	2.4 ~ 5.8	1,740	300 ~ 1,860	8.5	7.8
	28 + 32	2.80	3.20	-	-	6.00	2.4 ~ 6.7	1,920	300 ~ 2,360	9.3	8.5
	28 + 40	2.80	4.00	-	-	6.80	2.4 ~ 7.2	2,420	300 ~ 2,760	11.7	10.7
	28 + 50	2.80	5.00	-	-	7.80	2.4 ~ 8.6	2,680	280 ~ 3,330	12.9	11.8
	28 + 60	2.80	6.00	-	-	8.80	2.5 ~ 9.1	3,450	310 ~ 3,640	16.6	15.2
	28 + 70	2.80	7.00	-	-	9.80	2.5 ~ 10.1	4,140	310 ~ 4,620	20.0	18.3
	32 + 32	3.20	3.20	-	-	6.40	2.4 ~ 7.2	2,100	290 ~ 2,620	10.1	9.3
	32 + 40	3.20	4.00	-	-	7.20	2.4 ~ 8.1	2,620	290 ~ 3,390	12.6	11.6
	32 + 50	3.20	5.00	-	-	8.20	2.5 ~ 9.1	2,890	310 ~ 3,490	13.9	12.8
	32 + 60	3.20	6.00	-	-	9.20	2.5 ~ 10.0	3,570	310 ~ 4,460	17.2	15.8
	32 + 70	3.14	6.86	-	-	10.00	2.5 ~ 10.4	4,220	310 ~ 4,800	20.3	18.6
	40 + 40	4.00	4.00	-	-	8.00	2.5 ~ 8.6	3,240	320 ~ 3,930	15.6	14.3
	40 + 50	4.00	5.00	-	-	9.00	2.5 ~ 10.0	3,460	310 ~ 4,460	16.7	15.3
	40 + 60	4.00	6.00	-	-	10.00	2.5 ~ 10.4	4,460	310 ~ 4,790	21.5	19.7
	40 + 70	3.64	6.36	-	-	10.00	2.5 ~ 10.4	4,150	310 ~ 4,800	20.0	18.3
	50 + 50	5.00	5.00	-	-	10.00	2.5 ~ 10.4	3,610	300 ~ 4,000	17.4	16.0
	50 + 60	4.55	5.45	-	-	10.00	2.5 ~ 10.4	3,610	300 ~ 4,000	17.4	16.0
	50 + 70	4.17	5.83	-	-	10.00	2.5 ~ 10.4	3,470	300 ~ 3,850	16.7	15.3
	60 + 60	5.00	5.00	-	-	10.00	2.5 ~ 10.4	3,610	300 ~ 4,000	17.4	16.0
	60 + 70	4.62	5.38	-	-	10.00	2.5 ~ 10.4	3,470	300 ~ 3,850	16.7	15.3
70 + 70	5.00	5.00	-	-	10.00	2.5 ~ 10.4	3,320	330 ~ 3,690	16.0	14.7	
3 Rooms	28 + 28 + 28	2.80	2.80	2.80	-	8.40	2.9 ~ 8.7	2,750	360 ~ 2,880	13.3	12.2
	28 + 28 + 32	2.80	2.80	3.20	-	8.80	2.9 ~ 9.6	2,880	390 ~ 3,320	13.9	12.7
	28 + 28 + 40	2.80	2.80	4.00	-	9.60	2.9 ~ 10.1	3,320	390 ~ 3,770	16.0	14.7
	28 + 28 + 50	2.64	2.64	4.72	-	10.00	2.9 ~ 10.7	3,180	390 ~ 3,770	15.3	14.1
	28 + 28 + 60	2.41	2.41	5.18	-	10.00	2.9 ~ 10.7	3,180	390 ~ 3,770	15.3	14.1
	28 + 28 + 70	2.22	2.22	5.56	-	10.00	2.9 ~ 10.7	3,110	390 ~ 3,620	15.0	13.7
	28 + 32 + 32	2.80	3.20	3.20	-	9.20	2.9 ~ 10.1	2,990	390 ~ 3,690	14.4	13.2
	28 + 32 + 40	2.80	3.20	4.00	-	10.00	2.9 ~ 10.7	3,540	390 ~ 4,320	17.1	15.6
	28 + 32 + 50	2.54	2.91	4.55	-	10.00	2.9 ~ 10.7	3,110	390 ~ 3,700	15.0	13.7
	28 + 32 + 60	2.33	2.67	5.00	-	10.00	2.9 ~ 10.7	3,110	390 ~ 3,700	15.0	13.7
	28 + 32 + 70	2.15	2.46	5.39	-	10.00	2.9 ~ 10.7	3,040	420 ~ 3,540	14.7	13.4
	28 + 40 + 40	2.60	3.70	3.70	-	10.00	2.9 ~ 10.7	3,540	390 ~ 4,320	17.1	15.6
	28 + 40 + 50	2.37	3.39	4.24	-	10.00	2.9 ~ 10.7	3,110	390 ~ 3,620	15.0	13.7
	28 + 40 + 60	2.18	3.13	4.69	-	10.00	2.9 ~ 10.7	3,110	390 ~ 3,620	15.0	13.7
	28 + 40 + 70	2.03	2.90	5.07	-	10.00	2.9 ~ 10.7	2,970	420 ~ 3,540	14.3	13.1
	28 + 50 + 50	2.18	3.91	3.91	-	10.00	2.9 ~ 10.7	2,830	430 ~ 3,250	13.6	12.5
	28 + 50 + 60	2.03	3.62	4.35	-	10.00	2.9 ~ 10.7	2,830	430 ~ 3,250	13.6	12.5
	28 + 50 + 70	1.89	3.38	4.73	-	10.00	2.9 ~ 10.7	2,760	460 ~ 3,180	13.3	12.2
	28 + 60 + 60	1.90	4.05	4.05	-	10.00	2.9 ~ 10.7	2,830	430 ~ 3,250	13.6	12.5
	28 + 60 + 70	1.77	3.80	4.43	-	10.00	2.9 ~ 10.7	2,760	460 ~ 3,180	13.3	12.2
	28 + 70 + 70	1.66	4.17	4.17	-	10.00	2.9 ~ 10.7	2,690	460 ~ 3,110	13.0	11.9
	32 + 32 + 32	3.20	3.20	3.20	-	9.60	2.9 ~ 10.7	3,110	390 ~ 3,540	15.0	13.7
	32 + 32 + 40	3.08	3.08	3.84	-	10.00	2.9 ~ 10.7	3,470	390 ~ 4,160	16.7	15.3
	32 + 32 + 50	2.81	2.81	4.38	-	10.00	2.9 ~ 10.7	3,040	390 ~ 3,540	14.7	13.4
	32 + 32 + 60	2.58	2.58	4.84	-	10.00	2.9 ~ 10.7	3,040	390 ~ 3,540	14.7	13.4
	32 + 32 + 70	2.39	2.39	5.22	-	10.00	2.9 ~ 10.7	2,970	420 ~ 3,470	14.3	13.1
	32 + 40 + 40	2.86	3.57	3.57	-	10.00	2.9 ~ 10.7	3,390	390 ~ 4,160	16.3	15.0
	32 + 40 + 50	2.62	3.28	4.10	-	10.00	2.9 ~ 10.7	3,040	420 ~ 3,540	14.7	13.4
	32 + 40 + 60	2.42	3.03	4.55	-	10.00	2.9 ~ 10.7	3,040	420 ~ 3,540	14.7	13.4
	32 + 40 + 70	2.25	2.82	4.93	-	10.00	2.9 ~ 10.7	2,970	420 ~ 3,470	14.3	13.1
	32 + 50 + 50	2.42	3.79	3.79	-	10.00	2.9 ~ 10.7	2,760	460 ~ 3,180	13.3	12.2
	32 + 50 + 60	2.25	3.52	4.23	-	10.00	2.9 ~ 10.7	2,760	460 ~ 3,180	13.3	12.2
32 + 50 + 70	2.10	3.29	4.61	-	10.00	2.9 ~ 10.7	2,690	460 ~ 3,110	13.0	11.9	
32 + 60 + 60	2.10	3.95	3.95	-	10.00	2.9 ~ 10.7	2,760	460 ~ 3,180	13.3	12.2	
32 + 60 + 70	1.98	3.70	4.32	-	10.00	2.9 ~ 10.7	2,690	460 ~ 3,110	13.0	11.9	

* Specification based on JIS C 9612 standard.
 * A minimum of 2 indoor units must be connected.


CU-4S34SBH: Only Wall-Mounted and Free Multi Indoor Combination

Indoor Unit Combination	Cooling Capacity (kW)					Input Power (W)		Current (A)			
	Room A	Room B	Room C	Room D	Total	min ~ max	Rated	min ~ max	220V	240V	
3 Rooms	32 + 70 + 70	1.86	4.07	4.07	-	10.00	2.9 ~ 10.7	2,700	470 ~ 3,110	13.0	11.9
	40 + 40 + 40	3.33	3.33	3.33	-	9.99	2.9 ~ 10.7	3,390	390 ~ 4,080	16.3	15.0
	40 + 40 + 50	3.08	3.08	3.84	-	10.00	2.9 ~ 10.7	2,970	420 ~ 3,540	14.3	13.1
	40 + 40 + 60	2.86	2.86	4.28	-	10.00	2.9 ~ 10.7	2,970	420 ~ 3,540	14.3	13.1
	40 + 40 + 70	2.67	2.67	4.66	-	10.00	2.9 ~ 10.7	2,900	420 ~ 3,400	14.0	12.8
	40 + 50 + 50	2.86	3.57	3.57	-	10.00	2.9 ~ 10.7	2,760	460 ~ 3,180	13.3	12.2
	40 + 50 + 60	2.67	3.33	4.00	-	10.00	2.9 ~ 10.7	2,760	460 ~ 3,180	13.3	12.2
	40 + 50 + 70	2.49	3.13	4.38	-	10.00	2.9 ~ 10.7	2,690	460 ~ 3,110	13.0	11.9
	40 + 60 + 60	2.50	3.75	3.75	-	10.00	2.9 ~ 10.7	2,760	460 ~ 3,180	13.3	12.2
	40 + 60 + 70	2.35	3.53	4.12	-	10.00	2.9 ~ 10.7	2,690	460 ~ 3,110	13.0	11.9
	50 + 50 + 50	3.33	3.33	3.33	-	9.99	2.9 ~ 10.7	2,570	510 ~ 2,970	12.4	11.4
	50 + 50 + 60	3.13	3.13	3.74	-	10.00	2.9 ~ 10.7	2,630	510 ~ 2,970	12.7	11.6
	50 + 50 + 70	2.94	2.94	4.12	-	10.00	2.9 ~ 10.7	2,570	510 ~ 2,970	12.4	11.4
	50 + 60 + 60	2.94	3.53	3.53	-	10.00	2.9 ~ 10.7	2,630	510 ~ 2,970	12.7	11.6
4 Rooms	28 + 28 + 28 + 28	2.50	2.50	2.50	2.50	10.00	2.9 ~ 10.6	3,220	420 ~ 3,770	15.5	14.2
	28 + 28 + 28 + 32	2.41	2.41	2.41	2.77	10.00	2.9 ~ 10.6	3,150	420 ~ 3,680	15.2	13.9
	28 + 28 + 28 + 40	2.26	2.26	2.26	3.22	10.00	2.9 ~ 10.8	3,150	430 ~ 3,850	15.2	13.9
	28 + 28 + 28 + 50	2.09	2.09	2.09	3.73	10.00	2.9 ~ 10.8	2,930	470 ~ 3,520	14.1	12.9
	28 + 28 + 28 + 60	1.94	1.94	1.94	4.18	10.00	2.9 ~ 11.0	2,930	470 ~ 3,690	14.1	12.9
	28 + 28 + 28 + 70	1.82	1.82	1.82	4.54	10.00	2.9 ~ 11.0	2,930	500 ~ 3,610	14.1	12.9
	28 + 28 + 32 + 32	2.33	2.33	2.67	2.67	10.00	2.9 ~ 10.6	3,070	430 ~ 3,600	14.8	13.6
	28 + 28 + 32 + 40	2.19	2.19	2.49	3.13	10.00	2.9 ~ 10.8	3,070	430 ~ 3,770	14.8	13.6
	28 + 28 + 32 + 50	2.03	2.03	2.32	3.62	10.00	2.9 ~ 10.8	2,930	500 ~ 3,440	14.1	12.9
	28 + 28 + 32 + 60	1.89	1.89	2.16	4.06	10.00	2.9 ~ 11.0	2,930	500 ~ 3,610	14.1	12.9
	28 + 28 + 32 + 70	1.77	1.77	2.03	4.43	10.00	2.9 ~ 11.2	2,860	510 ~ 3,690	13.8	12.6
	28 + 28 + 40 + 40	2.06	2.06	2.94	2.94	10.00	2.9 ~ 10.8	3,070	430 ~ 3,770	14.8	13.6
	28 + 28 + 40 + 50	1.92	1.92	2.74	3.42	10.00	2.9 ~ 11.0	2,930	500 ~ 3,610	14.1	12.9
	28 + 28 + 40 + 60	1.79	1.79	2.56	3.86	10.00	2.9 ~ 11.0	2,930	500 ~ 3,610	14.1	12.9
	28 + 28 + 40 + 70	1.69	1.69	2.40	4.22	10.00	2.9 ~ 11.2	2,860	510 ~ 3,690	13.8	12.6
	28 + 28 + 50 + 50	1.79	1.79	3.21	3.21	10.00	2.9 ~ 11.0	2,800	560 ~ 3,460	13.5	12.4
	28 + 28 + 50 + 60	1.69	1.69	3.01	3.61	10.00	2.9 ~ 11.2	2,800	560 ~ 3,540	13.5	12.4
	28 + 32 + 32 + 32	2.26	2.58	2.58	2.58	10.00	2.9 ~ 10.8	3,070	460 ~ 3,680	14.8	13.6
	28 + 32 + 32 + 40	2.12	2.42	2.42	3.04	10.00	2.9 ~ 10.8	3,070	460 ~ 3,680	14.8	13.6
	28 + 32 + 32 + 50	1.97	2.25	2.25	3.53	10.00	2.9 ~ 11.0	2,860	510 ~ 3,610	13.8	12.6
	28 + 32 + 32 + 60	1.83	2.11	2.11	3.95	10.00	2.9 ~ 11.0	2,860	510 ~ 3,610	13.8	12.6
	28 + 32 + 32 + 70	1.72	1.98	1.98	4.32	10.00	2.9 ~ 11.2	2,860	510 ~ 3,690	13.8	12.6
	28 + 32 + 40 + 40	1.99	2.29	2.86	2.86	10.00	2.9 ~ 10.8	3,070	460 ~ 3,680	14.8	13.6
	28 + 32 + 40 + 50	1.87	2.13	2.67	3.33	10.00	2.9 ~ 11.0	2,860	510 ~ 3,530	13.8	12.6
	28 + 32 + 40 + 60	1.75	2.00	2.50	3.75	10.00	2.9 ~ 11.2	2,860	510 ~ 3,690	13.8	12.6
	28 + 32 + 40 + 70	1.65	1.88	2.35	4.12	10.00	2.9 ~ 11.2	2,860	510 ~ 3,690	13.8	12.6
	28 + 32 + 50 + 50	1.74	2.00	3.13	3.13	10.00	2.9 ~ 11.2	2,800	560 ~ 3,540	13.5	12.4
	28 + 32 + 50 + 60	1.65	1.88	2.94	3.53	10.00	2.9 ~ 11.2	2,800	560 ~ 3,540	13.5	12.4
	28 + 40 + 40 + 40	1.90	2.70	2.70	2.70	10.00	2.9 ~ 11.0	3,000	460 ~ 3,770	14.5	13.3
	28 + 40 + 40 + 50	1.77	2.53	2.53	3.17	10.00	2.9 ~ 11.2	2,860	510 ~ 3,690	13.8	12.6
	28 + 40 + 40 + 60	1.67	2.38	2.38	3.57	10.00	2.9 ~ 11.2	2,860	510 ~ 3,690	13.8	12.6
	28 + 40 + 50 + 50	1.66	2.38	2.98	2.98	10.00	2.9 ~ 11.2	2,800	560 ~ 3,540	13.5	12.4
	32 + 32 + 32 + 32	2.50	2.50	2.50	2.50	10.00	2.9 ~ 10.8	3,000	460 ~ 3,600	14.5	13.3
	32 + 32 + 32 + 40	2.35	2.35	2.35	2.95	10.00	2.9 ~ 10.8	3,000	460 ~ 3,600	14.5	13.3
	32 + 32 + 32 + 50	2.19	2.19	2.19	3.43	10.00	2.9 ~ 11.0	2,860	510 ~ 3,530	13.8	12.6
	32 + 32 + 32 + 60	2.05	2.05	2.05	3.85	10.00	2.9 ~ 11.0	2,860	510 ~ 3,530	13.8	12.6
	32 + 32 + 32 + 70	1.93	1.93	1.93	4.21	10.00	2.9 ~ 11.2	2,860	520 ~ 3,610	13.8	12.6
	32 + 32 + 40 + 40	2.22	2.22	2.78	2.78	10.00	2.9 ~ 11.0	3,000	460 ~ 3,770	14.5	13.3
	32 + 32 + 40 + 50	2.08	2.08	2.59	3.25	10.00	2.9 ~ 11.0	2,860	510 ~ 3,530	13.8	12.6
	32 + 32 + 40 + 60	1.95	1.95	2.44	3.66	10.00	2.9 ~ 11.2	2,860	510 ~ 3,690	13.8	12.6
	32 + 32 + 40 + 70	1.84	1.84	2.30	4.02	10.00	2.9 ~ 11.2	2,860	550 ~ 3,610	13.8	12.6
	32 + 32 + 50 + 50	1.95	1.95	3.05	3.05	10.00	2.9 ~ 11.2	2,800	600 ~ 3,540	13.5	12.4
32 + 32 + 50 + 60	1.84	1.84	2.87	3.45	10.00	2.9 ~ 11.2	2,800	600 ~ 3,540	13.5	12.4	
32 + 40 + 40 + 40	2.11	2.63	2.63	2.63	10.00	2.9 ~ 11.0	3,000	460 ~ 3,770	14.5	13.3	
32 + 40 + 40 + 50	1.97	2.47	2.47	3.09	10.00	2.9 ~ 11.2	2,860	510 ~ 3,690	13.8	12.6	
32 + 40 + 40 + 60	1.85	2.33	2.33	3.49	10.00	2.9 ~ 11.2	2,860	510 ~ 3,690	13.8	12.6	
32 + 40 + 50 + 50	1.85	2.33	2.91	2.91	10.00	2.9 ~ 11.2	2,810	600 ~ 3,540	13.5	12.4	
40 + 40 + 40 + 40	2.50	2.50	2.50	2.50	10.00	2.9 ~ 11.2	3,000	470 ~ 3,850	14.5	13.3	
40 + 40 + 40 + 50	2.35	2.35	2.35	2.95	10.00	2.9 ~ 11.2	2,860	520 ~ 3,610	13.8	12.6	

* Specification based on JIS C 9612 standard.
 * A minimum of 2 indoor units must be connected.


Wall-mounted

CS-MRZ16WKH-8/ CS-MRZ20WKH-8/ CS-MRZ25WKH-8/
CS-MRZ35WKH-8/ CS-MRZ42WKH-8/ CS-MRZ50WKH-8

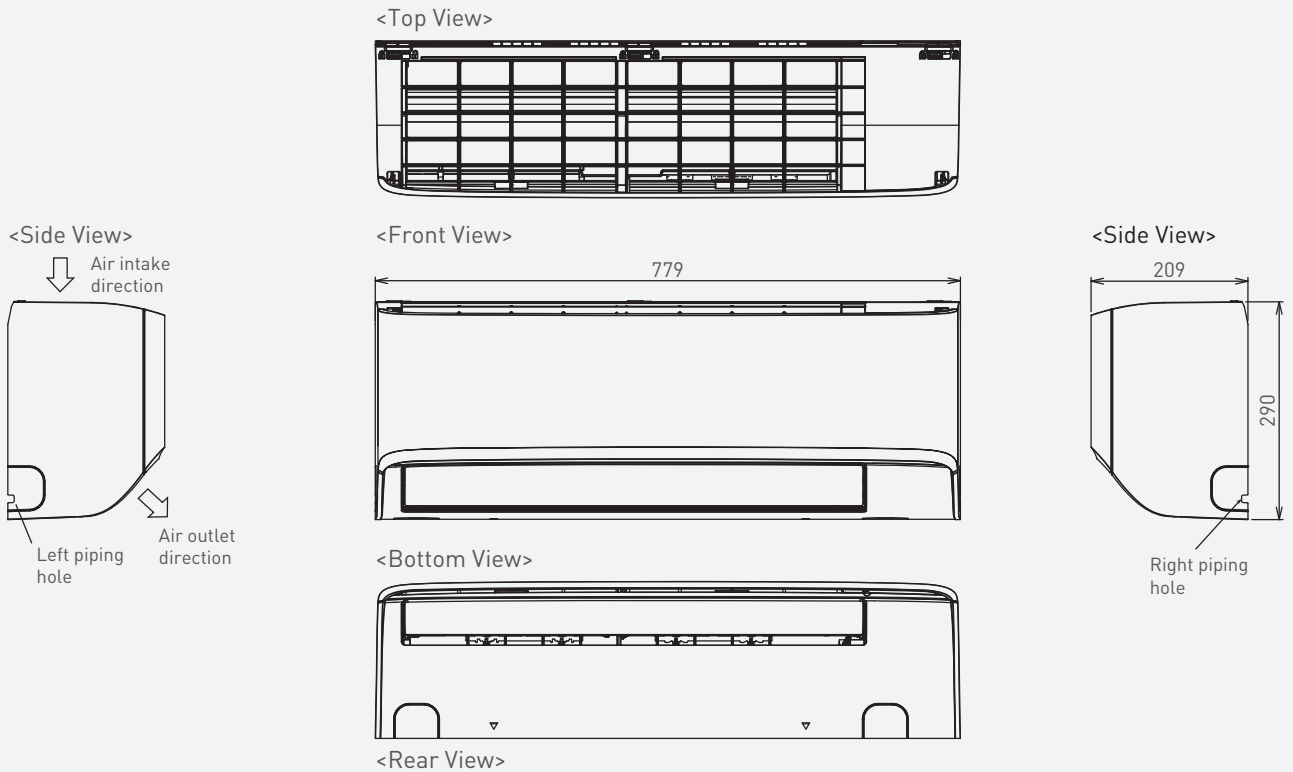

Unit: mm


CS-MRZ60WKH-8/ CS-MRZ71WKH-8

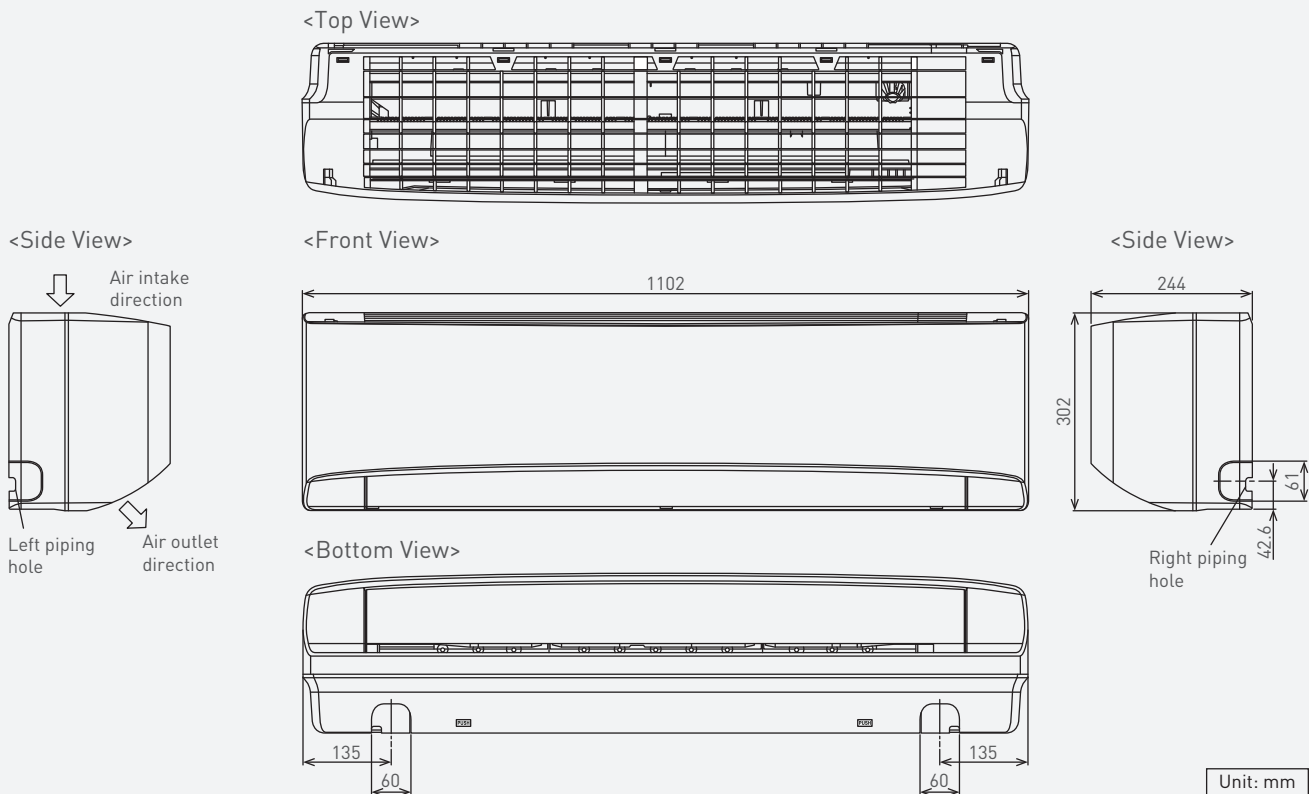


Unit: mm

Wall-mounted

CS-MPS9SKH/ CS-MPS12SKH/ CS-MPS15SKH

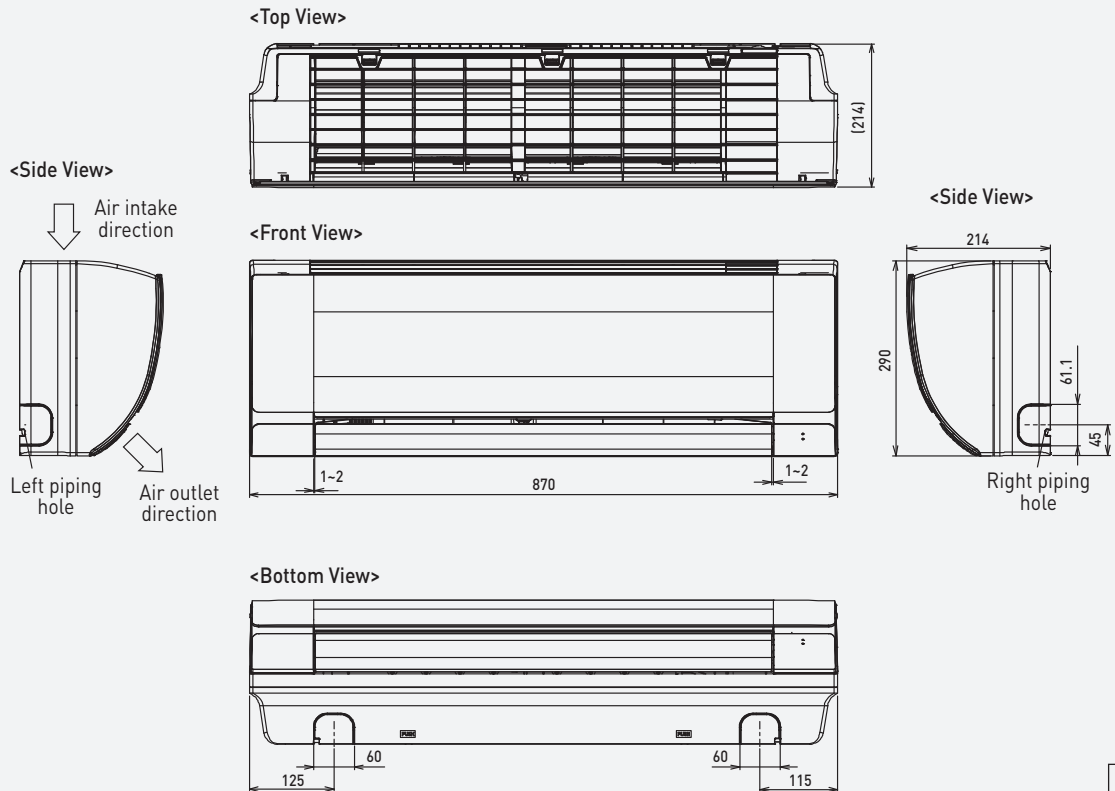


CS-MPS18SKH/ CS-MPS24SKH/ CS-MPS28SKH

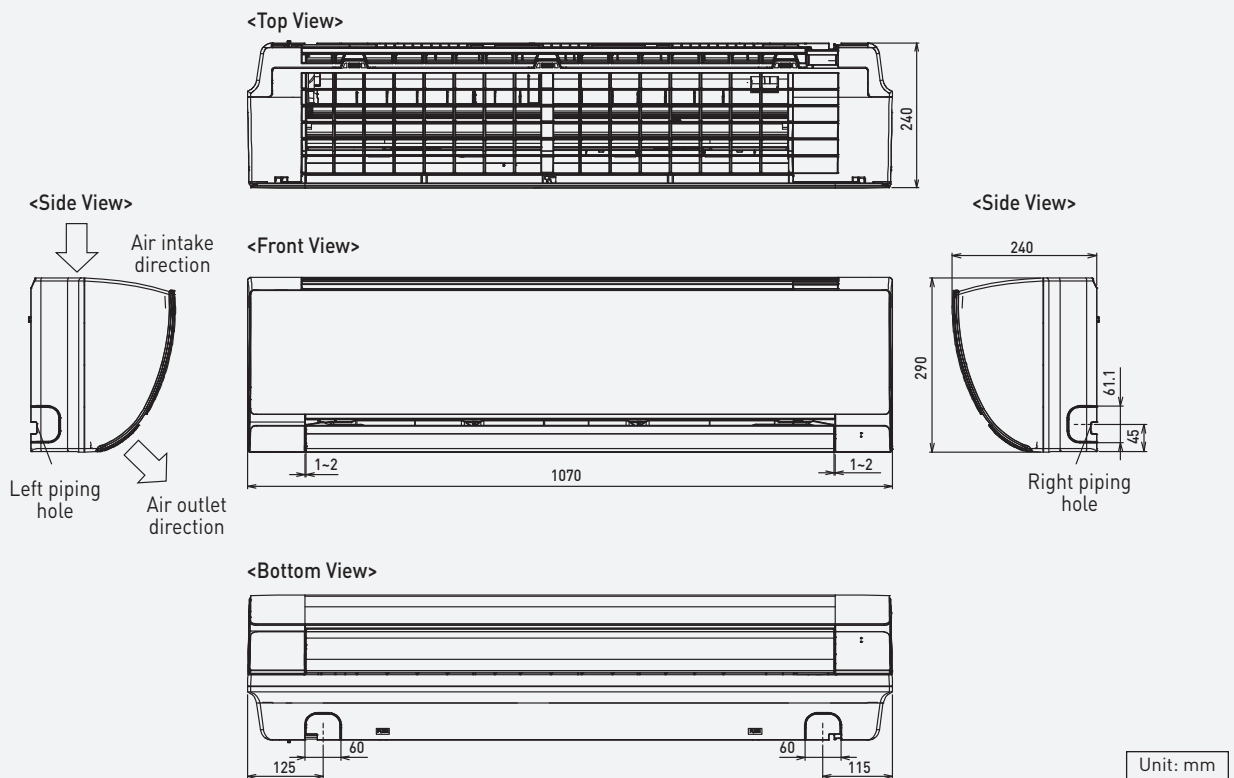


Slim Ducted

CS-MS9SD3H/ CS-MS12SD3H/
CS-MS18SD3H/ CS-MS24SD3H


<Front View>

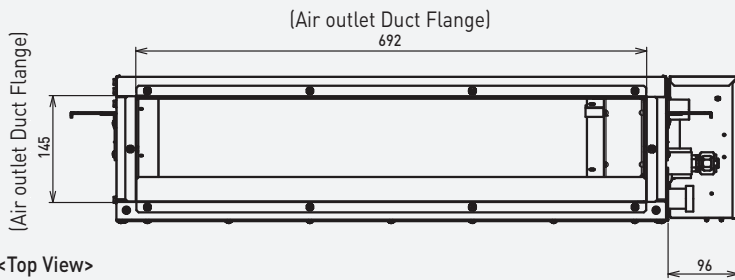


<Top View>

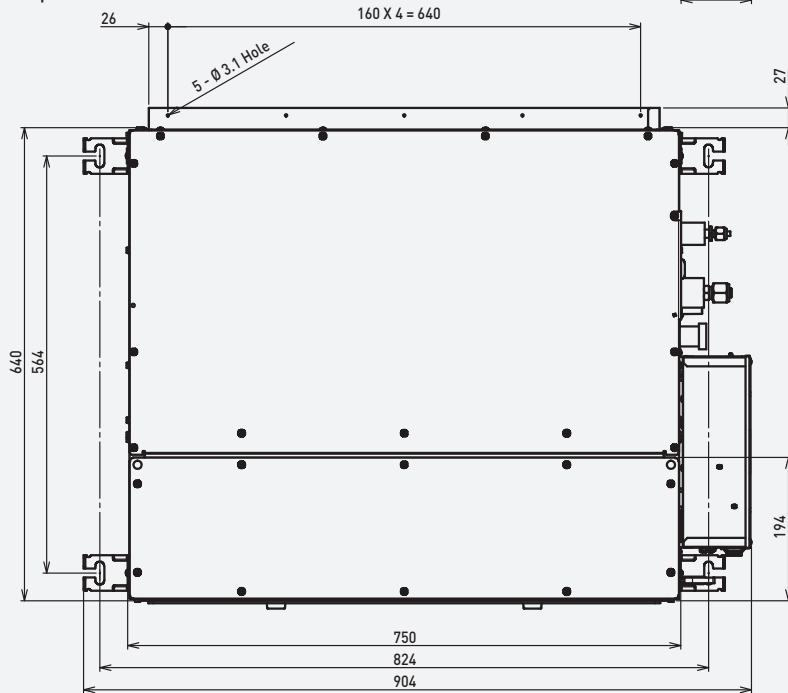

<Side View>

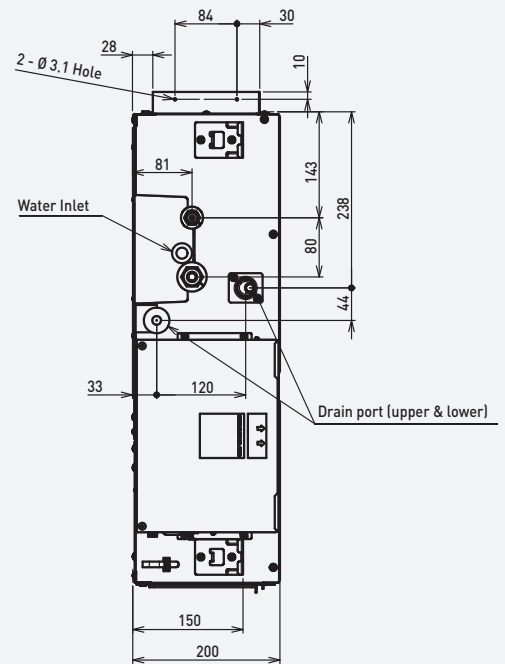


<Back View>

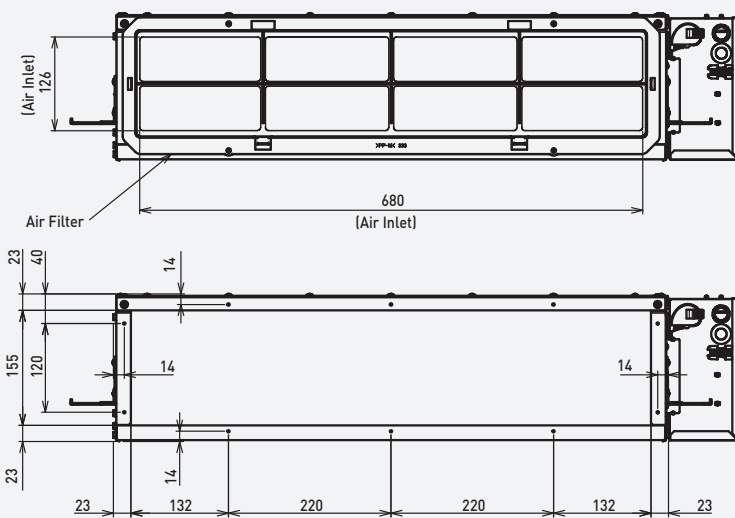

Unit: mm

4-Way Mini Cassette

CS-MZ25WB4H8A/ CS-MZ35WB4H8A/
 CS-MZ50WB4H8A/ CS-MZ60WB4H8A

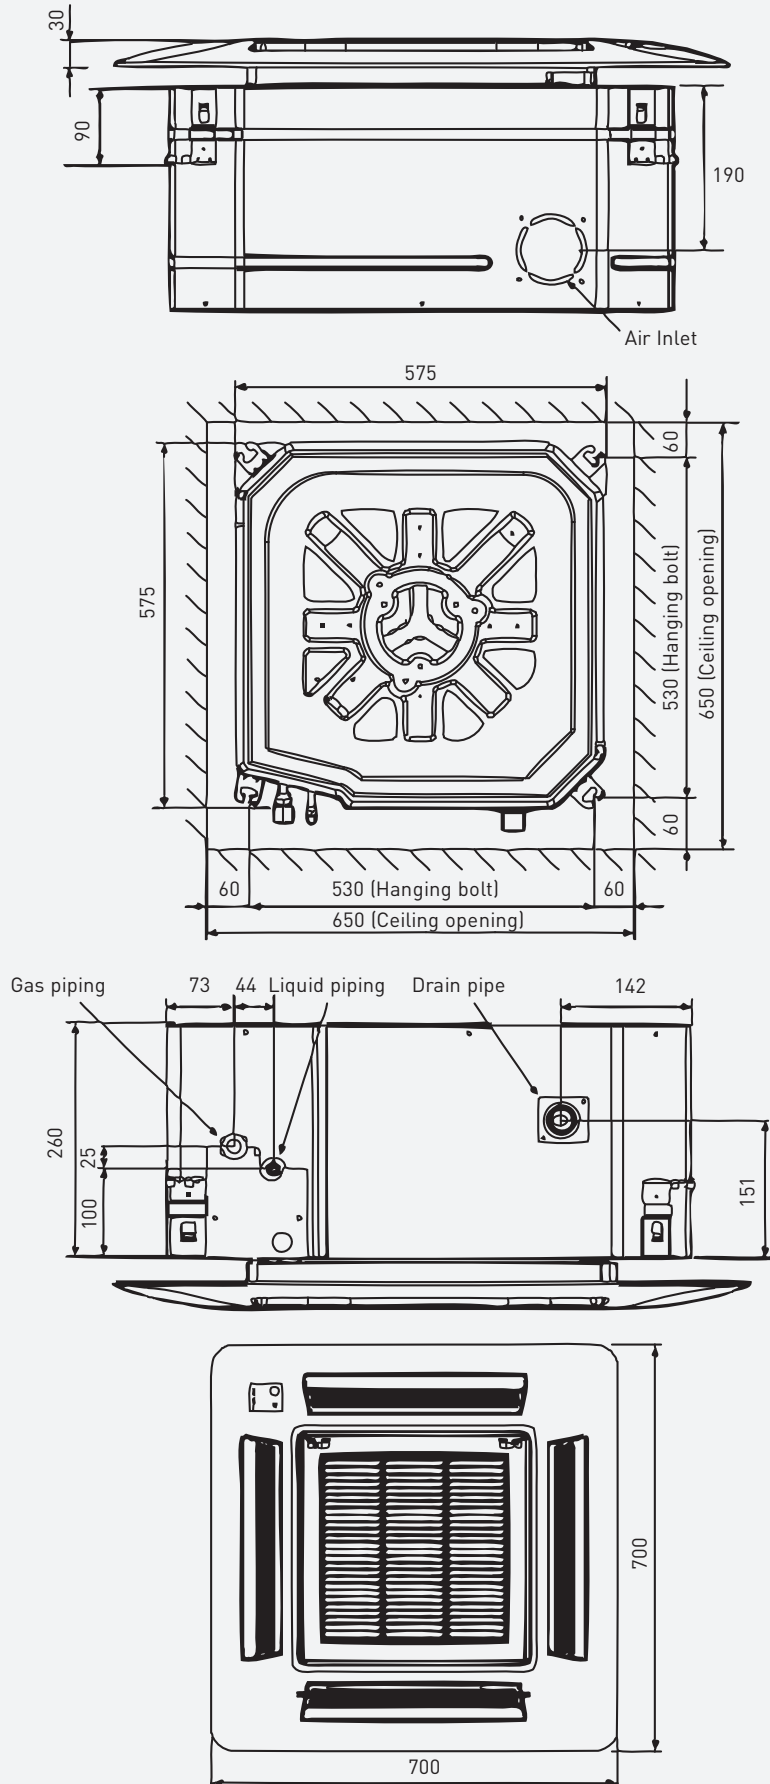

Unit: mm

Panasonic®

- Please read the Installation Instructions carefully before installing the unit, and the Operating Instructions before using it.
- Specifications are subject to change without prior notice.
- The contents of this catalogue are accurate as of December 2020.
- Due to printing considerations, actual colours may vary slightly from those shown.
- All graphics are provided solely for the purpose of illustrating a point.



Do not add or replace refrigerant other than the specified type. Manufacturer is not responsible for damage or deterioration in safety due to usage of other refrigerant.

Authorised Dealer



TRUNG TÂM HỖ TRỢ KHÁCH HÀNG - TỰ VẬN MIỄN PHÍ CÁC DỊCH VỤ

Hỗ Trợ Trước và Sau Mua Hàng • Tư Vấn, Hướng Dẫn Sử Dụng Sản Phẩm •
Giải Quyết Các Thắc Mắc, Khiếu Nại của Khách Hàng
hoặc (024) 3767 7360

Từ 8h15 - 17h30 Thứ 2 đến Chủ Nhật

www.panasonic.com/vn



www.facebook.com/PanasonicVietnam



Panasonic Heating & Cooling Solutions

Global site : aircon.panasonic.com

PRO Club : panasonicproclub.global



[airconpanasonicglobal](https://www.youtube.com/channel/UC...)