


PanaSync™ E110



- On-Screen Adjustment Menu
- 1,600 x 1,280 Maximum Resolution NI
- MPR II Certified
- AGRAS™ Coating for Reduced Glare
- .25mm Dot Pitch
- 48-Hour Swap / 3-Year Limited Warranty

All product/brand names are trademarks or registered trademarks of their respective holders. Specifications subject to change without notice. Product may be subject to export control regulations. Copyright © 1997 Matsushita Electric Corporation of America. All rights reserved.

O n l i n e S p e c S h e e t

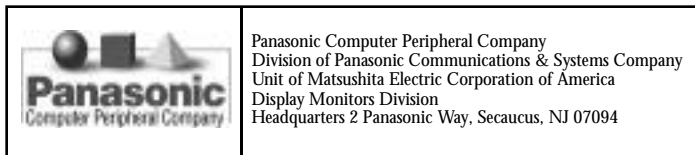

www.panasonic.com/alive

PanaSync™ E110 Specifications

CRT Screen Size	21" CRT (20.0"/50.8 cm Viewable Image Size) Flat Square
Dot Pitch	0.25mm
Surface	New AGRAS™ Coat
Viewable Display Area (HxV)	
Factory Preset	15.43" x 11.57", 19.3" diagonal
Full Scan	15.98" x 11.97", 20.0" diagonal (typical)
Input	
Video Signal	RGB Analog (0.7 Vp-p, 1.0 Vp-p with Sync-on-Green, 75 ohms)
Sync Signal	H/V separate (TTL), H/V combined, or Sync-on-Green
H-Sync	30-92kHz
V-Sync	50-180Hz
Modes	1 Factory Preset, 7 Reservations, 13 User Memories
Connector & Cables	
Video Input	One 15-pin Male Mini D-Sub to 15-pin Male Mini D-Sub (4.92'/1.5 meters)
Mac Adapter	Available-Free of Charge
Power	One UL 3-pole (CEE 22 type) (5.91'/1.8 meters)
Controls	
Front Panel	1 (menu) key, Left key, Right key, 2 (select) key, Power Switch (On/Off)
Indicators	LED power indicator Green=On, Yellow=Power-saving mode
On-Screen Menu	Contrast, Brightness, Degauss, H. Position, H. Size, V. Position, V. Size, V. Pincushion, Side Pincushion Balance, Trapezoid, Parallelogram, Rotation, Recall (Factory Setting), Color Temperature (9,300 + 8 MPCD/7500K/ 6500K/5000K/User Color), Signal (H&V Display Frequency), Video Level (0.7/1.0 Vp-p), H Moiré, V Moiré, Language (English, German, French, Italian & Spanish), Monitor Self-Test (w/no Signal Input or Signal Outside Range), OSD Position
Video	196MHz (typical)
Bandwidth Resolution (HxV)	1,280 dots x 1,024 lines 73Hz NI FCC Class B, Max. 1,600 dots x 1,280 lines 69Hz NI FCC Class A, Max.*
Operating Conditions	
Temperature	32-104°F
Humidity	5%-90% Non-condensing
Dimensions	19.9" (W) x 19.2" (H) x 20.4" (D)
Weight	60.6 lbs.
Approvals	UL, CSA, TUV/EN60950, TUV/IEC950, TUV/GS, DHHS, NORDIC, HC(HWC), PTB, VCCI Class B, FCC Class B, IC(DOC) Class B, CISPR Class B, CE, MPR II, TCO'92, VESA DPMS/Energy Star, ISO9241-3/-8
Power Consumption	
Supply	90 to 132, 198 to 264V AC (50 or 60Hz), Automatic
On	145 Watts (Typical)
Standby	<15 Watts
Suspend	<15 Watts
Off	<4 Watts
Warranty	3 Years Limited Parts & Labor, 1 Year On-Site Replacement (see your dealer for details)
Other	Windows '95 Plug & Play 24-hour/7-day customer service 48-hour Swap Program

*This monitor may only be used in a commercial, business or industrial environment at resolutions above 1,600 x 1,200 73Hz.