

# KXL-D740 4X Portable CD-ROM Player




## Features:

- Connects to a Notebook Computer Through a Standard PCMCIA Type II card (cable and card included) or Connects to a Desktop Computer Through a SCSI 2 Interface (required cable and card not included)
- Operates on Six (6) AA Size Batteries (not-supplied), included AC Adaptor, or Optional Ni-Cd Rechargeable Battery Pack (KXL-D30)
- SCSI-2 Software Command Compatible
- Power Save Function. Drive enters Sleep Mode after 4 minutes of inactivity to expand Battery life
- 2-Year Limited Warranty (see dealer for details)

All product/brand names are trademarks or registered trademarks of their respective holders. Specifications subject to change without notice. Product may be subject to export control regulations. Copyright © 1997 Matsushita Electric Corporation of America. All rights reserved.

O n l i n e   S p e c   S h e e t

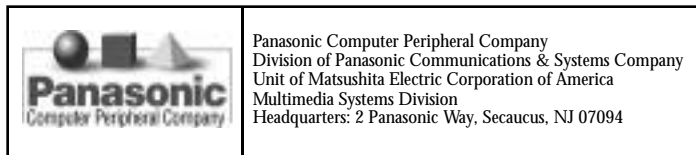

www.panasonic.com/alive

## KXL-D740 Specifications

### Performance

Disc Diameter	Accepts 4.75" or 3.16" Discs	
Disc Speed	Normal (1X)	Quad (4X)
	200-530 rpm	800-2,120 rpm
Data Transfer Rate	Normal (1X)	Quad (4X)
	150 KB/s	600 KB/s
From Buffer	7 MB/s (Max. only unsynchronous)	
Access Time Operated w/ AC Power Source	Access Time (4X) 295 ms typical (1/3 stroke)	
Buffer Size	128 KB	
MTBF	25,000 power on hours	
<b>Power Requirement</b>	Six (6) AA Size Batteries (not supplied) or Included AC Adaptor (120V ± 10% 60Hz)	

<b>Dimensions (WxDxH)</b>	5.52" x 8.16" x 1.40" (138mm x 204mm x 35mm)	
<b>Weight</b>	1.014 lb. (0.46 kg) without batteries	

### Headphones

Frequency Response	20Hz - 20KHz	
Signal to Noise Ratio	More than 80 dB (A Range)	
Output Level	0.60 Vrms	

<b>General Safety Standards</b>	UL I/F Radiation FCC Class 8 part 15 Laser HHS	
---------------------------------	--	--

### System Requirements

Notebook Computer	IBM or IBM compatible, PCMCIA Type II Card Slot, PCMCIA Controller i82365 compatible LSI or IBM Card Service (PCMCIA 1.07, 2.00) or SystemSoft (PCMCIA 2.01,2.10) or Phoenix PCPLUS (PCMCIA 2.00, 2.01, 2.10) or CardTalk, MS-DOS* 5.0 to 6.2 or PC DOS 5.0 to 7.0. Windows 3.1, 3.11 or Windows 95. 486 33MHz or Faster Microprocessor, 4 MB of Available Hard Disk space, 8 MB RAM Recommended	
-------------------	--	--

Note: The information is based on the test results measured by Panasonic internal test software.